

SONY®


TRINITRON® COLOR VIDEO MONITOR

BVM-2010P

BVM-2010PD

BVM-2010PM

BVM-2010PMD

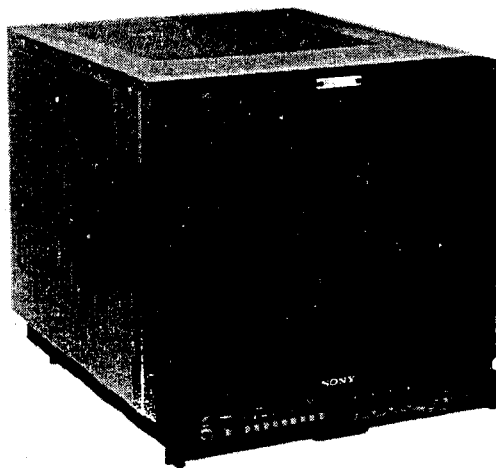

OPERATION AND MAINTENANCE MANUAL

3rd Edition

Serial No. 2000831 and Higher (BVM-2010P)
(EBU N-10 LEVEL)

Serial No. 2000004 and Higher (BVM-2010PM)

Serial No. 2000040 and Higher (BVM-2010PD)
(EBU N-10 LEVEL)

Serial No. 2000001 and Higher (BVM-2010PMD)

Warning—This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instructions manual, may cause interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to Subpart J of Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may be required to correct the interference.

Important—To insure that the complete system (including this peripheral) is capable of complying with the FCC requirements, it is recommended that the user make sure that the individual equipment of the complete system has a label with one of the following statements.

"This equipment has been tested with a Class A Computing Device and has been found to comply with Part 15 of FCC rules."

—or—

"This equipment complies with the requirements in Part 15 of FCC rules for a Class A Computing Device."

—or equivalent.


For the customers in Canada

This apparatus complies with the Class A limits for radio noise emissions set out in Radio Interference Regulations.

Pour les utilisateurs au Canada

Cet appareil est conforme aux normes Classe A pour bruits radioélectriques, spécifiés dans le Règlement sur le brouillage radioélectrique.

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK  ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL TO SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

VORSICHT!!

Hinweis für den Benutzer

Das Gerät ist nicht für den Einsatz in Bildschirmarbeitsplätzen vorgesehen.

CAUTION!!

DO NOT USE THE EXTERNAL DEGAUSSER TO DEMAGNETIZE THE SCREEN.
BE SURE TO USE THE DEGAUSS SWITCH ON THE FRONT PANEL.

CONFIDENTIAL

The material contained in this manual consists of information that is the property of Sony Corporation and is intended solely for use by the purchasers of the equipment described in this manual.

Sony Corporation expressly prohibits the duplication of any portion of this manual or the use thereof for any purpose other than the operation or maintenance of the equipment described in this manual without the express written permission of Sony Corporation.

CONFIDENTIEL

Le matériel contenu dans ce manuel consiste en informations qui sont la propriété de Sony Corporation et sont destinées exclusivement à l'usage des acquéreurs de l'équipement décrit dans ce manuel.


Sony Corporation interdit formellement la copie de quelque partie que ce soit de ce manuel ou son emploi pour tout autre but que des opérations ou entretiens de l'équipement à moins d'une permission écrite de Sony Corporation.

VERTRAULICH

Das in dieser Anleitung enthaltene Material besteht aus Informationen, die Eigentum der Sony Corporation sind, und ausschließlich zum Gebrauch durch den Käufer der in dieser Anleitung beschriebenen Ausrüstung bestimmt sind.

Die Sony Corporation untersagt ausdrücklich die Vervielfältigung jeglicher Teile dieser Anleitung oder den Gebrauch derselben für irgendeinen anderen Zweck als die Bedienung oder Wartung der in dieser Anleitung beschriebenen Ausrüstung ohne ausdrückliche schriftliche Erlaubnis der Sony Corporation.

ATTENTION AU COMPOSANT AYANT RAPPORT A LA SÉCURITÉ!!

LES COMPOSANTS IDENTIFIÉS PAR UN TRAMÉ ET UNE MARQUE  SUR LES DIAGRAMMES SCHEMATIQUES, LES VUES EXPLOSÉES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DES SUPPLÉMENTS PUBLIÉS PAR SONY. LES RÉGLAGES DU CIRCUIT QUI SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT SONT IDENTIFIÉS DANS CE MANUEL. SUIVRE LES PROCÉDURES QUAND LES COMPOSANTS CRITIQUES SONT REMPLACÉS OU LE FONCTIONNEMENT IMPROPRE EST SUSPECTÉ.

ATTENTION!!

NE PAS UTILISER DE DÉMAGNÉTISEUR EXTÉRIEUR POUR DÉMAGNÉTISER L'ÉCRAN.
UTILISER LA TOUCH DE DÉMAGNÉTISATION (DEGAUSS) SUR LE PANNEAU FRONTAL.

TABLE OF CONTENTS

1. OPERATION

1-1.	Outline	1-1
1-1-1.	Features	1-1
1-1-2.	Options	1-2
1-2.	Voltage selection	1-5
1-3.	Location and function of controls	1-6
1-3-1.	Front panel	1-6
1-3-2.	Rear panel	1-12
1-3-3.	Sub control panels inside the drawer	1-18
1-3-4.	Switches inside the cabinet	1-29
1-4.	Convergence adjustment	1-32
1-4-1.	Convergence adjustment of normal picture	1-32
1-4-2.	Convergence adjustment of underscanned picture	1-35
1-5.	White balance adjustment	1-36
1-6.	Specifications	1-37

2. DISASSEMBLY

2-1.	Cover Removal	2-1
2-2.	Bezel Assembly Removal	2-1
2-3.	Check of C Board	2-2
2-4.	QA, QB, W and V Boards Removal	2-2
2-5.	Open the BK Block	2-3
2-6.	D/A Block Assembly Removal (BVM-2010PD/PMD only)	2-3
2-7.	BK Board Removal	2-4
2-8.	Check of BK Board	2-4
2-9.	Check of DB Board	2-5
2-10.	Check of PA Board	2-5
2-11.	Check of BJ Board	2-6
2-12.	GC and RB Boards Removal	2-6
2-13.	Power Block Assembly Removal	2-7
2-14.	Switching Regulator Removal (BVM-2010PD/PMD only)	2-7
2-15.	Flyback Transformer and High Voltage Block Removal	2-8
2-15-1.	Removal and Replacement of High Voltage Cable	2-8
2-16.	Picture Tube Removal	2-9
2-17.	Control Panel Assembly Removal	2-9

3. CIRCUIT DESCRIPTION

3-1.	QA, QB, BA Boards	3-1
3-2.	BG Board	3-3
3-3.	BH Board	3-5
3-4.	BI Board	3-7
3-5.	Sync Processor, Pulse Generator (BJ Board)	3-9
3-6.	BK Board	3-13
3-7.	Beam Control Circuit (BI, BK Boards)	3-15
3-8.	PAL Demodulator, Y Trap Circuit (BD Board)	3-17
3-9.	PAL-M Demodulator, Y Trap Circuit (BM Board)	3-19

3-10.	Vertical Deflection Output Circuit Convergence Output Circuit (EB Board)	3-21
3-11.	Power Supply Circuit (GA, GB Boards)	3-23
3-12.	Convergence Circuit (DB, DC Boards, DCT Block)	3-25
3-13.	Deflection Circuit (DA Board)	3-29
3-14.	Horizontal Output (EA Board)	3-33
3-15.	High Voltage Regulator (PA Board)	3-35
3-16.	RA Board	3-37
3-17.	RB Board	3-38
3-18.	QE Board (BVM-2010PD/PMD only)	3-39
3-19.	QD Board (BVM-2010PD/PMD only)	3-40
3-20.	BR Board (BVM-2010PD/PMD only)	3-41

4. ADJUSTMENTS

4-1.	Internal View	4-1
4-2.	Circuit Boards Location	4-2
4-3.	Quick Reference	4-3
4-4.	Sub Control Panel Location	4-4
4-5.	Setup Adjustment in Case of Picture Tube Replacement	4-5
4-6.	Safety Related Adjustments	4-11
4-7.	Circuit Adjustments	4-17

5. DIAGRAMS

5-1.	Block Diagram	5-1
5-2.	Frame Wiring Diagram	5-3
5-3.	Mounting and Schematic Diagrams	5-5
	TA Board	5-7
	TB Board	5-11
	BA Board	5-15
	BD or BM Board	5-20
	BG Board	5-25
	BH Board	5-30
	BI Board	5-35
	BJ Board	5-40
	BK Board	5-45
	DA Board	5-50
	DB Board	5-55
	DC Board	5-60
	EA and EB Boards	5-66
	GA and GB Boards	5-72
	C, PA and PB Boards	5-78
	HA, HB, HC, HD, XB and Y Boards	5-84
	HE, HF Board	5-89
	GC, QA, QB, V and W Boards	5-93
	RA Board	5-97
	RB Board	5-102
	BR Board (BVM-2010PD/PMD only)	5-107
	QD Board (BVM-2010PD/PMD only)	5-111
	QE Board (BVM-2010PD/PMD only)	5-116
	Z Board	5-119
5-4.	Semiconductors	5-121

6. EXPLODED VIEWS

6-1.	Bezel and Covers	6-1
6-2.	Picture Tube	6-2
6-3.	Chassis	6-3
6-4.	Signal Block	6-4
6-5.	Drawer Block	6-5
6-6.	Power Block	6-6

7. ELECTRICAL PARTS LIST..... 7-1

SECTION 1 OPERATION

1-1. OUTLINE

1-1-1. Features

The BVM-2010P/PM/PD/PMD is a color video monitor designed for critical evaluation of video signals in broadcasting stations and production houses.

High resolution picture

The Super Fine Pitch Trinitron picture tube (0.3 mm aperture grille) gives a high resolution, high contrast picture. Horizontal resolution is more than 900 TV lines at the center of the picture.

Stabilized color temperature

The newly-developed beam control circuit maintains the color temperature constant for a long period of time.

Split screen for precise picture confirmation

The lower half of the picture can be displayed in monochrome mode while the upper half is displayed in color mode. This facilitates confirmation of the luminance and chrominance channels, evaluation of the noise in chrominance or luminance channel, etc.

Blue only mode for precise evaluation of noise component

In blue only mode, an apparent monochrome display is obtained with all three control grids driven with a blue signal. This facilitates color saturation and phase adjustments and observation of VTR noise.

Easy and precise convergence adjustment

The convergence can be adjusted at 15 points of the screen. This system facilitates adjustment of the peripheral areas of the screen.

Digital video input connectors (Only for the BVM-2010PD/PMD)

The BVM-2010PD/PMD is equipped with two digital video input connectors which make it possible to monitor the digital video signals by connecting the Sony 4:2:2 component DVTR systems.

Other features

- Three color standards selectable using the optional plug-in type decoder boards
- Picture set-up function facilitating adjustment of the monitor reference black for the black level of an incoming video signal
- Pulse cross function for simultaneous checking of the horizontal and vertical sync signals or VITS (Vertical Interval Test Signal)
- Built-in crosshatch and 100% white signal generators facilitating monitor set-up
- VITC (Vertical Interval Time Code) display possible using the optional VITC reader board
- Auto chroma/phase adjustment, auto white balance adjustment etc. are possible using the optional auto set-up adaptor.
- Precise setting of black level of the monitor is possible using the optional black level signal generator.

- A drawer containing convergence, white balance and preset controls, and other function selectors
- Auto and manual degaussing
- Three-position AFC switch
- Overdrive protection circuit to protect against picture tube damage
- EIA standard 19-inch rack mounting possible using the optional rack mount kit

1-1-2. Options


Model No.	Product name	Board name	Use
BKM-1410	NTSC ADAPTOR	BC	Decoder board for NTSC color system
BKM-1411	NTSC COMB ADAPTOR	BB	Comb filter board for NTSC color system
BKM-1412	NTSC COMB ADAPTOR	BT	Dynamic Comb filter board for NTSC color system
BKM-1420	PAL ADAPTOR	BD	Decoder board for PAL color system
BKM-1421	PAL-M ADAPTOR	BM	Decoder board for PAL-M color system
BKM-1422	PAL COMB ADAPTOR	BT	Comb filter board for PAL color system
BKM-1430	SECAM ADAPTOR	BE	Decoder board for SECAM color system
BKM-1440	RGB/COMPONENT ADAPTOR	BF	Decoder outputs of RGB or component signals
BKM-1460	VITC ADAPTOR	BL	Reader of Vertical Interval Time Code
BKM-1470	SAFE AREA DISPLAY	BQ	For displaying the safe area
BKM-1480	BLACK LEVEL SIGNAL GENERATOR	BS	For generating black level signals
BKM-2056	AUTO SET-UP ADAPTOR	BN BO	Auto chroma/phase adjustment, auto white balance adjustment, selection of color temperature
BKM-2085 -20	DIGITAL 4:2:2 SERIAL INPUT KIT	BA3 BV	For input of the component digital video signal
BKM-2090 -20	D-2 SERIAL INPUT KIT	BA3 BU	For input of the composite digital video signal
BKM-2000	RACK MOUNT KIT	—	For EIA standard 19 inch rack mounting

Notes

- Insert BA, BG, BH, BI and BJ boards into their respective compartments of the same name.
- Do not leave B5 compartment blank. Insert one of the boards specified in the above table. If no board is inserted, the luminance/chrominance or luminance channel will not be activated in composite signal mode.
- Do not insert BD (PAL DECODER) and BM (PAL-M DECODER) boards simultaneously. This causes malfunction of the monitor.
- Do not insert BB (NTSC COMB FILTER) and BT (NTSC COMB FILTER) boards simultaneously. This causes malfunction of the monitor.


For details on installation, refer to the operation and maintenance manual of the optional board.

Right view (with the cabinet removed)

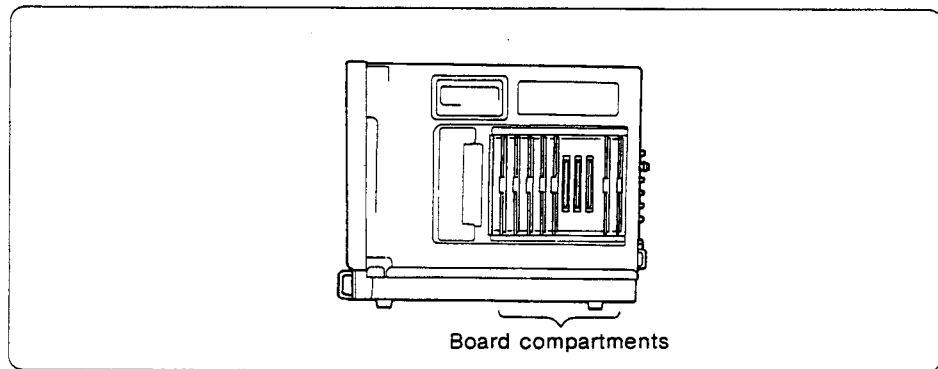

1-2. VOLTAGE SELECTION

The monitor operates on either 220 – 240 or 100 – 120V AC. Before connecting the unit to an AC outlet, make sure the voltage selector at the rear of the unit is set to the local power line voltage. Change the position of the selector if necessary.

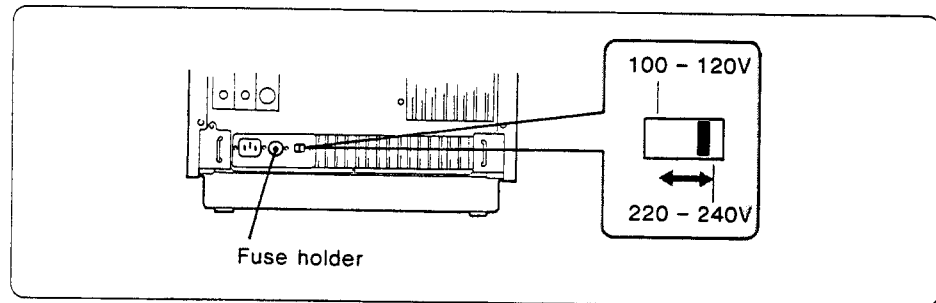



Note

Use a T2A/250V fuse for 220 – 240V AC operation, and a 4A/125V fuse for 100 – 120V AC operation. The appropriate fuse is installed at the factory in accordance with the voltage presetting. If you change the voltage selector setting, replace the fuse with an appropriate one.

1-3. LOCATION AND FUNCTION OF CONTROLS

1-3-1. Front Panel

Common to the BVM-2010P/PM/PD/PMD

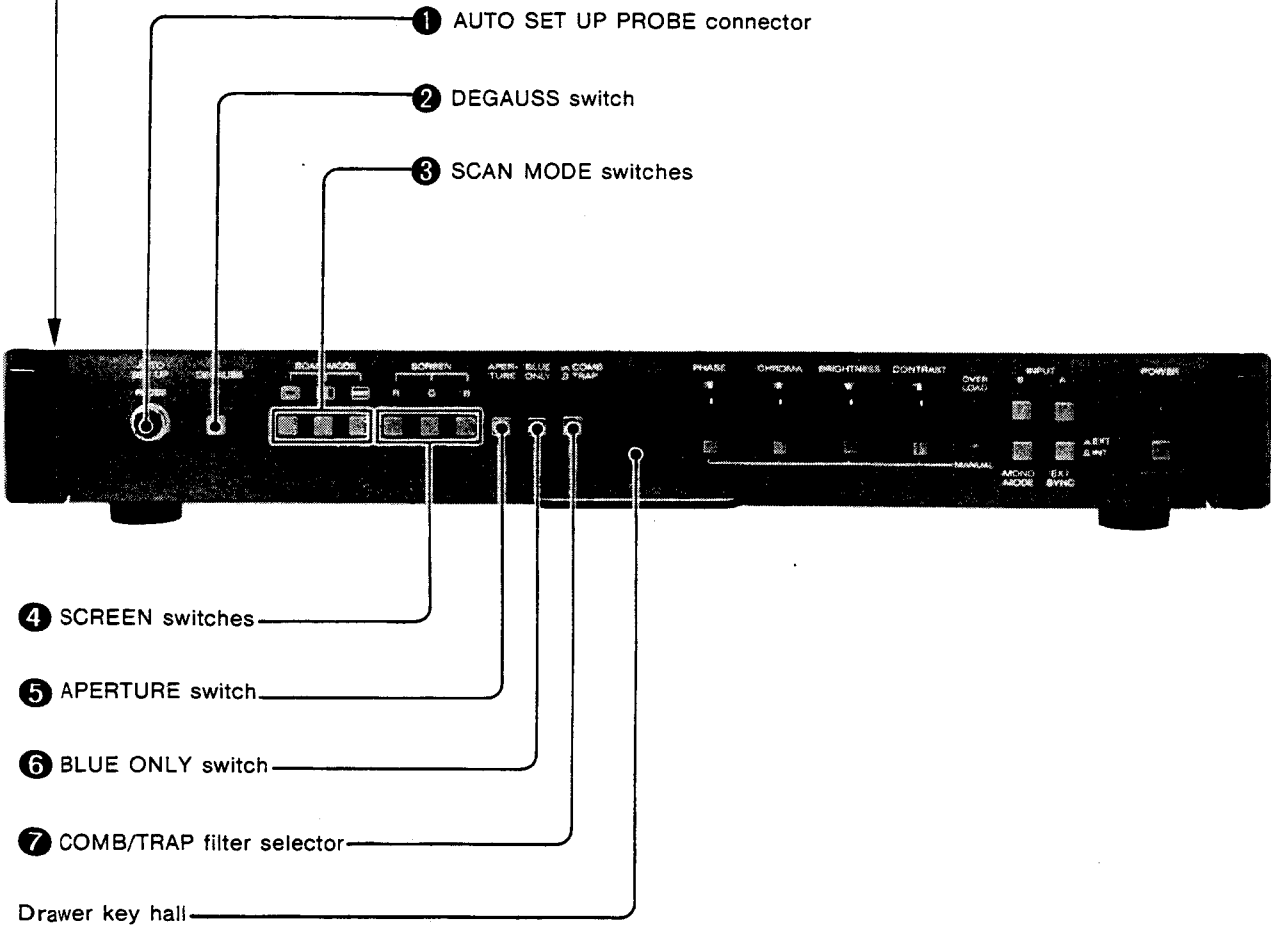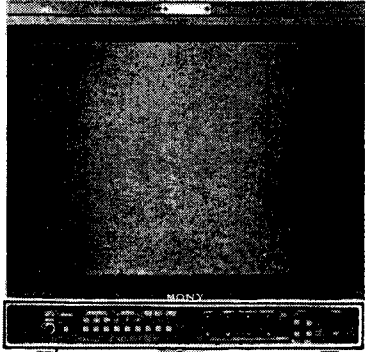

1 AUTO SET UP PROBE connector

Connect the optional BKM-2053 or BKM-2052 auto set-up probe.

2 DEGAUSS switch

When the power is turned on, automatic degaussing is activated.

To demagnetize the screen manually, press this switch momentarily with the power turned on.

Wait for 5 minutes or more before activating degaussing again.

3 SCAN MODE switches

(underscan): Depress this switch for underscanning. The display size is reduced by approximately 3% so that four corners of the raster are visible.

(horizontal delay): Depress this switch to observe the horizontal sync signal. The picture is shifted horizontally and the horizontal sync signal is displayed in the left quarter of the screen. Picture brightness is automatically increased for easy observation.

(vertical delay): Depress this switch to observe the vertical sync signal. The picture is shifted vertically and the vertical sync signal is displayed near the center of the screen. Picture brightness is automatically increased for easy observation.

- A pulse cross is displayed by depressing both the and switches.
- To resume normal scanning, press to release the depressed switches.

4 SCREEN switches

The R, G and B switches turn the red, green and blue beams respectively on and off. To turn off the beam, depress the switch. To turn it on again, press to release it.

5 APERTURE switch

Normally keep this switch released. A flat frequency response is obtained.

For aperture correction, depress this switch and adjust the APERTURE control inside the drawer. The boost frequency, 4.5 MHz or 6.5 MHz, can be selected with the S1 switch on the BG board.

At the 4.5 MHz position, the frequency response can be adjusted continuously with up to 6 dB boost at 4.5 MHz for subjective enhancement of the displayed picture.

At the 6.5 MHz position, the frequency response can be adjusted continuously with up to 6 dB boost at 6.5 MHz for compensation of the aperture loss of the CRT.


6 BLUE ONLY switch

Normally keep this switch released. Depress this switch to turn off the red and green signals. A blue signal is displayed as an apparent monochrome picture on the screen. This facilitates CHROMA and PHASE control adjustments and observation of VTR noise.

7 COMB/TRAP filter selector

This selector is effective for the NTSC color system only, with the BKM-1410 NTSC adaptor and the BKM-1411 or BKM-1412, NTSC comb adaptor installed. Depress the selector to activate the comb filter (COMB). Press to release it for the trap filter (TRAP).


When the BKM-1411 or BKM-1412, NTSC comb adaptor is not installed, or when a color system other than NTSC is selected, the trap filter is always activated regardless of this selector setting.

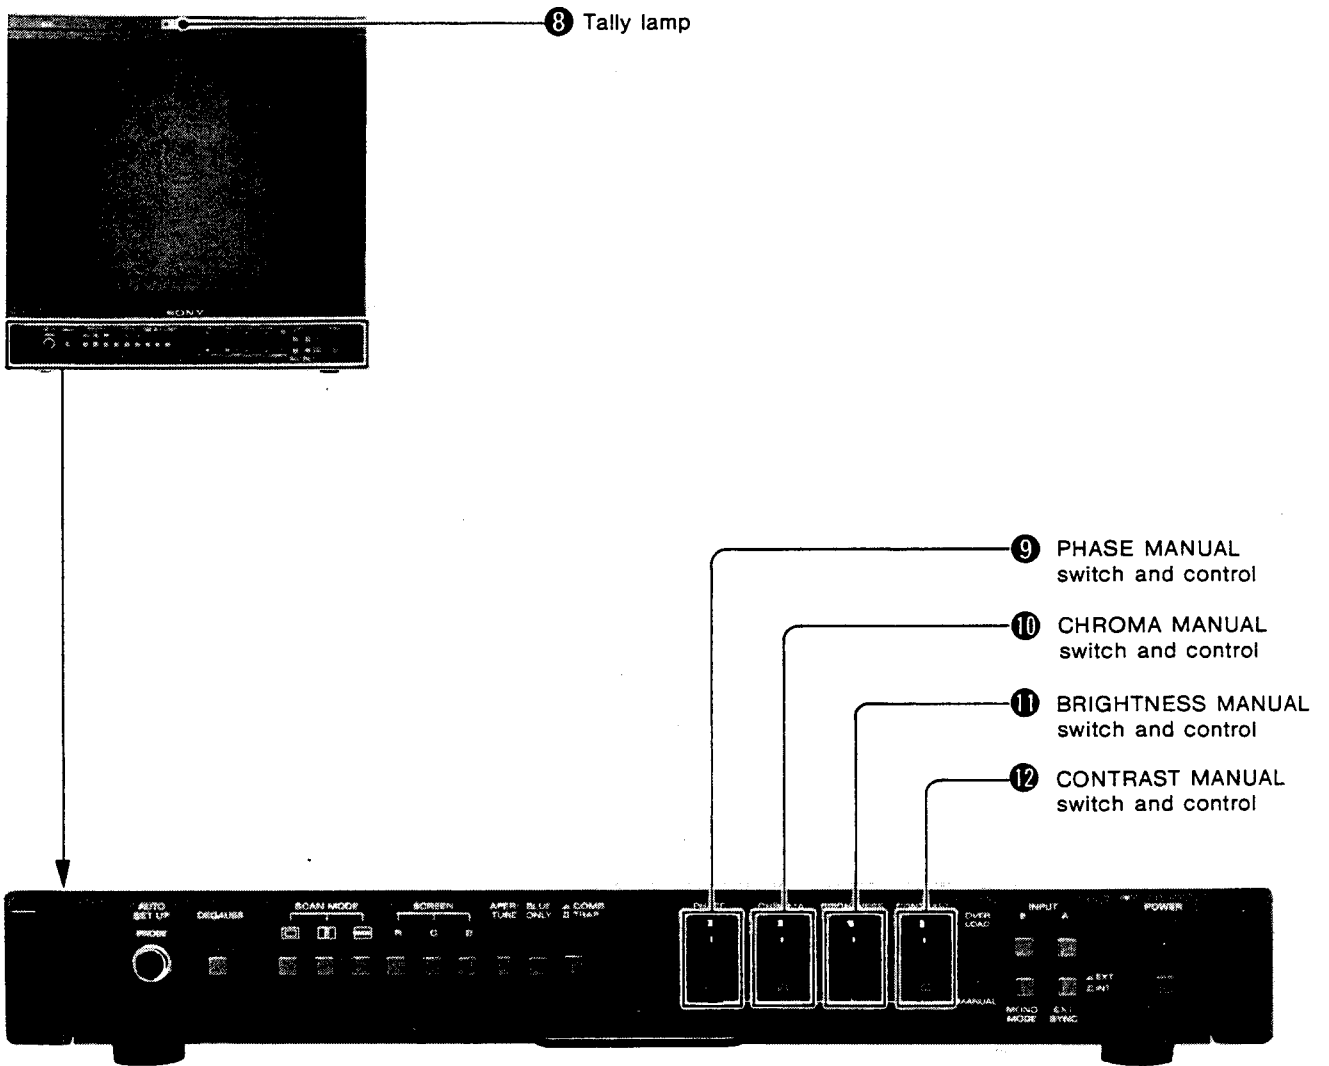

8 Tally lamp

The lamp lights when No. 3 and No.8 pins of the REMOTE connector on the rear panel are shortcircuited.

Attach one of the supplied tally number plates instead of the model number plate, as illustrated below.

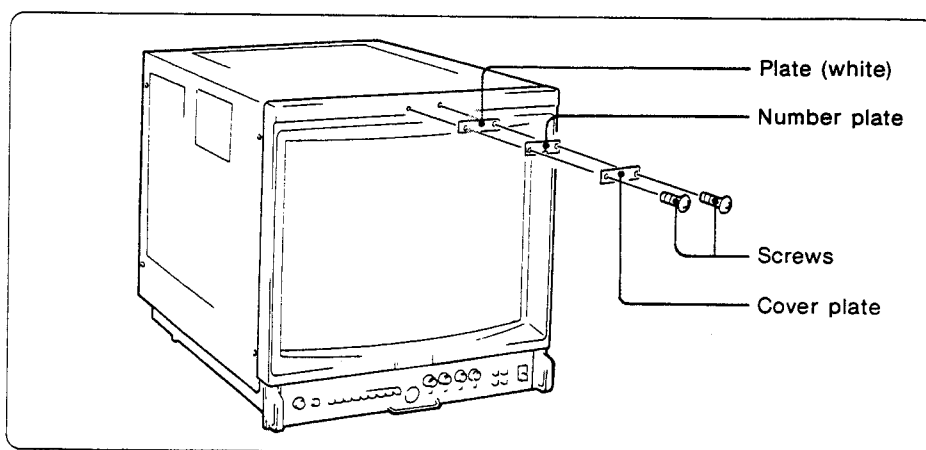**9 PHASE MANUAL switch and control**

When this switch is in the released position, the subcarrier phase preset with the PRESET PHASE control inside the drawer is obtained. To adjust the subcarrier phase manually, depress this switch and turn this control.

(This control is not effective when the COLOR STANDARD PAL button is depressed and the PAL D/S selector is set to D, or when the COLOR STANDARD SECAM button is pressed.)

10 CHROMA MANUAL switch and control


When this switch is in the released position, the color saturation preset with the PRESET CHROMA control inside the drawer is obtained. To adjust the color saturation manually, depress this switch and turn this control.

11 BRIGHTNESS MANUAL switch and control


When this switch is in the released position, the brightness preset with the PRESET BRIGHTNESS control inside the drawer is obtained. To adjust the brightness manually, depress this switch and turn this control.

12 CONTRAST MANUAL switch and control

When this switch is in the released position, the contrast preset with the PRESET CONTRAST control inside the drawer is obtained. To adjust the contrast manually, depress this switch and turn this control.

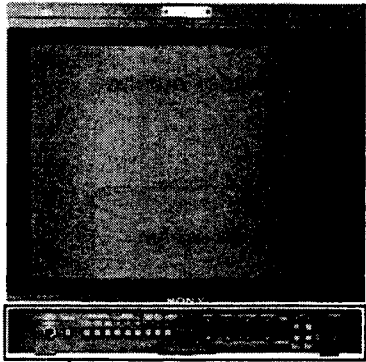

13 INPUT buttons

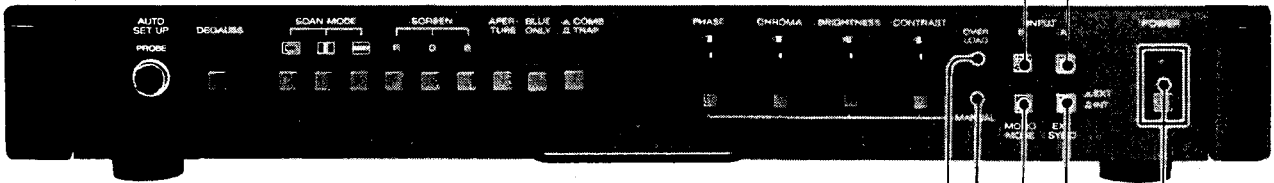

14 OVERLOAD indicator

15 MANUAL indicator

16 AUTO/MONO MODE selector

17 INT/EXT SYNC selector

18 POWER switch and indicator

- ⑬ **INPUT buttons**
Select the input signal.

BVM-2010P/PM

- A:** To monitor the signals connected to the VIDEO A INPUT connector, depress this button.
B: To monitor the signals connected to the VIDEO B INPUT connector, depress this button and press the INPUT SELECT "B" button inside the drawer.

BVM-2010PD/PMD


- A:** To monitor the signals being fed to the VIDEO A INPUT connector or DIGITAL A INPUT connector, depress this button.
B: To monitor the signals being fed to the VIDEO B INPUT connector or DIGITAL B INPUT connector, depress this button and press the INPUT SELECT "B" button inside the drawer.

For details on input selection, refer to "INPUT SELECT buttons" on page 1-21.

- ⑭ **OVERLOAD indicator**
This indicator lights to warn of overdrive of the CRT.
- ⑮ **MANUAL indicator**
This indicator lights when any of the MANUAL switches ⑨ through ⑫ is depressed.
- ⑯ **AUTO/MONO MODE selector**
Normally keep this selector released (AUTO). Color or monochrome mode is automatically selected according to the presence or absence of color burst. Depress the selector (MONO) to display the monochrome picture.
- ⑰ **INT/EXT SYNC selector**
Normally keep this selector released (INT). The monitor operates on the sync signal from the displayed composite video signal. To operate the monitor on an external sync signal supplied from the EXT SYNC connector on the rear panel, depress the selector (EXT).
- ⑱ **POWER switch and indicator**
Depress this switch to turn on the power. The POWER indicator will light. To turn the power off, press the switch again.

1-3-2. Rear Panel

Common to the BVM-2010P/PM/PD/PMD

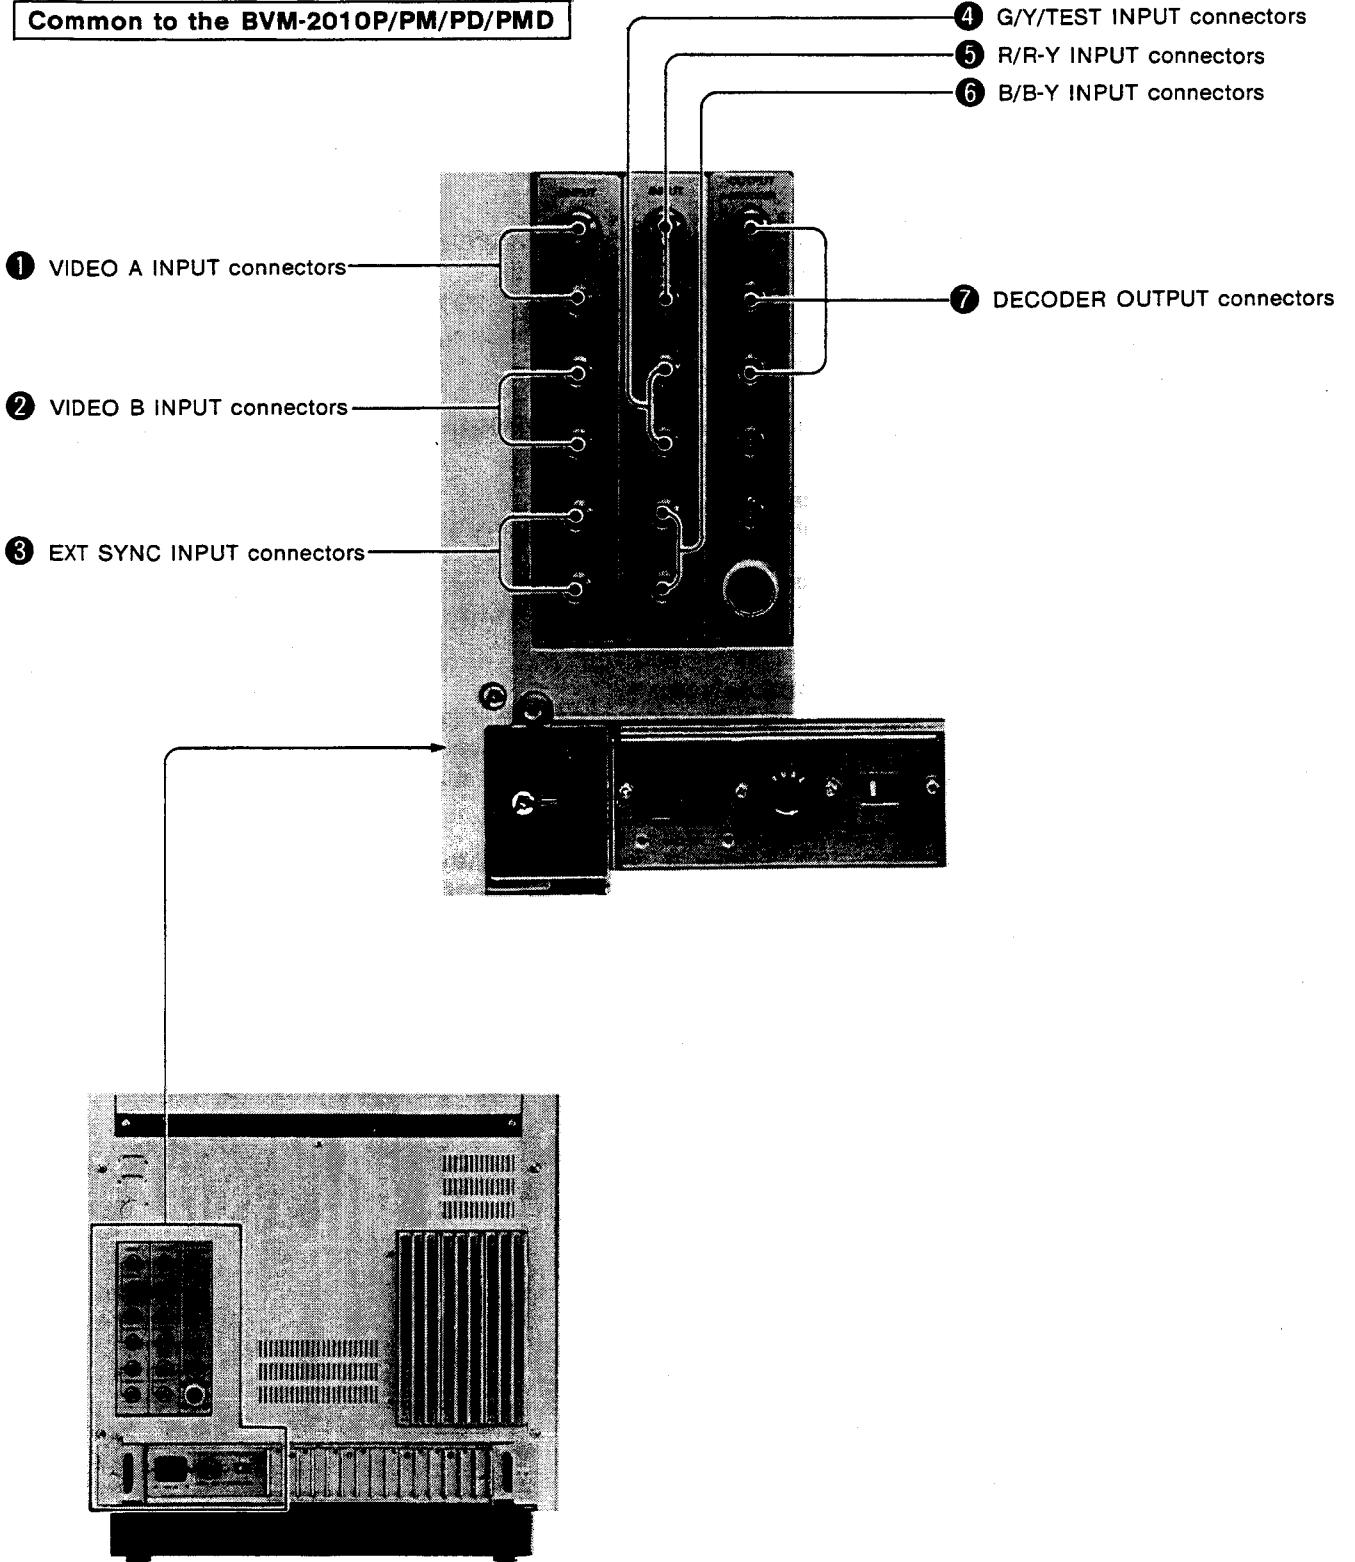


- ① **VIDEO A INPUT connectors (BNC)**
- ② **VIDEO B INPUT connectors (BNC)**
Accept video signals. Use one connector for input and the other for loop-through output.
When the loop-through output is not used, attach a 75-ohm terminator.
- ③ **EXT SYNC INPUT (external sync input) connectors (BNC)**
Accept sync signals.
Use one connector for input and the other for loop-through output.
When the loop-through output is not used, attach a 75-ohm terminator.
- ④ **G/Y/TEST INPUT connectors (BNC)**
- ⑤ **R/R-Y INPUT connectors (BNC)**
- ⑥ **B/B-Y INPUT connectors (BNC)**
Input an RGB, component (Y, R-Y, B-Y) or test signal. The input signal can be selected with the INPUT SELECT buttons on the sub control panel. Use one connector for input and the other for loop-through output. When the loop-through output is not used, attach a 75-ohm terminator.
- ⑦ **DECODER OUTPUT connectors (BNC)**
These connectors provide RGB or component (Y, R-Y, B-Y) outputs decoded from the signals displayed on the screen, only when the BKM-1440 RGB/component adaptor is installed.
The RGB or component outputs are selected with the S1 selector on the BF board of the BKM-1440 kit.

Quick reference for output selection


Output signal	Component	RGB
Operation		
S1 selector on BF board	Lower position	Upper position
Input signal	Encoded VIDEO A, VIDEO B, TEST or component	
Output connectors	DECODER OUTPUT (R/R-Y, G/Y, B/B-Y)	

Notes

- The DECODER OUTPUT connectors do not provide the correct RGB outputs from the displayed RGB signals. For RGB outputs, use the loop-through outputs of the R/G/B input connectors.
- The outputs from non-composite signals are also non-composite. Supply sync signals from the EXT SYNC INPUT connector if required.
- The output signals are affected by the CHROMA, PHASE and APERTURE controls and MATRIX switch.
- The color killer is not activated for output signals.

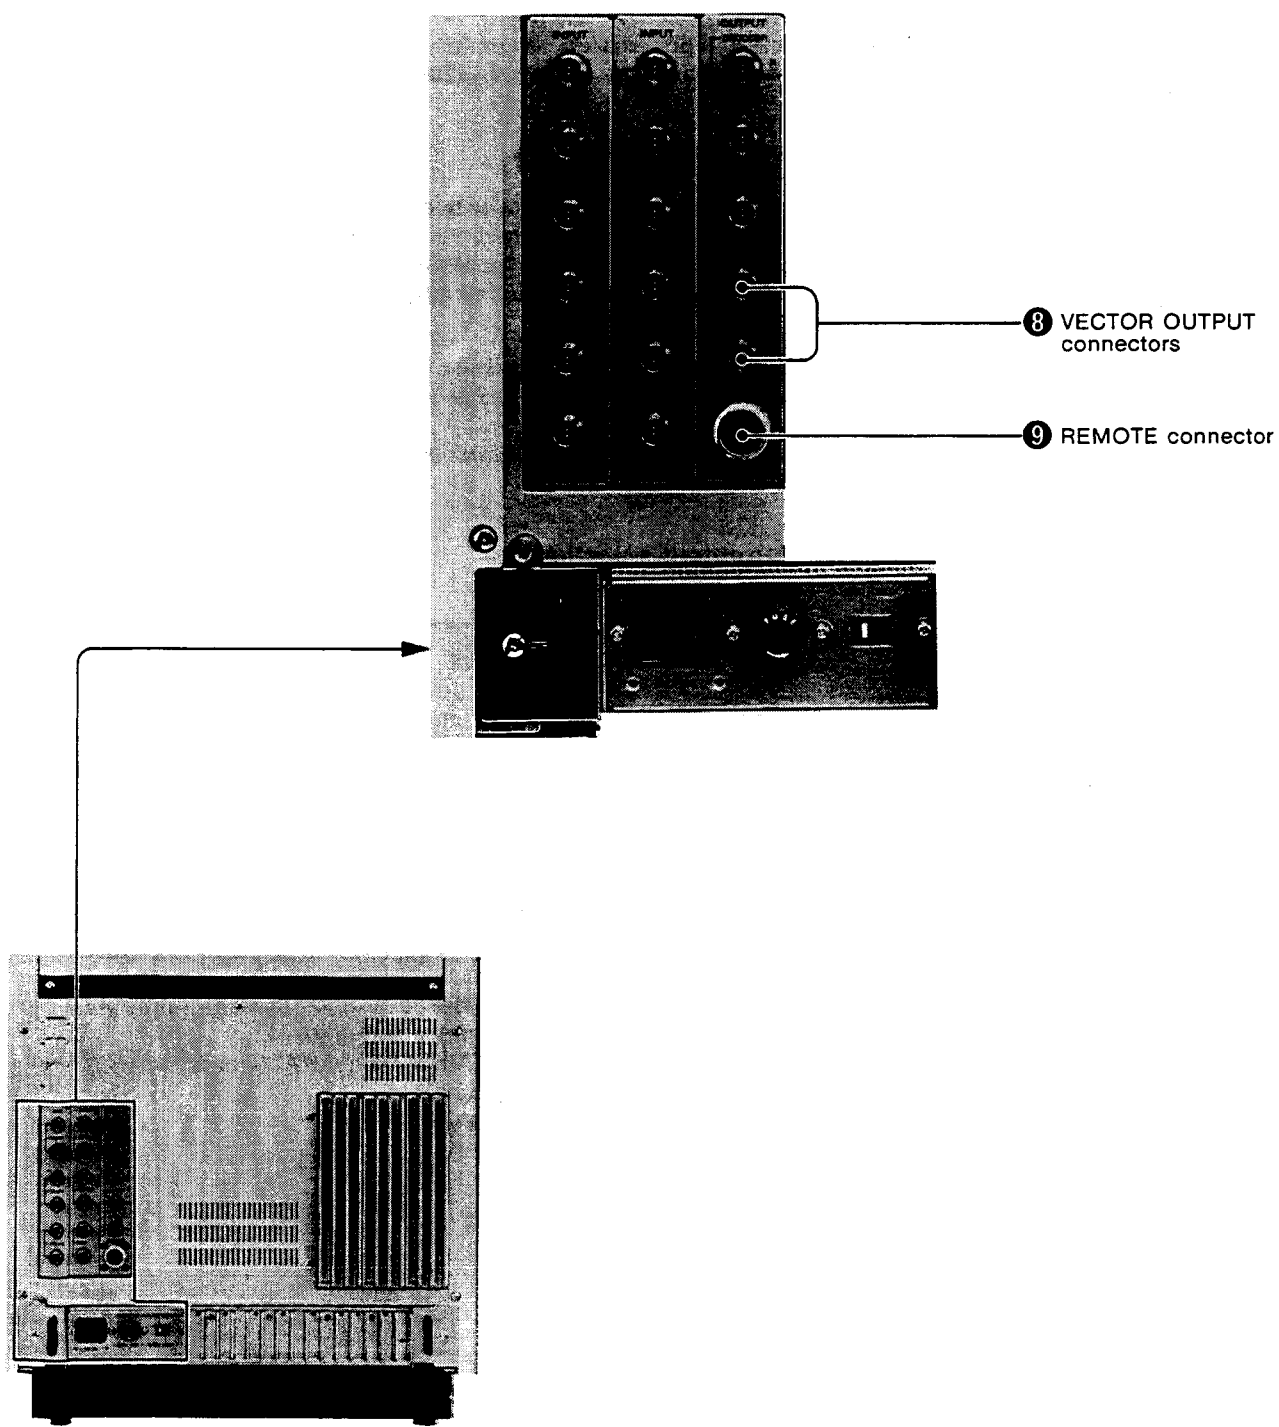

- ⑧ **VECTOR OUTPUT connectors (BNC)**
Provide R-Y and B-Y demodulated chroma outputs. Connect the Tektronix 1424 display unit or equivalent to provide vector displays. Connect the R-Y connector to the Y input of the display unit, and the B-Y connector to the X input.
- ⑨ **REMOTE connector (10-pin)**
Use the supplied 10-pin connector.



To enter remote control mode, short-circuit pin No. 5 with pin No. 8. The relationship between the function and pin connections in remote control mode are shown below.


Function			Pin No.						
INPUT*	SYNC*	MODE*	1	2	3	4	5	6	7
VIDEO A	INT	AUTO	O	O	-	O	S	-	-
		MONO	S	O	-	O	S	-	-
	EXT	AUTO	O	O	-	S	S	-	-
		MONO	S	O	-	S	S	-	-
VIDEO B	INT	AUTO	O	S	-	O	S	-	-
		MONO	S	S	-	O	S	-	-
	EXT	AUTO	O	S	-	S	S	-	-
		MONO	S	S	-	S	S	-	-
VITC OFF**			-	-	-	-	-	S	-
VITC HOLD**			-	-	-	-	-	O	S
TALLY ON			-	-	S	-	-	-	-

S: Short-circuit with pin No. 8.
O: Open
-: Either S or O.


* Remote control operations have priority over the MODE, INPUT and SYNC selectors on the front panel.
** To remotely control the VITC display, first set the VITC switch inside the drawer to ON and then short-circuit pin 6 or 7 with pin 8. (For VITC display, the optional BKM-1460 is required.)

Note

For remote control operations, be sure to depress the INPUT SELECT "B" button inside the drawer.

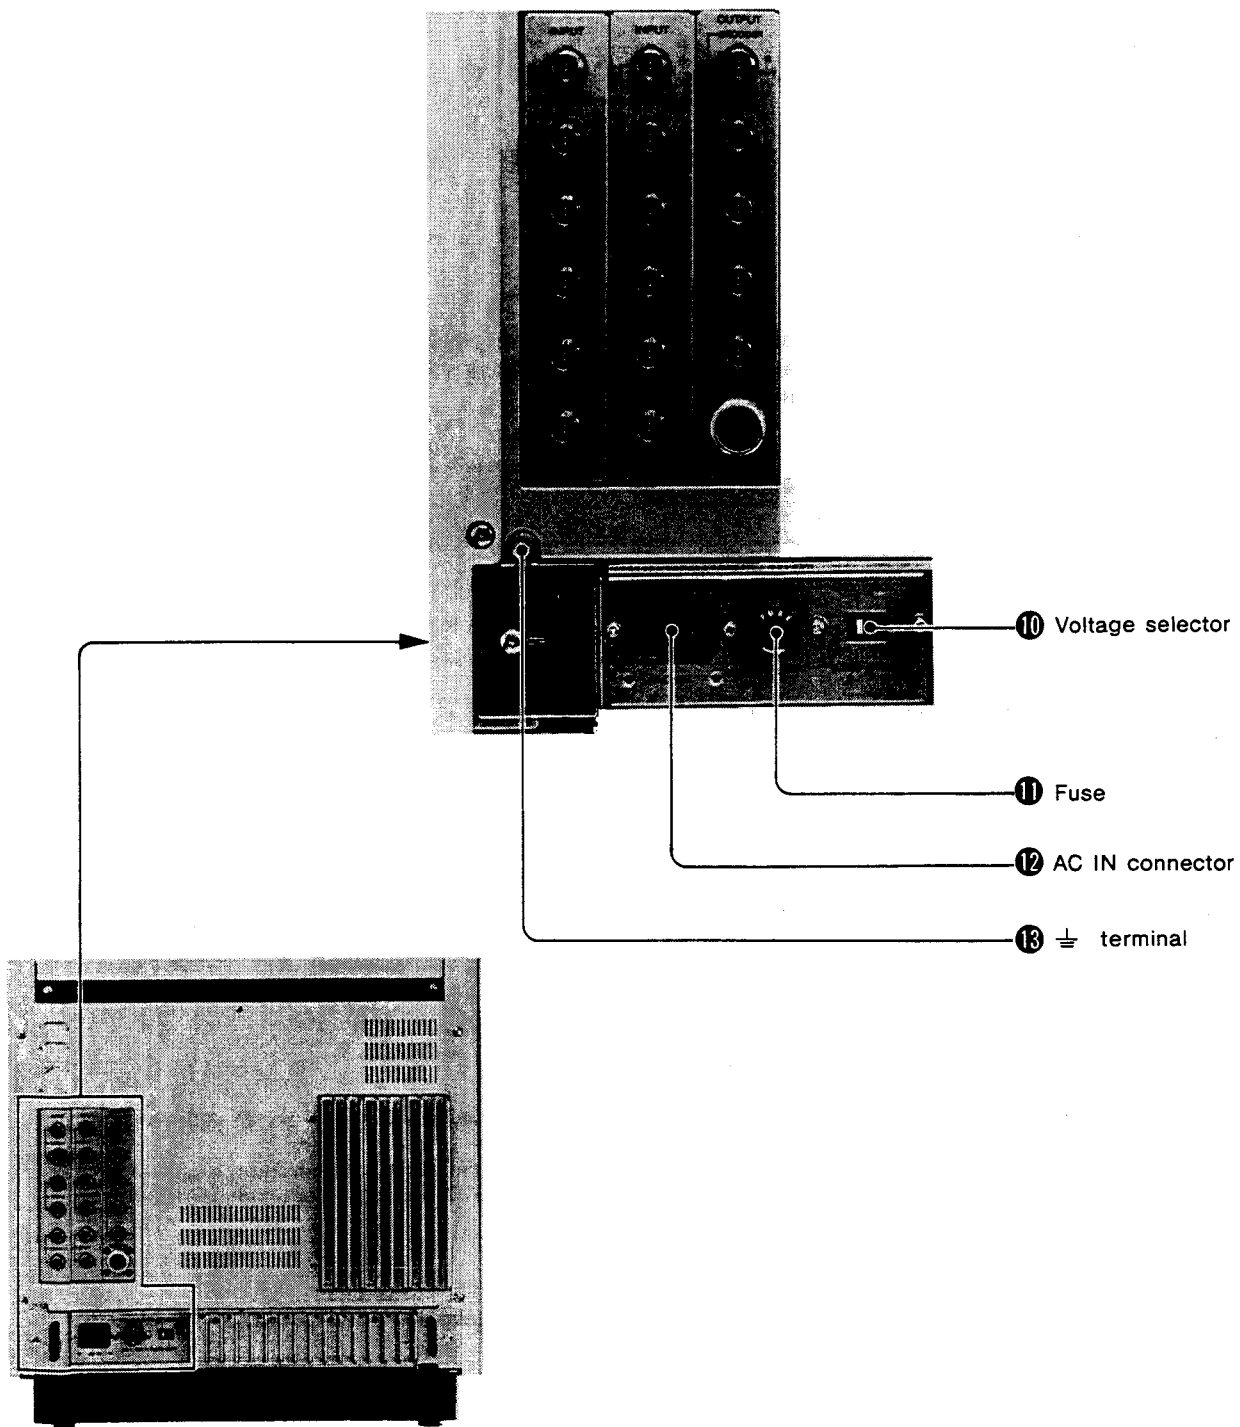


- ⑩ **Voltage selector**
Set to the local power line voltage, 220 – 240V AC or 100 – 120V AC.
- ⑪ **Fuse**
Use a T2A fuse for operation on 220 – 240V AC, or a 4A fuse for operation on 100 – 120V AC.
- ⑫ **AC IN connector**
Connect the supplied AC power cord here and secure it with the supplied cord stopper, if required.

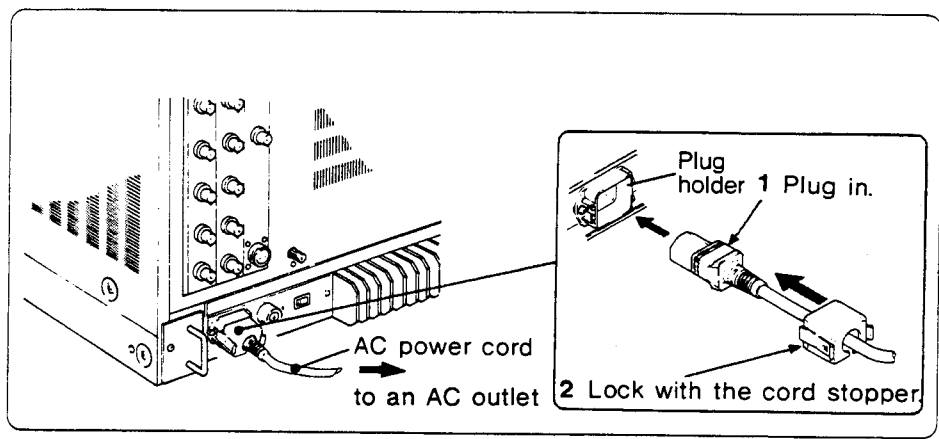

- ⑬ **Ground (⊖) terminal**
Connect to the system ground, if necessary.


Only for the BVM-2010PD/PMD

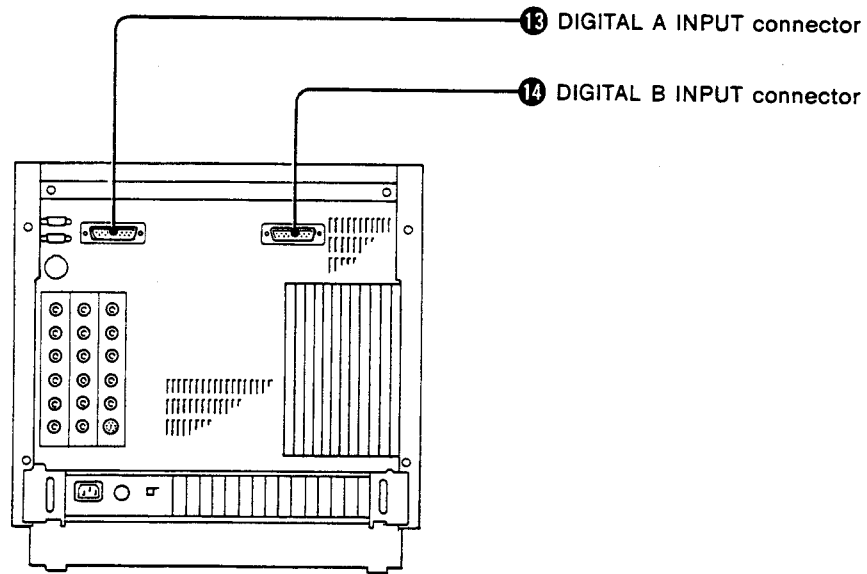

- ⑬ **DIGITAL A INPUT connector (D-SUB 25-pin)**
- ⑭ **DIGITAL B INPUT connector (D-SUB 25-pin)**
Accept RP-125 or Tech 3246-E standard video signals from the Sony 4:2:2 component DVTR system.


1-3-3. Sub Control Panels inside the Drawer

Insert the supplied key into the keyhole of the drawer lock, turn it 90° clockwise and pull the drawer out.

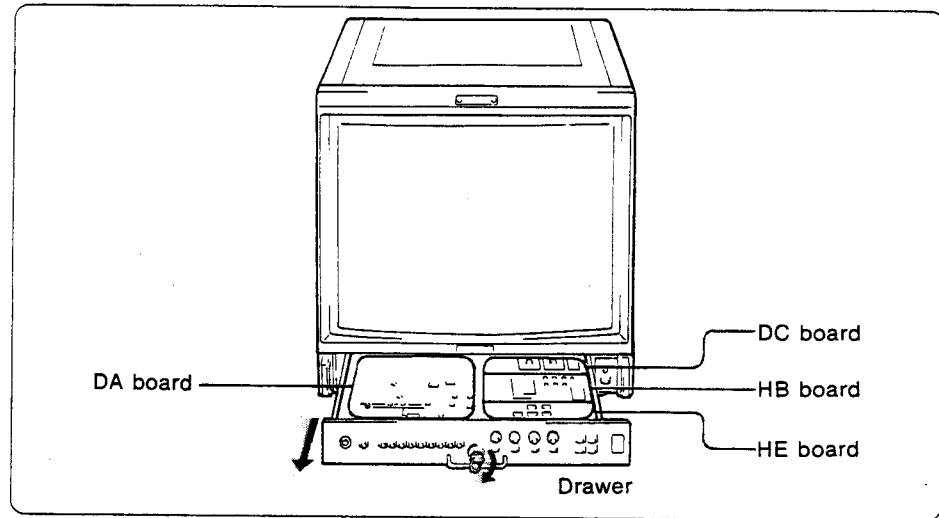

- Adjust the controls on the sub control panels when the monitor is fully warmed up. Warm-up time will be at least 30 minutes after the power has been turned on.
- Adjust the control using the supplied screwdriver.

HB board (Function selection and white balance adjustment section)

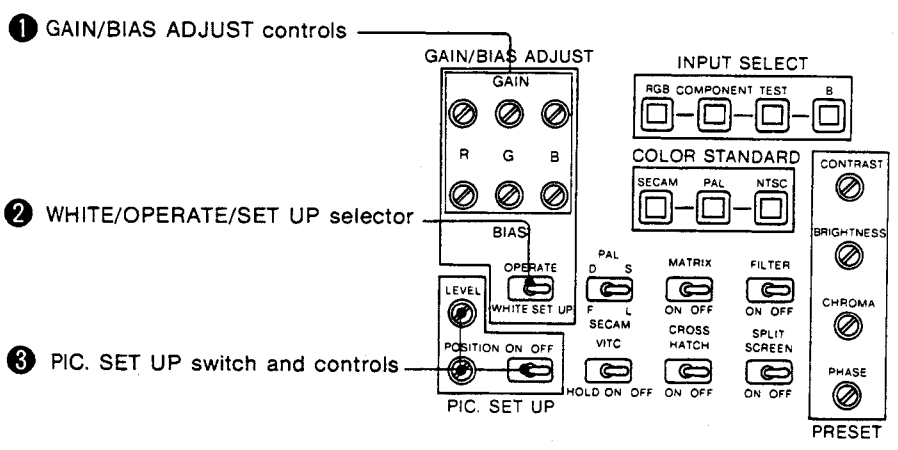

1 GAIN/BIAS ADJUST controls

Used for white balance adjustment.
 GAIN and BIAS controls are provided for the R (red), G (green) and B (blue) screens.

BIAS: Set the WHITE/OPERATE/SET UP selector to SET UP and adjust the white balance and brightness of the screen at the lowlight with these controls.


GAIN: Set the WHITE/OPERATE/SET UP selector to WHITE and adjust the white balance and contrast of the screen at the highlight with these controls. For details on the white balance adjustment, refer to "1-5. WHITE BALANCE ADJUSTMENT" on page 1-36.

2 WHITE/OPERATE/SET UP selector


OPERATE: Normally set to this position for normal monitoring.
WHITE: When adjusting the white balance at the highlight, set to this position. Internal 100% white signal is displayed on the screen.
SET UP: When adjusting the white balance at the lowlight, set to this position. A horizontal white bar of approximately 1/3 the screen height is displayed.

3 PIC. SET UP (picture set up) switch and controls

Used to match the black reference of the monitor with the black level of the input signal.
ON/OFF switch: When this switch is set to ON, a vertical picture band and the black reference of the monitor are displayed on the screen for easy level comparison.

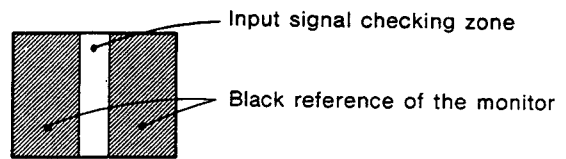

POSITION control: Move the position of the picture band horizontally so that the black signal of the picture is located next to the black reference area.
LEVEL control: Adjust this control to match the brightness of the black reference area with that of the input black signal.

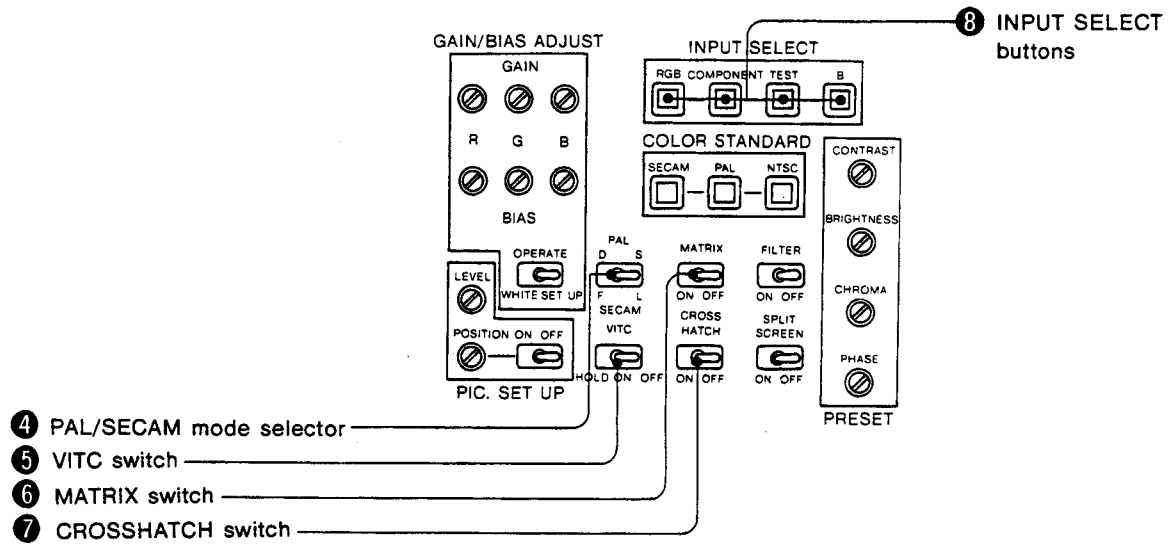

- 4 PAL/SECAM mode selector**
 This selector functions as the PAL D/S selector for PAL color system, and as the SECAM F/L selector for SECAM color system.
PAL D/S selector: Selects the demodulation mode of the PAL system, D (deluxe) or S (simple). Normally set to D.
SECAM F/L selector: Selects the ID signal of the SECAM system, L (line) or F (field). Normally set to L.
- 5 VITC (Vertical Interval Time Code) switch**
 This switch functions only when the optional BKM-1460 VITC adaptor is installed.
ON: Set to this position to display the VITC.
OFF: To turn off the VITC display.
HOLD: To hold the VITC figure, press the switch momentarily to this position. To run the VITC again, press the switch to this position again.
- 6 MATRIX switch**
 Normally set this switch to OFF. Set to ON to activate the matrix circuit so that the chromaticity of the displayed picture more closely approximates to that of "true" NTSC phosphors.
- 7 CROSSHATCH switch**
 Set to ON to display the internal crosshatch pattern for adjusting convergence, etc.
 The crosshatch pattern is synchronized to the selected composite sync signal.

⑧ INPUT SELECT buttons

To monitor one of the following four input signals, depress the INPUT B selector on the front panel and press the appropriate button.

RGB: To monitor the R/G/B signals connected to the R/R-Y, G/Y/TEST and B/B-Y connectors

COMPONENT: To monitor the component (R-Y, Y and B-Y) signals connected to the R/R-Y, G/Y/TEST and B/B-Y connectors

TEST: To monitor the composite video signals connected to the G/Y/TEST connector

B: **BVM-2010P/PM** To monitor the composite video signals connected to the VIDEO B INPUT connector

BVM-2010PD/PMD To monitor the composite video signals connected to the VIDEO INPUT B connector or to monitor the digital video signal connected to the DIGITAL B INPUT connector


Quick reference for input selection

BVM-2010P/PM

Input signal Operation	Encoded video			Component	RGB
	VIDEO A	VIDEO B	TEST		
INPUT selectors (front panel)	A	B	B	B	B
INPUT SELECT buttons (Inside the drawer)	/	B	TEST	COMPONENT	RGB
INPUT connectors	VIDEO A	VIDEO B	G/Y/TEST	R/R-Y, G/Y/TEST, B/B-Y	R/R-Y, G/Y/TEST, B/B-Y

BVM-2010PD/PMD

Input signal Operation	Encoded video			4:2:2 digital		Component B	RGB
	VIDEO A	VIDEO B	TEST	DIGITAL A	DIGITAL B		
INPUT buttons (Front panel)	A	B	B	A	B	B	B
INPUT SELECT button (Inside the drawer)	/	B	TEST	/	B	COMPONENT	RGB
COLOR STANDARD buttons (Inside the drawer)	SECAM PAL	SECAM PAL	SECAM PAL	DIGITAL	/	/	/
INPUT connectors	VIDEO A	VIDEO B	G/Y/ TEST	DIGITAL A	DIGITAL B	R/R-Y G/Y/TEST B/B-Y	

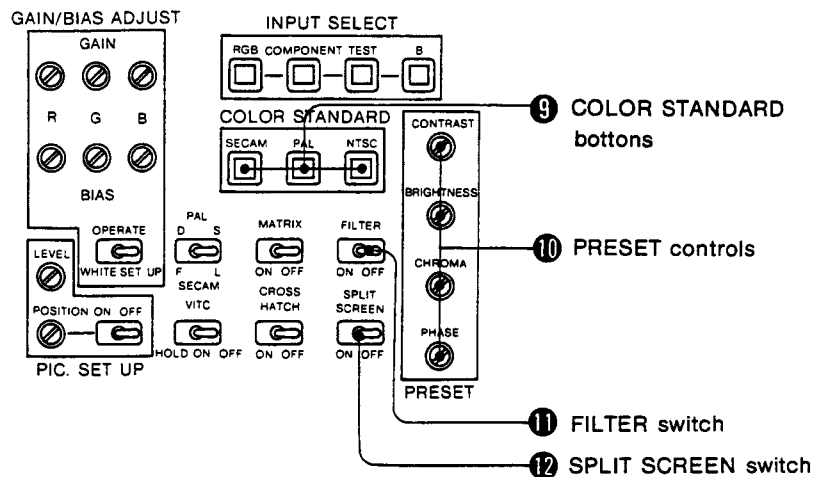

9 COLOR STANDARD buttons

Select the color standard of the input picture.
For displaying the picture of each color standard, the appropriate decoder board (optional) should be installed. See page 1-2.

BVM-2010P/PM

SECAM: For SECAM standard
PAL: For PAL or PAL-M standard
NTSC: For NTSC standard

BVM-2010PD/PMD

DIGITAL (SECAM): For digital video signal (or SECAM standard*)
PAL: For PAL or PAL-M standard
NTSC: For NTSC standard

Note

If the decoder board for the selected color system is not installed:

- The picture does not appear on the screen when the FILTER switch is set to ON.
- The picture is displayed in monochrome mode when the FILTER switch is set to OFF.

10 PRESET controls

Adjust the preset levels.
CONTRAST: Preset the picture contrast level.
BRIGHTNESS: Preset the picture brightness level.
CHROMA: Preset the color saturation level.
PHASE: Preset the subcarrier phase.

11 FILTER switch

This switch functions only when the AUTO/MONO MODE selector on the front panel is set to MONO.
Normally set to ON to activate the comb or trap filter. Set to OFF to deactivate the filter for a wider frequency range.


- When the MODE selector is set to AUTO, the filter is always activated for color signals regardless of this switch setting.

12 SPLIT SCREEN switch

Normally set to OFF. When this switch is set to ON, the lower half of the picture is displayed in monochrome mode.

* To monitor the SECAM standard video signal, mount the BKM-1430 on the unit and set the COLOR STANDARD selector on the BR board to the upper or middle position. See page 1-31.

DC board (Convergence adjustment section)

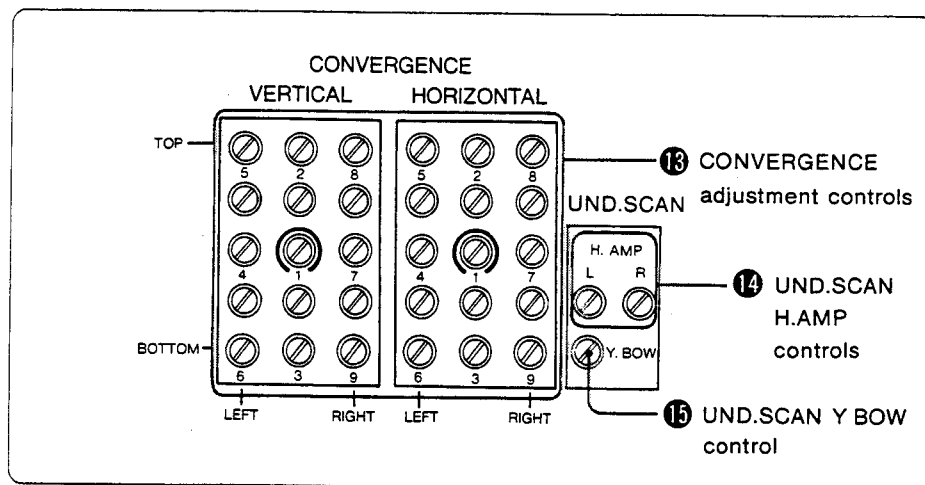

13 CONVERGENCE adjustment controls

Used to adjust the convergence of the normal picture. The VERTICAL controls adjust the convergence vertically; the HORIZONTAL controls adjust it horizontally. 15 controls cover the entire screen so that each control adjusts the corresponding portion of the screen. Refer to "1-4. CONVERGENCE ADJUSTMENT" on page 1-32.


14 UND.SCAN H.AMP (underscan horizontal amplifier) control

Used to adjust the horizontal convergence of the underscanned picture. See 1-4-2.

15 UND.SCAN Y BOW (underscan Y bow) control

Used to adjust the horizontal convergence at the top and bottom of the center of the underscanned picture. See 1-4-2.

DA board (H.V. oscillator section)

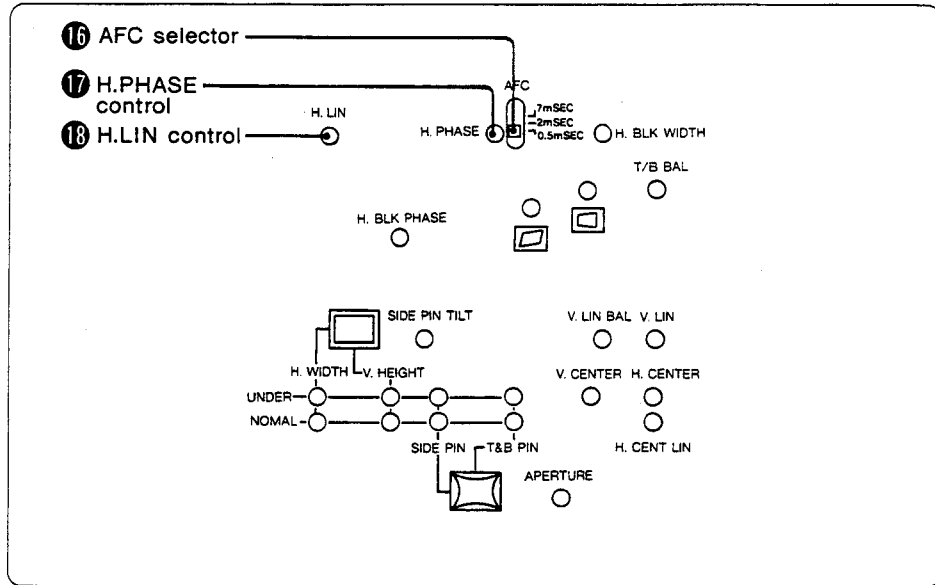


- 16 AFC (automatic frequency control) selector**
 Selects the AFC time constant.
0.5 mSEC (fast): This mode is fast enough to correct for VTR jitter. Set to this position to obtain a stable playback picture from a VTR.
2 mSEC (normal): Normally set to this position.
7 mSEC (slow): This mode is slow enough to display the time base instability introduced by mechanical jitter, in the VTR playback signal.
- 17 H.PHASE (horizontal phase) control**
 Used to adjust the horizontal position of the picture.




- 18 H.LIN (horizontal linearity) control**
 Used to adjust the horizontal linearity of the picture.




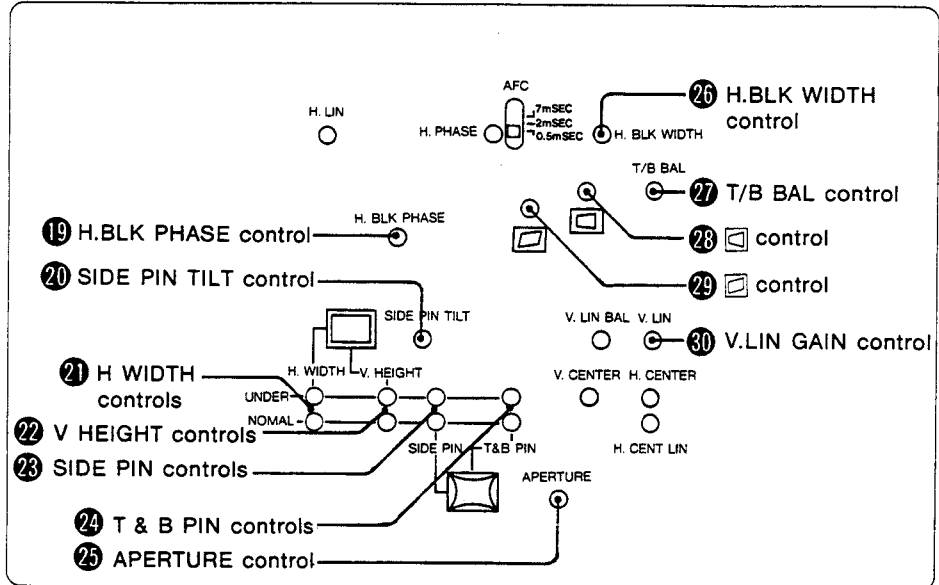

19 H.BLK PHASE (horizontal blanking phase) control
 Used to adjust the phase of the horizontal blanking at both sides of the screen.



20 SIDE PIN TILT (side pincushion tilt) control
 Used to adjust the phase of the side pincushion distortion.



21 H WIDTH (horizontal width) controls
 Adjust the horizontal width of the picture. Use the NORMAL control for the normal picture, and the UNDER control for the underscanned picture.


22 V HEIGHT (vertical height) controls
 Adjust the height of the picture. Use the NORMAL control for the normal picture, and the UNDER control for the underscanned picture.

23 SIDE PIN (pincushion) controls
 Correct the side pincushion distortion. Use the NORMAL control for the normal picture, and the UNDER control for the underscanned picture.


24 T & B PIN (top and bottom pincushion) distortion controls
 Correct the top and bottom pincushion distortion. Use the NORMAL control for the normal picture, and the UNDER control for the underscanned picture.

25 APERTURE control
 Adjusts the frequency response when the APERTURE switch on the front panel is depressed.


26 H.BLK WIDTH (horizontal blanking width) control
 Used to adjust the width of the horizontal blanking.




27 T/B BAL (top and bottom pincushion balance) control
 Used to adjust the distortion at the center (X axis) of the picture.




28 □ (trapezoid distortion) control
 Used to correct the horizontal trapezoid distortion.




29 □ (parallelogram distortion) control
 Used to correct the right angled distortion of the deflection yoke.



30 V.LIN GAIN (vertical linearity gain) control
 Used to adjust the vertical linearity of the picture.



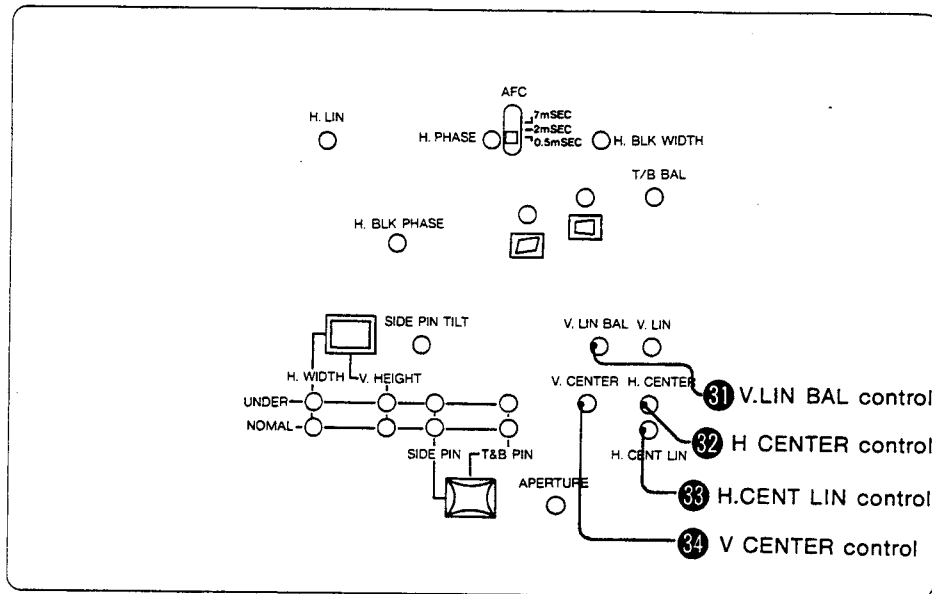


31 V.LIN BAL (vertical linearity balance) control
 Used to adjust the balance of the vertical (Y axis) linearity of the picture.



32 H CENTER (horizontal centering) control
 Adjusts the horizontal position of the picture.


33 H.CENT LIN (horizontal centering linearity) control
 Used to adjust the horizontal linearity at the center of the picture.



34 V CENTER (vertical centering) control
 Adjusts the vertical position of the picture.

HE board (Auto chroma/phase adjustment, Auto white balance adjustment section)

To activate these keys, the optional BKM-2056 auto set-up adaptor must be installed.

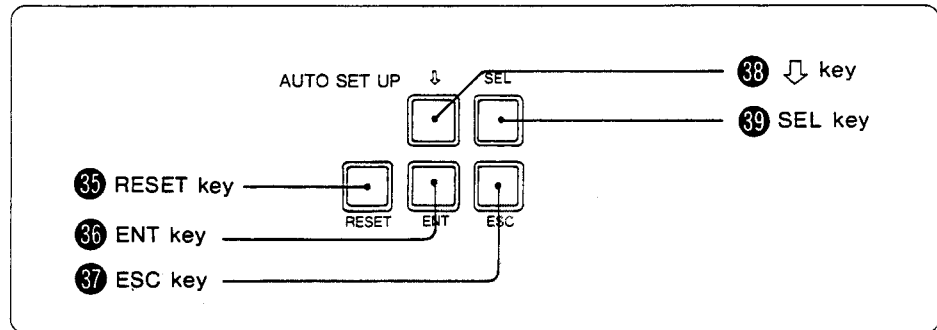**35 RESET key**

Press to reset the auto set-up operation and return to the initial status. This key is operative even when automatic adjustment is in operation.

36 ENT (enter) key

Press to advance to the next step during auto set-up operation and to present next menu choice. This key is also used to start the auto set-up operation.

37 ESC (escape) key

Press to return to the previous step during auto set-up operation. This key is not operative while automatic adjustment is in operation.

38 ↓ (cursor) key

For selecting options from menus. Each time this key is pressed, the cursor moves downwards, and then to the top.


39 SEL (select) key

Press to set the monitor to color temperature selection mode. Also used to select the memory position of the probe in color analyzer mode.

1-3-4. Switches inside the Cabinet

Remove the cabinet, referring to Section 2.


BJ board

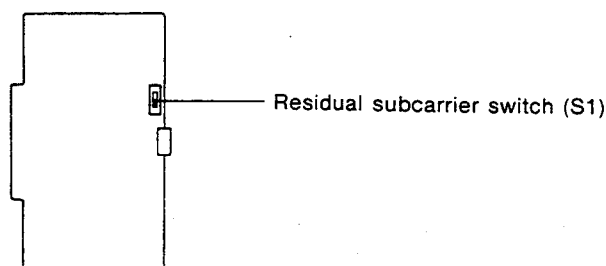

Residual subcarrier switch (S1)

This switch is factory-preset to the lower position (OFF). Normally there will be no residual subcarrier in input video signals. However, if a residual subcarrier is present, this may affect the display. Set this switch to the upper position (ON) to check if a residual subcarrier is present. If it is present in the incoming signal, color shift appears in the picture.

BH board

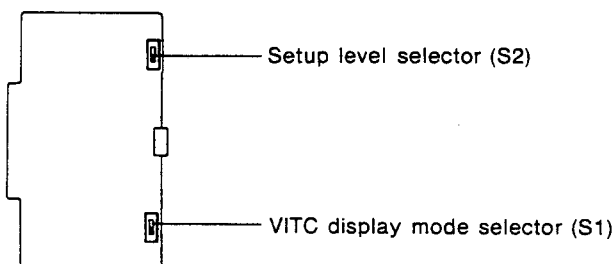

Setup level selector (S2)

Select the setup level.

0 IRE: Setup level is 0%.

AUTO: Factory-preset position. Setup level is 0% when the field frequency of the input signal is 50 Hz, and 7.5% when the field frequency is 60 Hz.

7.5 IRE: Setup level is 7.5%.

The setup level can be adjusted with the controls on the BH board: 0% level with the RV1 control, and 7.5% level with the RV2 control in the range from -2.5% through +12.5%.


VITC display mode selector (S1)

Used to invert the character and background colors.

Upper position: Factory-preset position. The VITC is displayed in white characters with black background.

Lower position: The VITC is displayed in black characters with white background. For details, refer to the operation and maintenance manual of the BKM-1460 VITC adaptor.

BG board

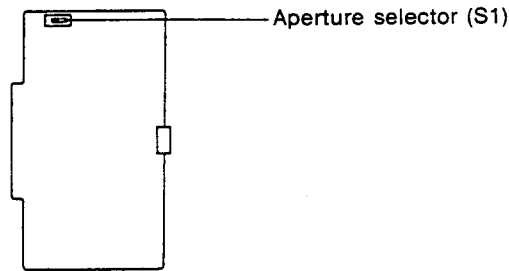


Aperture selector (S1)

Selects the boost frequency, 4.5 MHz or 6.5 MHz, for aperture correction. This selector is factory-preset to 4.5 MHz.

QA and QB boards

The QA and QB boards are located behind the INPUT connector panels. Remove the INPUT connector panels, referring to Section 2.

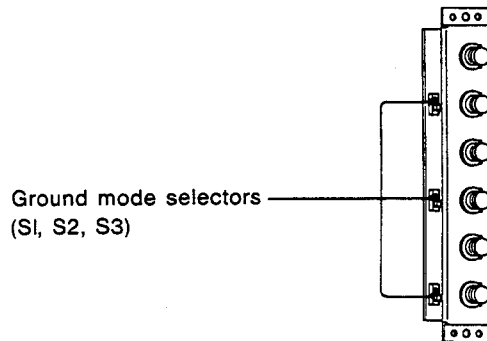


Ground mode selectors (S1, S2, S3)

Three selectors are provided for each VIDEO A, VIDEO B and EXT SYNC connectors (QA board), or for each R/R-Y, G/Y/TEST and B/B-Y connectors (QB board).

S (non-floating): Factory-preset position. Normally keep the selectors at this position.


F (floating): When there is hum in the input signal, set to this position. Common mode noises will be rejected.

QD board (Only for the BVM-2010PD/PMD)

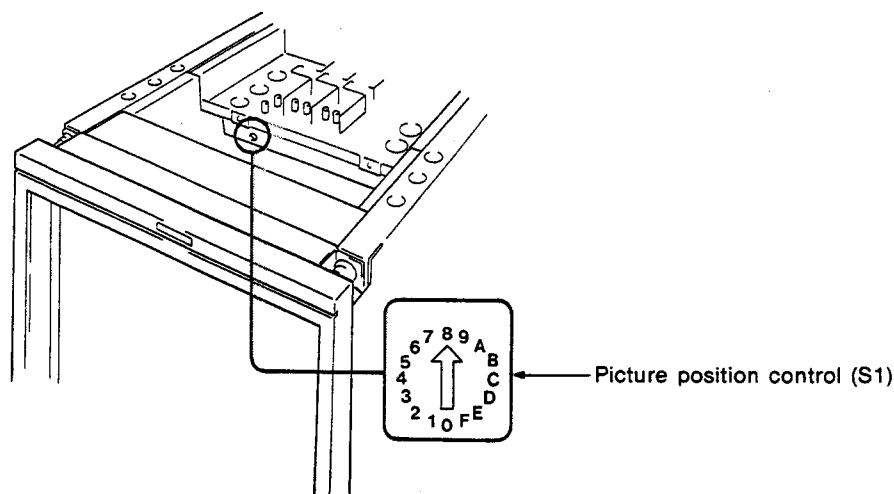

Picture position control (S1)
 Leave this dial set to position 8.
 Only qualified service personnel should change its position.

BR board (Only for the BVM-2010PD/PMD)

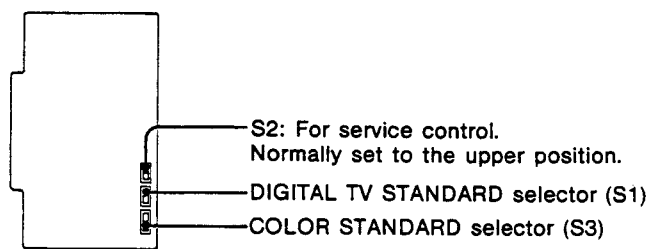


DIGITAL TV STANDARD selector (S1)
 Depending on the TV standard of the input digital video signal, select the position.
Upper position (525): 525/60 line standard system
Lower position (625): 625/50 line standard system

COLOR STANDARD selector (S3)
 Select the COLOR STANDARD button (inside the drawer) to be used for monitoring the digital video signal by setting the selector to the upper position (NTSC), middle position (PAL) or lower position (SECAM).
 The selector is factory preset to the lower position (SECAM). To monitor the SECAM standard video signal, set the selector to the upper or middle position.
 If either of these two are chosen, put the label **DIGITAL** on the PAL or NTSC button of the COLOR STANDARD buttons.

1-4. CONVERGENCE ADJUSTMENT















1-4-1. Convergence Adjustment of Normal Picture







Use the CONVERGENCE controls inside the drawer.

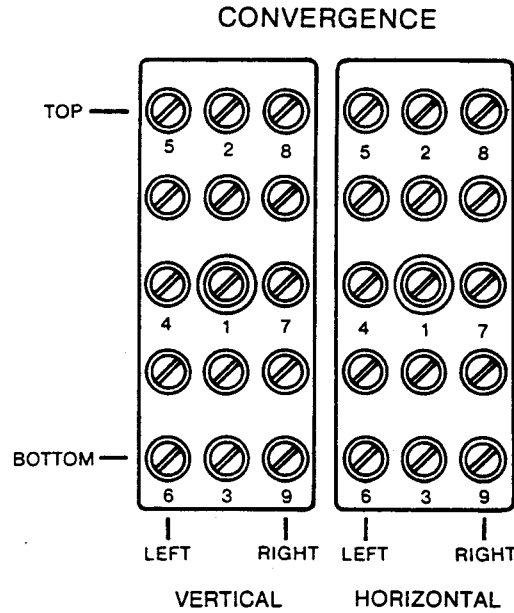

- Numbers 1 to 9 in the illustration above refer to the sequence of operations.
- The HORIZONTAL controls adjust the convergence horizontally, and the VERTICAL controls adjust the convergence vertically.
- When adjusting the convergence, observe the portion of the screen indicated by the | or --- mark in the illustrations. The red and blue beams move symmetrically to the green beam.


Adjust the convergence of corresponding portion of the screen as follows:

VERTICAL	HORIZONTAL
1 At center 	
2 At center top 	
3 At center bottom 	
4 At left center 	
5 At top left 	
6 At bottom left 	
7 At right center 	


VERTICAL	HORIZONTAL
<p>8 At top right</p> 	
<p>9 At bottom right</p> 	
<p>10 Adjust the convergence between the center and top and between the center and bottom on the screen as required.</p>  	

1-4-2. Convergence Adjustment of Underscanned Picture


Adjust the convergence of the underscanned picture after convergence adjustment of the normal picture is completed.



- 1 Adjust the horizontal convergence with the UND.SCAN H.AMP control.

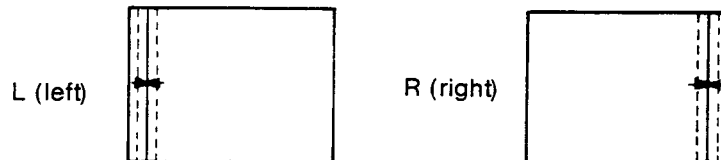


- 2 Adjust the horizontal convergence at the four corners of the picture with the UND.SCAN Y BOW control.



1-5. WHITE BALANCE ADJUSTMENT

Use the WHITE/OPERATE/SET UP selector and GAIN/BIAS ADJUST controls inside the drawer.

During adjustment, turn the red, green and blue beams on and off with the SCREEN switches on the front panel, as required.

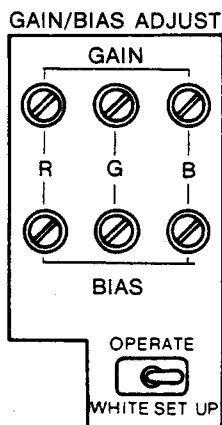

- 1 Display a test signal on the screen.
- 2 Set the WHITE/OPERATE/SET UP selector to SET UP.
- 3 Adjust the white balance at the lowlight with the BIAS controls.
- 4 Set the WHITE/OPERATE/SET UP selector to WHITE.
- 5 Adjust the white balance at the highlight with the GAIN controls.
- 6 After adjustment, set the WHITE/OPERATE/SET UP selector to OPERATE.

Note

For white balance adjustment using a color analyzer or equivalent, see Section 2.

1-6. SPECIFICATIONS

1. OPERATION IIIIIIIIIII

Common to the BVM-2010P/PM/PD/PMD

System	BVM-2010P/PD 625 lines per picture, 50 fields per second interlaced, PAL
	BVM-2010PM/PMD 525 lines per picture, 60 fields per second interlaced, PAL-M
CRT	Super Fine Pitch Trinitron 0.3 mm aperture grille, 90-degree deflection, ϕ 36 mm in-line gun Effective picture size: 291 × 384 mm (h/w) (11½ × 15⅛ inches) 482 mm (19 inch) picture measured diagonally

Input

Connectors	BNC type (12)
Video	VIDEO A/B, TEST, R/G/B 0.7 Vp-p, non-composite or 1 Vp-p, composite, video signal \pm 6 dB positive, high impedance, with loop-through output Y/R-Y/B-Y Y: Composite, 1.0 Vp-p \pm 6 dB, high impedance, loop-through R-Y/B-Y: 0.7 Vp-p \pm 6 dB, high impedance, loop-through
Sync	EXT SYNC 1 – 8 Vp-p negative, high impedance, with loop-through output
Return loss	More than 46 dB (7 MHz with 75-ohm termination)
Hum rejection	Reduced by more than 50 dB Maximum hum: Less than 4 Vrms, where hum is applied to the monitor in floating ground mode

Output


Connectors	VECTOR OUT: BNC type (2) DECODER OUT: BNC type (3) (output decoded signals only when BKM-1440 is installed.) REMOTE: 10-pin connector (1)
------------	---

* The input level of a component signal conforms to the EBU "N-10" standard. (Only for the BVM-2010P/PD)




SECTION 2 DISASSEMBLY

2-1. COVER REMOVAL

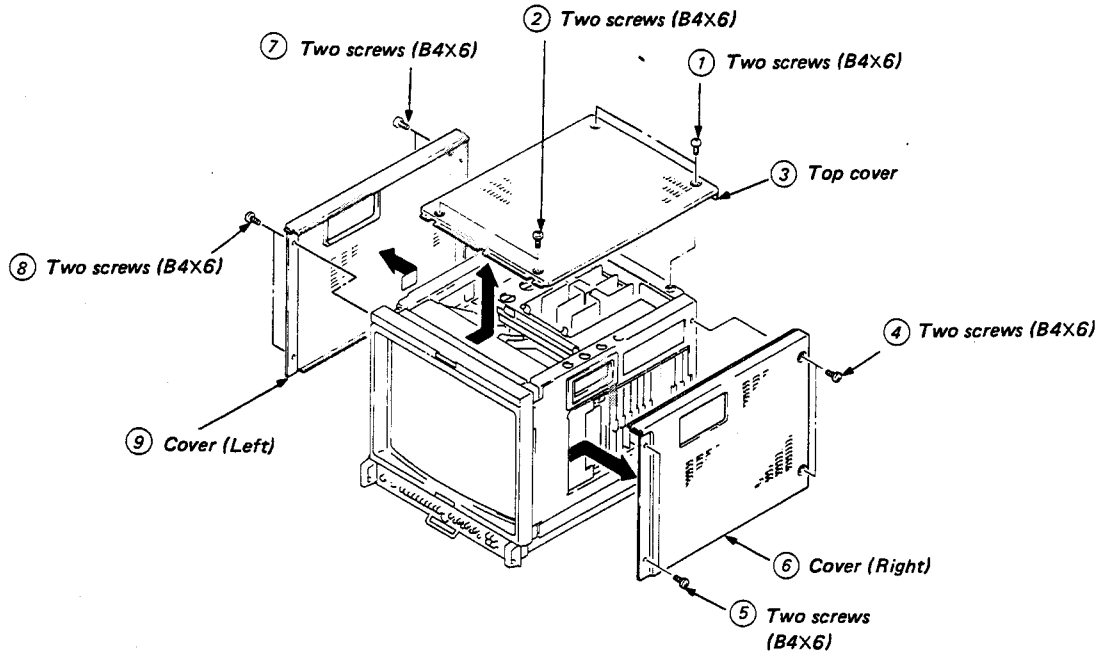

2-2. BEZEL ASSEMBLY REMOVAL

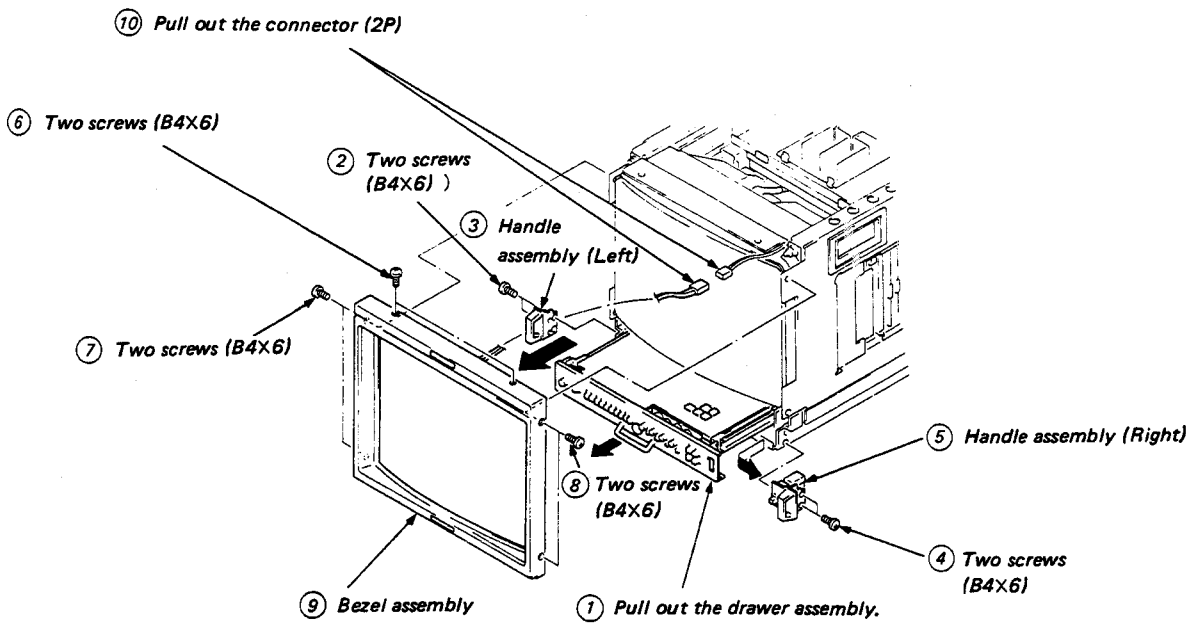


IIIIIIII 2. DISASSEMBLY

2-3. CHECK OF C BOARD


Note: Do it after removing cover (Right, Left).
(Refer to 2-1. COVER REMOVAL)

Note: The illustration shows the BVM-2010PD/PMD. The BVM-2010P/PM can be check of C board in the same way.

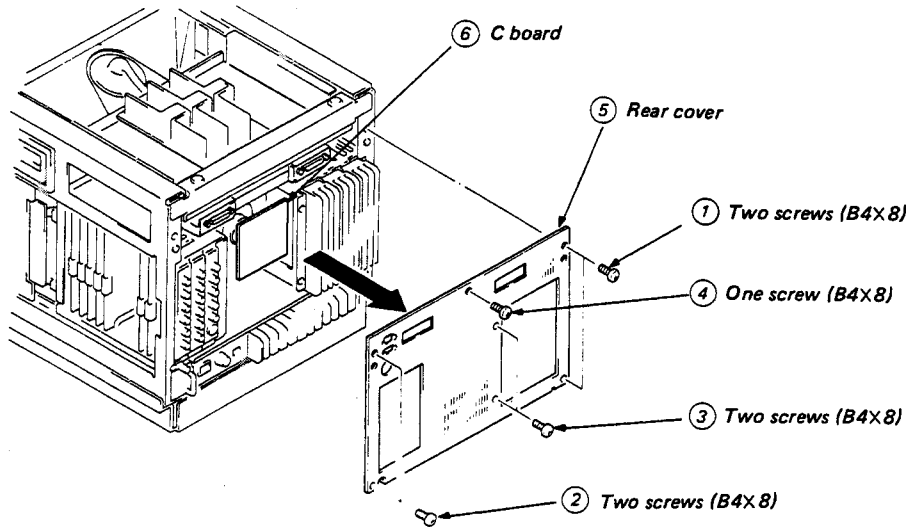


2-4. QA, QB, W AND V BOARDS REMOVAL

Note: Do it after removing rear cover. (Refer to 2-3. CHECK OF C BOARD)

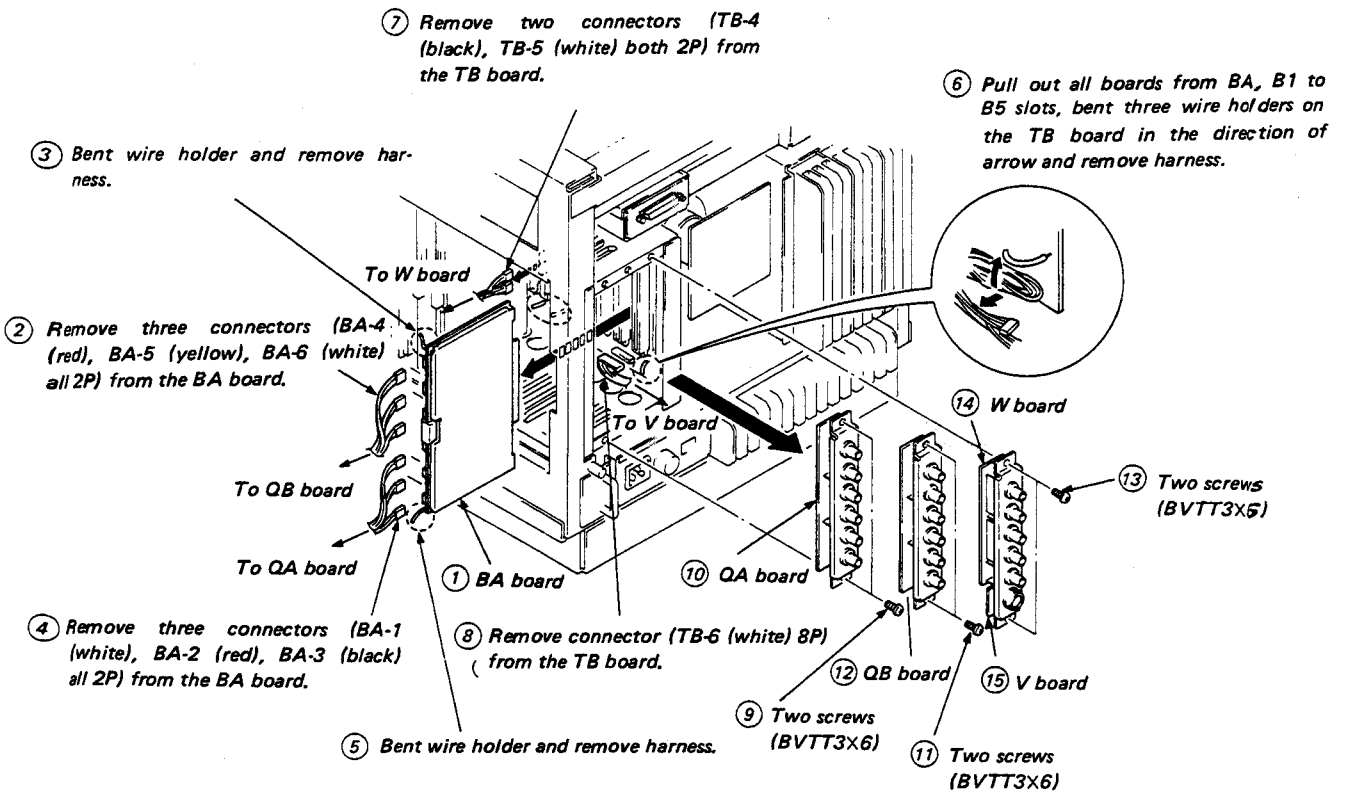

2-5. OPEN THE BK BLOCK


Note: The illustration shows the BVM-2010PD/PMD. The BVM-2010P/PM can be opened in the same way.

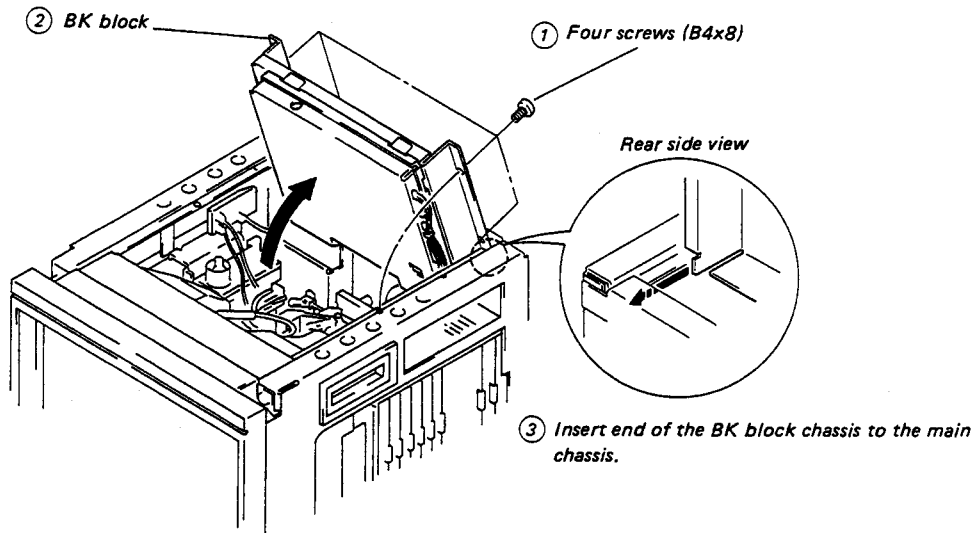


2-6. D/A BLOCK ASSEMBLY REMOVAL (BVM-2010PD/PMD ONLY)

Note: Do it after opening BK block.
(Refer to 2-5. OPEN THE BK BLOCK)


Note: The D/A block assembly is supplied only with the BVM-2010PD/PMD.

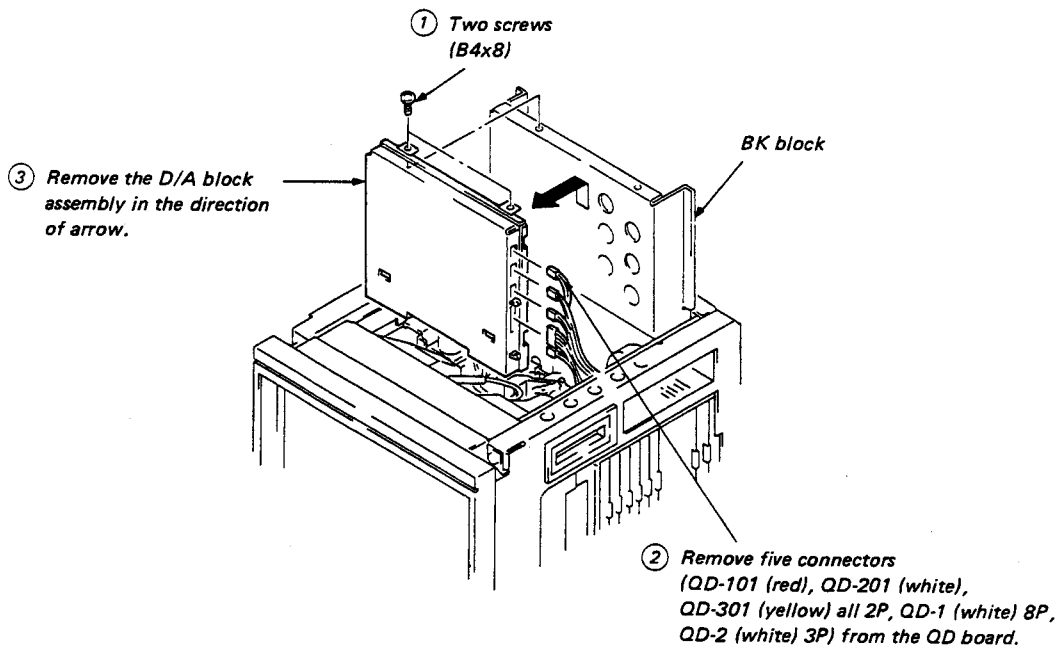


2-7. BK BOARD REMOVAL

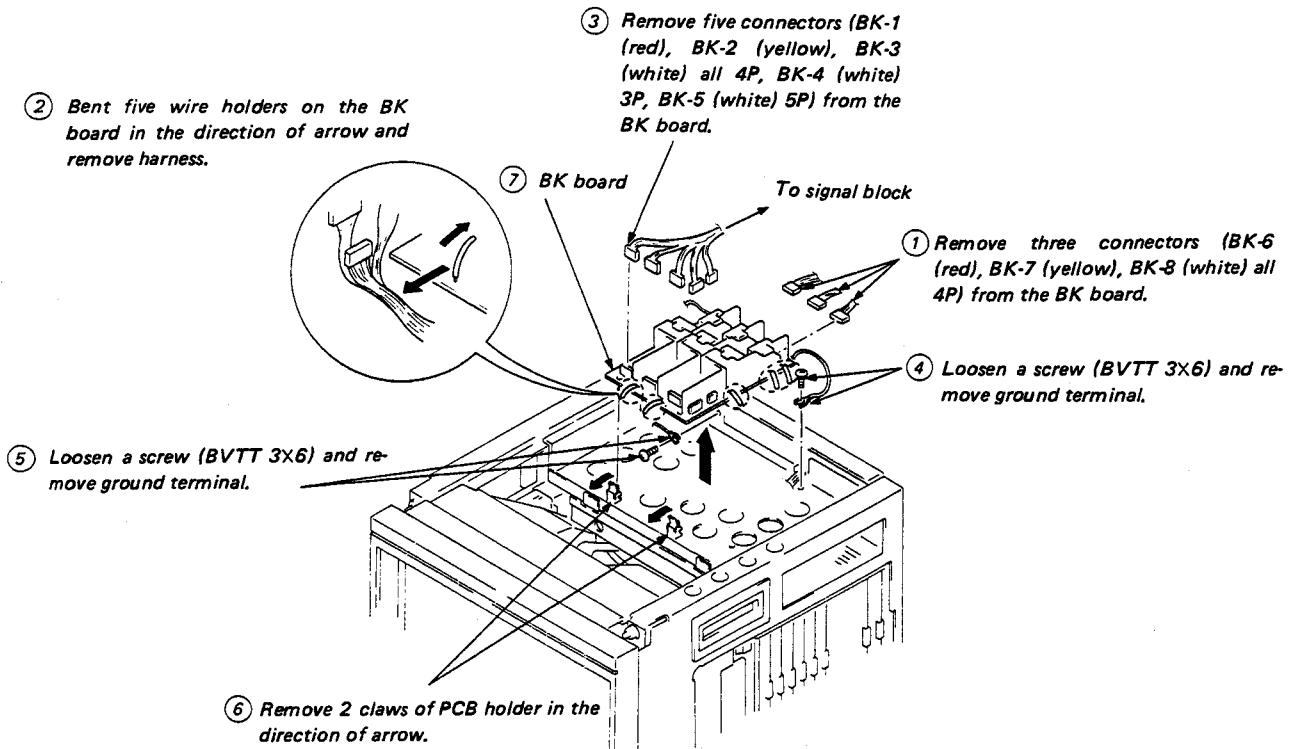

2-8. CHECK OF BK BOARD

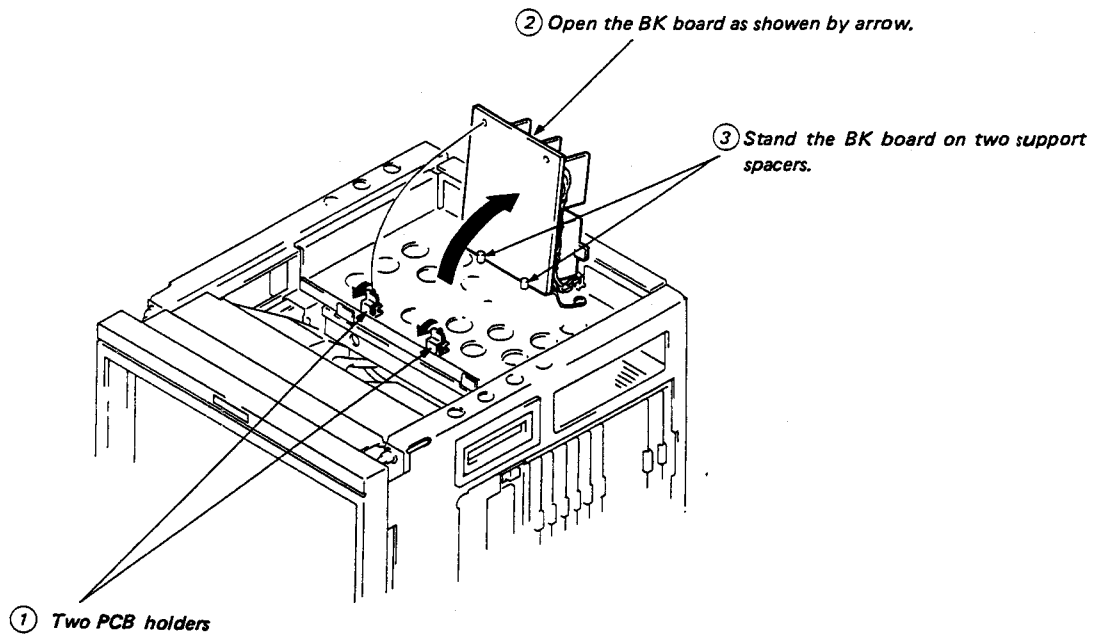


2-9. CHECK OF DB BOARD

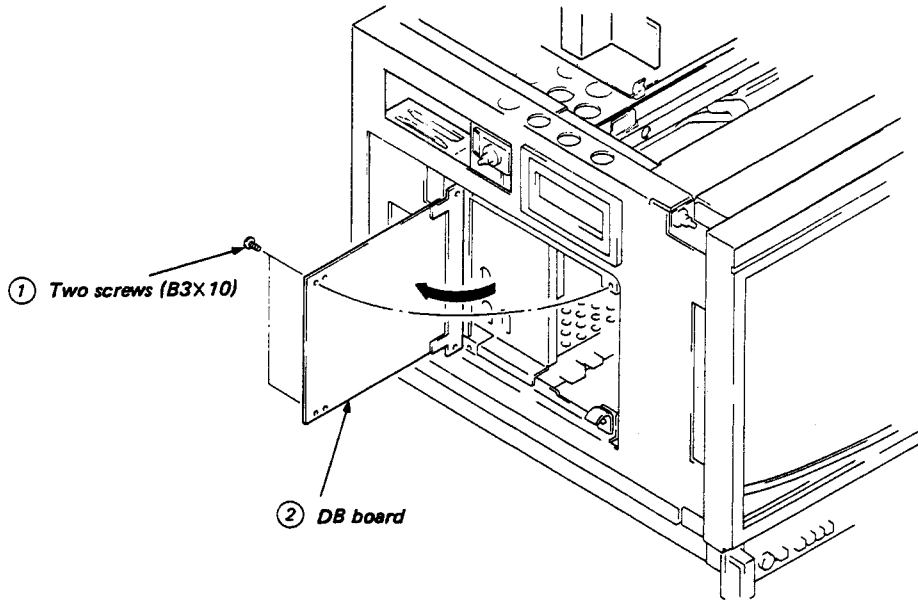

2-10. CHECK OF PA BOARD

Note: EA and EB boards can be checked similarly.

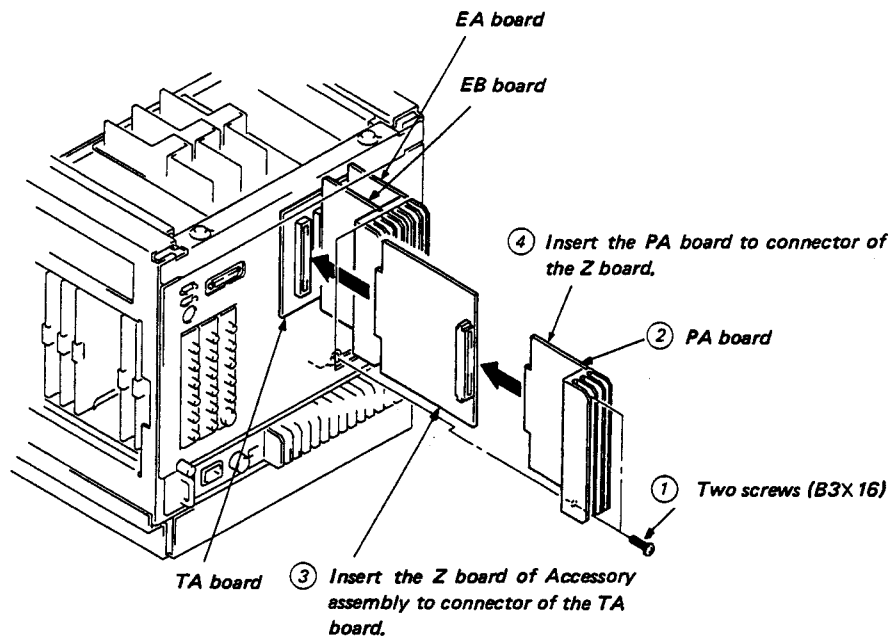


2-11. CHECK OF BJ BOARD


Note: PC board retainer is attach as anti-ditach jig for the board. Remove the PC board retainer before checking.

Note: The BR wiring board is supplied only with the BVM-2010PD/PMD.


Note: BA, BD, BM, BG, BH, BI and BR boards can be checked similarly.

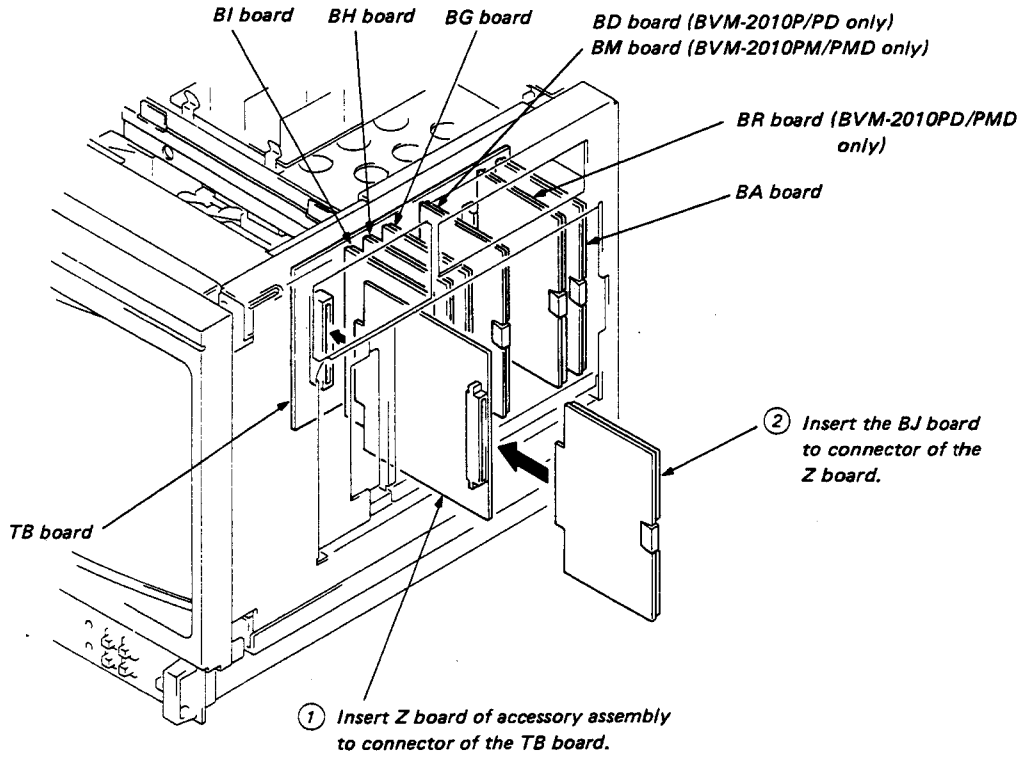

2-12. GC AND RB BOARDS REMOVAL

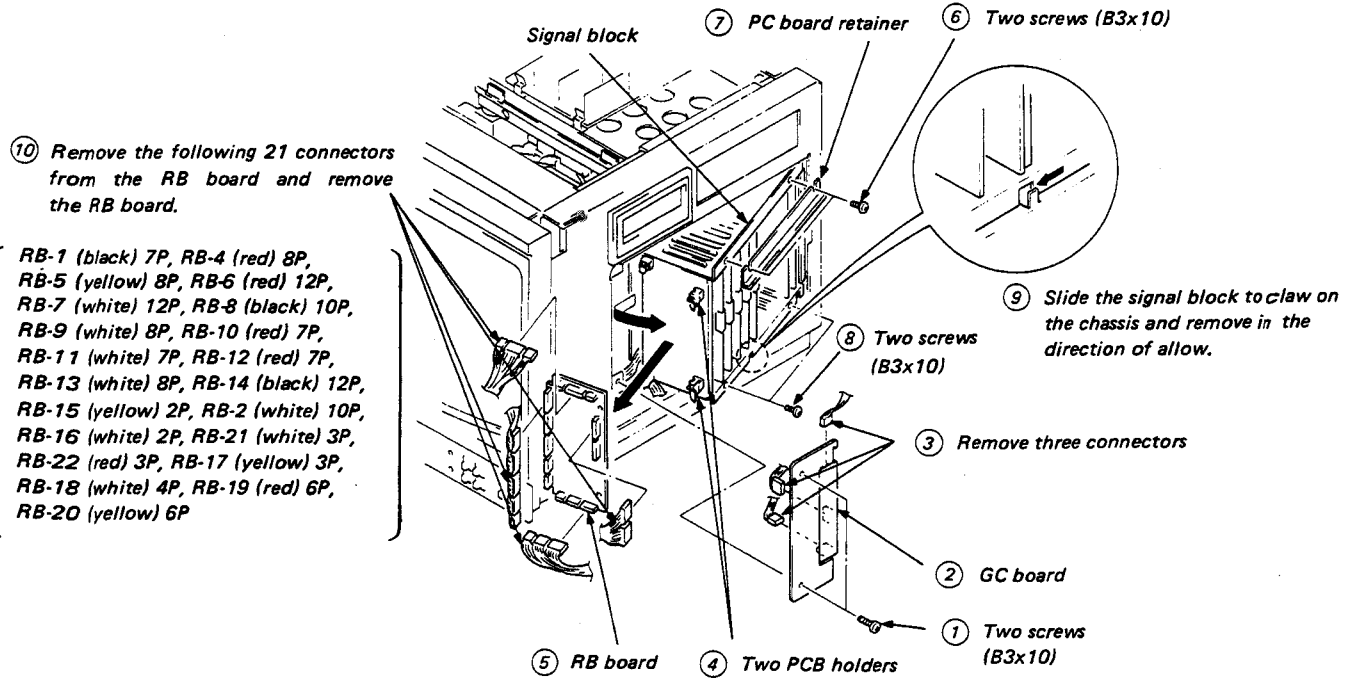

2-13. POWER BLOCK ASSEMBLY REMOVAL

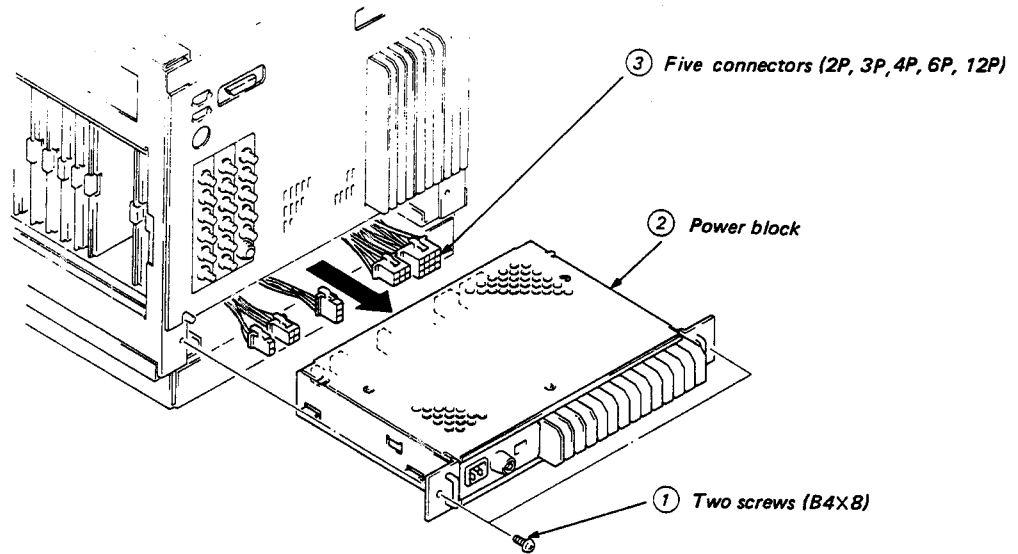


2-14. SWITCHING REGULATOR REMOVAL (BVM-2010PD/PMD ONLY)

Note: Do it after removing rear panel and power block assembly.



(Refer to 2-3. CHECK OF C BOARD, 2-13. POWER BLOCK ASSEMBLY REMOVAL)

Note: The switching regulator is supplied only with the BVM-2010PD/PMD.

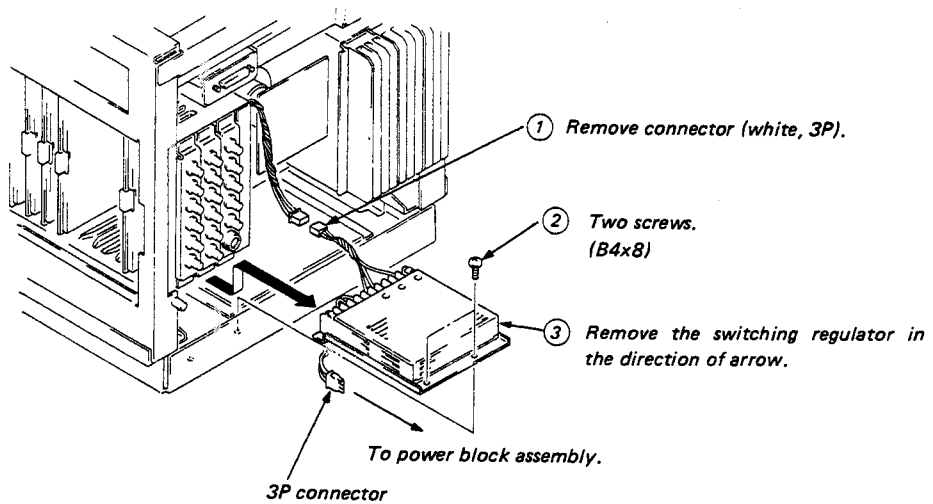


2-15. FLYBACK TRANSFORMER AND HIGH VOLTAGE BLOCK REMOVAL

● REMOVAL OF ANODE CAP

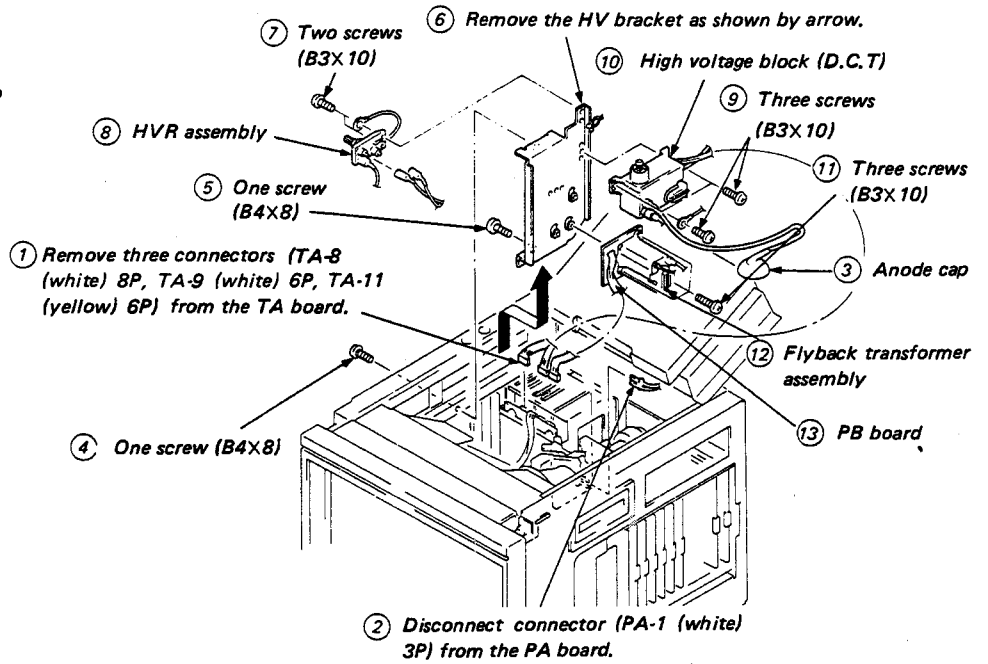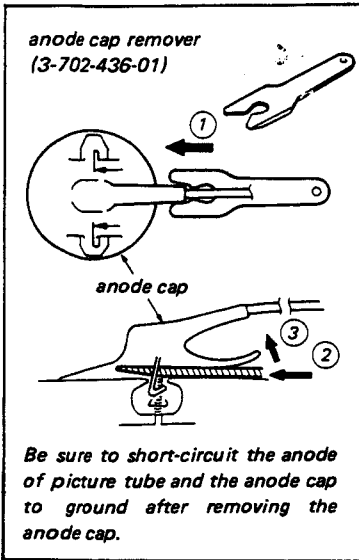


2-15-1. REMOVAL AND REPLACEMENT OF HIGH VOLTAGE CABLE


<Removal>

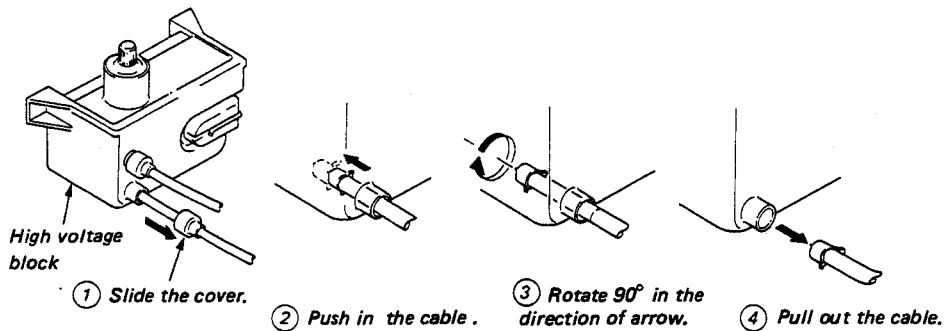


<Installation>

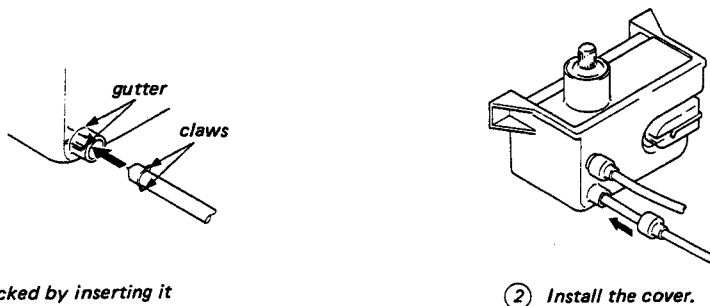


2-16. PICTURE TUBE REMOVAL

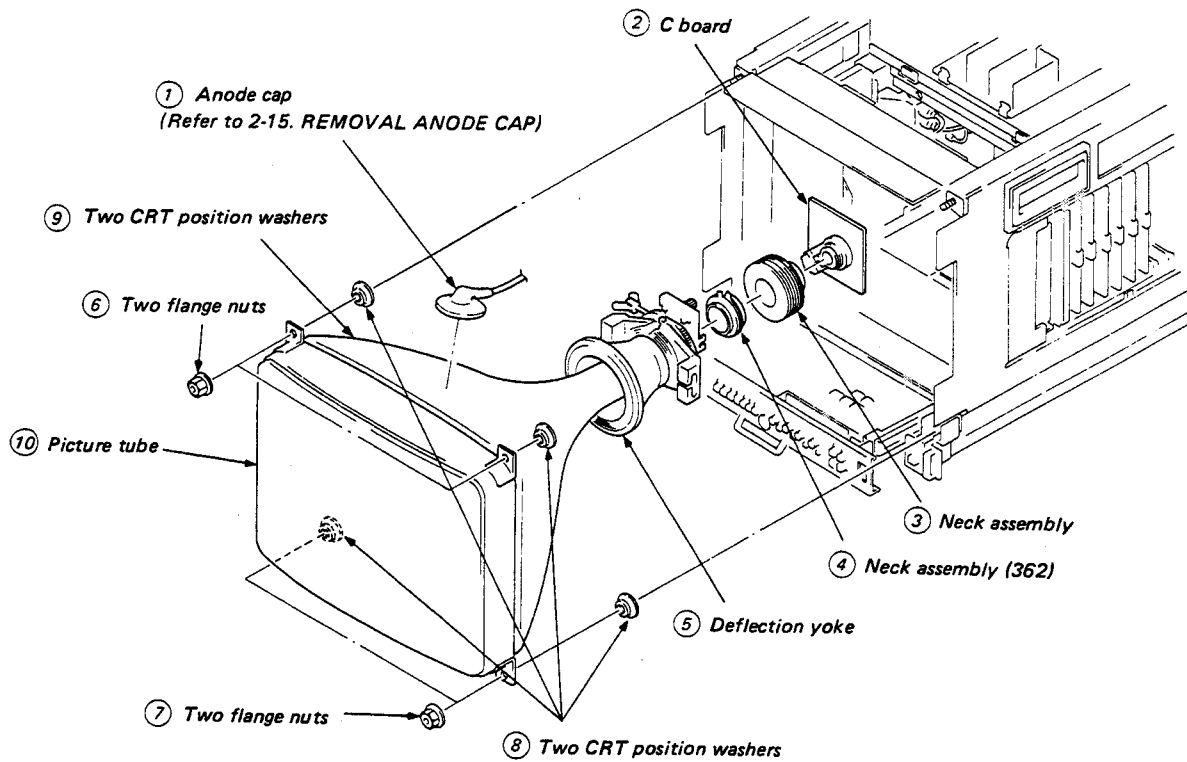

2-17. CONTROL PANEL ASSEMBLY REMOVAL

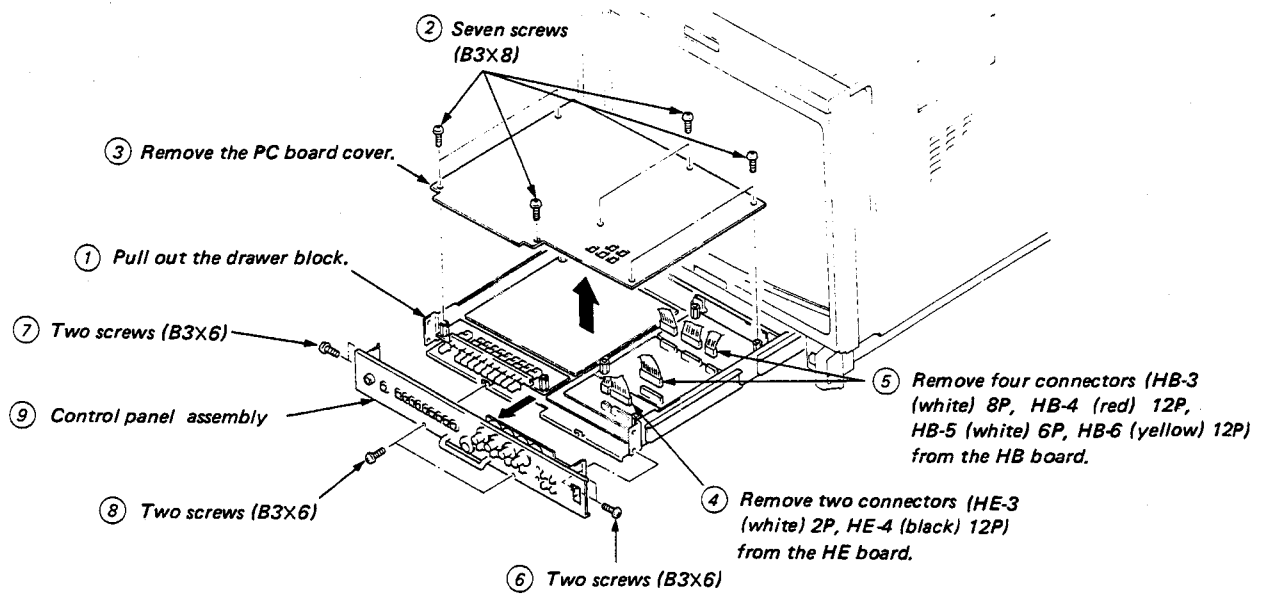



SECTION 3 CIRCUIT DESCRIPTIONS

3-1. QA, QB, BA BOARDS

3-1-1. Input Circuit

Cable Compensation (QA, QB)

CABLE COMPENSATION is composed of inductance L and capacitor C1 (Figure 1) in QA board and performs return loss compensation.

Grounding or floating in input terminal can be selected by switch S1.

On floating mode, common mode rejection can be performed. QB board also has same function.




Figure 1

Hook Up Circuit (BA)

This circuit is composed of transistors Q101-105 and performs common mode rejection when SW S1 is selected to the floating mode.

In Figure 2, Gains of amplifier for input A and B are derived as follows.

$$A = \frac{R_c}{R_i} : \text{Gain of amplifier for input A}$$

$$B = -\frac{R_c}{R_i} : \text{Gain of amplifier for input B}$$

When input (ec + ei) is applied to input A and input (ec - ei) to input B, then output eo is

$$e_o = \frac{R_c}{R_i} (e_c + e_i) + (-\frac{R_c}{R_i}) (e_c - e_i) = 2 \frac{R_c}{R_i} e_i$$

This equation indicates that ec is eliminated and there is no common mode signal in output signal.

On hook up circuit, NF Amplifier (Negative Feedback) is used to get frequency response flat.

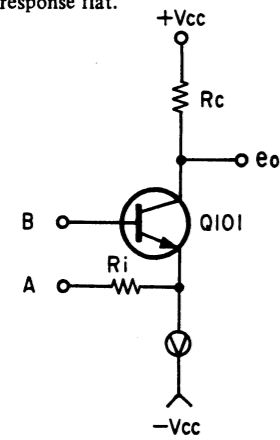


Figure 2

Input Select Sw, Sync Select SW (BA)

For composite video signal, VIDEO A/B/TEST mode is selected by INPUT SELECT SW (IC1). For sync signal, INT SYNC/EXT SYNC is selected by SYNC SELECT SW IC2.

3-1-2. Sync AGC Circuit

This circuit is composed of following components; LPF (Low Pass Filter) (Q701), variable gain amplifier (Q702-Q705), bias control circuit (Q708-Q710), gain control circuit (Q711, 712) and amplifier (Q706, 707), Figure 3 shows block diagram of this circuit. An inverted composite video signal or composite sync signal (eo) is derived at the collector of transistor Q707.

The bias control circuit compares maximum value of eo with base voltage of Q708 (E1) and controls bias of amplifier so that they match.

Also the gain control circuit compares pedestal level of eo with base voltage of Q711 (E2), and controls variable gain amplifier so that they match.

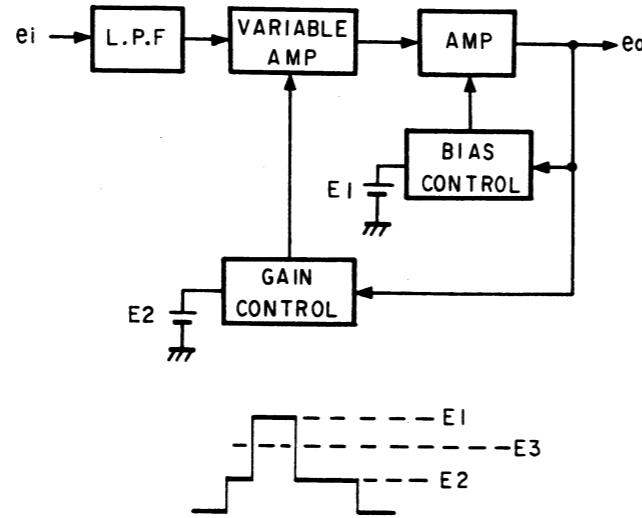



Figure 3

Composite Sync Separation, Vertical Sync Separation

Composite sync is separated from composite video signal or composite sync by comparing voltage eo with the base voltage of transistor Q713 (E3).

Horizontal component in composite video signal or composite sync signal is removed by LPF (Low Pass Filter, Q716) and Vertical sync is separated by transistor Q717.

BLOCK DIAGRAM OF QA, QB, BA BOARDS

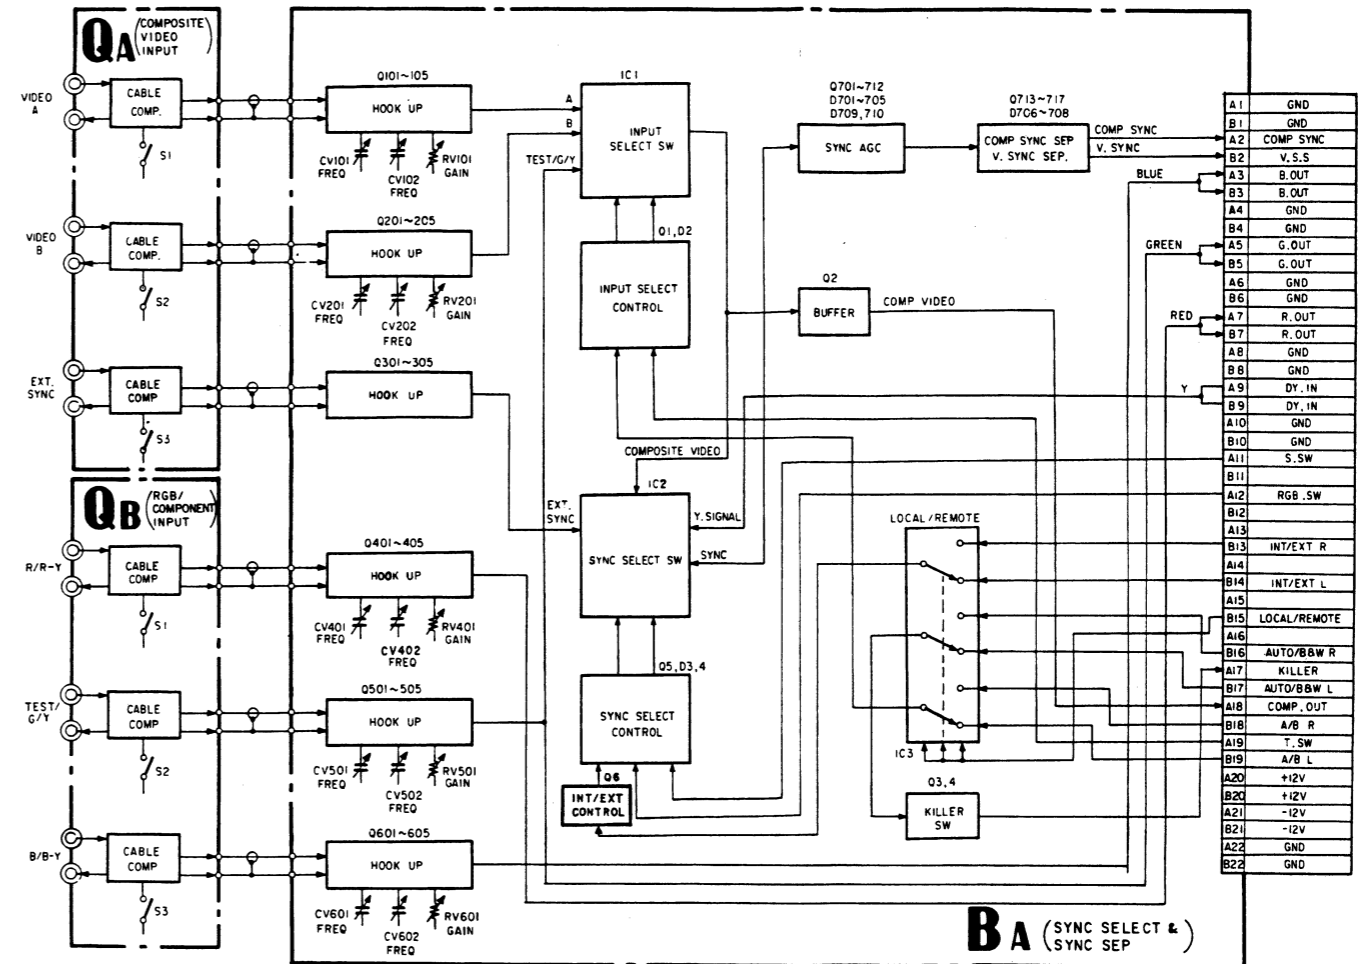

3-2. BG BOARD

3-2-1. Luminance Signal Circuit

Filter SW

IC1 works as a selector switch of composite video signal or luminance signal derived from Y/C separation circuit. This IC activates by either FILTER-SW in right side drawer or killer signal.

Aperture Control

Aperture control circuit is composed of DL1(delay line), transistors Q5, 7, 8 and IC2. IC2 operates as a variable resistor. Resistance value between Pin ① and ③ is controlled by the potential between pin ③ and pin ④, also pin ① and pin ⑥.

Input signal: e_{ro} ,
Delayed signal by delay line: e_{r1}
Second delayed signal: e_{r2}

See Figure 4

e_1 (at base of transistor Q5) is obtained as below due to the combination of direct wave and reflected wave by DL1.

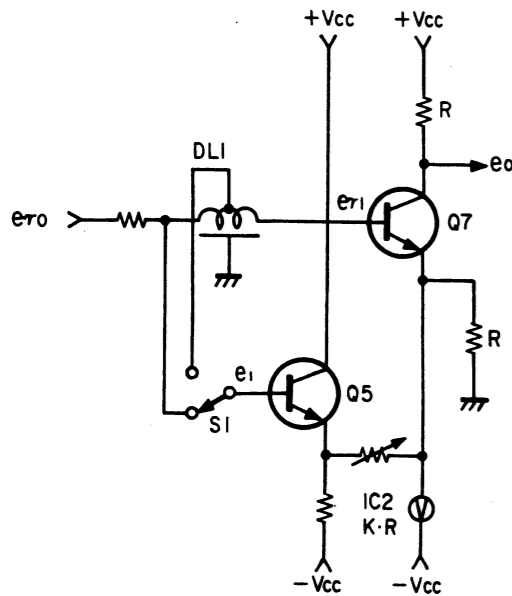


Figure 4

$$e_1 = (e_{r0} + e_{r2})/2$$

Therefore e_o is

$$e_o = -\left(e_{r1} + \frac{1}{K} \left(e_{r1} - \frac{1}{2} (e_{r0} + e_{r2}) \right) \right)$$

1st term 2nd term

K: variable constant

In the above equation, 1st term shows waveform A in Figure 5 and 2nd term shows waveform B. When K is variable, amount of pre-shoot and overshoot can be varied.

Switch S1 is used for selection of boost frequency.




Figure 5

Y Delay, Y Buffer Amplifier

Y/C delay time can be matched by delay line DL2 and Y signal is amplified and fed to the next stage.

3-2-2. Color Gain Control Circuit

In this section (R-Y) signal processing is described as below, but (B-Y) signal is processed by the same way as (R-Y) signal.

R-Y Amplifier and Clamping

The R-Y color difference signal from the decoder board is amplified at the amplifier composed of transistors Q21 and Q22 and clamped at the Horizontal Sync by transistors Q23, Q24 and IC3.

R-Y Gain Control Amplifier

This is a variable gain control amplifier composed of variable resistor element of IC4 and transistors Q25-Q27. Gain of this amplifier can be controlled by the color gain control voltage at the pin ⑫ of IC4.

AGC Pulse Generator

Generates the reference pulse for AGC (Automatic Gain Control) of color gain control circuit.

Gain Control Amplifier for AGC Pulse

Circuit is the same as R-Y GAIN CONTROL AMPLIFIER. Gain of this amplifier is controlled by the voltage at pin ⑧ of IC4.

Color Gain Control

AGC pulse, which is output signal of Gain control amplifier for AGC pulse, is clamped by IC6 (2/3) and is made sampling by IC6 (3/3). Amplitude of AGC pulse and DC voltage supplied from CHROMA control on the front panel are compared and matched by IC7 (1/2) with controlling the above gain control amplifier. This control voltage is supplied to the control terminals of R-Y and B-Y gain control amplifiers and controls color gain.

3-2-3. G-Y MATRIX amplifier

G-Y signal is obtained by matrixing R-Y signal and B-Y signal with the amplifier composed of transistors Q44 and Q45.

3-2-4. NTSC MATRIX SW

NTSC MATRIX mode operation is obtained by the matrix circuit composed of resistor networks CP14-CP19, transistor Q29, Q30, Q39, Q40, Q49, Q50 and IC5. CP14-CP19 perform matrixing and IC5 works as a switch.

3-2-5. Vector Output Circuit

R-Y Vector Output Gain Switcher

Vector output levels are compensated for each color standards, NTSC, PAL and SECAM.


R-Y Vector Output Amplifier and Clamping

Vector output signal is amplified by IC9 (2/2) and transistor Q54 and clamped by IC8 and transistor Q55 for the suitable operation.

3-2-6. COMPONENT R-Y Amplifier and Delay Circuit

R-Y signal of COMPONENT signal is compensated with amplitude, polarity and delay time to match the R-Y signal of decoder output.

BLOCK DIAGRAM OF BG BOARD

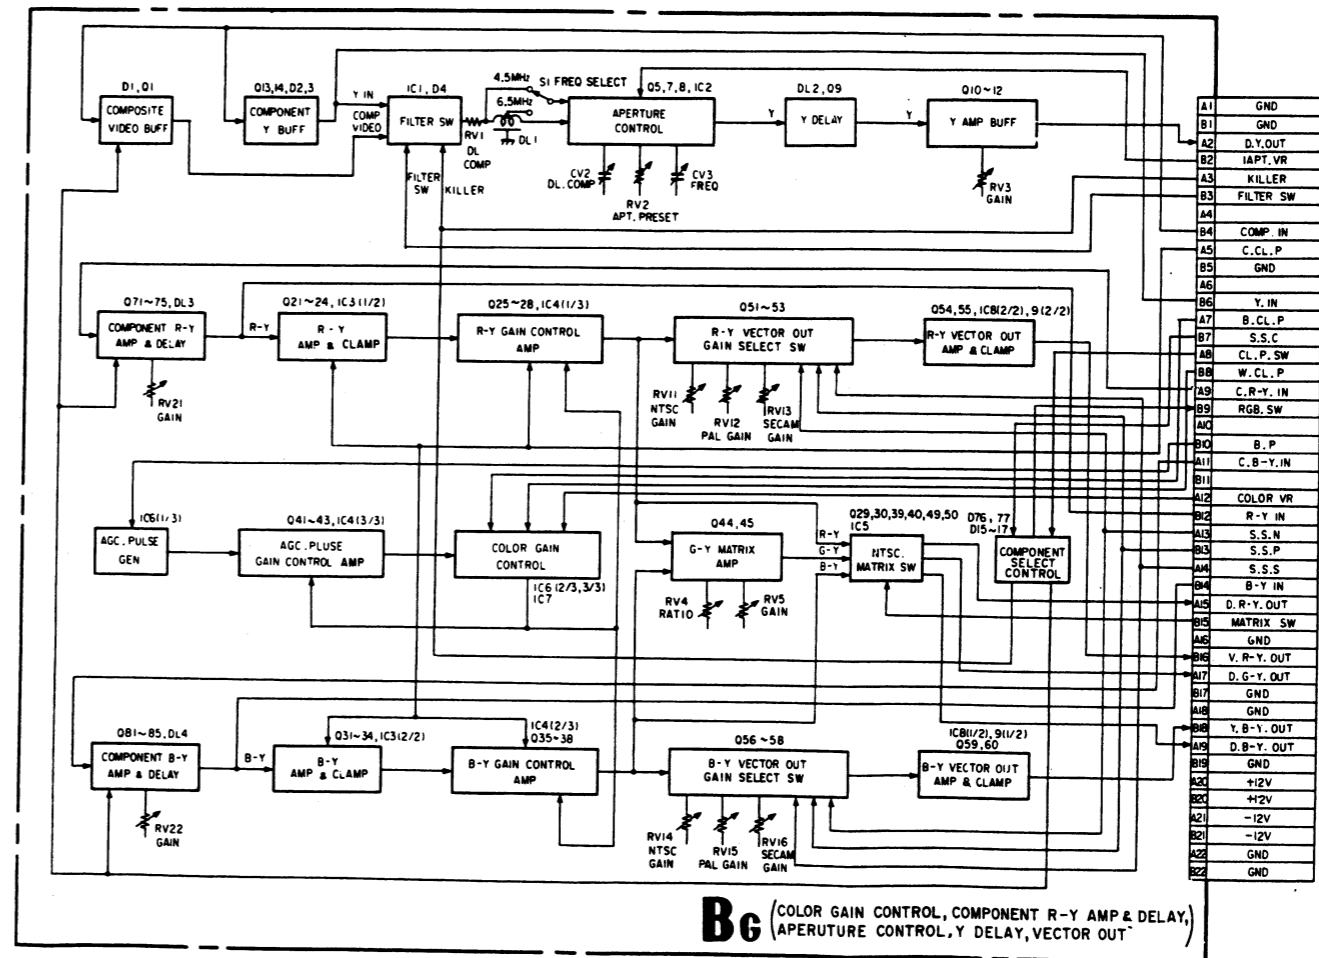

3.3. BH BOARD

BLOCK DIAGRAM OF BH BOARD

3-3-1. Switching Circuit Between Y (Luminance) Signal, Color Difference Signal and RGB Signal, AGC Pulse Insertion, Y-C Matrix

Switching Circuit of Y Signal, Crosshatch Signal and SET UP Signal, Buffer

Y signal, crosshatch signal and SET UP signal are selected by the switcher (IC1 (1/3) (2/3)) and selected signal is output via buffer Q1.

Switching Circuit of R-Y Signal, Red Signal and SET UP Signal (Same as B-Y, G-Y Signal)

R-Y signal, Red signal, SET UP signal are selected by IC2 (1/3, 2/3) and selected signal is output via buffer Q4.

Y Signal Screening (Same as R-Y, B-Y, and G-Y Signals)

The signal is performed SAMPLE and HOLD (S/H) at the back porch of signal by transistor Q2 and IC5 (2/2). Y screening is performed by replacing S/H output signal, by the original signal. For color difference signals screening is made at the Horizontal Sync portion.

Red Matrix, Blue Only SW, Buffer (Same as Green and Blue)

Red is obtained by Y-C matrix circuit composed of resistor network CP9 from color difference signals.

AGC pulse from pulse generator is inserted into Red signal for contrast control.

IC7 activates by the Blue only SW on the front panel. Blue only SW is used for the display of blue signal as a monochrome picture.

3-3-2. Contrast Control, Brightness Control, Peak Limiter

Red Contrast, and Brightness Control Amplifier (Same as Green and Blue)

This is a variable gain control amplifier composed of variable resistor element IC101 and transistor Q102 and Q103. By controlling the voltage at pin ④ of IC101, contrast control is performed, and brightness control is done by controlling the bias voltage of transistor Q102.

Red limiter (Same as Green and Blue)

When excess input signal comes in, amplitude is limited by the limiter composed of transistors Q104 and Q105.

Red Contrast Control


AGC pulse inserted in Red signal is clamped by transistor Q107 and sampled by transistor Q108.

Amplitude of above AGC pulse is compared with the reference voltage applied from CONTRAST control on the front panel in IC102 (2/2).

Contrast control is performed by controlling the gain of Red contrast brightness control amplifier so that these voltages may match.

Red Brightness Control (Same as Green and Blue)

The black level of Red signal is performed SAMPLE and HOLD (S/H) by transistor Q106. This S/H voltage is compared with the reference voltage applied from Brightness control on the front panel in IC102 (1/2). Brightness control is performed by controlling the bias of Red contrast Brightness control amplifier so that these voltages may match.

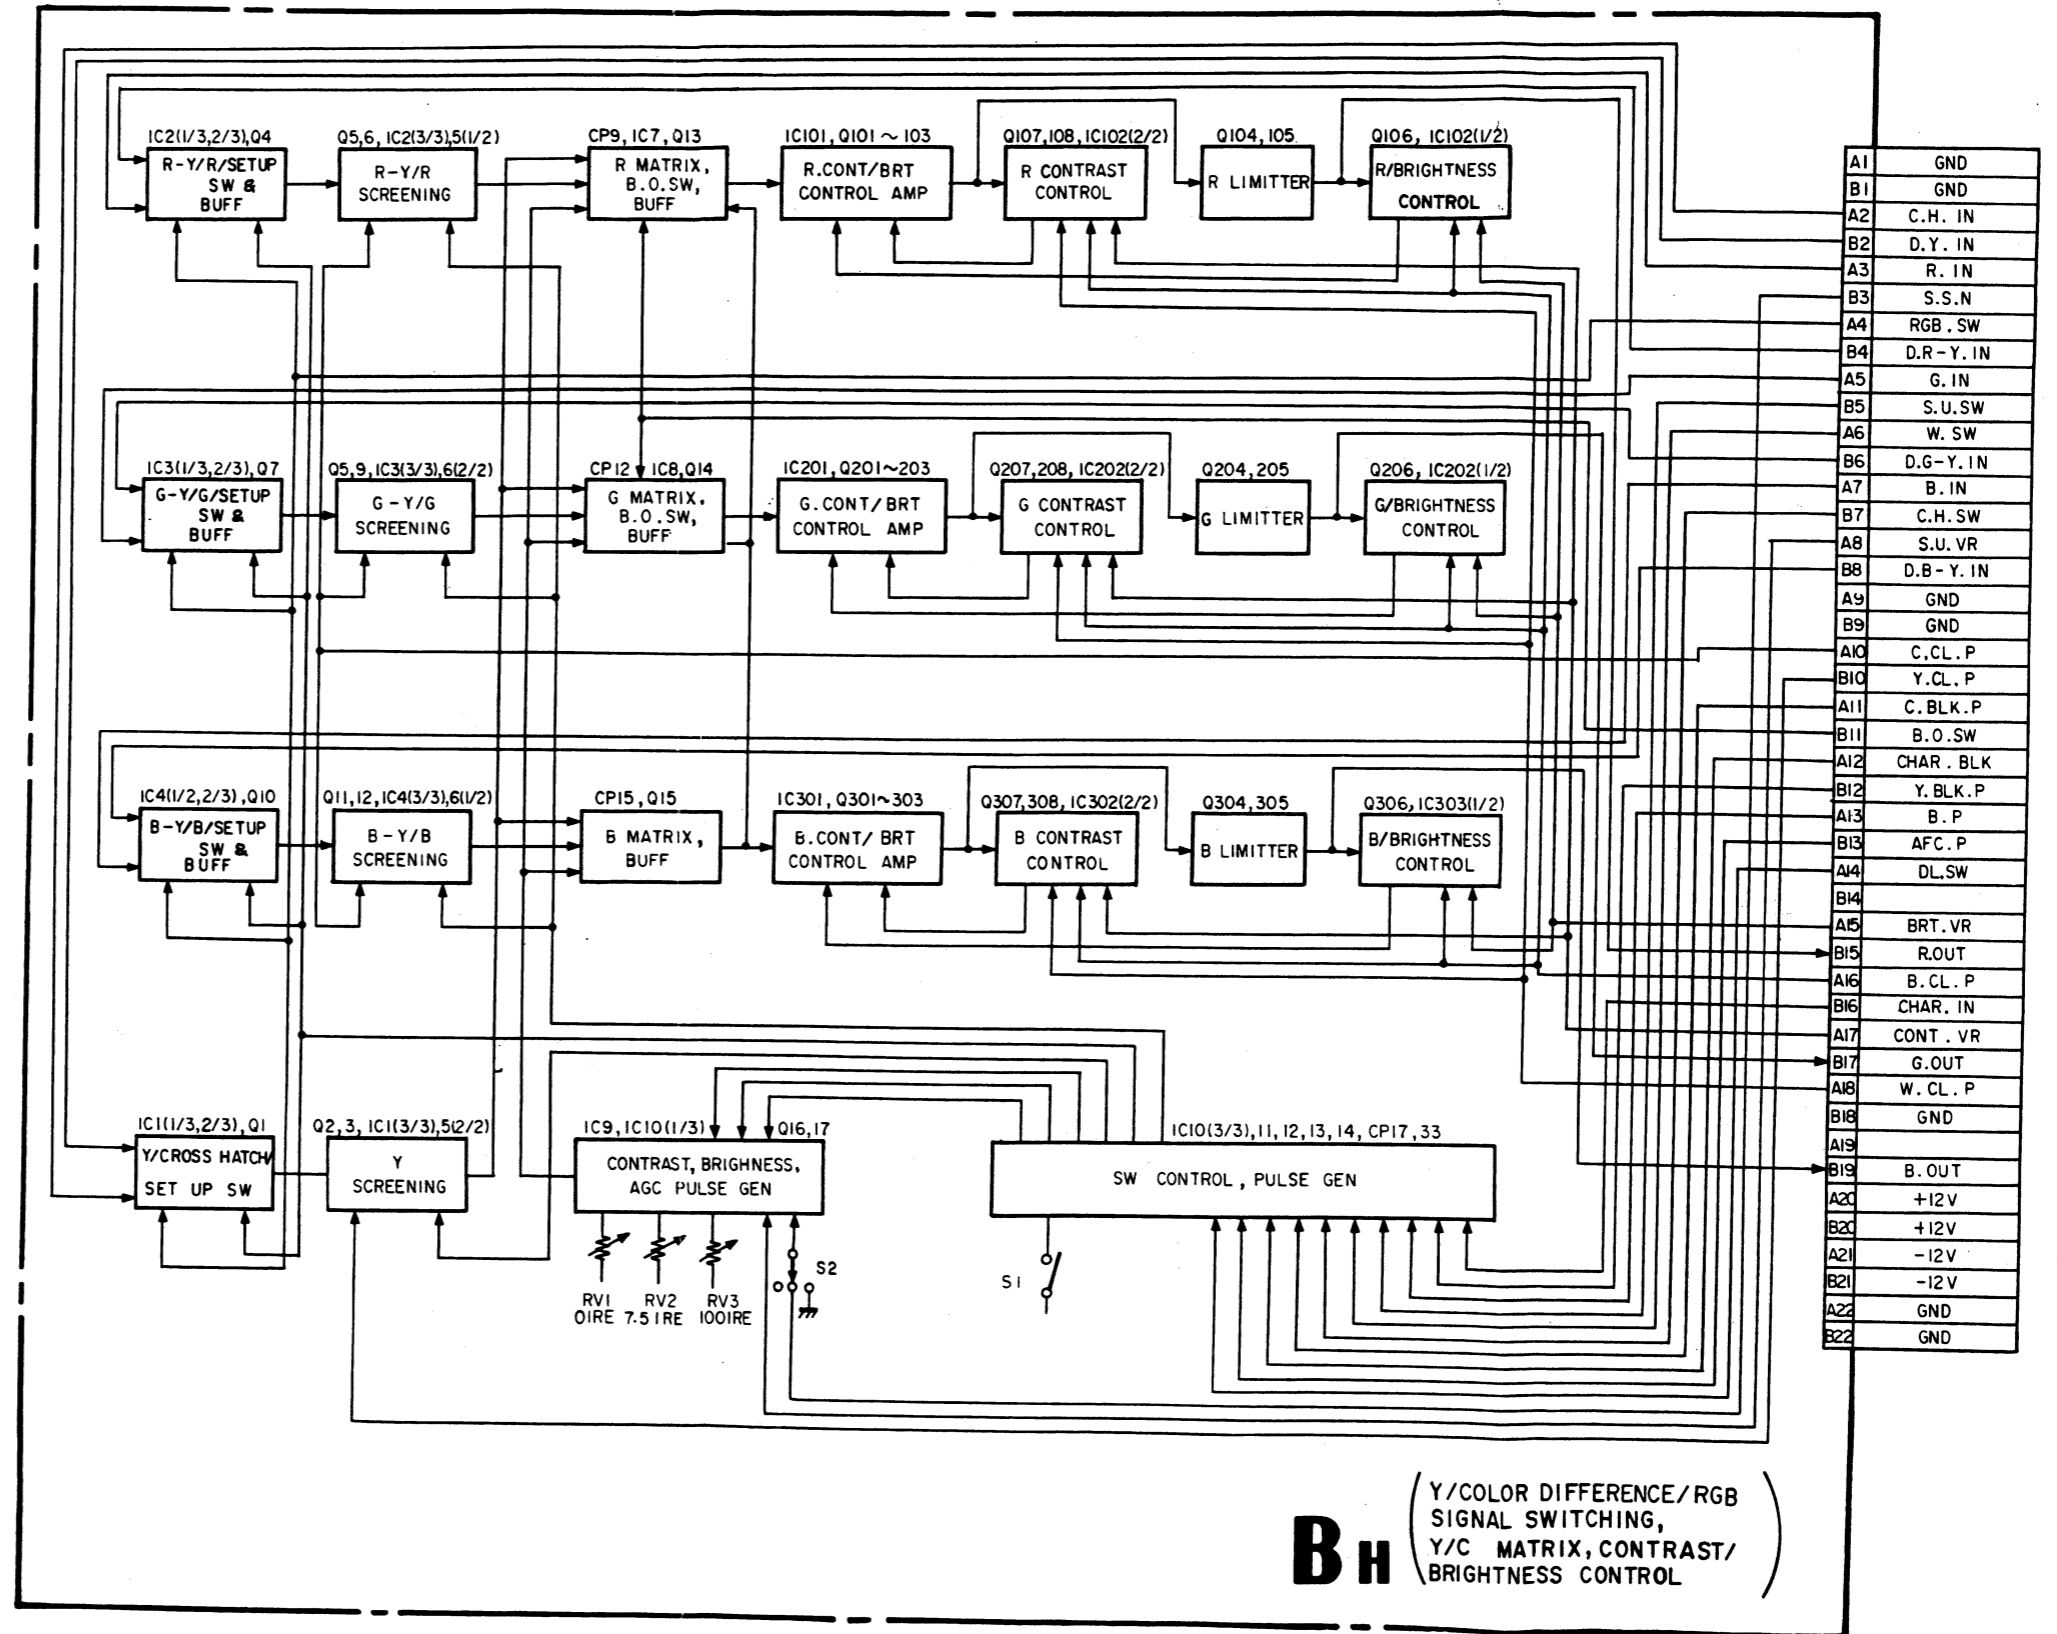

BH (Y/COLOR DIFFERENCE/RGB SIGNAL SWITCHING, Y/C MATRIX, CONTRAST/BRIGHTNESS CONTROL)

3-4. BI BOARD

3-4-1. Red Screen SW, AGC Pulse Insertion (Same as Green and Blue)

Red signal can be cut off by RED SCREEN SW on the front panel. Horizontal rate AGC pulse is removed and the reference pulse is inserted in the signal for the GAIN and BIAS adjustment of video output amplifier and for the beam control circuit.

3-4-2. Red Limiter, Gain Bias Control Amplifier

This limiter is used for limiting the excess input level of the signal below 0V DC.

The GAIN/BIAS CONTROL amplifier is composed of variable resistor element and transistors as same as contrast control amplifier' (See section of BH board)

3-4-3. Red Feedback Amplifier, Red Gain Control Red Bias Control Circuit

RED FEEDBACK amplifier inverts the phase of the signal derived from VIDEO OUTPUT amplifier via NF BUFF (Negative Feedback Buffer) in BK board.

The BIAS of VIDEO OUTPUT AMPLIFIER is controlled by RED BIAS CONTROL circuit so that the black level of inverted signal may be 0V DC.

(This time, black level of VIDEO OUTPUT will be -90V DC.)

RED GAIN CONTROL circuit controls the gain of VIDEO OUTPUT AMPLIFIER so that the level of the reference pulse may match to the voltage at pin ③ of IC403.

(When GAIN control (RED) in the drawer is turned, the level of the reference pulse inserted in section 1 changes. And amplitude (Gain) of Red signal changes so that the amplitude of the reference pulse derived from RED FEEDBACK amplifier may be maintained constant by GAIN CONTROL circuit.)

3-4-4. Red Cathode Current Detection, Red G1 Control Circuit (I-V Conversion)

Refer to the BK board section of beam control circuit

3-4-5. ABL Detector, Drive Control, Over Drive

The reference level of GAIN CONTROL circuit is controlled by ABL detector and DRIVE CONTROL so that the cathode current of CRT OVER DRIVE circuit lights up the OVER LOAD LED on the front panel for warning.

3-4-6. G2 Control Circuit

Circuit diagram of G2 control circuit is shown in Figure 6.

The signal for G1 BIAS control is fed to base of the transistor Q11 from RED G1 BIAS control circuit. (Same as G and B)

Only one of the highest voltages among the base voltages of transistors Q11-Q13 is turned on and is compared with the reference voltage of base voltage Q14.

And this circuit drives transistor Q105 located in PA board so that Transistor Q105 in PA board drives G2 voltage for adjusting cut off level of CRT.

Base voltage of transistor Q14 (reference voltage) is set so that the voltage of Black level at G1 electrode may be -120V DC and maintain Ekco (cut off voltage) -120V constant.


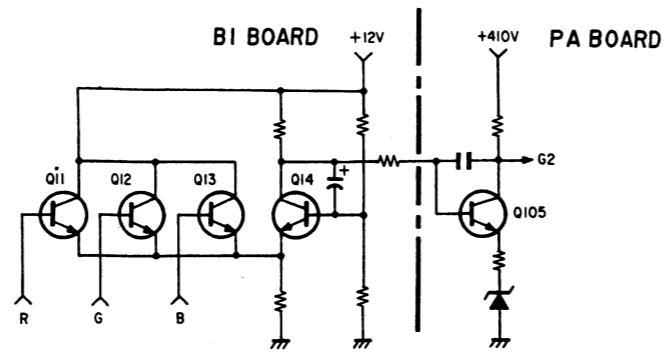


Figure 6

BLOCK DIAGRAM OF BI BOARD

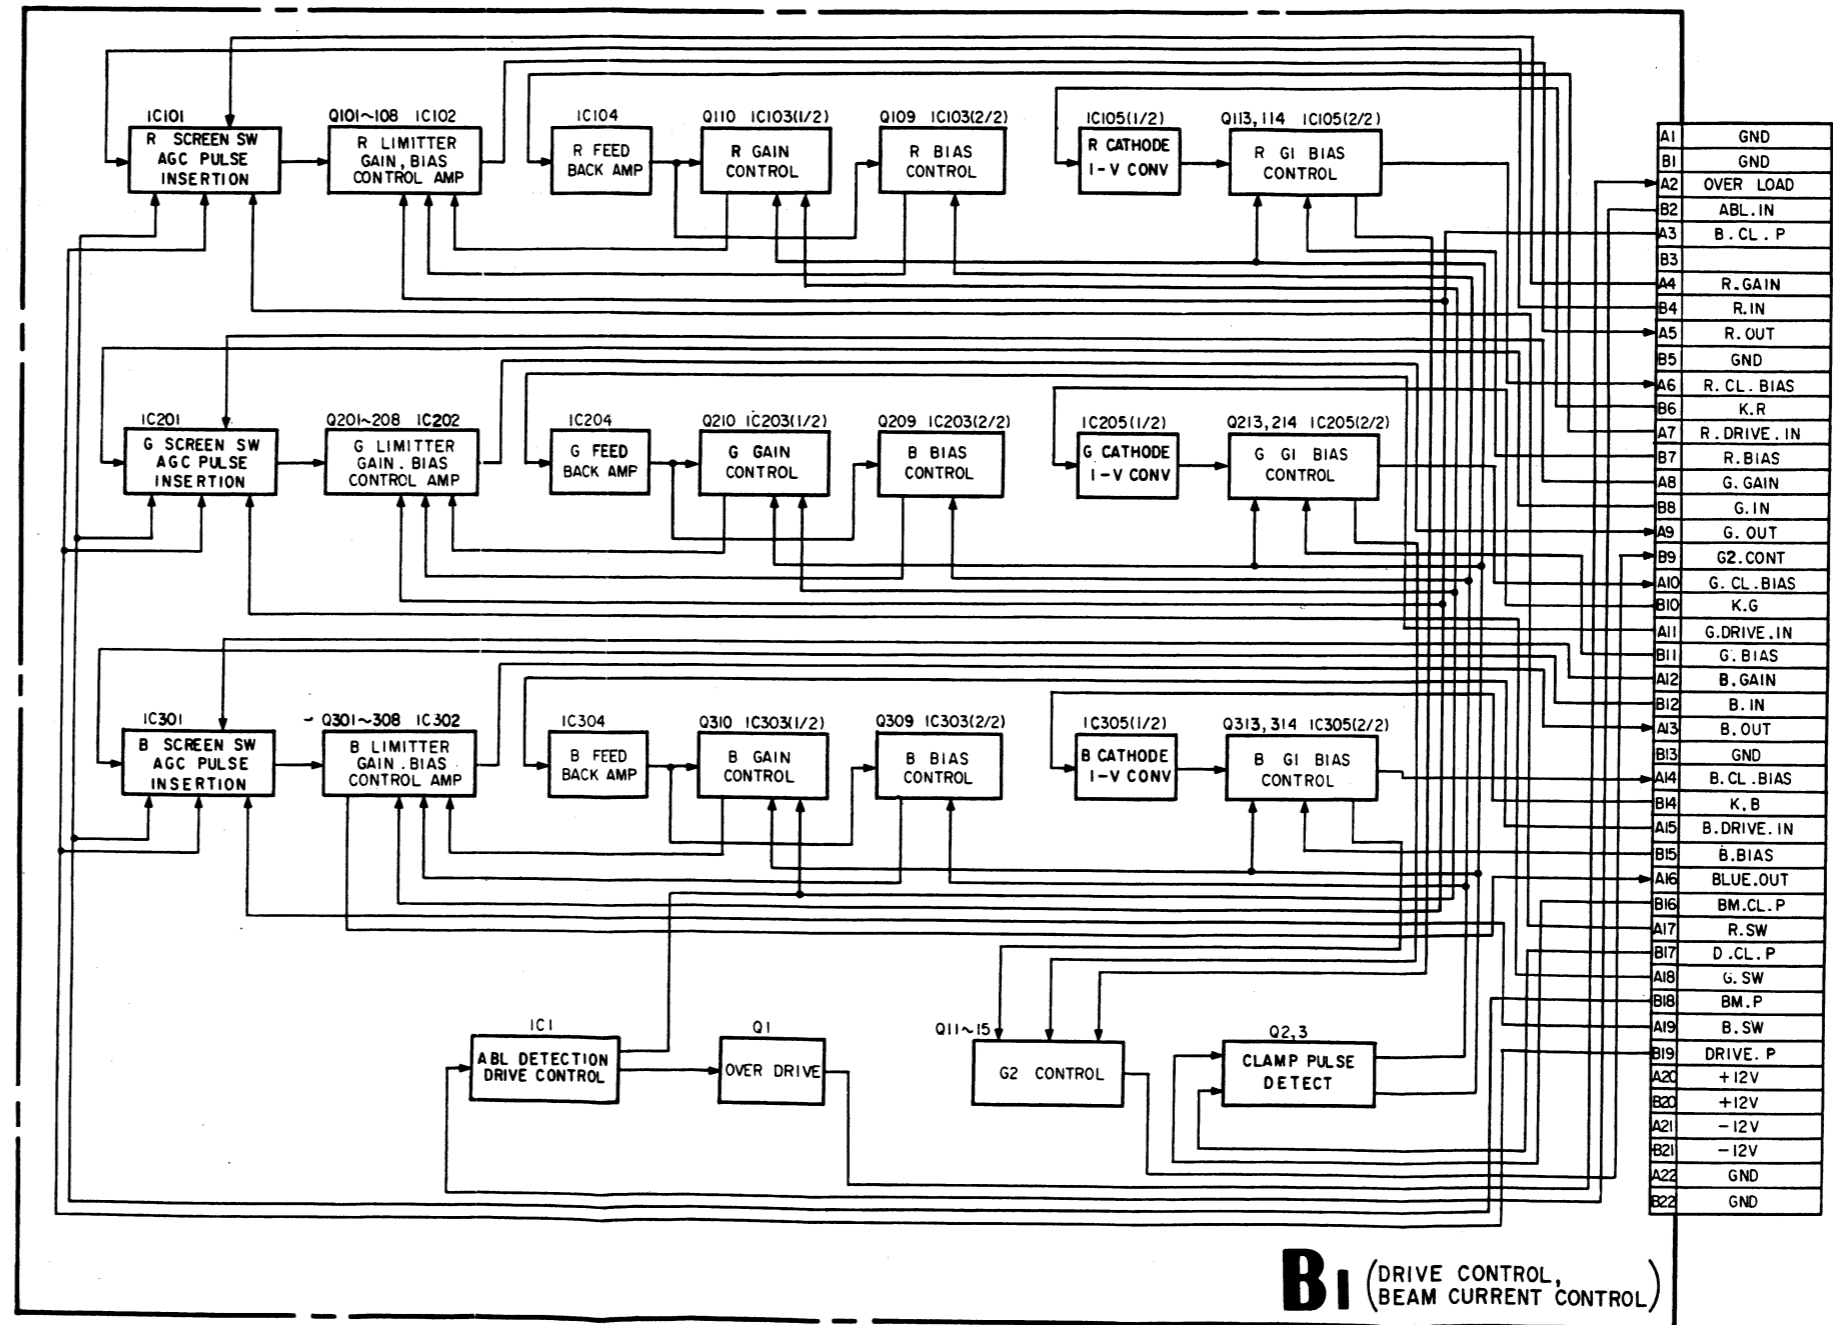

3-5. SYNC PROCESSOR, PULSE GENERATOR (BJ BOARD)

3-5-1. 1H Pulse Processing

The composite sync is separated from incoming signal at BA board. And 1H sync is made by separating V sync and equalizing pulse from composite sync.

Also H sync which has constant pulse width is made from 1H sync.

3-5-2. 2fH Multivibrator

This circuit generates 2fH rate pulse from H rate flyback pulse.

3-5-3. Vertical Counter

The 2fH rate pulse is counted down to generate Vertical rate trigger pulse for vertical deflection circuit.

When there is no incoming signal, trigger pulse is generated by vertical counter (384H).

When there is incoming signal with V sync, this counter circuit is reset by V sync and generates trigger pulse synchronized with V sync.

Also in order to increase stability of vertical scanning, noise gating process is made during V sync period.

3-5-4. V Sync and Delay

V sync and V BLANKING pulses are generated by output trigger pulse from vertical counter.

And when V DELAY SW on the front panel is selected ON, these pulses are generated in a V/2 delayed position relative to the V sync position of incoming signal.

3-5-5. Crosshatch Generator

Internal crosshatch signal is made as follows.

The vertical lines are generated by approx. 18fH rate pulses synchronized with flyback pulse.

And flyback pulse is counted down to generate horizontal lines.

3-5-6. Burst Gate Pulse, Y-CLAMP Pulse, C-CLAMP Pulse Generator

The Burst Gate Pulse (B.G.P.), clamp pulse for luminance signal (Y.CL.P) and clamp pulse for color difference signal (C.CL.P) are generated from 1H sync via LCR network and transistors.

3-5-7. Picture Set Up Pulse Generator

This is the gate pulse generator for picture set-up function, and consists of mono multipliers.

3-5-8. Split, Y Blanking, C Blanking Pulse Generator

Y BLANKING pulse (Y BLK P) and C BLANKING pulse (C BLK P) are generated. These pulses are used for the purpose of DC restoration of color difference signal, Y signal and RGB signal. DC restoration is made by inserting the black reference signal during blanking period in the signal. Also C.BLK. pulse is mixed with vertical rate blanking signals for SPLIT display and for B/W display.

3-5-9. Horizontal Rate AGC and Clamp Pulse Generator

COLOR GAIN control, CONTRAST control and BRIGHTNESS control are stabilized by insertion of reference signal and using feedback circuit. Horizontal rate BLACK pulse (B.P), BLACK CLAMP pulse (B.CL.P) and WHITE CLAMP pulse (W. CL.P) are generated here.

3-5-10. Vertical Rate AGC and Clamp Pulse Generator

In this model, BEAM CONTROL circuit is used for high stability in white balance.


The reference signal is inserted in the signal for gain control circuit in video output amplifier and for beam control circuit. Vertical rate pulses are used for this purpose.

Vertical rate BEAM PULSE (BM.P) DRIVE PULSE (DRIVE.P) and BEAM CLAMP PULSE (BM.CL.P) are generated here.

3-5-11. Others

Black reference is determined at the position of clamping in black reference insertion circuit for both color difference signal and RGB signal. Accordingly C.CL.P is used as clamp pulse for color difference signal processing and Y.CL.P is for RGB signal. CLAMP PULSE SELECTION SW switches C.CL.P. or Y. CL.P to the clamp pulse for the insertion of black reference.

BLOCK DIAGRAM OF BJ BOARD

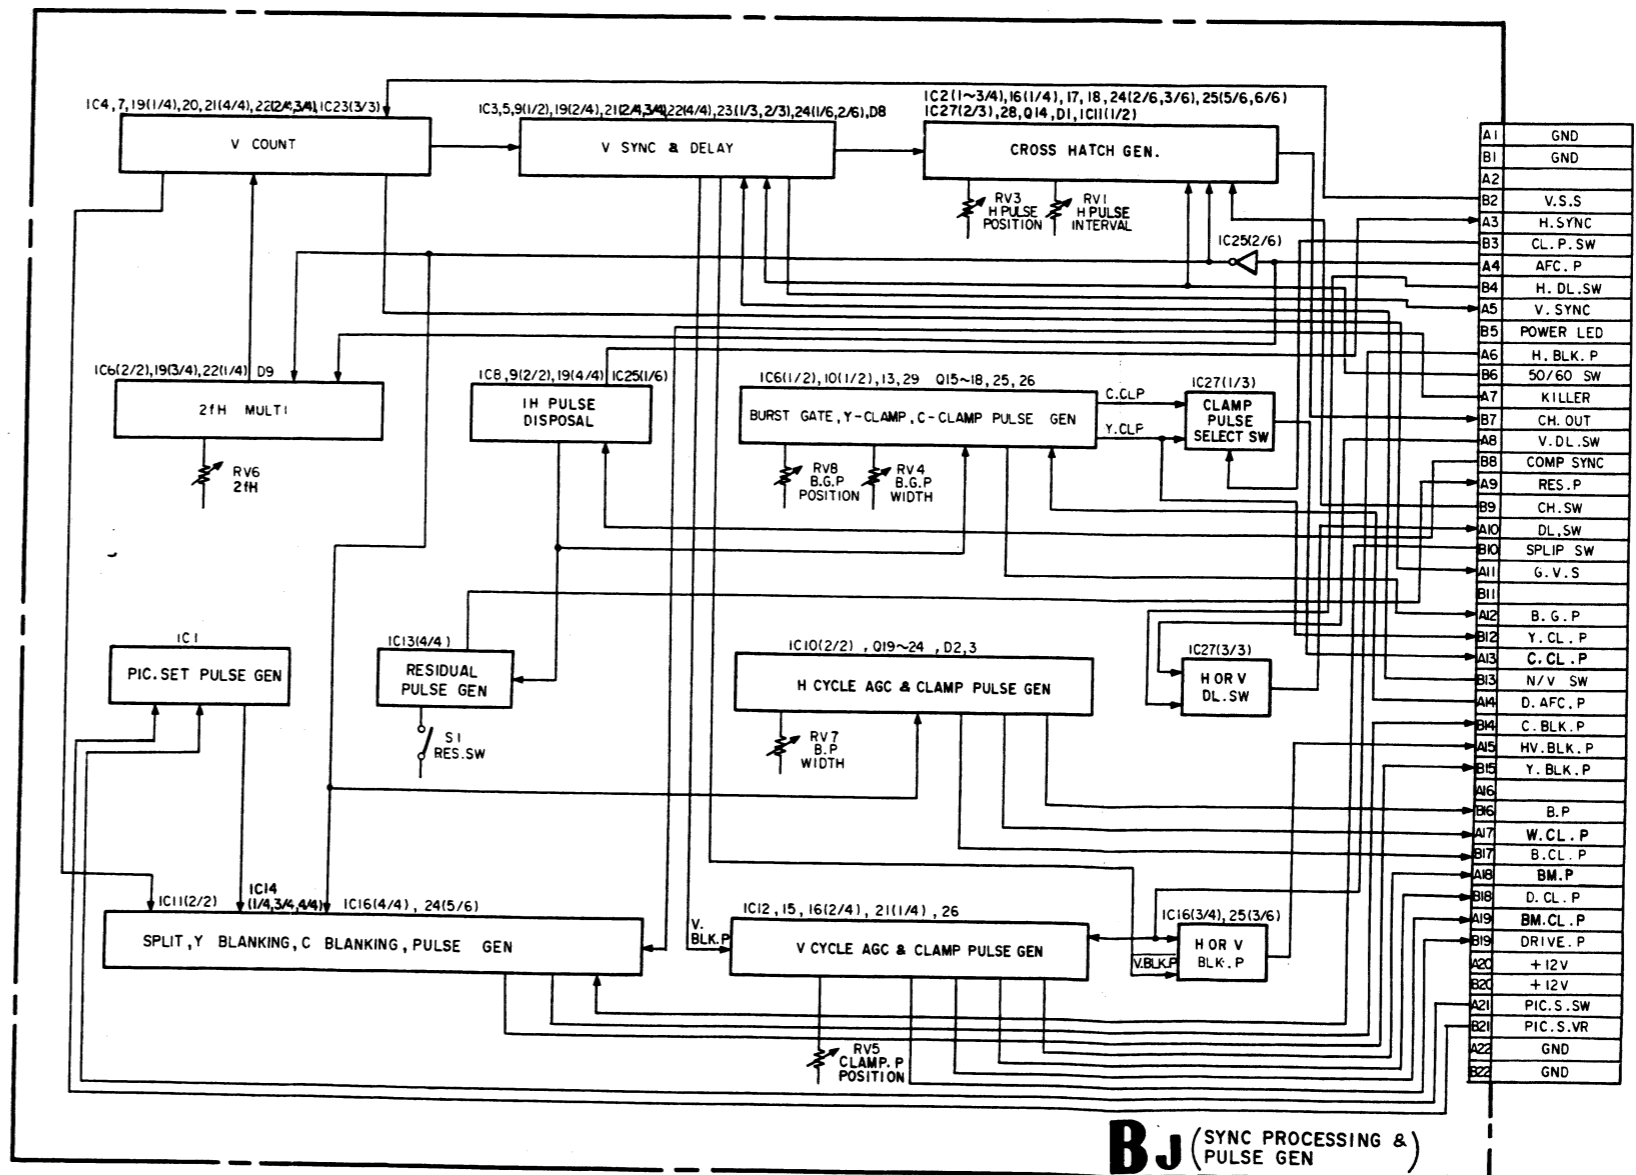

TIMING CHART OF MAJOR PULSE (BJ BOARD)

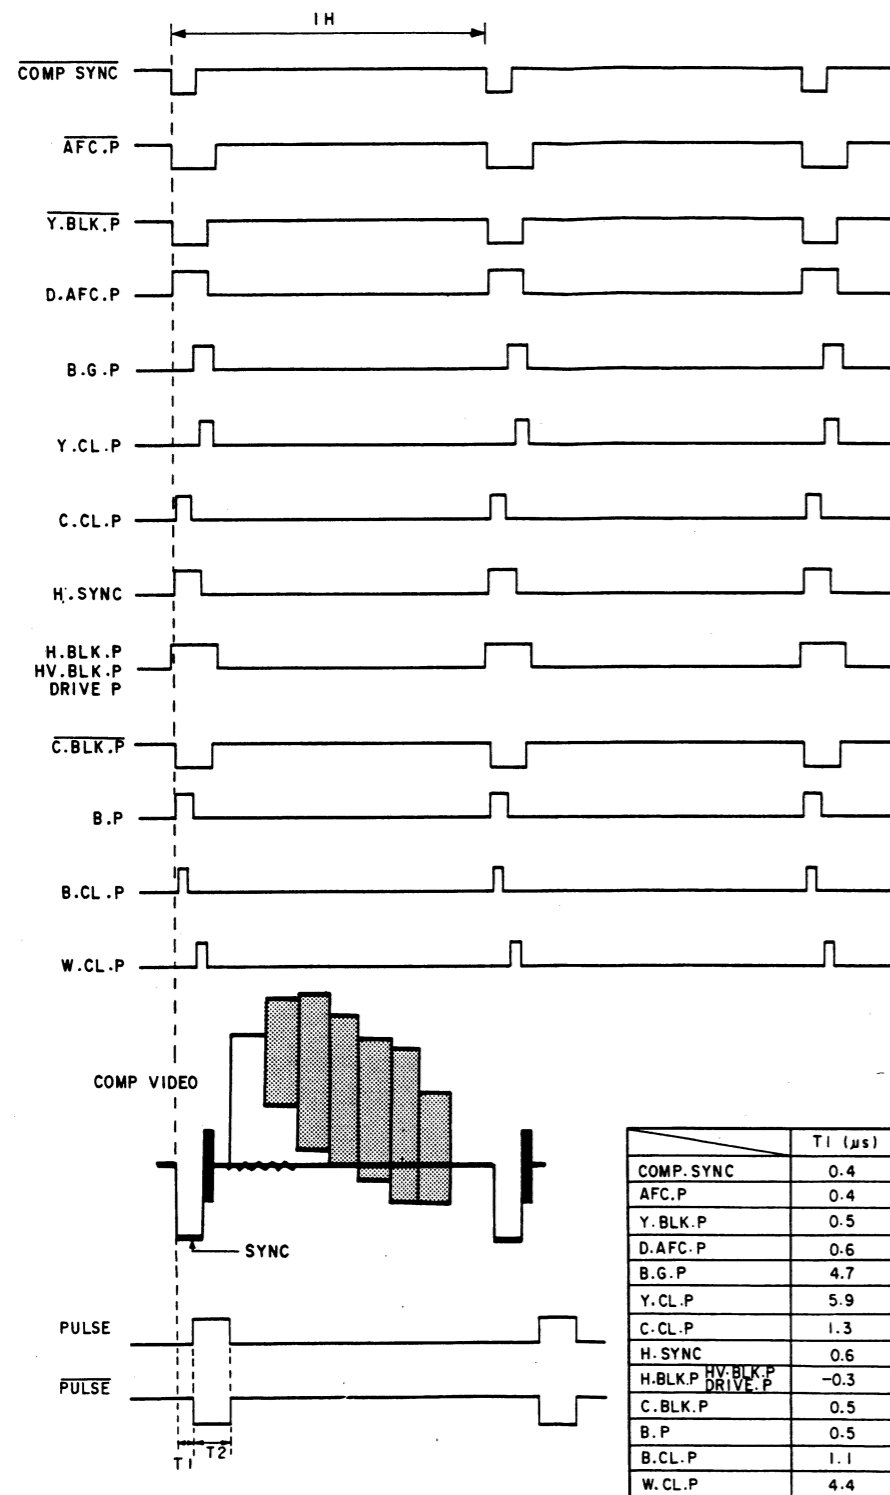


Figure 7

FIELD 1 VERTICAL BLANKING

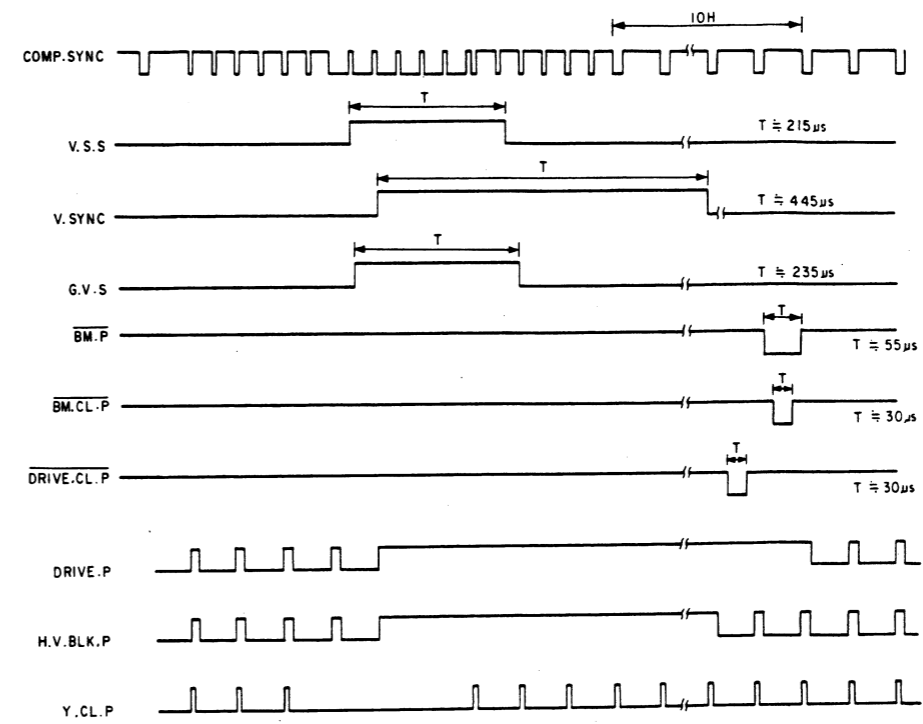


Figure 8

FIELD 2 VERTICAL BLANKING

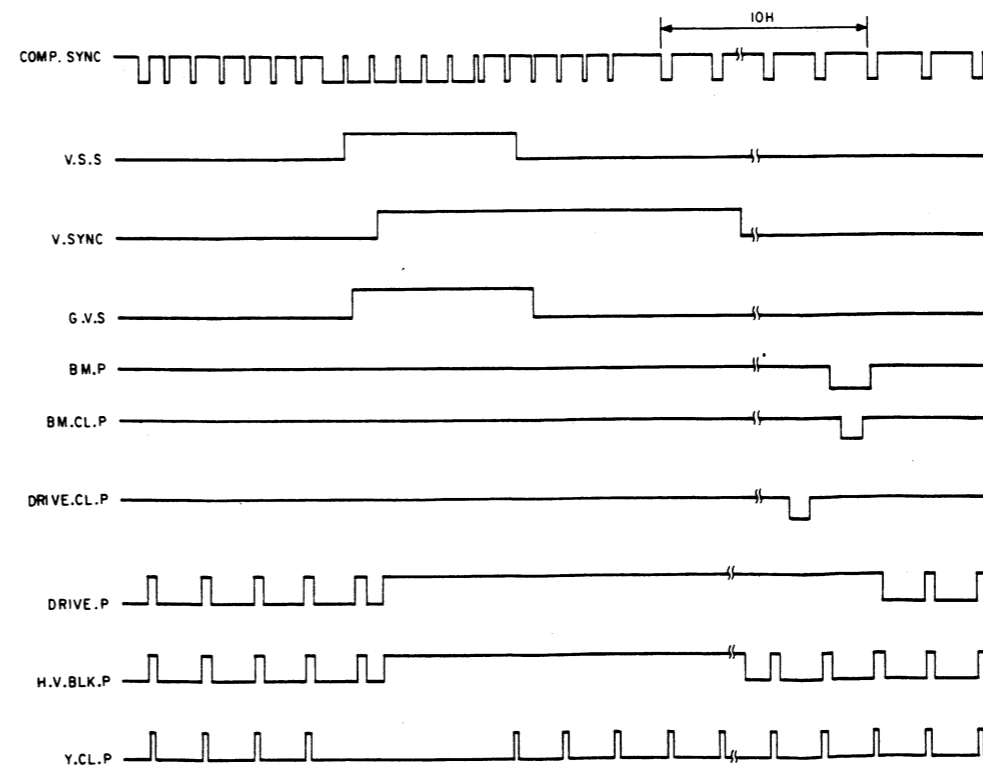


Figure 9

3-6. BK BOARD

Following are described about Red channel. Green and Blue channel are the same.

3-6-1. Red Drive Amplifier, Red Buffer

This circuit drives final stage of video output amplifier. Gain is approx. 2


3-6-2. Red Video Output Amplifier and Buffer

This is the final stage amplifier to obtain amplitude enough to drive G1 of CRT.

Gain is approx. 14

Also in this amplifier, BLANKING pulse is mixed with video signal.

BLOCK DIAGRAM OF BK BOARD

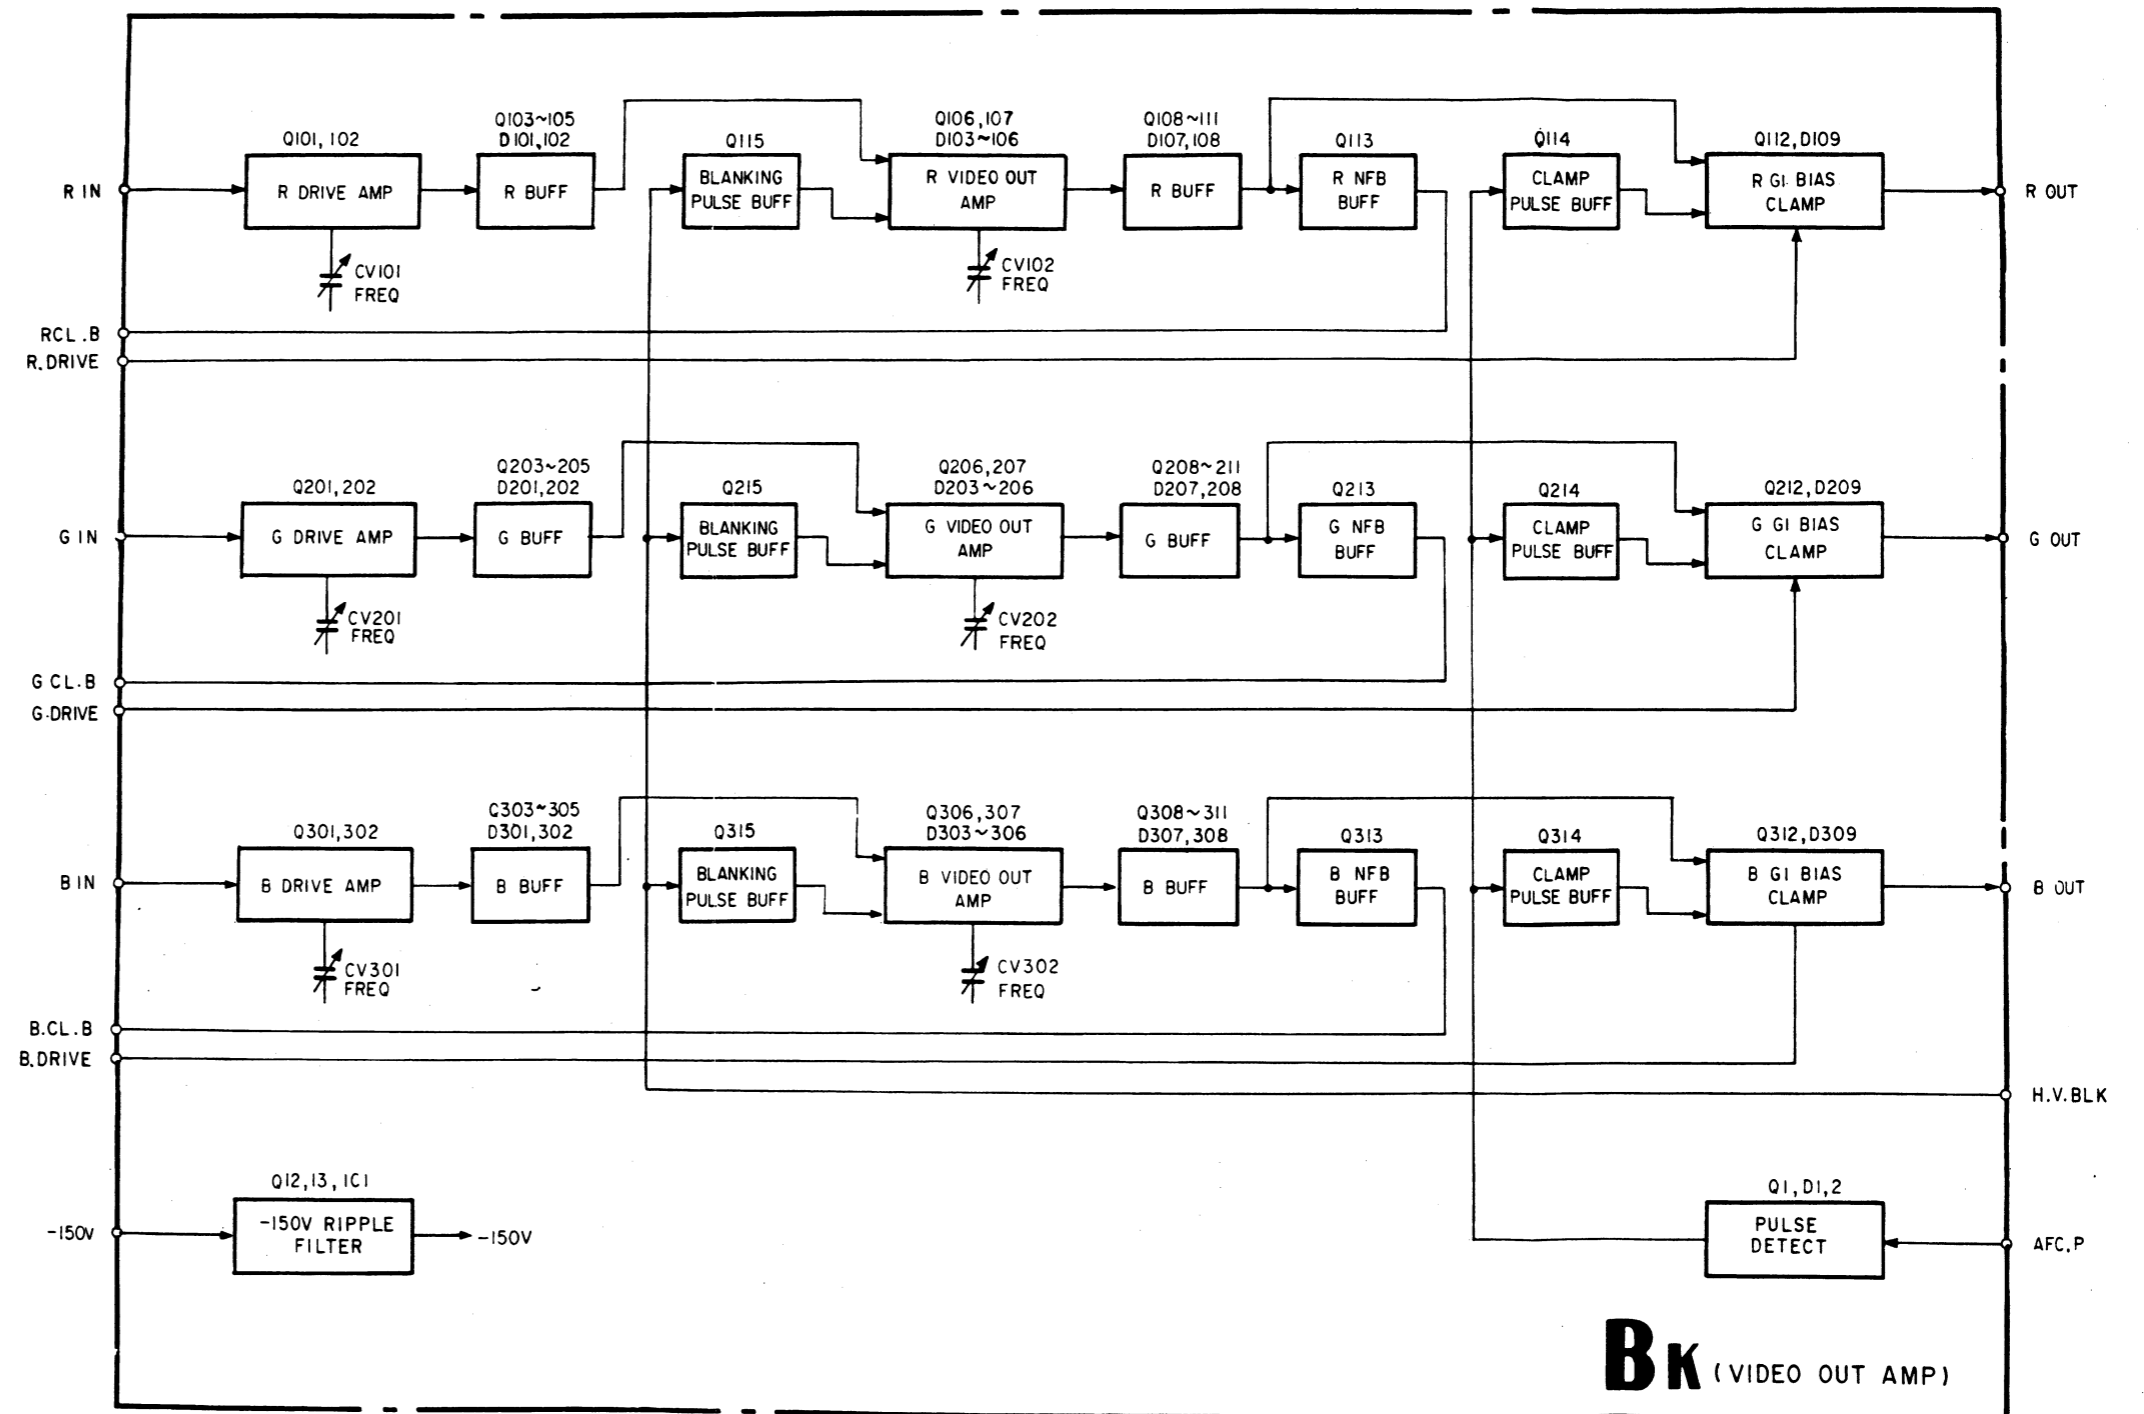

3-7. Beam control Circuit (BI, BK BOARD)
 (Same as Green and Blue)

Block diagram is shown in Figure 10.

3-7-1. Detection of Cathode Current and I-V Conversion
 (BI BOARD)

Cathode current is detected as a voltage by using IC105 (1/2)

3-7-2. Red G1 Bias Control (BI BOARD)

BMP is inserted in the signal during vertical blanking in BI board.
 This BMP is detected as a cathode current and sampled by BM CLP applied to FET Q113.

This bias control circuit controls the base voltage of transistor Q114 so that converted voltage from cathode current and the reference voltage may match.

3-7-3. Red G1 Bias Clamp Circuit (BK BOARD)

Video output signal is clamped at the voltage of collector of transistor Q114 in BI board by using transistor Q112.

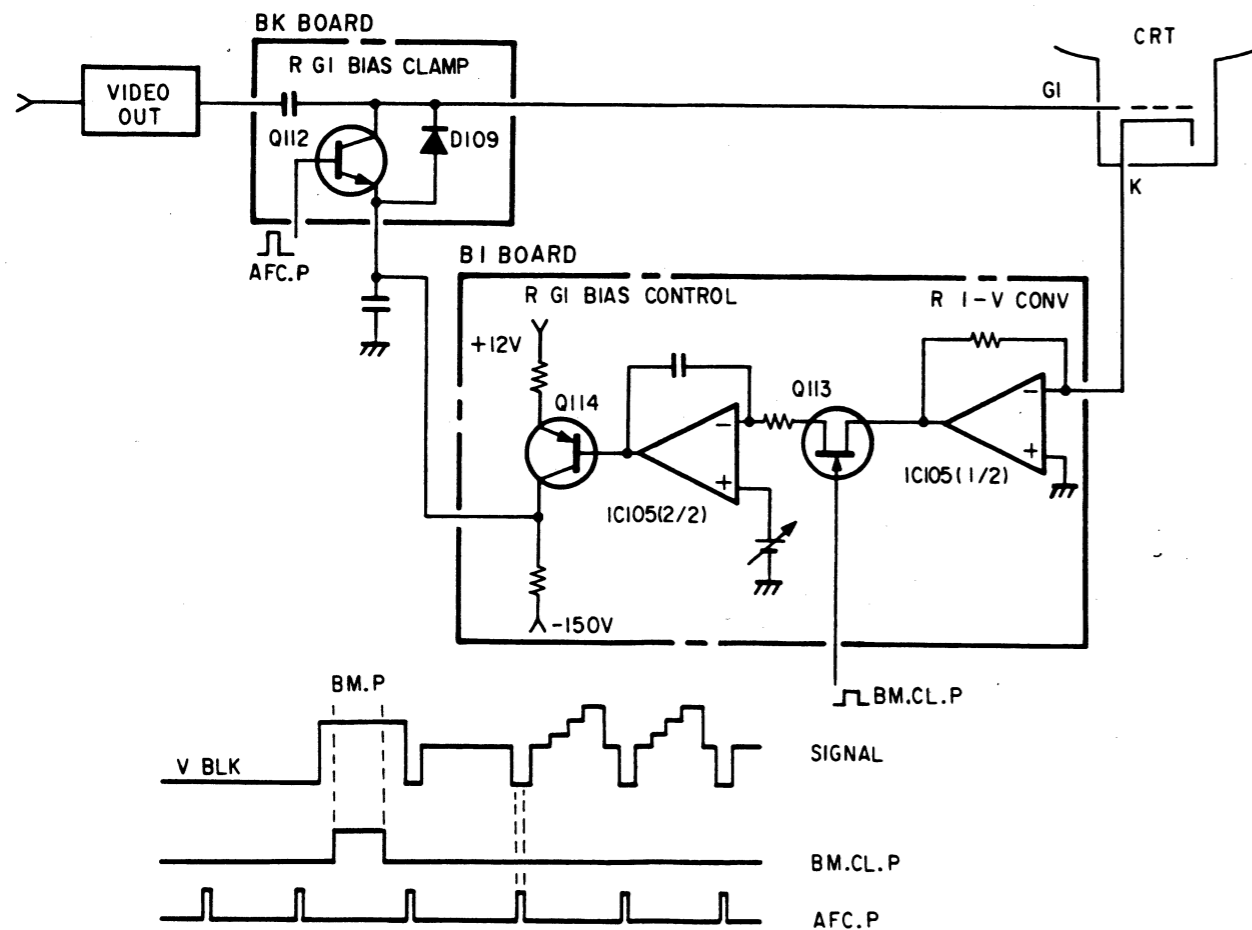


Figure 10

3-8. PAL DEMODULATOR, Y TRAP CIRCUIT (BD BOARD)

The composite video signal (PAL) supplied from BA board is fed to transistor Q1 (buffer), then is supplied to the 4.43 MHz trap circuit with Y signal and to band pass filter with chrominance signal.

3-8-1. Chroma Band Pass Filter

The composite video signal obtained from at the emitter of transistor Q1 is fed to the Band pass filter composed of resistor R12, capacitor C7, C8, inductor L3 and transistor Q5. The center frequency of this filter is adjusted to the subcarrier frequency (4.43 MHz) by L3, and chrominance signal is derived from Q5.

3-8-2. Residual SW Circuit

The chrominance signal derived at transistor Q5 is fed to analog switcher IC2. When switch S1 on BJ board is set to ON position, residual pulse which has almost same phase as H sync is fed to control terminal of analog switcher (pin ③ of IC2) and screening is performed during H sync period. When switch S1 on BJ board is set to OFF position, Low level signal (0V DC) is fed to control terminal and screening action is not performed. Thus residual switch circuit does not activate. When there is residual subcarrier in the video signal, clamp level of color difference signal changes by turning switch S1 ON/OFF and therefore residual subcarrier can be checked on the picture as a color shift.

3-8-3. Chroma Amplifier Circuit

The chrominance signal from residual switch circuit (IC2 pin ④) is fed to chroma amplifier circuit (Q19, Q36). After the chroma signal is amplified by the inversion amplifier (gain: 1X), it is voltage divided by resistors R400 and R314 and then input to the R-Y input terminal (IC1, pin (3)) and B-Y input terminal (IC1, pin (2)) of the following demodulator circuit via the buffer (Q38).


3-8-4. Phase Control Circuit

The chrominance signal from residual switch is also fed to phase control circuit (Q6, Q7, Q8, Q9, D12). In this circuit, a variable capacitance diode (D10) is used to control the phase of color burst signal. Anode voltage of D10 is applied by variable resistor RV8 and preset adjustment of phase is made by this variable resistor. When the PHASE control on the right side of the front panel is turned, DC level of phase control signal (board terminal A13) changes and this phase control signal is fed to the cathode of D10 via analog switcher (IC5). In this way, Burst phase of chrominance signal is controlled according to the DC level of the phase control signal. When PAL-D is selected with the PAL switch inside the right side drawer, between pins ③ and ④ of IC5 becomes conductive and phase control becomes dependent on RV7, disabling the Phase Control of the right side front panel.

Analog switcher IC5 (1/3) activates to make short-circuit between input terminal pin ③ or ⑤ and output terminal pin ④, only when COLOR STANDARD SELECTOR in the right side of drawer is selected to PAL and otherwise pin ⑤ kept open circuit. As above phase controlled chrominance signal is derived from collector of transistor Q9 and burst signal in this signal is gated by IC6. The gated burst signal is fed to the burst input terminal pin ⑪ of demodulator IC1.

3-8-5. PAL Demodulator

Block diagram of IC used for PAL demodulator is shown in Figure 11. This IC is designed for use of NTSC demodulator. When chrominance signal is fed to pin ② and pin ③, color burst signal to pin ⑪ and Burst Gate Pulse (B.G.P.) to pin ⑬, R-Y and B-Y color difference signals are obtained at output terminals pin ⑬ and pin ⑭. The demodulation axes of this demodulator are R-Y axis and B-Y axis. Variable capacitor CV1 is adjusted so that the phase angles between them are 90°. Local oscillator (4.43 MHz) is formed by CW oscillator in IC1 connected to the terminal pin ⑤, ⑥, ⑦, ⑧ and external circuit. The variable capacitor CV2 is adjusted so that the free run frequency may be subcarrier frequency 4.433619 MHz. Also APC (Automatic Phase Control) circuit is formed by APC section in IC1 connected to the terminal pin ⑨ and ⑩ local oscillator is controlled by APC circuit. The color difference signals demodulated by this IC are fed to low pass filter, where high frequency component is removed, then R-Y and B-Y color difference signals are obtained.

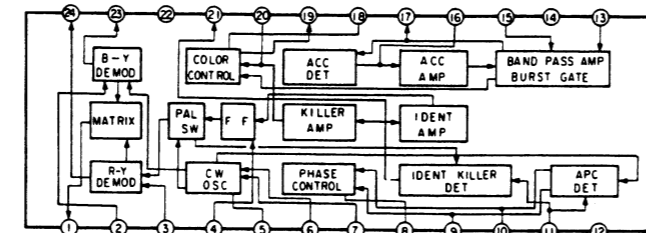

Block diagram of PAL demodulator
Figure 11

3-8-6. PAL-D Matrix and PAL S/D Switching Circuit

This circuit is further divided into circuits for the R-Y and B-Y signals, but the operation of both circuits is the same. So only the R-Y one will be explained. R-Y signals input from the demodulator circuit are input to Q20 (BUFF) and Q21 (BUFF). The signals input to Q21 are then input to pin ② of the analog switcher (IC5). When PAL S has been selected, between pins ② and ⑤ becomes conductive and the signals are supplied to the following circuit via Q33 (BUFF). The signals input to Q20 are formed by IC7 and Q18. Bias is controlled by a clamp circuit and is input to pin ⑮ of the 1H delay line (IC3). The DC level of the input is adjusted to the optimum value by using RV9. IC3, driven by the 10.64 MHz clock signal generated by the clock generator circuit configured with XZ, Q34 and Q35, delays the input signal by 1H cycle and outputs it from pin ⑪.

The high frequency component of the signal thus output is removed by the low-pass filter configured with Q22 and Q23, after which the signal is input to the following PAL-D matrix circuit. The PAL-D matrix circuit is configured with R100, R101 and Q24. The signal that was not delayed is input through R100 while the 1H delayed signal is input through R101 at a ratio of 1/2. The PAL-D signal added to the base of Q24 is obtained from its emitter. The signal obtained from the Q24 emitter is input to pin ① of IC5. When PAL-D is selected, between pins ① and ⑤ becomes conductive and the signal is supplied to the following circuit via Q33 (BUFF).


3-8-7. 4.43 MHz Trap Circuit, Phase Compensation, Y Delay Correction Circuit

The composite video signal from the emitter of transistor Q1 is fed to 4.43 MHz trap circuit composed of resistor R5, R6, R7, capacitor C1, C2 and inductor L1. Adjustment of L1 is made so that the resonance frequency of this trap circuit should be subcarrier frequency. Y (Luminance) signal removed subcarrier is obtained at output terminal of the trap circuit and is fed to the phase compensation circuit. (Transistor Q2, resistor R8, R9 R10, inductor L2 capacitor C4) This circuit compensates phase delay of the signal at high frequency due to the trap circuit. Y signal compensated phase delay is fed to Y-delay circuit. In this circuit Luminance/Chrominance time error is compensated by delay line.

3-8-8. Color Standard Selector

When PAL system is not selected by the COLOR STANDARD SELECTOR in the right side drawer, transistor Q101, Q102 are cut off and ±12V line power source is not supplied to the demodulator circuit.

BLOCK DIAGRAM OF BD (PAL) BOARD

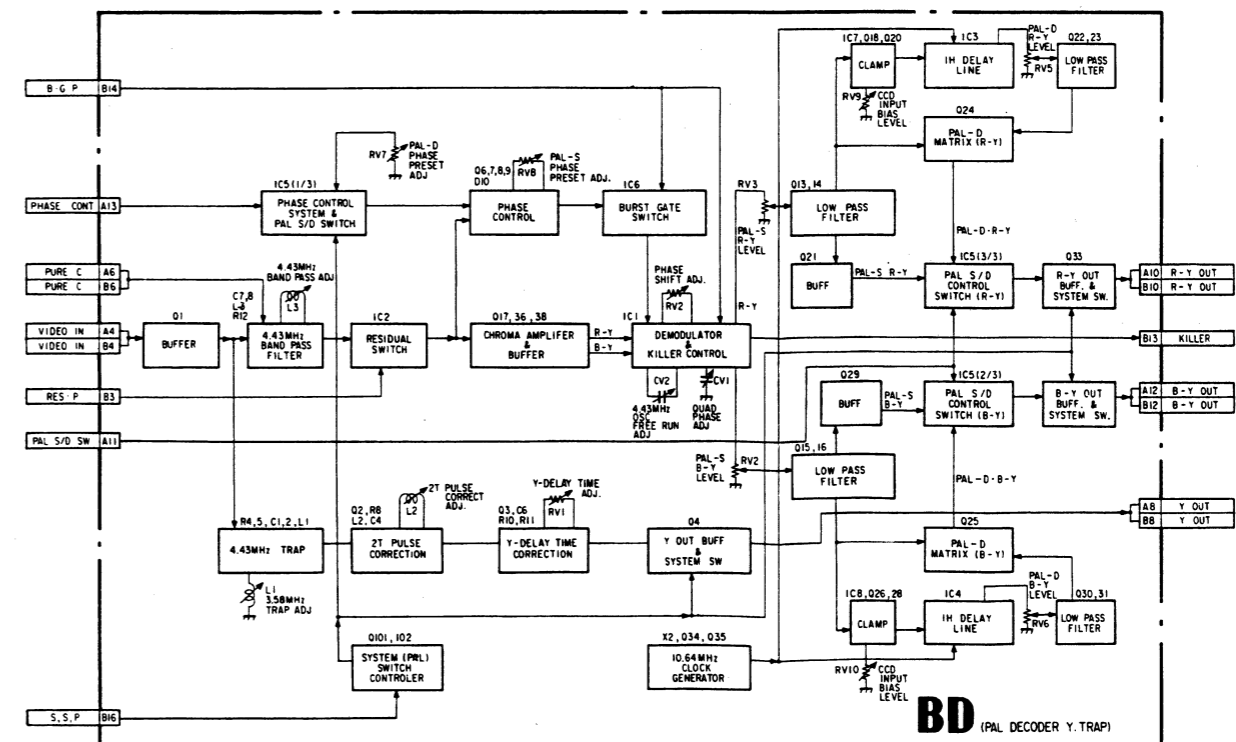

3-9. PAL-M DEMODULATOR, Y TRAP CIRCUIT (BM BOARD)

The composite video signal supplied from BA board is fed to transistor Q1 (buffer), then is supplied to the 3.58 MHz trap circuit with Y signal and to band pass filter with chrominance signal.

3-9-1. Chroma Band Pass Filter

The composite video signal obtained from at the emitter of transistor Q1 is fed to the Band pass filter composed of resistor R12, capacitor C7, C8, inductor L3 and transistor Q5.

The center frequency of this filter is adjusted to the subcarrier frequency (3.58 MHz) by L3, and chrominance signal is derived from Q5.

3-9-2. Residual SW Circuit

The chrominance signal derived at transistor Q5 is fed to analog switcher IC2.

When switch S1 on BJ board is set to ON position, residual pulse which has almost same phase as H sync is fed to control terminal of analog switcher (pin 3) of IC2 and screening is performed during H sync period.

When switch S1 on BJ board is set to OFF position, Low level signal (0V DC) is fed to control terminal and screening action is not performed. Thus residual switch circuit does not activate.

When there is residual subcarrier in the video signal, clamp level of color difference signal changes by turning switch S1 ON/OFF and therefore residual subcarrier can be checked on the picture as a color shift.

3-9-3. Chroma Amplifier Circuit

The chrominance signal from residual switch circuit (IC2 pin 4) is fed to chroma amplifier circuit (Q19, Q36).

After the chroma signal is amplified by the inversion amplifier (gain: 1X), it is voltage divided by resistors R400 and R314 and then input to the R-Y input terminal (IC1, pin (3)) and B-Y input terminal (IC1, pin (2)) of the following demodulator circuit via the buffer (Q38).

3-9-4. Phase Control Circuit

The chrominance signal from residual switch is also fed to phase control circuit (Q6, Q7, Q8, Q9, D12).

In this circuit, a variable capacitance diode (D10) is used to control the phase of color burst signal.

Anode voltage of D10 is applied by variable resistor RV8 and preset adjustment of phase is made by this variable resistor.

When the PHASE control on the right side of the front panel is turned, DC level of phase control signal (board terminal A13) changes and this phase control signal is fed to the cathode of D10 via analog switcher (IC5). In this way, Burst phase of chrominance signal is controlled according to the DC level of the phase control signal.

When PAL-D is selected with the PAL switch inside the right side drawer, between pins 3 and 4 of IC5 becomes conductive and phase control becomes dependent on RV7, disabling the Phase Control of the right side front panel.

Analog switcher IC5 (1/3) activates to make short-circuit between input terminal pin 3 or 5 and output terminal pin 4, only when COLOR STANDARD SELECTOR in the right side of drawer is selected to PAL and otherwise pin 5 kept open circuit.

As above phase controlled chrominance signal is derived from collector of transistor Q9 and burst signal in this signal is gated by IC6. The gated burst signal is fed to the burst input terminal pin 11 of demodulator IC1.

3-9-5. PAL-M Demodulator

Block diagram of IC used for PAL demodulator is shown in Figure 12. This IC is designed for use of NTSC demodulator.

When chrominance signal is fed to pin 2 and pin 3, color burst signal to pin 11 and Burst Gate Pulse (B.G.P.) to pin 13, R-Y and B-Y color difference signals are obtained at output terminals pin 23 and pin 24.


The demodulation axes of this demodulator are R-Y axis and B-Y axis. Variable capacitor CV1 is adjusted so that the phase angles between them are 90°.

Local oscillator (3.58 MHz) is formed by CW oscillator in IC1 connected to the terminal pin 5, 6, 7, 8 and external circuit.

The variable capacitor CV2 is adjusted so that the free run frequency may be subcarrier frequency 3.575611 MHz.

Also APC (Automatic Phase Control) circuit is formed by APC section in IC1 connected to the terminal pin 9 and 10 local oscillator is controlled by APC circuit.

The color difference signals demodulated by this IC are fed to low pass filter, where high frequency component is removed, then R-Y and B-Y color difference signals are obtained.

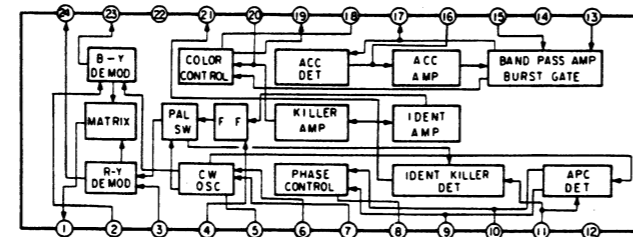

Block diagram of PAL-M demodulator

Figure 12

3-9-6. PAL-D Matrix and PAL S/D Switching Circuit

This circuit is further divided into circuits for the R-Y and B-Y signals, but the operation of both circuits is the same. So only the R-Y one will be explained.

R-Y signals input from the demodulator circuit are input to Q20 (BUFF) and Q21 (BUFF).

The signals input to Q21 are then input to pin 2 of the analog switcher (IC5). When PAL S has been selected, between pins 2 and 15 becomes conductive and the signals are supplied to the following circuit via Q33 (BUFF).

The signals input to Q20 are formed by IC7 and Q18.

Bias is controlled by a clamp circuit and is input to pin 15 of the 1H delay line (IC3). The DC level of the input is adjusted to the optimum value by using RV9.

IC3, driven by the 10.64 MHz clock signal generated by the clock generator circuit configured with XZ, Q34 and Q35, delays the input signal by 1H cycle and outputs it from pin 11.

The high frequency component of the signal thus output is removed by the low-pass filter configured with Q22 and Q23, after which the signal is input to the following PAL-D matrix circuit.

The PAL-D matrix circuit is configured with R100, R101 and Q24. The signal that was not delayed is input through R100 while the 1H-delayed signal is input through R101 at a ratio of 1/2.

The PAL-D signal added to the base of Q24 is obtained from its emitter. The signal obtained from the Q24 emitter is input to pin 1 of IC5. When PAL-D is selected, between pins 1 and 15 becomes conductive and the signal is supplied to the following circuit via Q33 (BUFF).

3-9-7. 3.58 MHz Trap Circuit, Phase Compensation, Y Delay Correction Circuit

The composite video signal from the emitter of transistor Q1 is fed to 3.58 MHz trap circuit composed of resistor R5, R6, R7, capacitor C1, C2 and inductor L1.

Adjustment of L1 is made so that the resonance frequency of this trap circuit should be subcarrier frequency.

Y (Luminance) signal removed subcarrier is obtained at output terminal of the trap circuit and is fed to the phase compensation circuit. (Transistor Q2, resistor R8, R9 R10, inductor L2 capacitor C4)


This circuit compensates phase delay of the signal at high frequency due to the trap circuit.

Y signal compensated phase delay is fed to Y-delay circuit. In this circuit Luminance/Chrominance time error is compensated by delay line.

3-9-8. Color Standard Selector

When PAL system is not selected by the COLOR STANDARD SELECTOR in the right side drawer, transistor Q101, Q102 are cut off and $\pm 12V$ line power source is not supplied to the demodulator circuit.

BLOCK DIAGRAM OF BM (PAL-M) BOARD

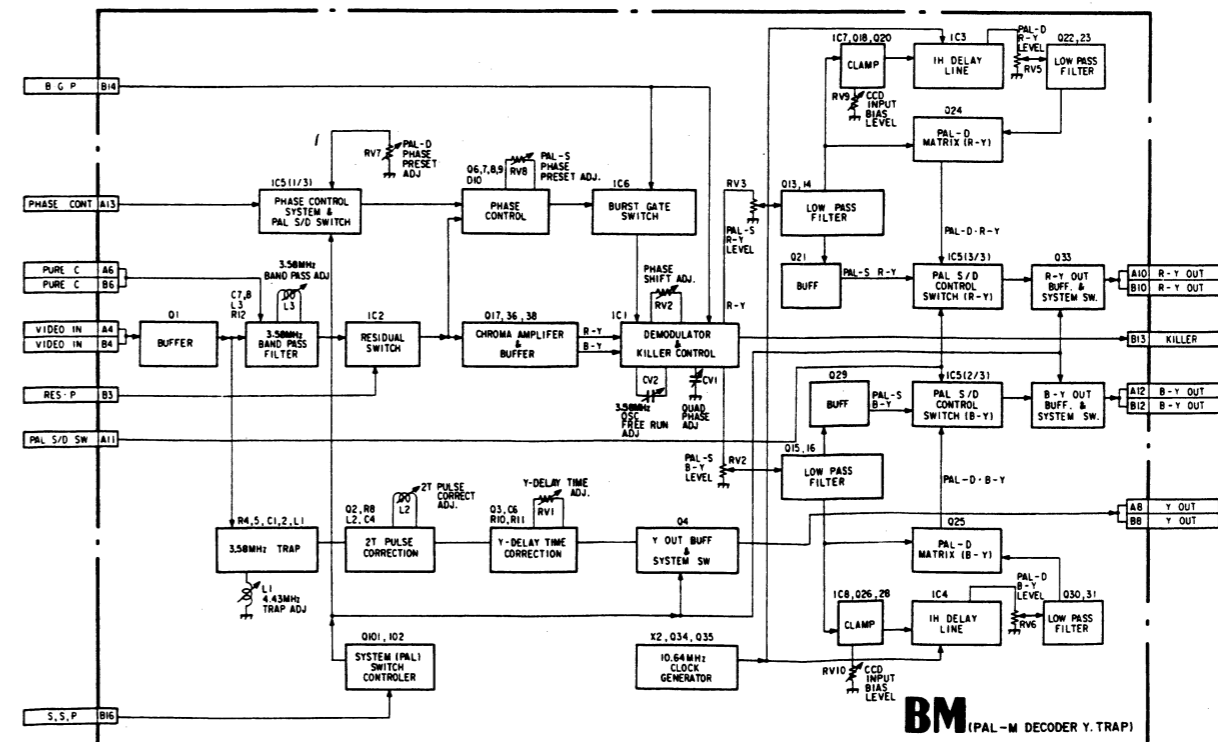

**3-10. VERTICAL DEFLECTION OUTPUT CIRCUIT
CONVERGENCE OUTPUT CIRCUIT
(EB BOARD)**

3-10-1. Vertical Deflection Output

Vertical Deflection Output amplifier is composed of DC coupled SEPP (Single Ended Push Pull) amplifier (Q1~Q5) and boost up circuit.

This boost up circuit contains transistors Q7 and Q8 to reduce power consumption by applying the voltage to the output transistor during vertical retrace time.

Both vertical rate saw tooth waveform and correction waveform for top and bottom pincushion are generated in DA board and fed to output amplifier. Vertical centering is performed by changing DC level of vertical rate sawtooth because Vertical DY (Deflection Yoke) is connected to output amplifier directly.

3-10-2. Convergence Yoke Output Circuit

CY (Convergence Yoke) is used for adjustment of misconvergence of vertical direction. This CY is driven by SEPP (single ended push pull) amplifier (Q9~Q13) and connected directly. Correction waveform is provided from DB board.

**3-10-3. DCT (Dynamic Convergence Transformer)
Output Circuit**

This circuit is used for adjustment of misconvergence for Horizontal direction.

DCT is also driven by SEPP amplifier (Q14~Q19) and AC coupled to it.

Correction waveform is provided to the primary of DCT and transferred to the secondary windings, output voltage of secondary windings is applied to CV electrode of CRT (picture tube) and performed convergence adjustment.

circuit diagram shown in Figure 13 is the theory of basic DCT circuit.


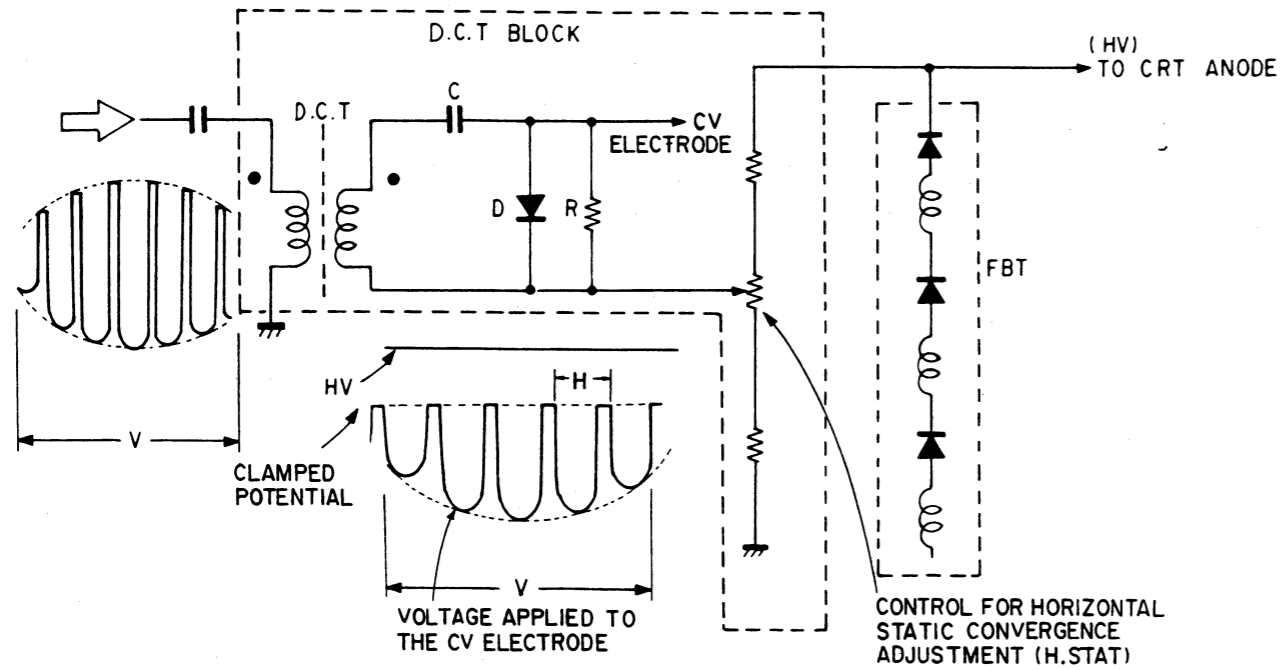


Figure 13

BLOCK DIAGRAM OF EB BOARD

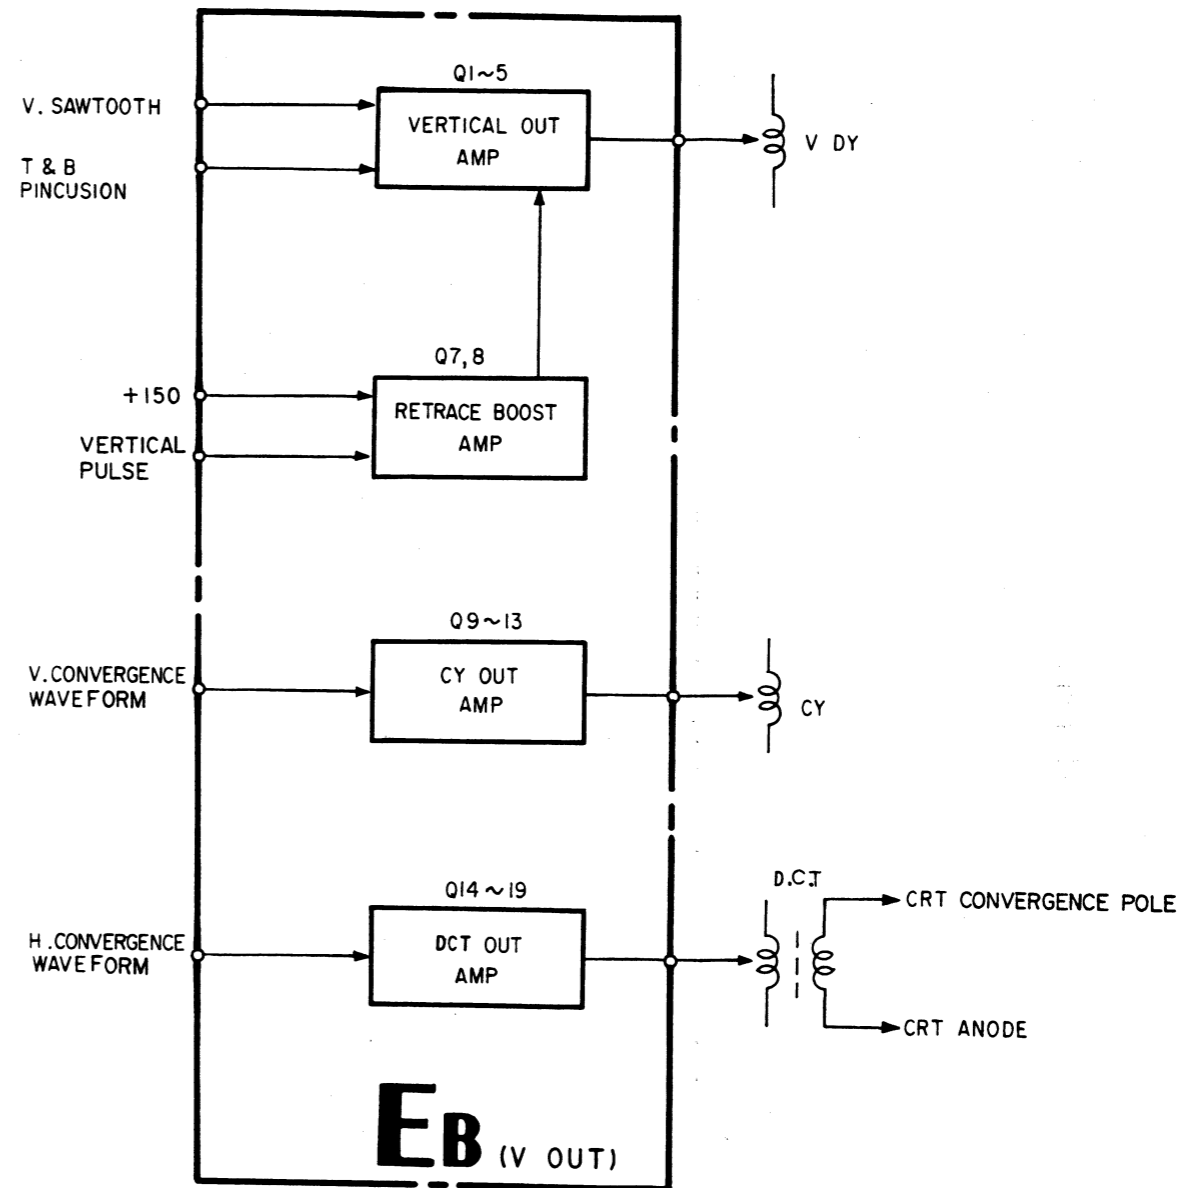

3-11. POWER SUPPLY CIRCUIT (GA, GB BOARDS)

3-11-1. AC Power Supply, Rectifier Circuit

Voltage selector located at the rear side of the unit should be selected to the local line voltage (AC 100/120V or 220/240V). In case of AC 100/120V selected by voltage selector, rectifier D21 capacitors C80 and C81 operate as a double multiple rectifier. See Figure 14(a). In case of AC 220/240V selected by voltage selector, rectifier D21 capacitors C80 and C81 operate as a full-wave rectifier. See Figure 14(b).


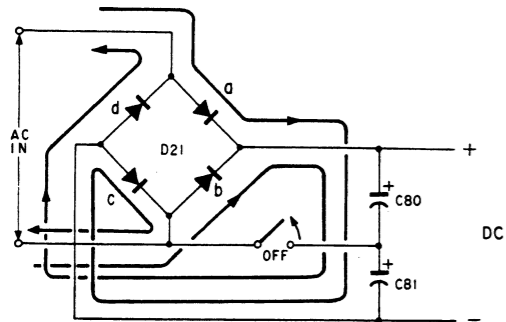


Figure 14(a)

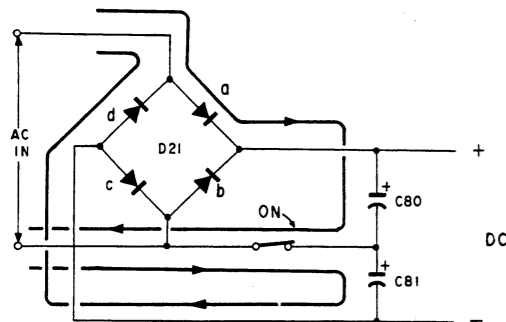

AC IN Passes through D21d and charges to C81.
AC Passes through D21a and charges to C80.

Figure 14(b)

3-11-2. Degauss Circuit

There are 2 posistors (PTH1, PTH2) in the degaussing circuit. One is used for AC 100/120V operation, the other is for AC 220/240V operation, these posistors are switched by voltage selector. This degaussing circuit is turned ON and OFF by using Relay (RY1) automatically. When power is turned ON, Automatic degaussing starts to work and a few seconds later stops automatically. Also Manual degaussing is available if necessary after a few minutes power is turned on when posistor (PTH1 or PTH2) gets cool down. This manual degaussing is operated by a push of button (Degauss Switch) at the left of the front panel. When degaussing circuit starts to work, Q11 transistor turns on by time constant circuit composed of resistors R88, 91 and capacitor C74. Q11 drives Q12 transistor. Relay (RY1) is driven by Q12. Time constant circuit keeps degaussing circuit to activate for several seconds until degaussing is finished.

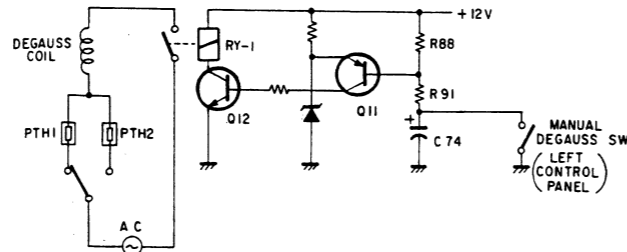


Figure 15

3-11-3. Starter Circuit

Blocking oscillator composed of IC1 and T4 starts working by turning the power on. DC output voltage of the rectifying-circuit, D7 and C57 in T4 secondary circuit, is supplied to the regulator-circuit IC (IC2 and IC3) with line voltage of 50 to 70V AC (at 110/120V AC) by function of the start-rectifying circuit (Q7, Q8, Q9). And the regulator circuit starts working and as +15V-line works, the voltage is supplied to the regulator-circuit IC through D20. At the same time, a voltage for stopping the blocking-oscillator operation is provided to IC1 from the primary winding ⑥-⑦ of the switching regulator transformer SRT2.

3-11-4. Switching Regulator Circuit

Block diagram is shown in Figure 16. This is half bridge type of switching regulator in this model.

Following Description is the Theory of Half-Bridge Switching Regulator.

DC voltage E_{IN} rectified from AC voltage in AC power rectifier section is divided by capacitor C1 and C2. C1 and C2 have almost same value. Q1 (contains 2 transistors) operates as a switch driven by PWM modulated pulse via T2 (Drive Transformer). Switching current flows through primary windings of T1 (SRT) by switching transistor Q1 via T3 (Current Transformer). Thus output voltages are generated at secondary windings of T1.

Practical Circuit Used in this Model

There are 2 switching regulators in this power supply. One is for low voltage power supply, $\pm 15V$, $\pm 18V$ and $+5V$. The other is for high voltage $\pm 150V$ power supply. Low voltages are generated by IC2, T1, T2, T3 and Q2. High voltages are generated by IC3, T6, T7 and Q2. Refer to block diagram. Current Transformer T3 and T7 detects excess current in transistor Q1 and Q2 for the protection of damage.


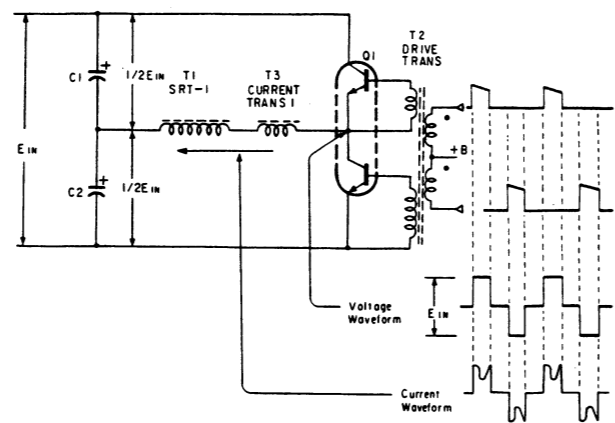


Figure 16

3-11-5. Over Voltage Protector

GB board, mounted on the GA board, is a protection circuit that when the output voltage surpasses the rated value for some reason, it makes short-circuit the CT (frequency-determination capacitor) on IC2 and IC3 and the regulator stops its operation to protect the circuits.

BLOCK DIAGRAM OF GA, GB BOARDS

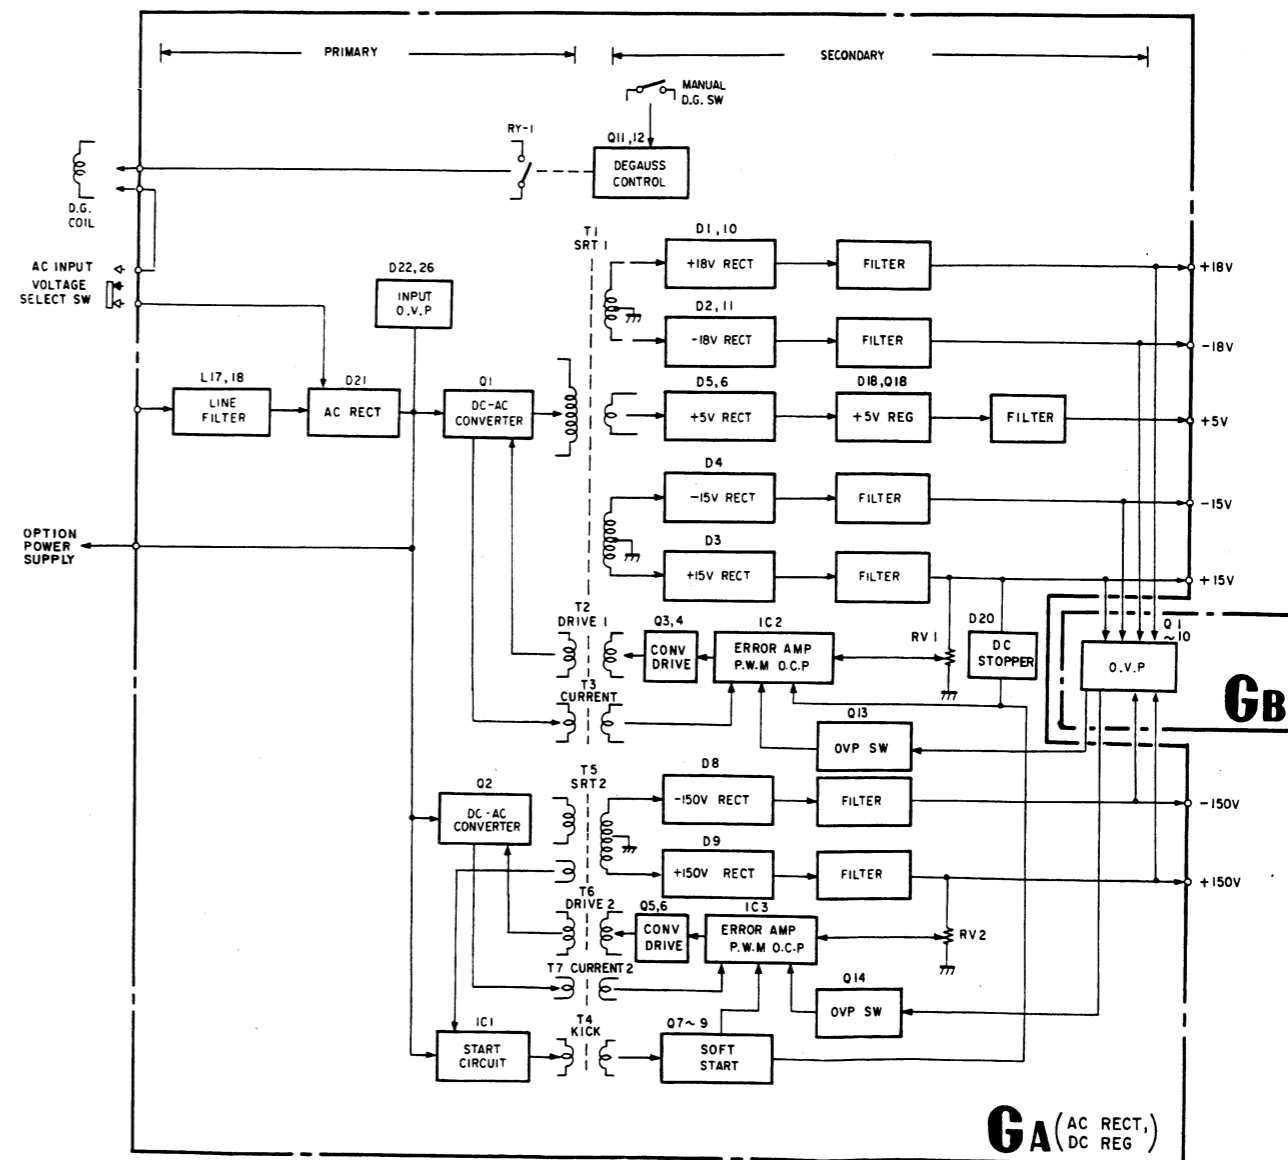

3-12. CONVERGENCE CIRCUIT (DB, DC BOARDS, DCT BLOCK)

3-12-1. General Description

This is a simple explanation of the convergence system in Super fine Trinitron picture tube used in this model. The Deflection Yoke (DY) used in this model generates an almost uniform magnetic field in order to get fine beam spot size. Accordingly basically misconvergence of horizontal direction as shown in Figure 17 is generated on the picture screen.

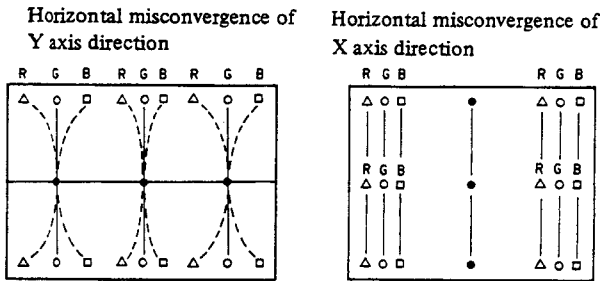


Figure 17

3-12-2. Static Electrical Convergence System

Trinitron system has a unique static convergence system. The structure of electric gun is shown in Figure 18. G6 is the electrode for convergence. Static electrical convergence control can be used. In this system beam spot deterioration is less than that of the electromagnetic system.

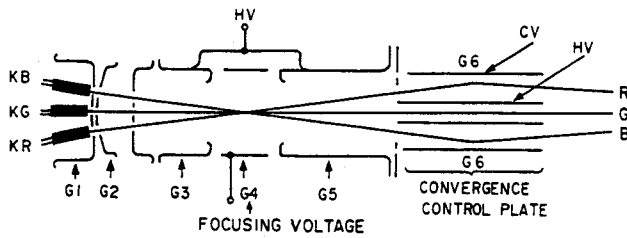


Figure 18

3-12-3. Convergence Correction Circuit (Horizontal Convergence)

Misconvergence of horizontal direction on Y axis is corrected by applying vertical rate parabola waveform to the convergence plate (G6)

And misconvergence of horizontal direction is corrected by applying horizontal rate parabola waveform to G6. See Figure 19.

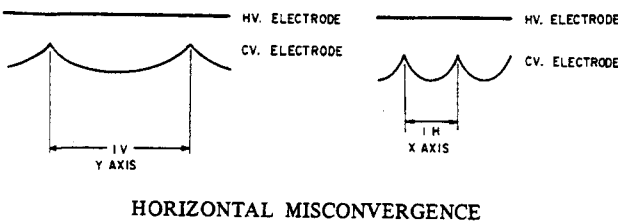


Figure 19

In this model, transformer is used to supply correction voltage to the G6 electrode for the horizontal direction misconvergence. In the secondary of the transformer peak clamp circuit using diode is applied so that both the vertical rate parabola waveform and horizontal rate parabola waveform are mixed and supplied to CV electrode. See Figure 20.

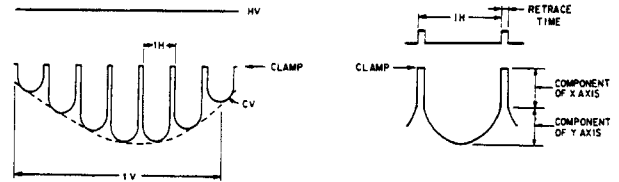


Figure 20

The correction waveforms are generated in DB board and output amplifier is located in EB board.

3-12-4. Vertical Convergence

Theoretically there is no misconvergence of Vertical direction since electric gun is aligned in line. But there is a slight amount of misconvergence due to the variations of CRT and DY and also due to the terrestrial magnetism.

There are also 2 kinds of misconvergence of vertical direction on X axis and Y axis as same as horizontal direction.

Misconvergence of Vertical direction on X axis is corrected by CY (convergence yoke).

Figure 21 shows the CRT neck as seen from the rear side.

Red beam and Blue beam are moved to the vertical direction differentially by CY. As Green beam is at the center of the CRT neck, it is not affected by the magnetic field of CY due to the cancellation of the magnetic field at the center of the neck.

Misconvergence of vertical direction on Y axis is corrected by NTC (Neck Twist Coil).

A Neck Twist Coil is wound around the center of electrode G2 ~ G3 (See Figure 24) for the correction. Theoretically, as the RED and Blue beams have HI component (They are opposite direction) as seen in Figure 21, they move to the vertical direction due to the magnetic field generated by NTC.

However as magnetic field of the NTC is the parallel to the Green beam, Green beam is not affected.

Correction waveform generator is located in DB board, output amplifier of CY is in EB board and output amplifier of NTC is in DB board.


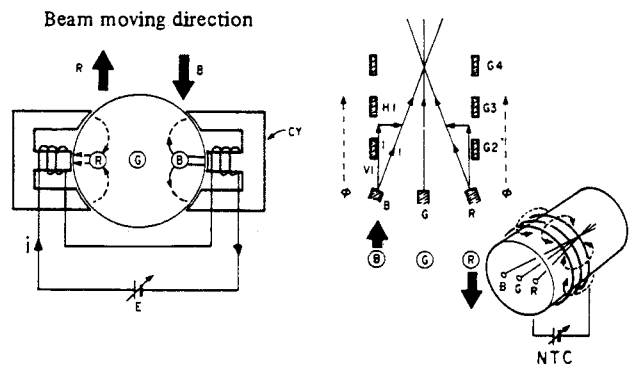


Figure 21

BLOCK DIAGRAM OF DB, DC BOARDS

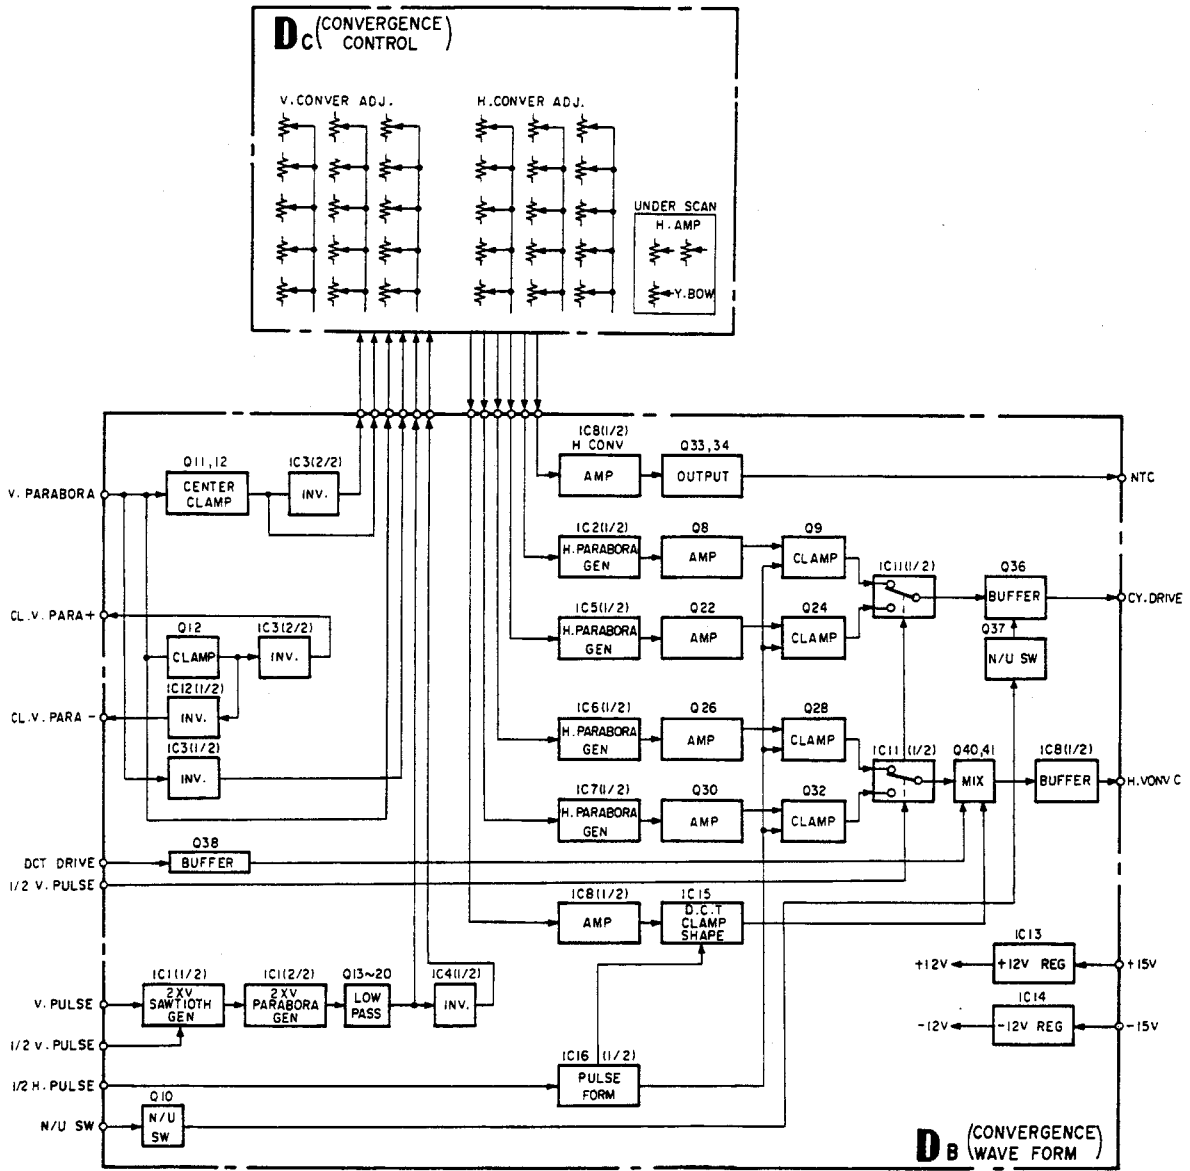

3-12-5. Convergence Correction Waveform Generator (DB BOARD)

This monitor incorporates unique convergence circuit which can adjust convergence at 15 positions of the picture screen, each 15 potentiometers for horizontal and vertical convergence adjustments are located on the left side of the drawer corresponding to the picture screen.

3-12-6. Horizontal Convergence Correction Waveform Generator

A vertical rate parabola waveform is supplied to the DB board from the DB board and is inverted and switched to make correction waveform.

For the left side of the picture screen, the correction waveform is compounded by adjusting potentiometers RV16 ~ RV20 on the DC board. This waveform is converted to horizontal rate parabola waveform which level is proportional to the compounded waveform by H parabola generator (IC6, Q25). This is amplified by transistor Q26 and clamped at the center position of the horizontal period by transistor Q28 and IC6. See Figure 22.

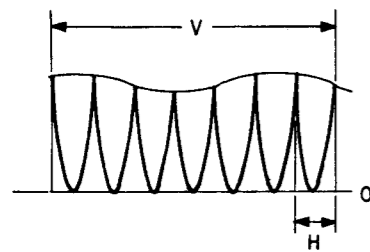


Figure 22

For the right side of the picture screen, the correction waveform is generated by adjusting potentiometers RV26 ~ RV30 on the DC board as same as the left side of the picture.

These correction waveforms (left and right side) are switched and mixed by analog switcher which activates at 1/2H period as seen in Figure 23.

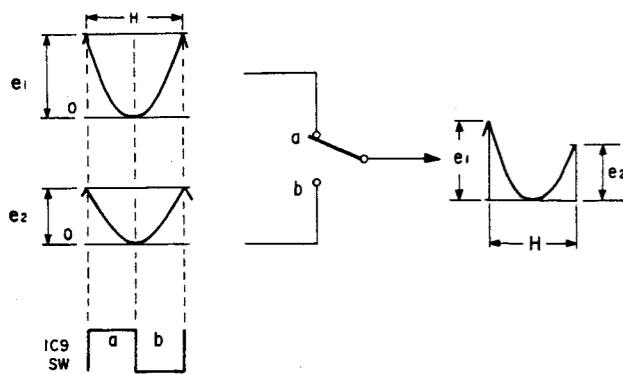


Figure 23

As a result, right side adjustments and left side adjustment can be performed independently of each other.

For the center of the picture screen, vertical parabola waveform is compounded to the correction waveform by adjusting potentiometers RV21 ~ RV25 on the DC board, and converted to horizontal pulse. This means amplitude of horizontal pulse is modulated by vertical parabola. (Q40, 41) See Figure 24.

This modulated pulse is mixed with horizontal parabola for left and right side correction. This mixed waveform is amplified and supplied to convergence plate in CRT via DCT. Thus horizontal convergence is corrected. See Figure 24.

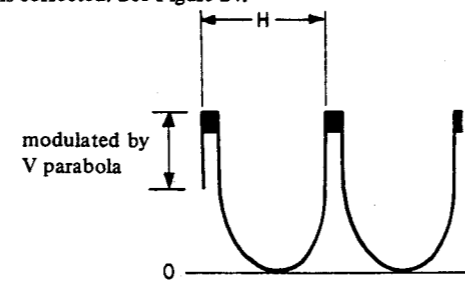


Figure 24

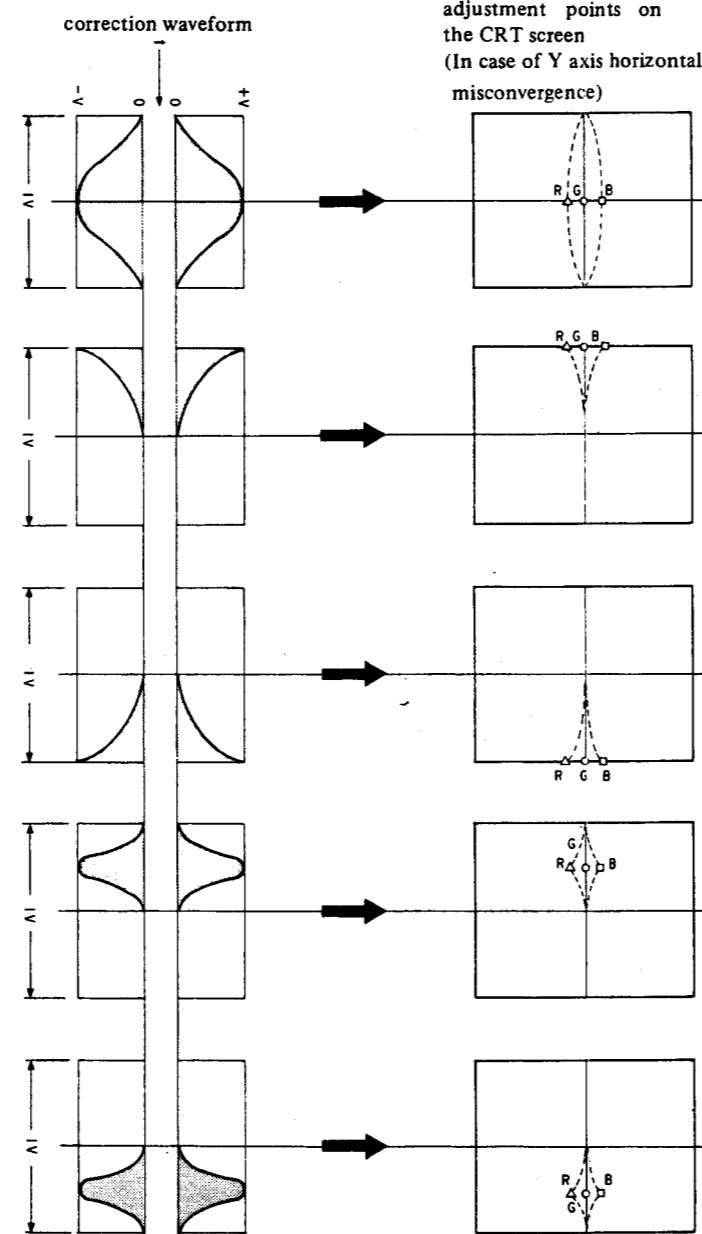


Figure 25


3-12-7. Vertical Convergence Correction Waveform Generator

For the left and right side of the picture, correction circuit for vertical convergence is same as horizontal correction circuit of left and right side of the picture. The correction waveform is amplified in EB board and supplied to CY.


For the center of picture screen, correction waveform is fed to amplifier (IC8 (1/2), Q33 Q34) and supplied to NTC (Neck twist Coil).

This vertical convergence is performed.

Diagram of correction waveform generation

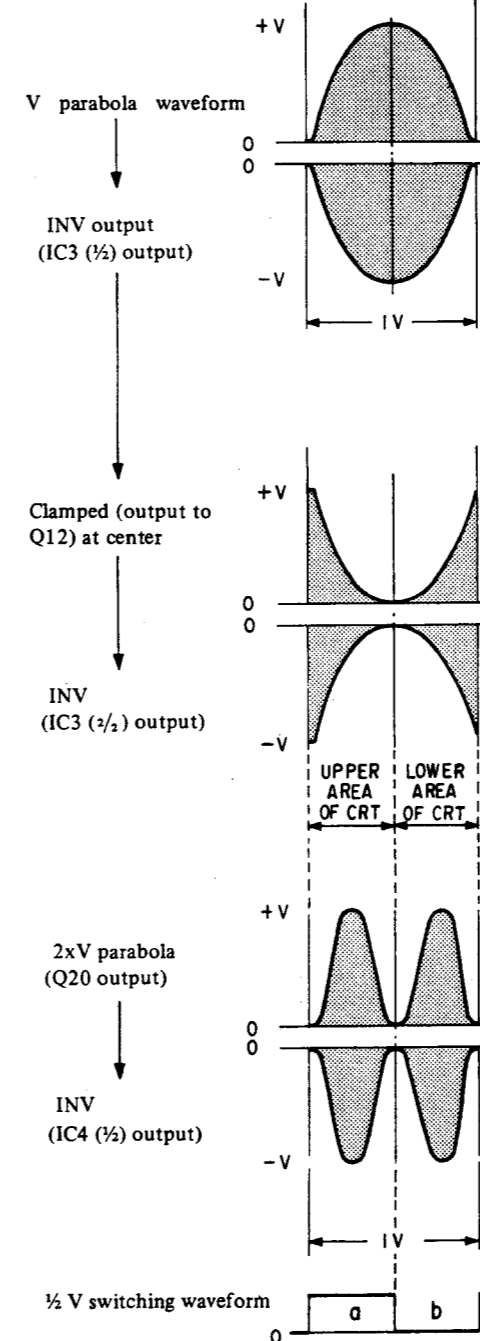

Correction waveform for top and bottom of the CRT screen (Vertical rate)

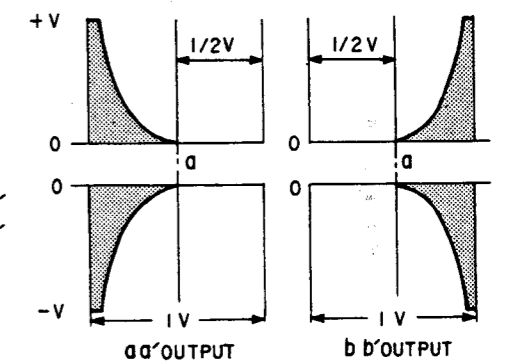

Correction waveform for center position of CRT screen (Vertical rate)


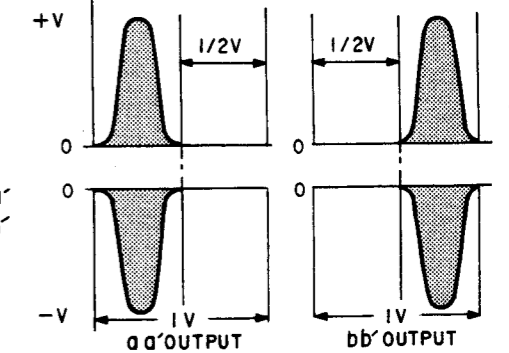


Figure 26

3-13. DEFLECTION CIRCUIT (DA BOARD)

3-13-1. H Delay and Horizontal AFC (Automatic Frequency Control) Circuit


In this model H delay function is performed by delaying H. AFC pulse in the horizontal AFC circuit. (See Figure 27)
H. AFC pulse which is fed from H.O.T. (Horizontal Output transformer) is wave shaped and is delayed about 20 μ s by IC1 (2/2). This delayed pulse is integrated by inductor L1, and capacitor C14, thus saw tooth waveform is obtained and fed to terminal pin ④ of IC4. AFC detection is performed by IC4, Output of AFC detector is fed to control terminal of horizontal oscillator (H.OSC) via low pass filter composed of capacitor C12, C15 and resistor R10. 3 types of AFC mode are selected by changing low pass filter which determines AFC time constant. AFC time constant circuit is composed of switch S1, resistor R13, R14, R15 and capacitor C17, C18.

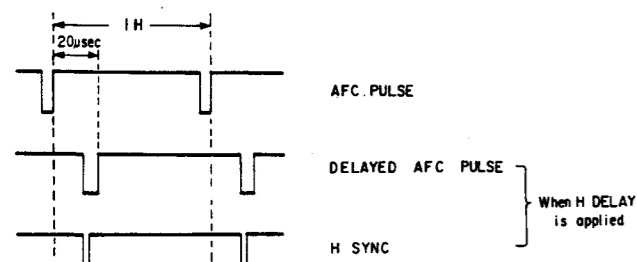

Pulse at H delay operation Figure 27

3-13-2. Horizontal Linearity Correction Circuit

In this model Horizontal Linearity correction is made by applying correction voltage to the Horizontal deflection circuit. Basically, Linearity correction is made by modulating power source of horizontal output circuit with horizontal saw tooth voltage. Also So-called "Inside pincushion" correction is performed by applying correction waveform to S correction capacitor. This correction waveform is generated by balanced modulator (IC7) with vertical rate parabola waveform. See Figure 28. Horizontal sawtooth waveform is generated by IC5 (1/2) for horizontal linearity correction. Horizontal rate parabola waveform is generated by integration of saw tooth by IC6 (1/2). This parabola waveform is performed balanced modulation by IC7 with vertical rate parabola waveform, horizontal saw tooth and parabola waveform are fed to horizontal linearity output amplifier in EA board. Correction of horizontal linearity correction and inside pincushion correction are performed.

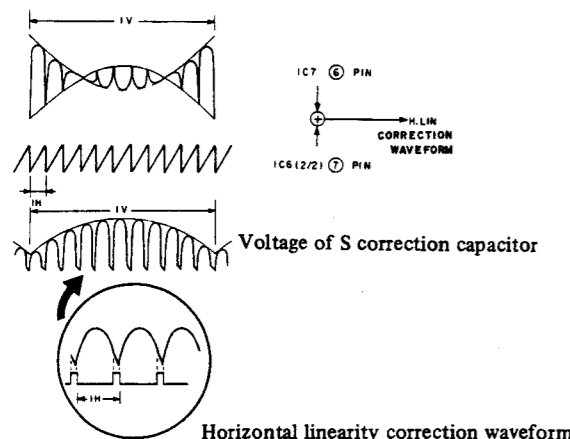

Horizontal linearity correction waveform Figure 28

3-13-3. Horizontal Blanking Pulse Generator

Horizontal rate sawtooth waveform generated in H. Linearity circuit is fed to the comparator IC8 (1/2). In this circuit, 1/2H delayed pulse is obtained. This pulse is fed to integrator IC9 (1/2) and 1/2H delayed sawtooth waveform is obtained and this is fed to the comparator IC10 (1/2). Thus the comparator generates horizontal pulse to make H. Blanking pulse which starts just before the starting edge of the retrace time. Also width of horizontal blanking pulse is determined by JK-FF IC1 (1/2).

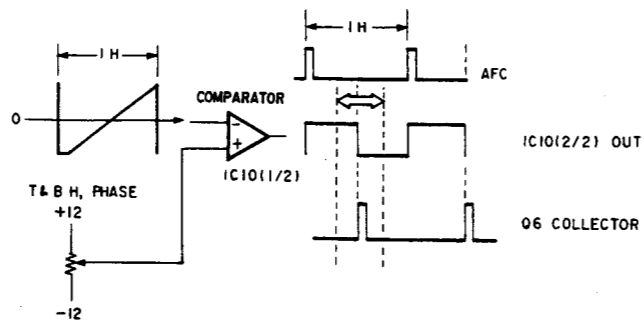


Figure 29

3-13-4. Top & Bottom Pincushion Circuit

Horizontal rate sawtooth waveform generated in H Linearity circuit is also fed IC10. IC10 generates advanced H pulse for the phase correction because vertical Deflection Yoke works as an integrator at horizontal rate, and deflection current for Top & Bottom pincushion correction is delayed about 1/2H for this reason. See Figure 29.

Advanced H pulse is fed to IC11 (1/2) and advanced horizontal sawtooth waveform is generated. It is integrated by IC11 (2/2) and horizontal rate parabola waveform is obtained. Modulated butterfly waveform for Top & Bottom pincushion correction is obtained by Balanced modulator IC12. In this balanced modulator, horizontal rate parabola waveform is used as a carrier and vertical rate sawtooth waveform is modulated by this carrier. See Figure 30. This correction waveform is fed to vertical deflection output amplifier in EB board.

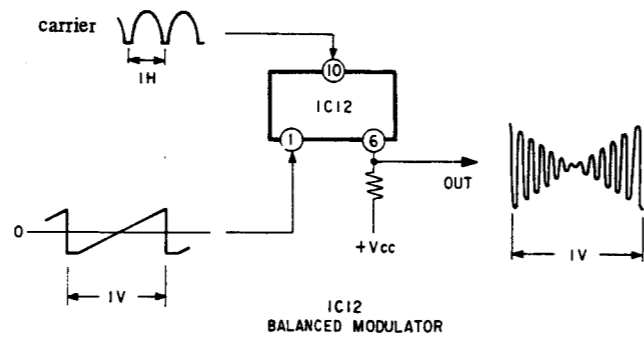


Figure 30

3-13-5. Automatic 50/60Hz Field Selection Circuit

This model has an automatic vertical field frequency selection circuit so that color systems with different frequencies such as NTSC or PAL and SECAM can be received. IC18 is automatic field frequency detecting device and its output switches (IC13) time constant of integrator in vertical deflection circuit.

3-13-6. Scan Mode Selection Circuit

There are 3 modes of scanning in this model: NORMAL SCAN/ UNDER SCAN/SET UP SCAN. There are level adjustments for H1 width, V, height side pincushion and top & bottom pincushion. Levels of correction waveforms are switched so that these adjustments are made independently for each scanning mode. IC14, IC15 and IC16 activates for this purpose.

3-13-7. Vertical Deflection, Side Pincushion Correction

IC19 (1/2) generates vertical rate sawtooth waveform for vertical deflection. V sawtooth waveform is generated by the integrator IC9 (1/2) which is reset by V sync. Also vertical rate parabola is generated by integrating V. sawtooth waveform by IC9 (2/2). This V parabola is used for side pincushion correction, and also V. parabola is converted to sine waveform by IC20 (1/2) and is mixed with V parabola waveform. This mixed waveform is used for side pincushion correction and fed to side pincushion output amplifier in EA board. Vertical drive voltage for vertical deflection is generated by mixing vertical rate sawtooth waveform generated by IC19 (1/2) and sine waveform generated by IC22 (1/2). This drive waveform is fed to vertical deflection output amplifier. Balance adjustment of vertical linearity correction can be performed by IC22 (1/2) and vertical centering can be adjusted by IC22 (2/2).


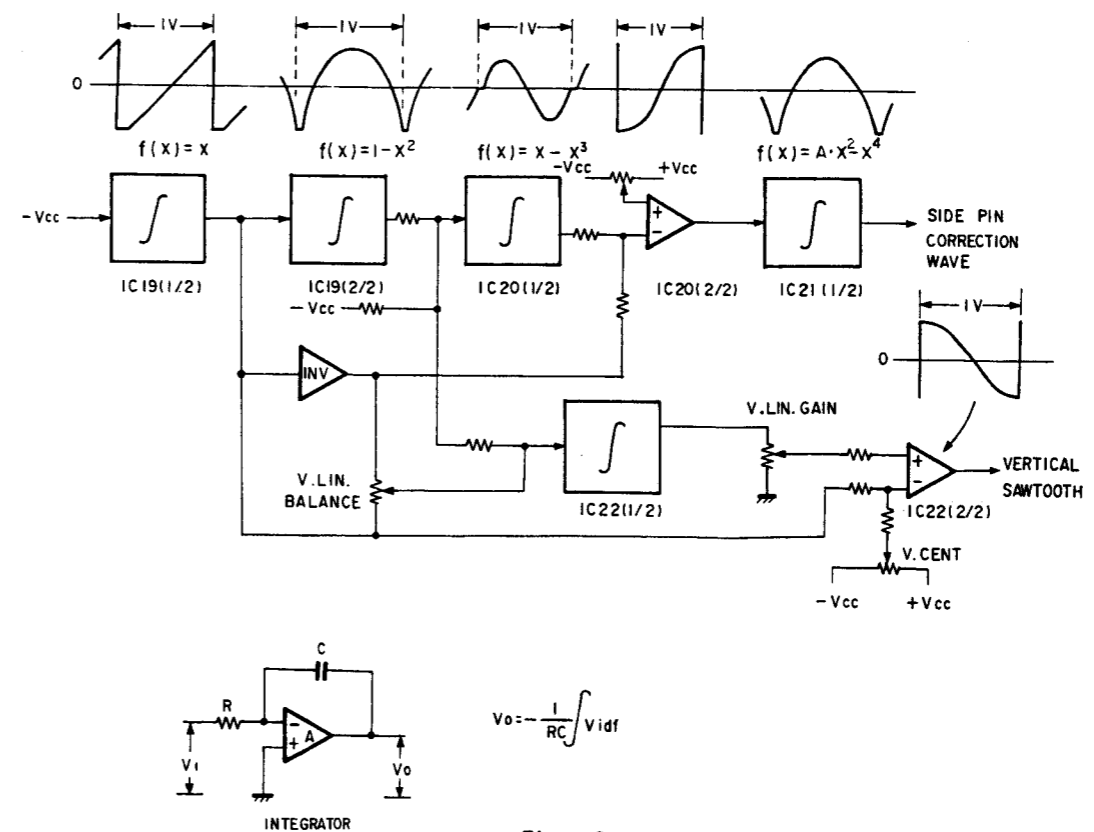


Figure 31

BLOCK DIAGRAM OF DA BOARD

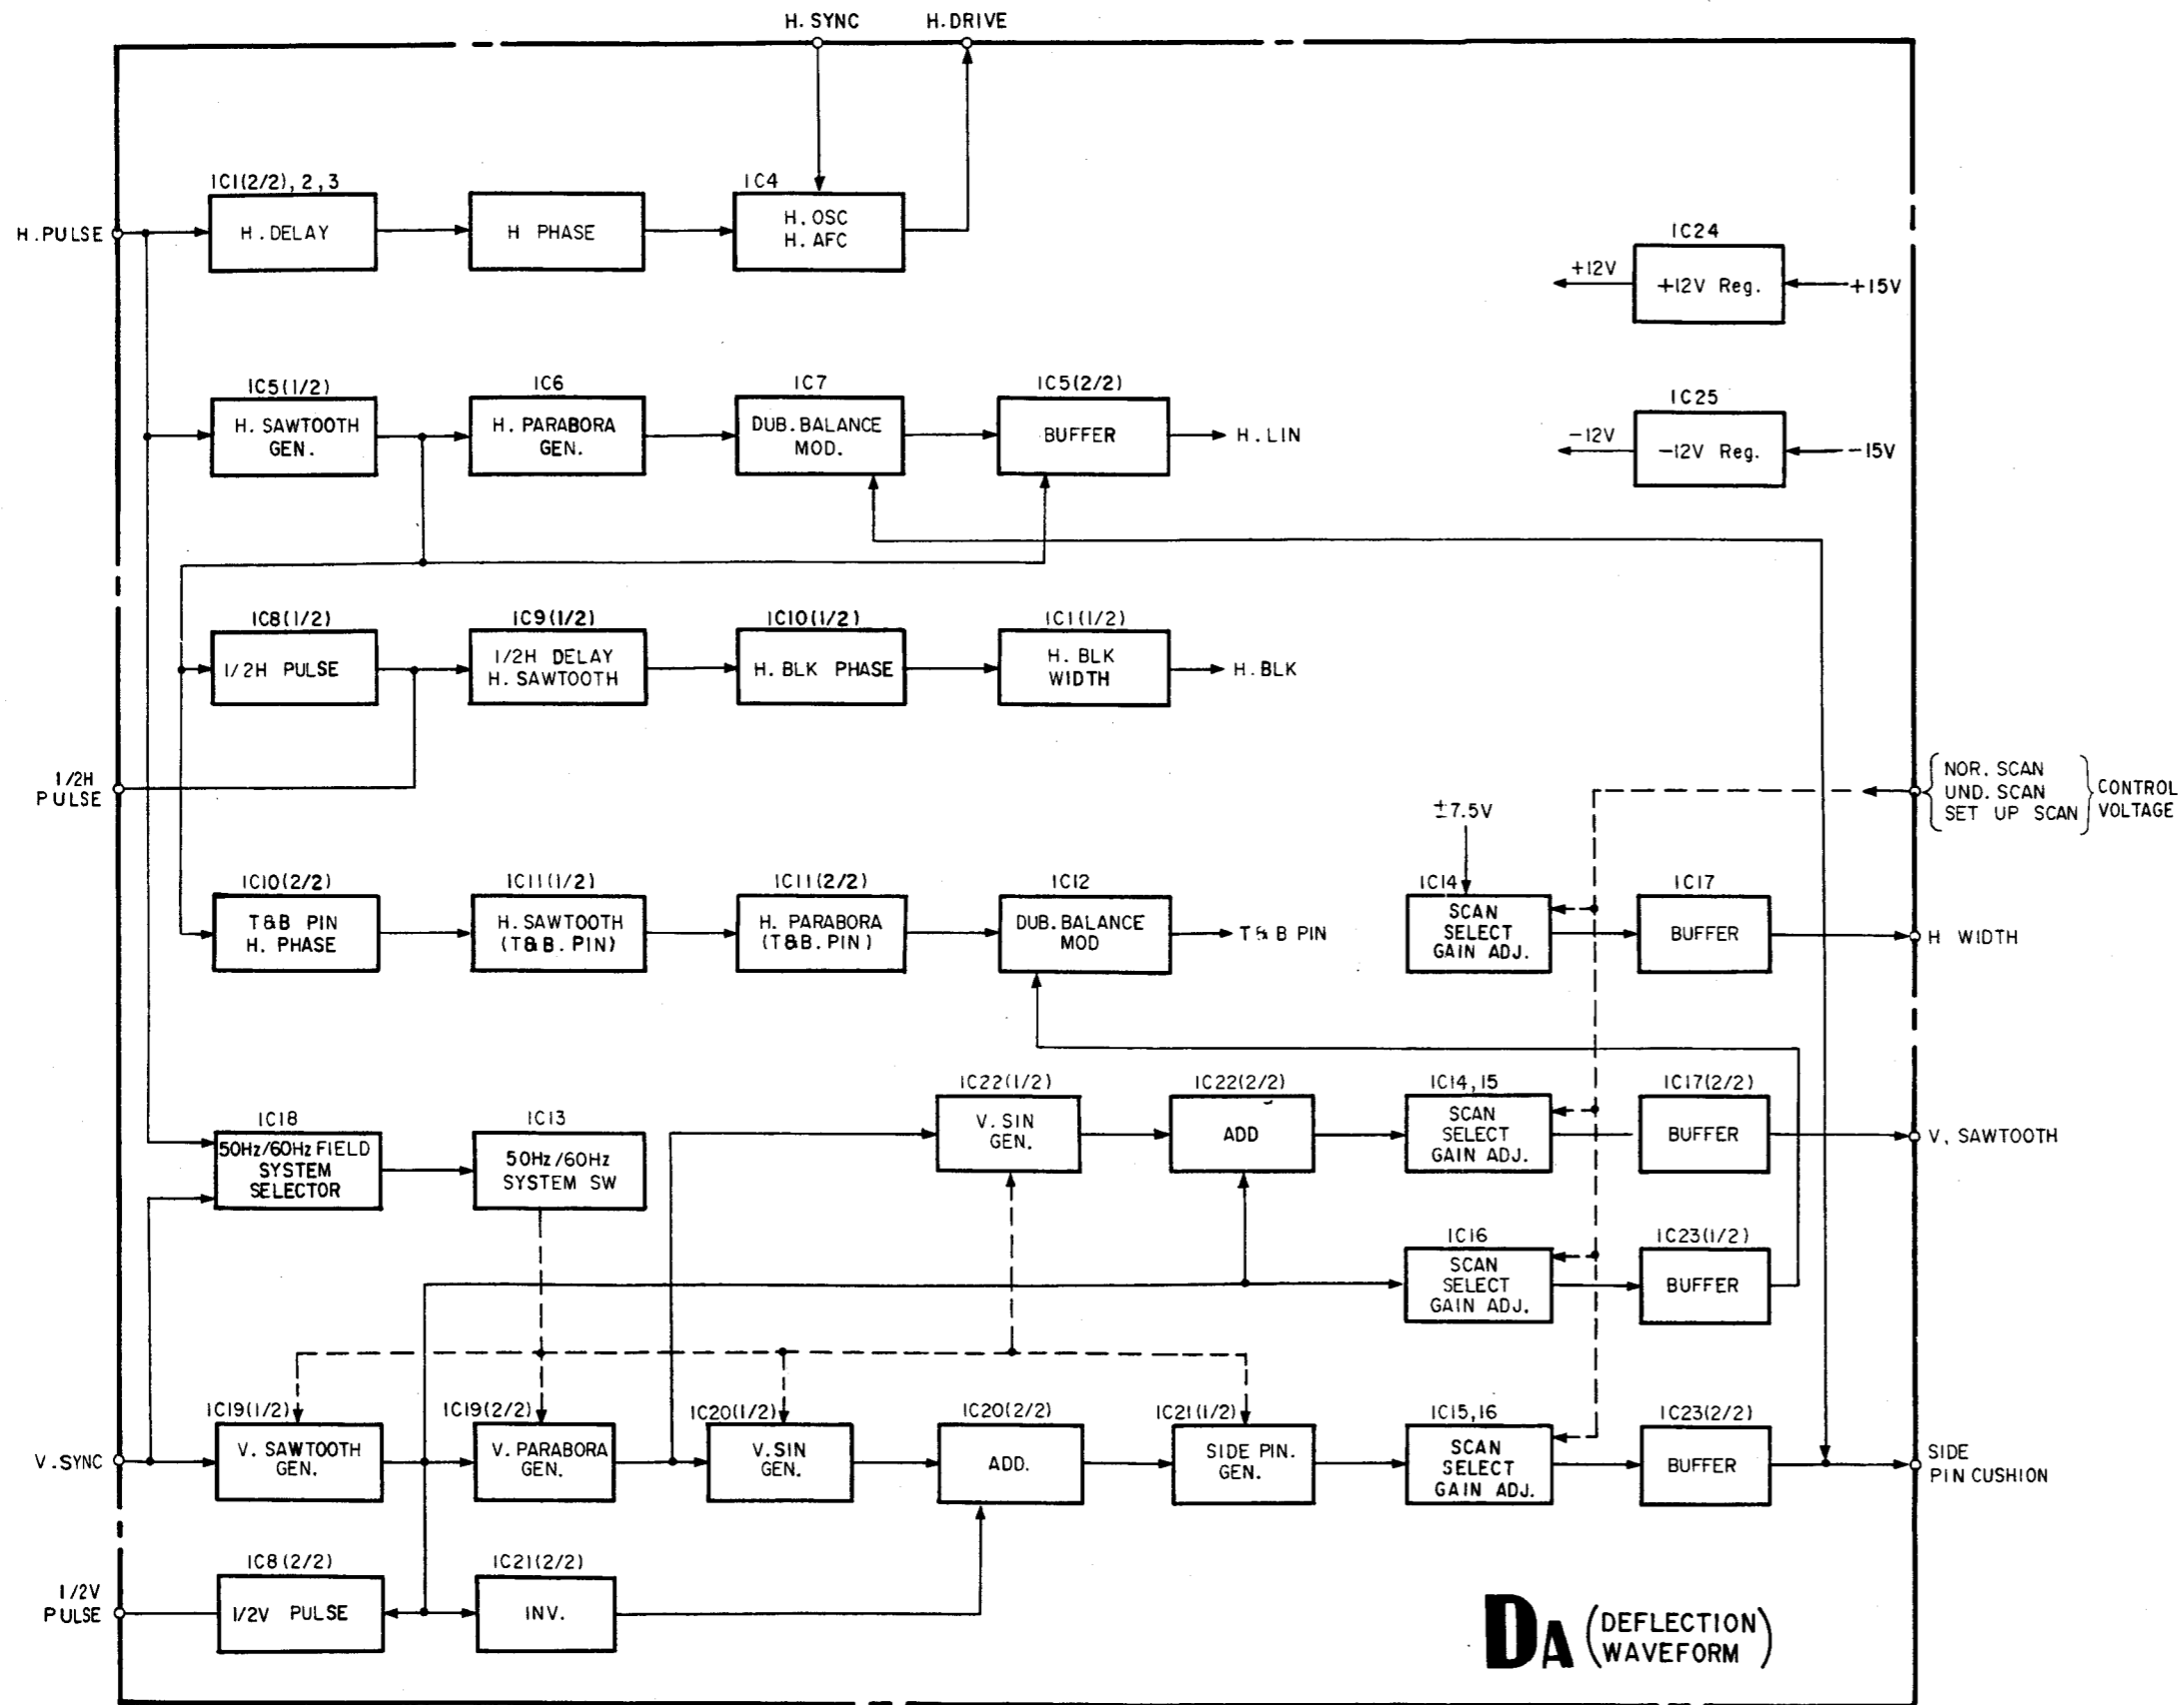

3-14. HORIZONTAL OUTPUT (EA BOARD)

3-14-1. Horizontal Deflection Circuit

Horizontal drive pulse for Horizontal deflection output is made at DA board and is fed to T4 (Horizontal Drive Transformer) via Q13 (H. driver), T4 is driven by Q13 and output pulse of T4 drives Q14 (Horizontal Output Transistor).

To obtain high efficiency in this model, DC-DC converter is used for side pincushion correction, Horizontal Width adjustment and +B Line voltage conversion to the horizontal deflection circuit.

This converted Line voltage is fed to horizontal deflection output circuit via H.O.T (Horizontal Output Transformer). Side pincushion correction and H. width adjustment are made by this DC-DC converter. IC1 contains error amplifier and PWM (Pulse Width Modulator) circuit for DC-DC converter. Side pincushion correction waveform and DC voltage for H. Width adjustment are made in DA board and supplied to error amplifier to control DC-DC converter.


3-14-2. Horizontal Centering Circuit

± low voltages power supply for H centering are made in this circuit from output of secondary windings of T5 (Horizontal Output Transformer). These low voltages are converted to current source for mixing DC current on the deflection current. In this circuit Bow shaped geometry distortion due to the H centering adjustment is adjusted by providing vertical rate parabola waveform current on the H centering current.

3-14-3. Horizontal Linearity Correction Circuit

Waveform for Horizontal Linearity correction made in DA board is fed to SEPP amplifier (Single Ended Push Pull) which are composed of Q1 - Q5 transistors. Output of this amplifier is fed to H deflection circuit (Deflection Yoke) and make correction of H linearity by T1 (Horizontal Linearity Transformer).

BLOCK DIAGRAM OF EA BOARD

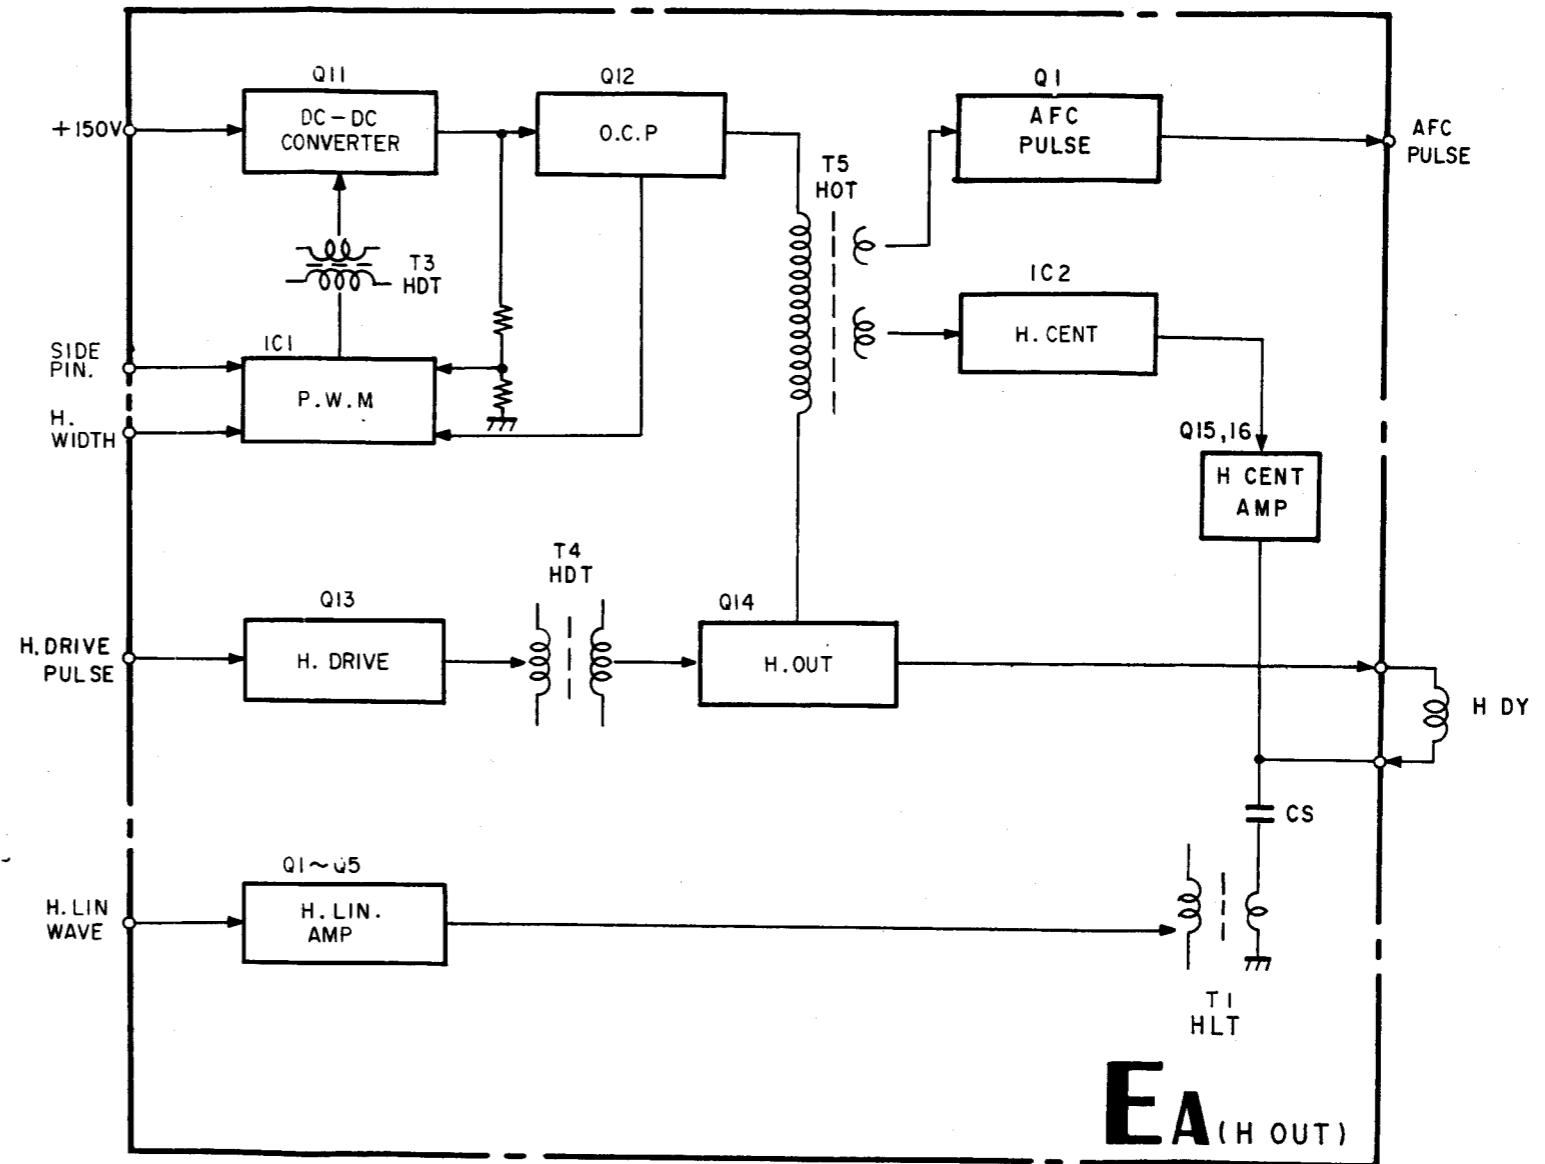

3-15. HIGH VOLTAGE REGULATOR (PA BOARD)

This high voltage regulator uses also DC-DC converter so as to reduce power consumption. The theory of operation of this circuit is as follows.

3-15-1. Detection of High Voltage

High Voltage applied to the CRT anode is converted to the low voltage by DCT block (Dynamic Convergence Transformer). This low voltage is fed to buffer amplifier IC4(2/2) and compared with external reference voltage in IC1. The DCT contains resistor network and transformer for convergence adjustment. This resistor network works as a voltage divider.

3-15-2. PWM Modulator

IC1 works as error amplifier and PWM modulator comparing voltage between high voltage and the reference voltage is amplified and modulated so as to drive Q102 output transistor. Output signal from IC1, which is modulated in PWM, is fed to Q102 via drive transformer. +B line supplied to FBT (Fly Back Transformer) circuit is controlled by switching Q102 output transistor on/off.

3-15-3. Output Circuit

When high voltage drops down, output voltage of DCT also drops as above mentioned. At this time PWM circuit is designed so that the ON period of Q102 output transistor should be longer than high voltage drops down. +B line, switched ON/OFF by Q102, is supplied to converter circuit which drives FBT via LOT (Line Output Transformer).

Amount of collector current of Q103, which drives FBT, depends upon ON period of Q102 because PWM modulator is triggered by H. pulse. Therefore when ON period of Q102 is longer, collector current of Q103 increases and energy stored in capacitor C124 increases, causing potential of C124 to rise. (Refer to Figure 37) When output transistor Q103 goes off, flyback pulse is generated by resonance between capacitor C108 and inductance obtained by parallel connection of FBT and LOT. This flyback pulse is transferred to the secondary circuit of FBT. Therefore high voltage is generated.

3-15-4. High Voltage Regulator

Q102, Q107, IC4 (2/2), IC1 (IC for controlling P.W.M) and HVR (D C T block) form a regulator.

Since the detection pin voltage of HVR is decreased when the high voltage is lowered due to increase of the CRT current, it makes the switch ON time length of Q102 longer. As a result, the collector peak current of Q103 is increased and accordingly, the energy accumulated in C124, which is fed to it through the FBT, is increased. In this way, it raises the potential of C124 and regulates the high voltage.

Q103, C108, C124 and the FBT form a high voltage converter circuit.

The pulse of on-duty 60% is generated with the H pulse by a time constant circuit which consists of Q109, Q110, Q111, Q112, R143, C128, R144, C127 and D111. When Q103 is switched OFF due to the on-duty 60% pulse, flyback pulse is generated at the collector of Q103 by resonating of the LOT, FBT and C108.

3-15-5. High Voltage Protection Circuit

High voltage protector activates to shut down high voltage, when high voltage exceeds the predetermined value so as to prevent X-ray radiation.

The high voltage converted to the low voltage is detected at the terminal of DCT block. This detected voltage is fed to the + input terminal of comparator IC2(2/2) via low pass filter, which is composed of resistor R245 and capacitor C216. When this voltage exceeds the reference voltage, the voltage of \ominus input terminal of comparator IC2(2/2), output level of this comparator goes high level and turns SCR (D206) gate on to shut down the drive pulse of flyback generator. Thus high voltage stops. The reference voltage of the comparator IC2(2/2) is made by mixing stabilized voltage (zener diode D215)

3-15-6. Protection Circuit for Excess Beam Current

Beam current which flows in secondary windings of FBT is measured at the terminal 9 of FBT. This beam current is converted to the voltage by resistor R1 (R4) and R2 (R3), R5 (R6) located in PB board in series connection of secondary windings of FBT. This converted voltage is fed to \ominus input of comparator IC2(1/2) or IC3 (1/2). As beam current increases, \ominus input voltage goes down. When beam current increases until \ominus input voltage goes below the reference voltage (\oplus input terminal voltage) output voltage of comparator goes up high level and SCR (D205 or D206) turns ON. Thus drive pulse of flyback generator is shut down. Therefore high voltage stops.

3-15-7. CRT Protection Circuit

When vertical deflection stops, this circuit activates to shut down high voltage to prevent damage of CRT.

When vertical deflection stops, there is no vertical output pulse generated at vertical output amplifier. So Q201 transistor is cut off and output of comparator IC4(1/2) goes up high level. Q202 transistor turns on and flyback generator stops.

3-15-8. G2 Voltage Regulator

Flyback pulse generated at Q103 (H output transistor) is rectified to obtain DC voltage. This rectified DC voltage is regulated by Q104, IC3(1/2) and Q106 transistor. Regulated 410V DC voltage is obtained. Q105 transistor which works in accordance with G2 control circuit in B1 board supplied proper voltage to G2 of CRT.

3-15-9. Power Supply for Heater

Power supply to heater is generated from secondary windings of LOT. Heater voltage is adjusted by resistor R107.

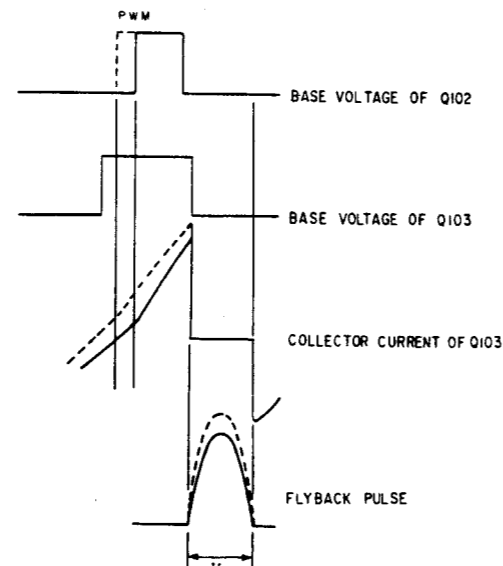


Figure 32


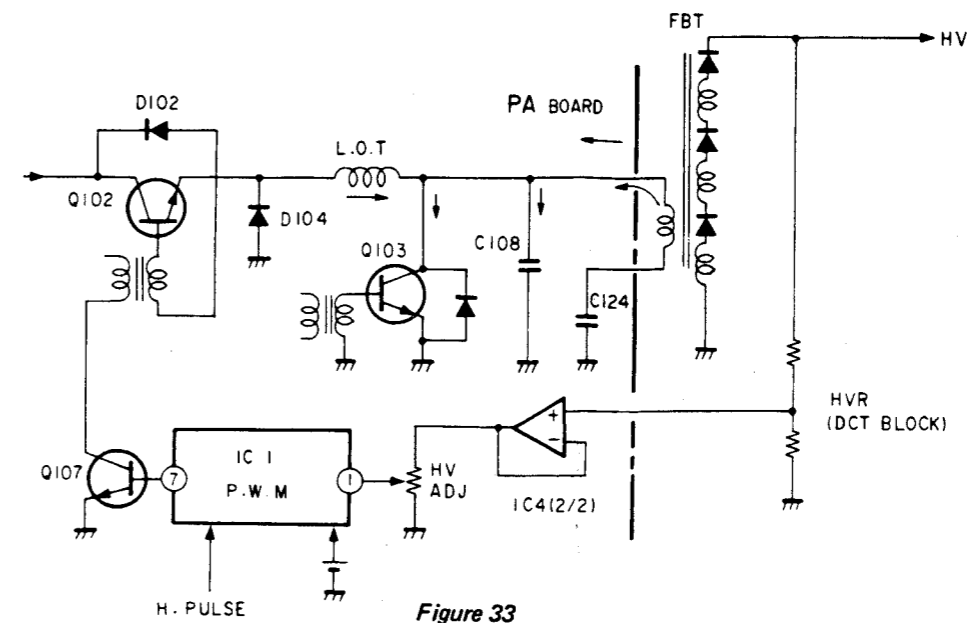


Figure 33


BLOCK DIAGRAM OF PA BOARD

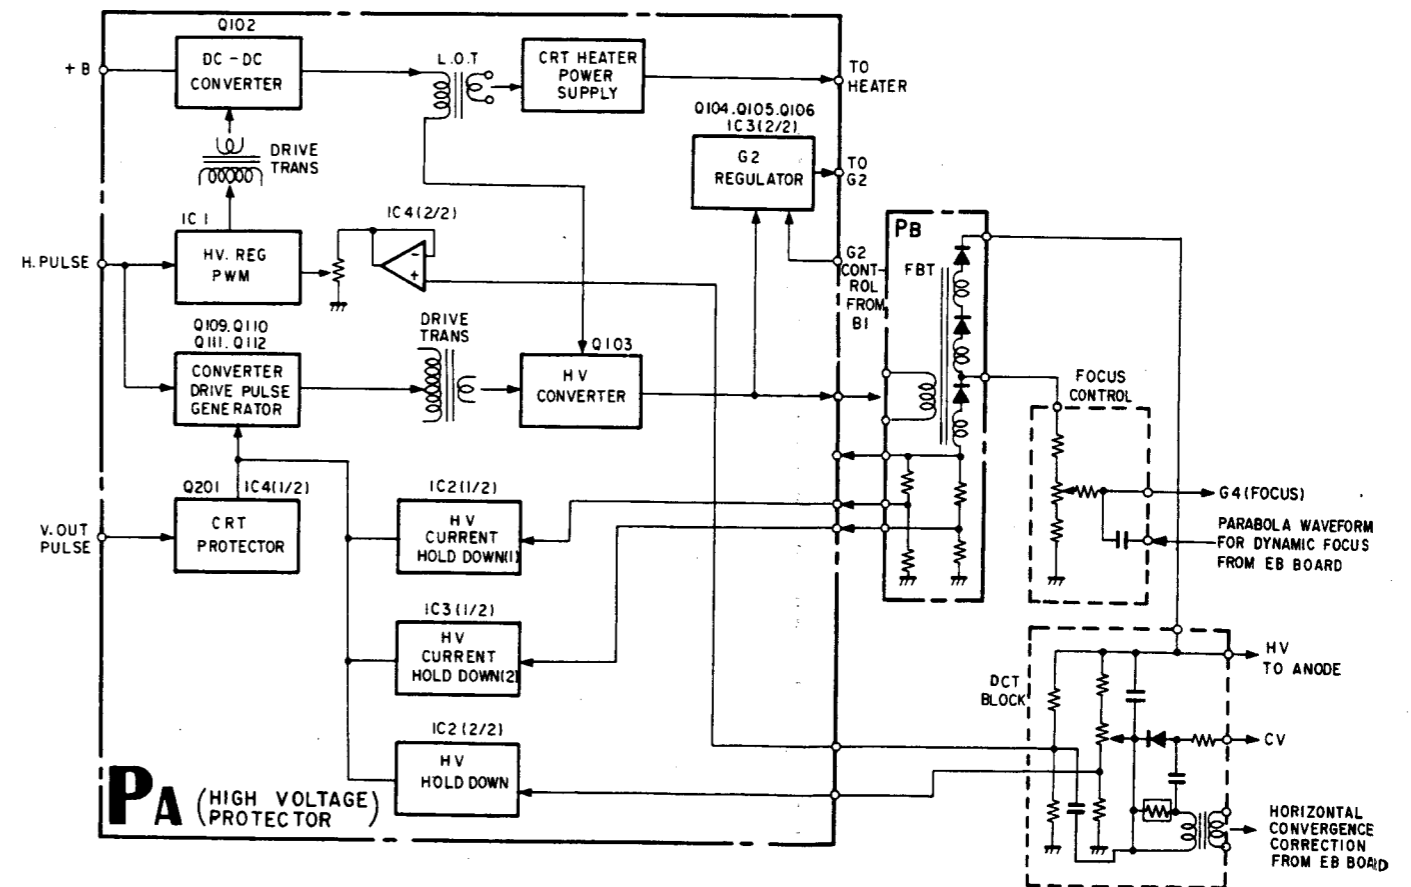

3-16. RA BOARD

Parallel-Serial Conversion


In this board, parallel data of selector switches and manual controls, etc. are time divided by H cycle and converted to serial data. This circuit is composed of counter (IC7), decoder (IC8) and multiplexer (IC1 to IC6). The counter counts $\phi 1$ (normally H pulse), and is reset by $\phi 2$ (normally V pulse). The decoder decodes output of the counter, and gives address to multiplexer (IC1 to IC6). The multiplexer (IC1 to IC6) outputs in sequence from Y_0 correspondingly to addresses. In this way, parallel data is converted to serial data with H-cycle dividing.

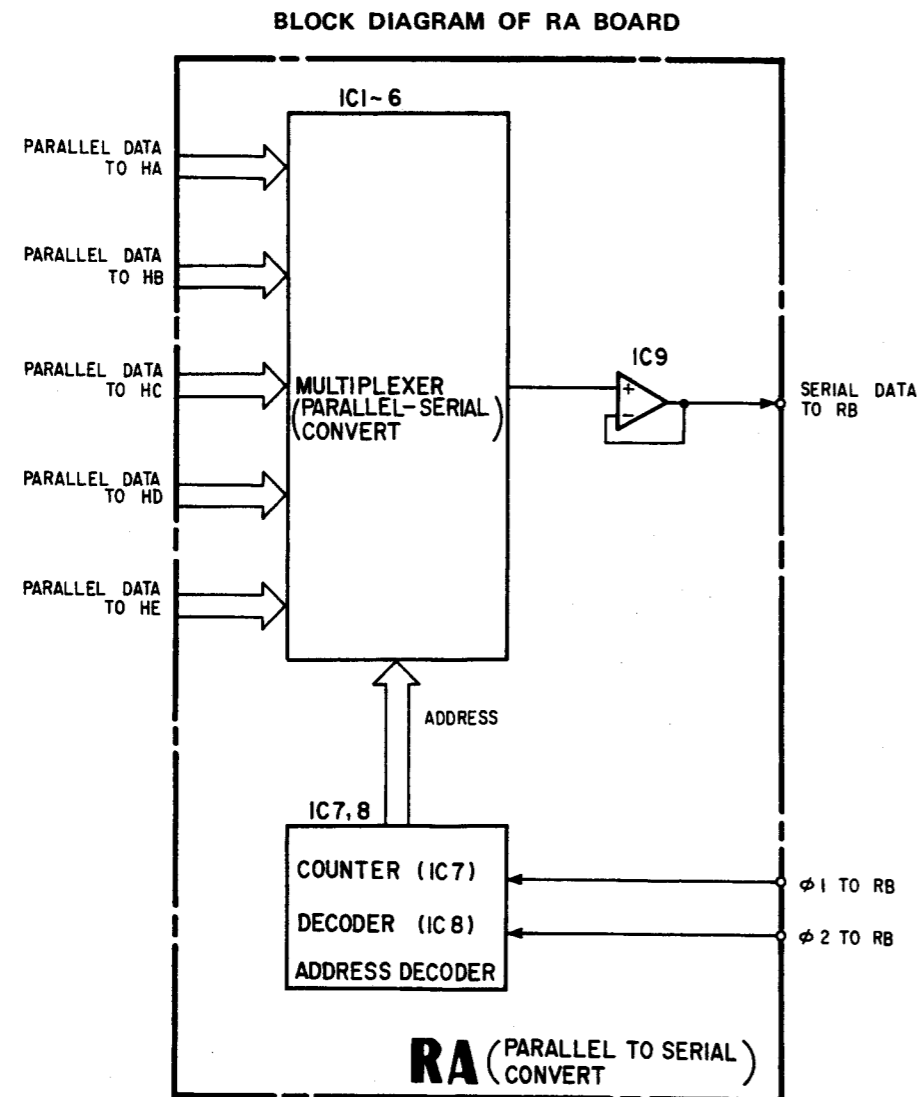

3-17. RB BOARD

Serial-Parallel Conversion

In this board, serial data which are output from the RA board are converted to parallel data, and they are supplied to the control circuit. This circuit is composed of counter (IC13), decoder (IC14), demultiplexer (IC15 to IC20), sample hold and output buffer (IC3 to IC10, IC21 to IC26, Q1 to Q37). The counter counts $\phi 1$ (normally H pulse), and is reset by $\phi 2$ (normally V pulse). The decoder decodes output of the counter, and gives address to de-multiplexer (IC15 to IC20). The de-multiplexer (IC15 to IC20) outputs in sequence from Y_0 correspondingly to addresses. The output is sample and hold, and converted to parallel data, passed through output buffer and it controls respective control circuits.

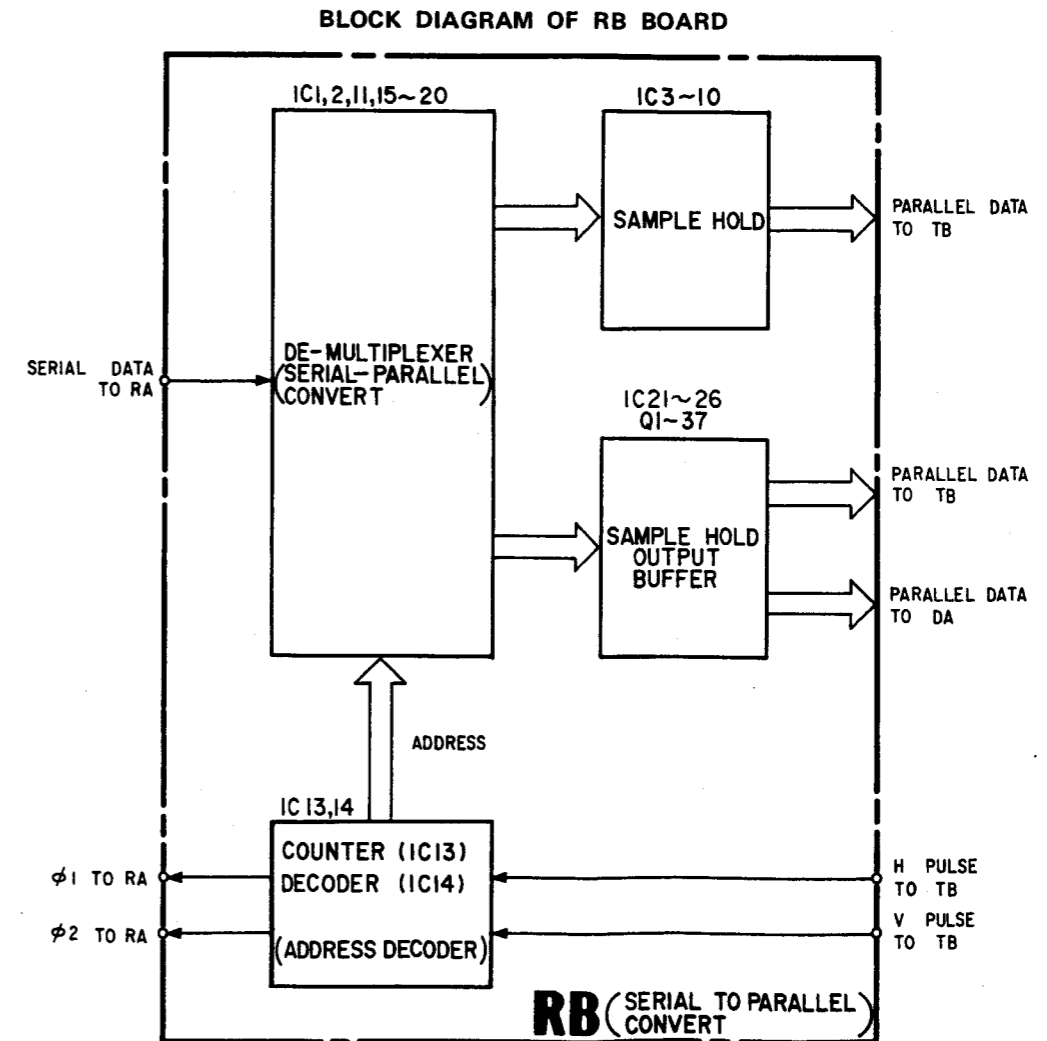


3-18. QE BOARD (BVM-2010PD/PMD ONLY)

Conversion of ECC to TTL

The signal input from DIGITAL input connector is converted from ECL logic level to TTL logic level with IC41 to IC43 (IC44 to IC46). LATCH IC49 (IC50) selects input A and B by means of selection of OUTPUT ENABLE. CLOCK selects A and B with IC48.

BLOCK DIAGRAM OF QE BOARD

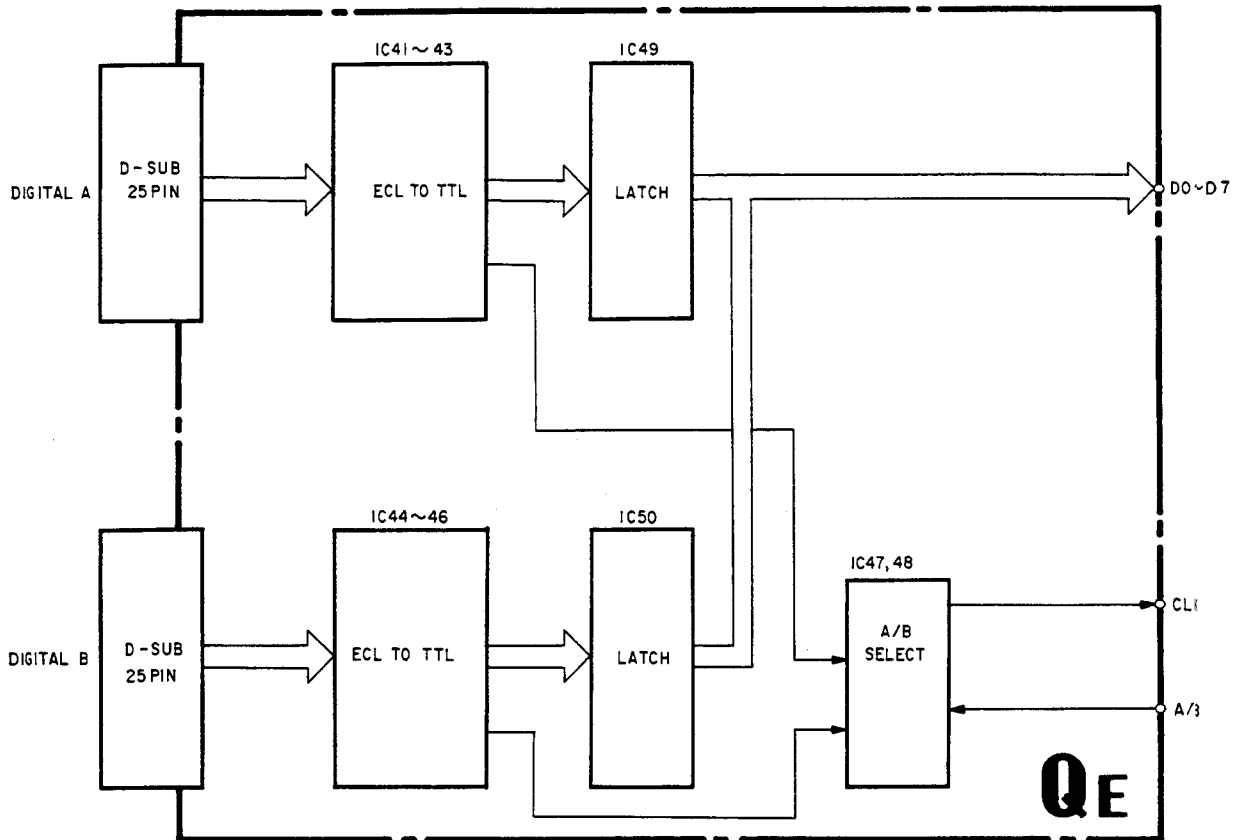

3-19. QD BOARD (BVM-2010PD/PMD ONLY)

4:2:2 decode, D/A conversion (Hereinafter, similar to B-Y, Y)

3-19-1. 4:2:2 Decode


The signal input from the QE board is decoded into R-Y, B-Y and Y signals with IC8 and IC9.

3-19-2. Blanking

IC101 and IC102 are blanking circuits. When the horizontal and vertical blanking period is 0, blanking is selected to 80 (HEX) signal. (IC301 and IC302 select the black level to 10 (HEX).)

3-19-3. Digital Filter

IC105 to IC108 comprize a simple digital filter. It is explained in terms of analog. it becomes as shown in Fig. 38. The output data of IC101 and IC102 vary with clock of 2T such as n0, n1 and n2. IC105 and IC106 are delay circuits of 2T and T, respectively. IC107 and IC108 are adding circuits. The outputs of IC107 and IC108 varies $n_0, (n_0 + n_1)/2, n_1$ at the cycle of T. As a result, a data of $(n_0 + n_1)/2$ is interpolated between n_0 and n_1 .

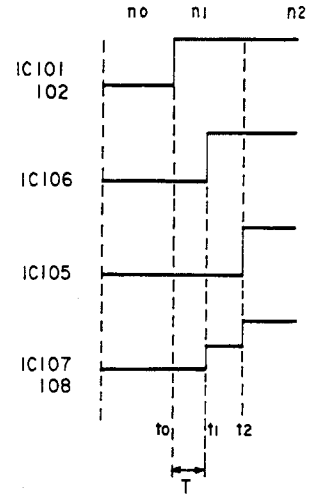


3-19-4. D/A Conversion

IC109 is an IC for D/A conversion and it converts the input digital signal into analog signal and it is output after being passed through Low Pass Filter (LPF101).

3-19-5. COMP SYNC Generator

IC11 to IC22 generate COMPOSITE SYNC signal from output clock H signal and frame signal of IC8.

BLOCK DIAGRAM OF QD BOARD

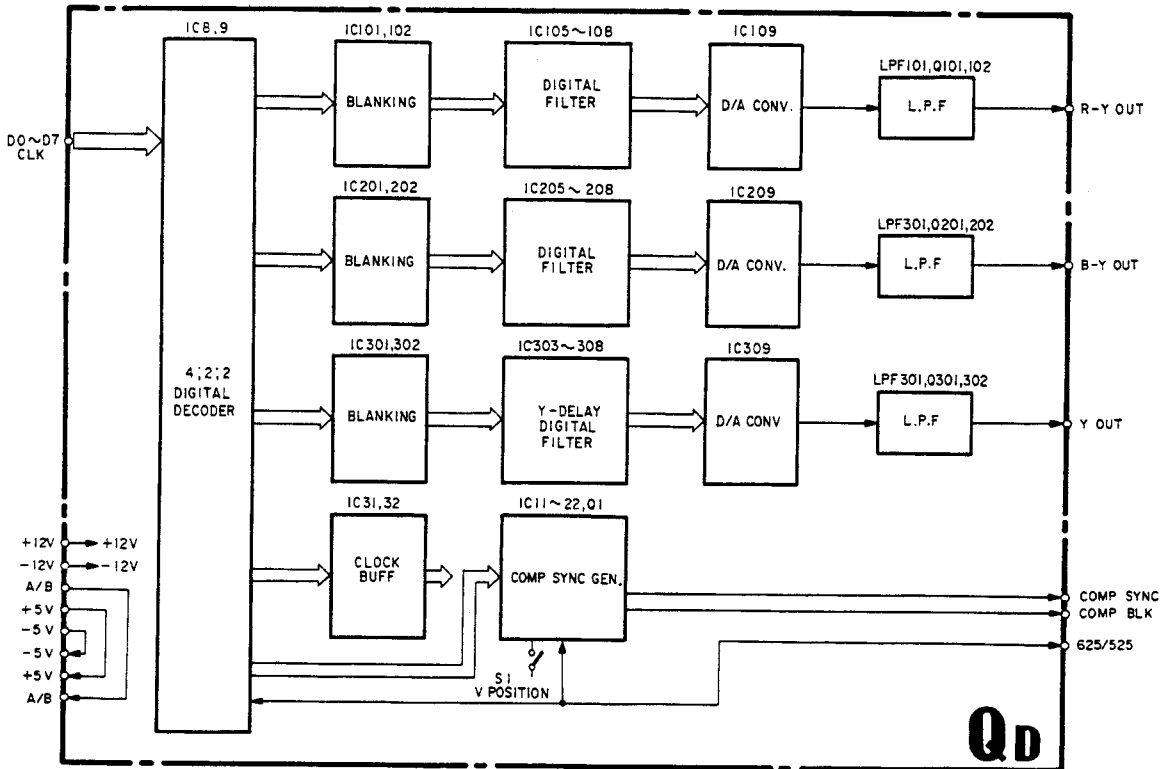

3-20. BR BOARD (BVM-2010PD/PMD ONLY)

3-20-1. R-Y AMP and DELAY circuit (Similar to B-Y)

The level and delay of R-Y signal output from the QD board are adjusted to those of Y signal with Q101 and IC101.


3-20-2. Y AMP

The Y signal output from the QD board is added COMP SYNC and amplified with Q301 to Q303.

3-20-3. R-Y BUFF (Similar to B-Y and Y)


Q104 and Q105 output R-Y signal when DIGITAL is selected

BLOCK DIAGRAM OF BR BOARD

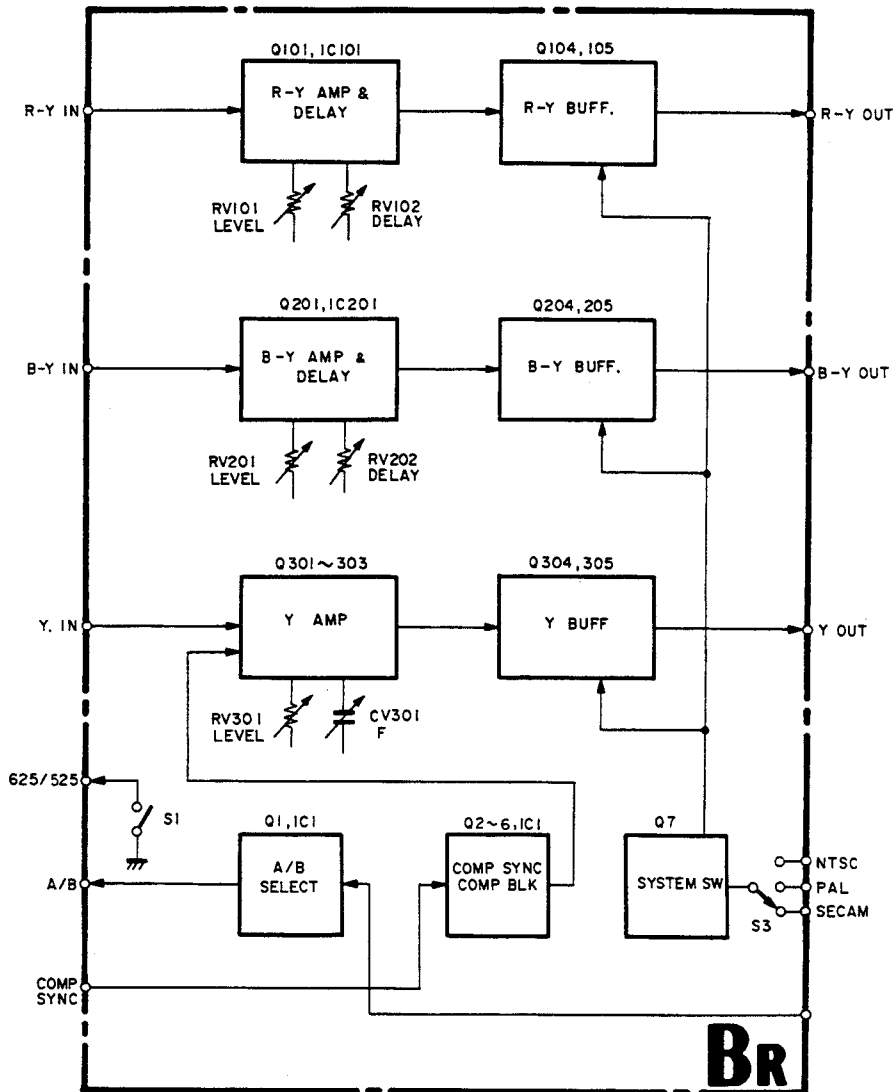

SECTION 4 ADJUSTMENTS


4-1. INTERNAL VIEW

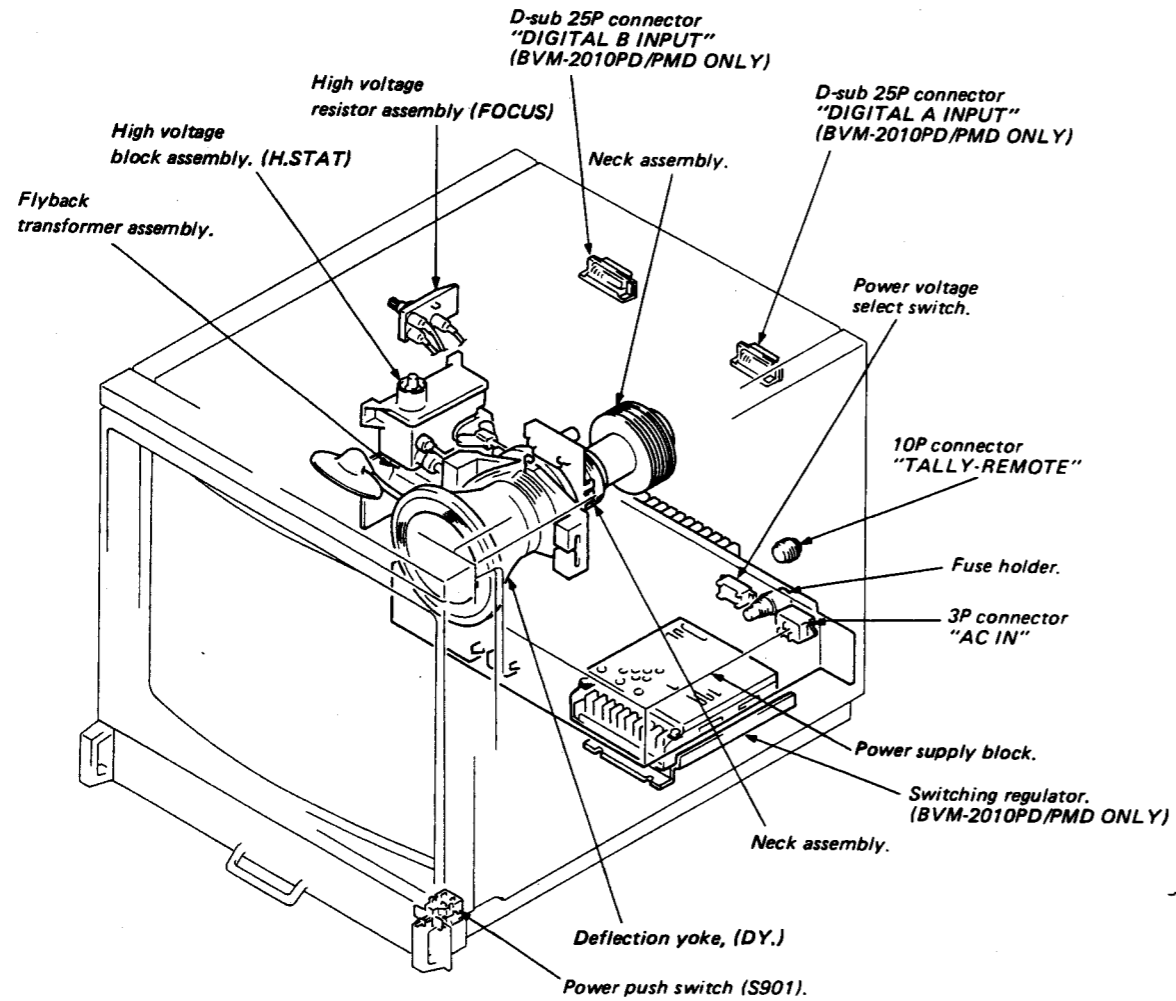

*1 HD board
 BVM-2010P ONLY Serial No. up to 2,001,080
 BVM-2010PD ONLY Serial No. up to 2,000,041
 BVM-2010PM ONLY Serial No. up to 2,000,003

*2, 3 HG, HH board
 BVM-2010P ONLY Serial No. 2,001,081 and higher, BVM-2010PM ONLY Serial No. 2,000,004 and higher
 BVM-2010PD ONLY Serial No. 2,000,042 and higher, BVM-2010PMD ONLY Serial No. 2,000,001 and higher

4-2. CIRCUIT BOARDS LOCATION

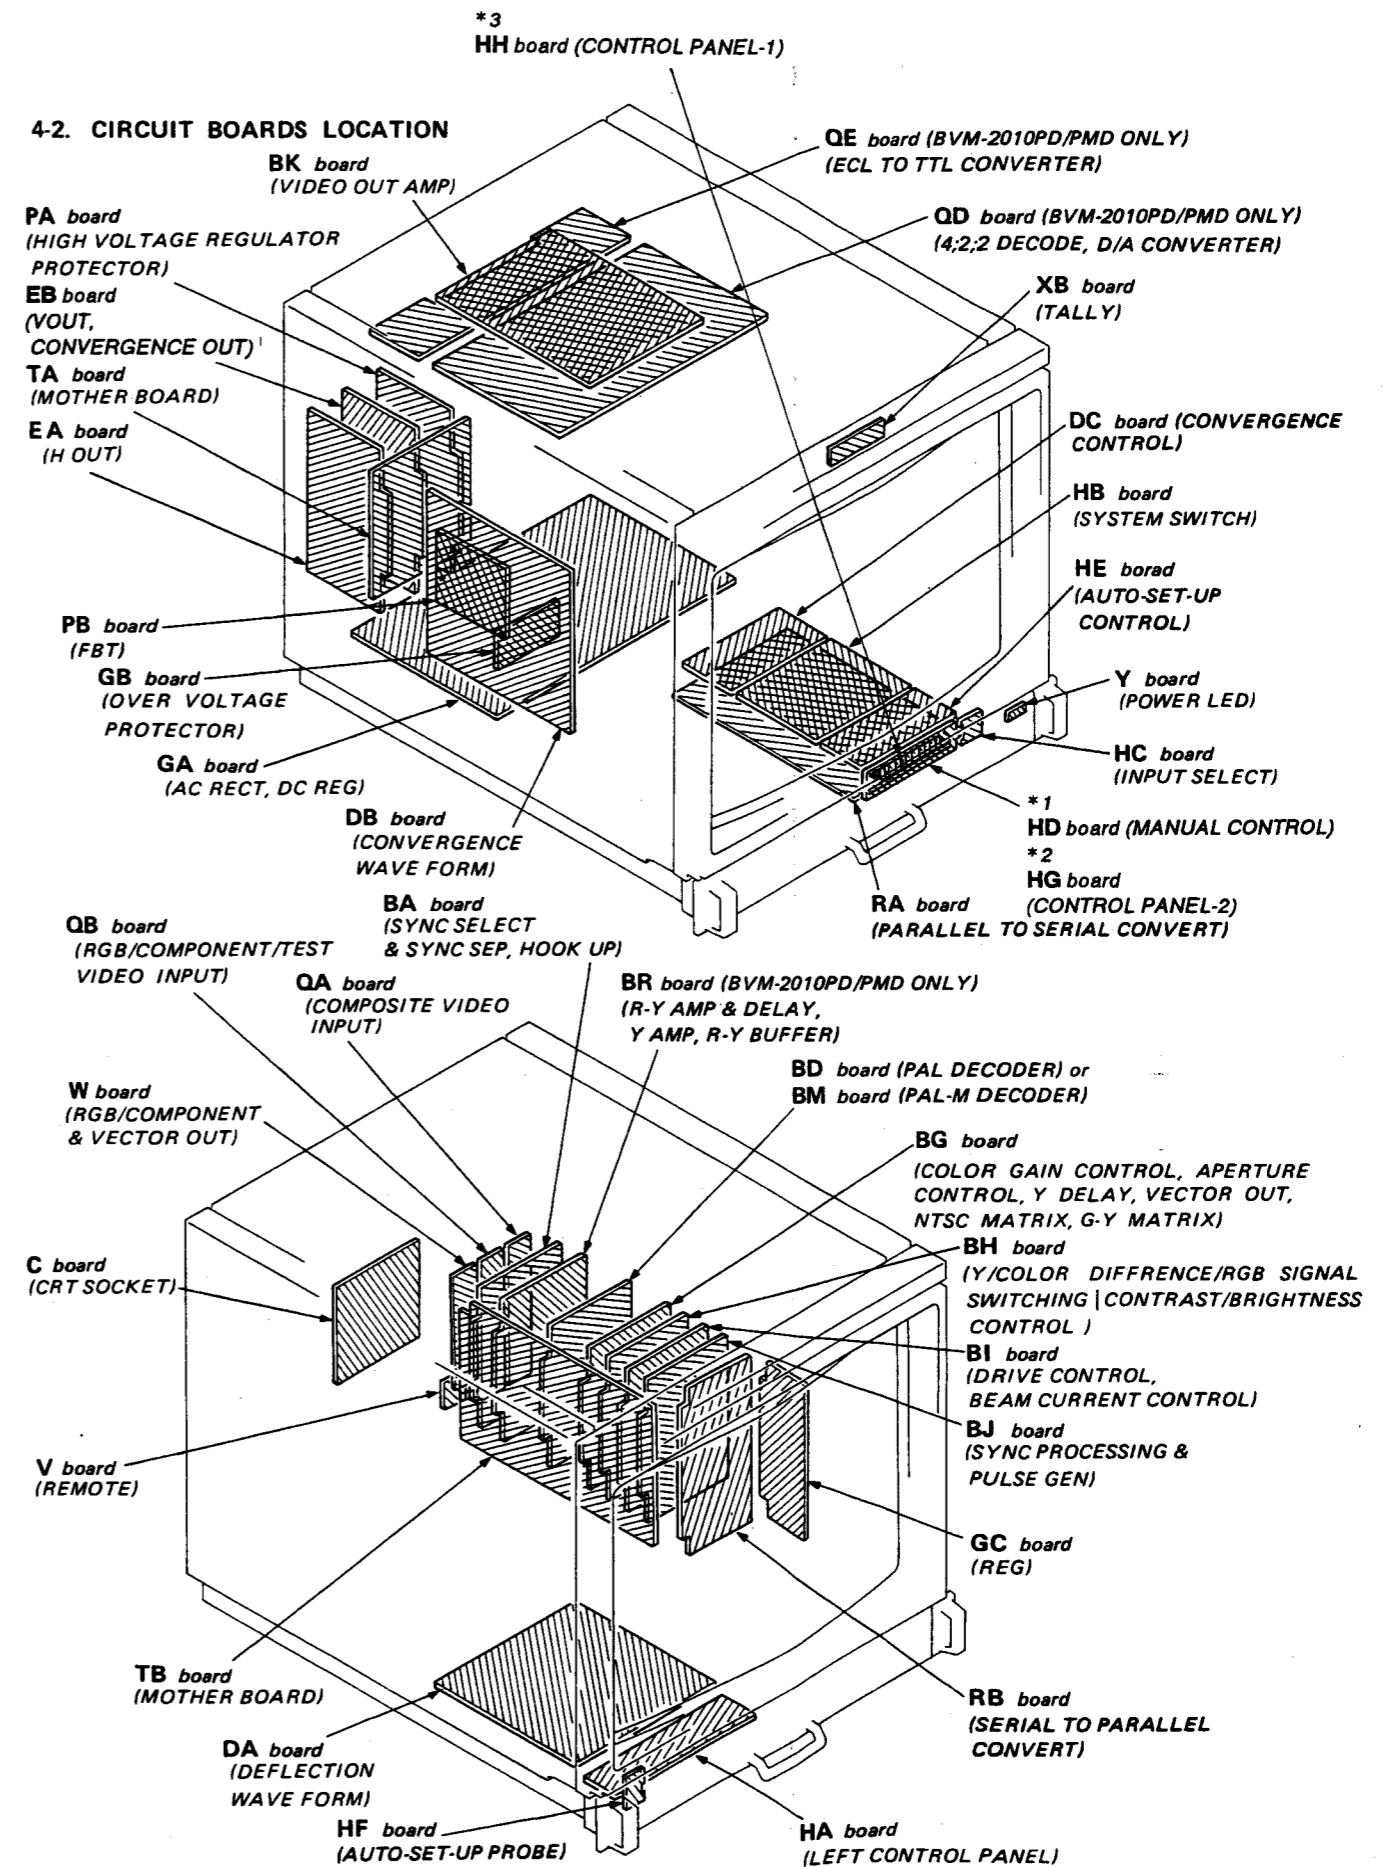


4-3. QUICK REFERENCE

(BR, QD, QE boards are BVM-2010PD/PMD only).


SECTION	BOARD	BA	BD	BM	BG	BH	BI	BJ	BK	DA	DB	EA	DC	BR
CIRCUIT DESCRIPTION		3-1	3-17	3-19	3-3	3-5	3-7 3-15	3-9	3-13 3-15	3-29	3-25 3-27	3-33	3-25	3-41
ADJUSTMENTS		4-21 4-25	4-31		4-21 4-27 4-49	4-21	-	4-19 4-30 4-46	4-47	4-50	-	-	-	4-57
BLOCK DIAGRAM		3-2	3-18	3-20	3-4	3-6	3-8	3-10	3-14	3-31	3-26	3-34	3-26	3-41
MOUNTING DIAGRAM		5-15	5-23		5-25	5-33	5-35	5-43	5-45	5-53	5-55	5-66	6-63	5-109
SCHEMATIC DIAGRAM		5-17	5-21		5-27	5-31	5-37	5-41	5-47	5-51	5-57	5-69	5-61	5-107
ELECTRICAL PARTS LIST		7-1	7-3		7-7	7-10	7-11	7-14	7-16	7-20	7-24	7-27	7-26	7-18
SECTION	BOARD	EB	GA	GB	C	PA	PB	HA	HB	HC	HD	XB	RA	QD
CIRCUIT DESCRIPTION		3-21	3-23	3-23	-	3-35	-	-	-	-	-	-	3-37	3-40
ADJUSTMENTS		-	-	-	-	-	-	-	4-18 4-21	-	-	-	-	-
BLOCK DIAGRAM		3-22	3-24	3-24	-	3-36	-	-	-	-	-	-	3-37	3-40
MOUNTING DIAGRAM		5-68	5-73	5-72	5-78	5-79	5-78	5-86	5-86	5-85	5-85	5-85	5-97	5-113
SCHEMATIC DIAGRAM		5-69	5-75	5-76	5-82	5-81	5-82	5-88	5-87	5-87	5-88	5-88	5-99	5-111
ELECTRICAL PARTS LIST		7-28	7-29	7-32	7-20	7-34	7-36	7-32	7-33	7-33	7-33	7-43	7-39	7-37
SECTION	BOARD	Y	GC	QA	V	W	TA	TB	Z	HE	QB	HF	RB	QE
CIRCUIT DESCRIPTION		-	-	3-1	-	-	-	-	-	-	3-1	-	3-38	3-39
ADJUSTMENTS		-	-	-	-	-	-	-	-	-	-	-	-	-
BLOCK DIAGRAM		-	-	3-2	-	-	-	-	-	-	3-2	-	3-38	3-39
MOUNTING DIAGRAM		5-85	5-93	5-93	5-94	5-94	5-7	5-11	5-119	5-89	5-93	5-89	5-103	5-117
SCHEMATIC DIAGRAM		5-88	5-95	5-95	5-96	5-95	5-9	5-13	-	5-92	5-96	5-91	5-105	5-116
ELECTRICAL PARTS LIST		7-43	7-32	7-36	7-42	7-43	7-42	7-42	-	7-33	7-36	7-34	7-40	7-38

4-4. SUB CONTROL PANEL LOCATION

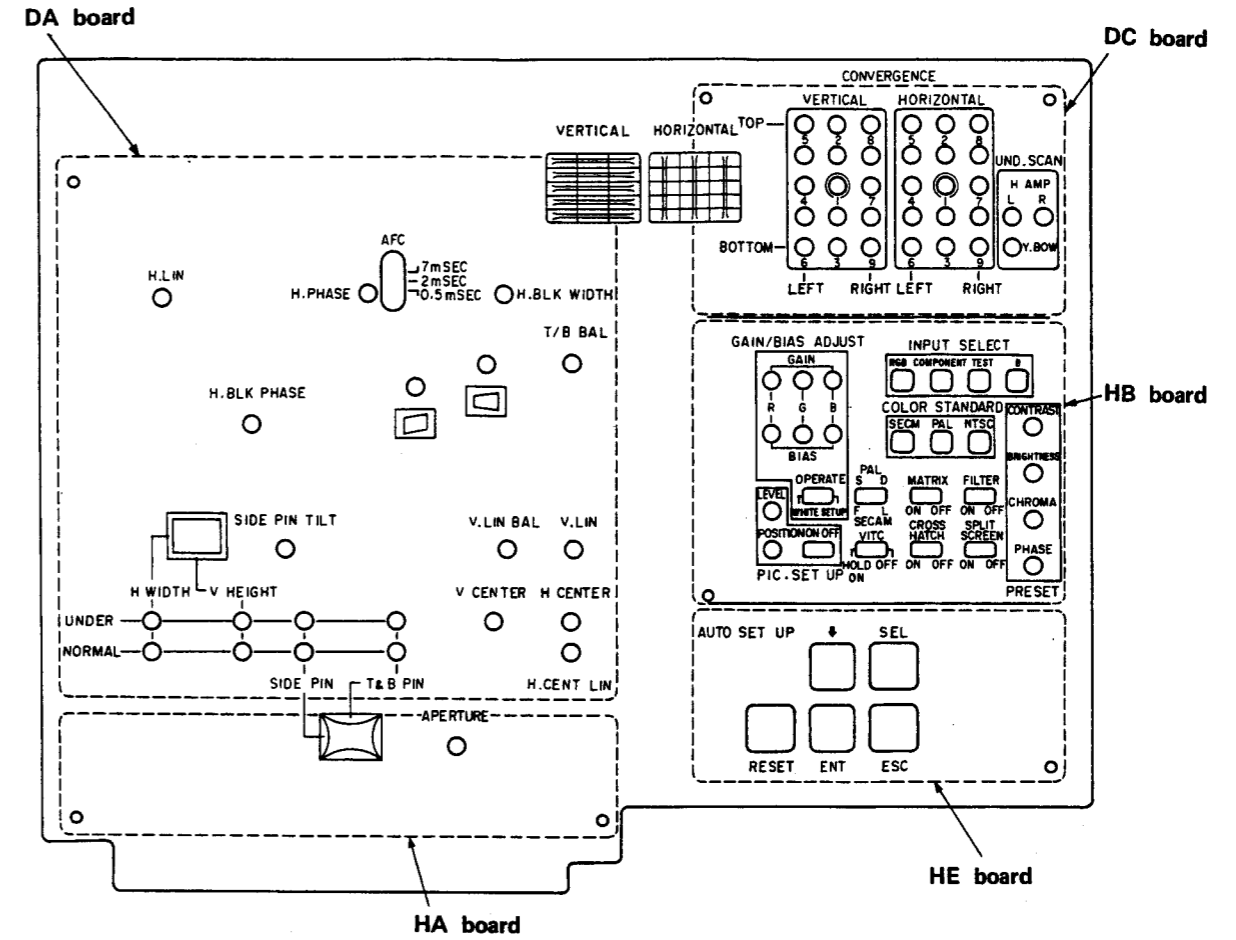

ADJUSTING METHOD OF DRAWER BLOCK

* Pull out sub-control panel and press two stopper buttons to drop it 60° as shown in the figure.

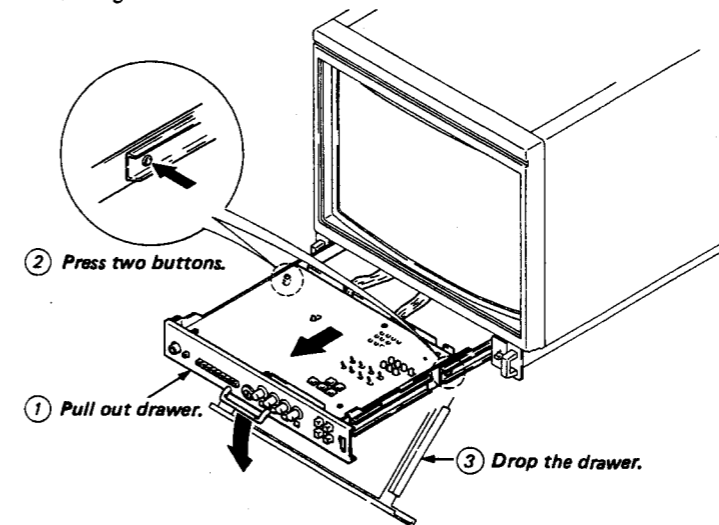

4-5. SETUP ADJUSTMENT IN CASE OF PICTURE TUBE REPLACEMENT

When the picture tube has been replaced, make the following adjustments. Convergence and white balance are normally adjusted by the potentiometers on the sub control panel.

(Refer to pages 4-6, 4-7, 4-8 and 4-9)

[Jigs Tools and Measurement Equipment Required]

1. SIGNAL GENERATOR (TEKTRONIX 1411 and 1412 Series)
2. COLOR ANALYZER
3. LUMINANCE METER

[Landing adjustment]

1. Connect signal generator and receive a white signal.
2. Set BRIGHTNESS and CONTRAST VRs to the preset position (□).
3. Face the CRT screen toward East (or West) and press the DEGAUSS switch.
4. Set the purity knob to mechanical center as shown in Fig. 1-1.

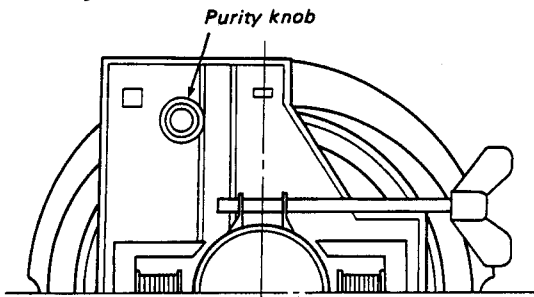


Fig. 1-1.

5. Slide DY (Deflection Yoke) as far forward as possible.
6. Set the neck assembly in the position shown in Fig. 1-2.




Fig. 1-2

7. Set the screen to green only (R and B on the FRONT PANEL are in the IN position and G in the OUT position).
8. Turn purity knob as shown in Fig. 1-3 to bring the green on the center of the screen.




Fig. 1-3.

9. Slide DY back for uniform green raster.
10. Make the screen red only (G and B on the FRONT PANEL are in the IN position and R in the OUT position) and check landing.
11. Make the screen blue only (R and G on the FRONT PANEL are in the IN position and B in the OUT position) and check landing.
12. Adjust DY tilt and tighten DY set-screw.
13. Secure the DY with the spacers. (Fig. 1-4)


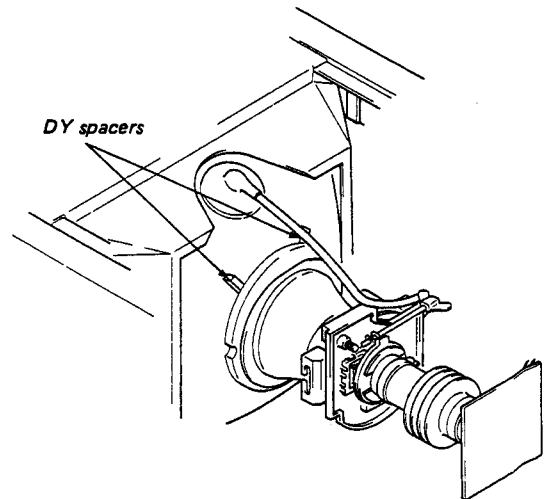


Fig. 1-4.

• Final check

After adjustments, check that there is no mislanding by facing the CRT towards East, West, North and South directions.

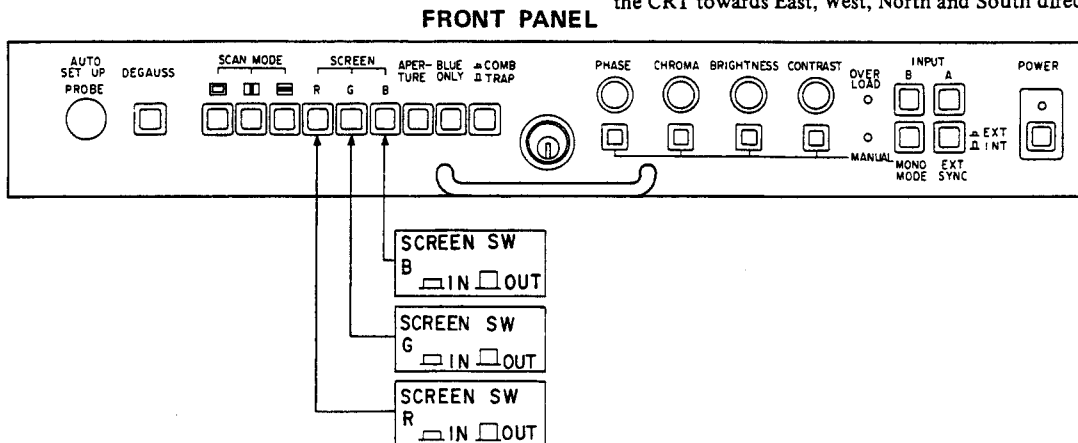

[Focus adjustment]

1. Connect signal generator (TEKTRONIX 1411 and 1412).
2. Input a dot or cross-hatch signals.
3. Adjust the FOCUS control for best focus in the central portion of the screen as shown in Fig. 1-5.

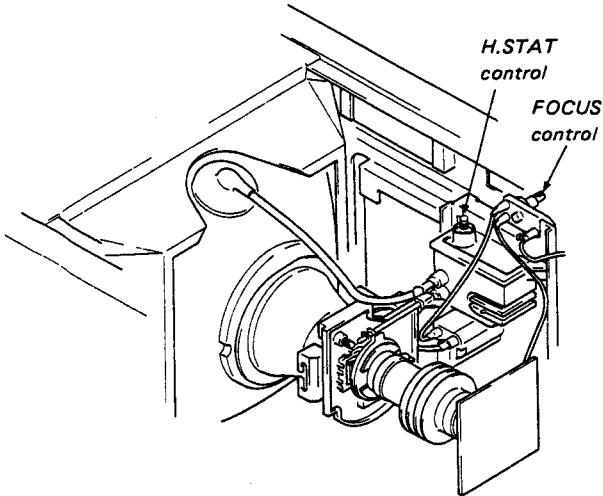


Fig. 1-5.

[Convergence Adjustment]

Preparation

1. Complete the signal generator connection and feed the dot and cross-hatch signals.
2. Set the CONTRAST and BRIGHTNESS controls at the points where the dots and the cross-hatch can be observed clearly.
3. Set the H. STATIC CENTER control (RV23) on the DC board to mechanical center as shown in Fig. 1-6.

DC board

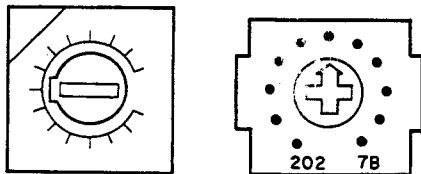
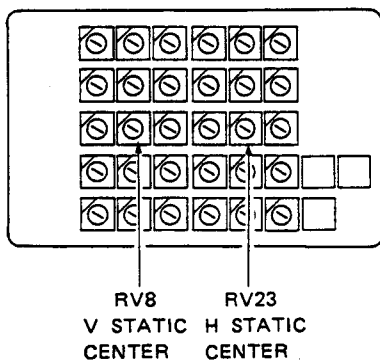


Fig. 1-6.

[Static Convergence]

• **Horizontal Static Convergence**

1. Adjust H. STAT control of DCT BLOCK to match the convergence of red and green in the horizontal direction at screen center.
2. Perform the HMC correction when blue is out of convergence in the same direction on all over the screen.
3. Move the BMC magnet to correct H. static convergence as shown in Fig. 1-7.

• **Vertical Static Convergence**

1. Adjust the V. STATIC CENTER (RV8) on the DC board to match the convergence of red and green in the vertical direction at screen center.
2. When blue is out of the convergence in the same direction all over the screen, perform the VMC correction.
3. Move the BMC magnet to correct static convergence as shown in Fig. 1-7.

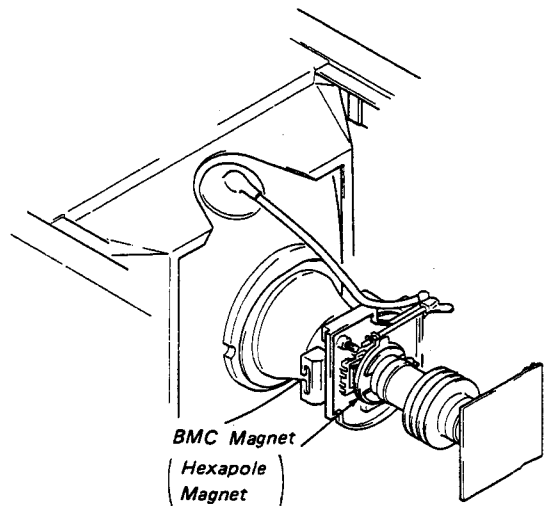


Fig. 1-7.

• **HMC and VMC correction for BMC Magnet.**

1. HMC (Horizontal, Mis, convergence) correction and motion of the Electron Beam with the Hexapole Magnet.

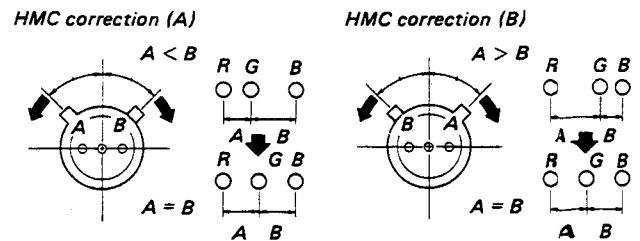


Fig. 1-8.

2. VMC (Vertical, Mis, convergence) correction and motion of the Electron Beam with the Hexapole Magnet.

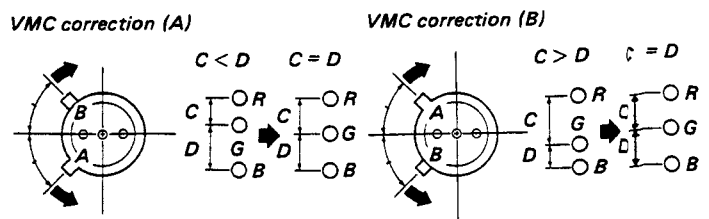


Fig. 1-9.

[DYNAMIC CONVERGENCE]

1. Adjust CONVERGENCE controls (RV1 ~ RV30) on the DC board as shown in Fig. 1-10.
2. It can be adjusted as Red and Blue move in symmetry to the Green. (Green does not move)
3. Adjust the convergence corresponding to the portion of the screen as follows.
4. Always match the convergence in the order of center → on Y axis → on X axis → corner against the screen.

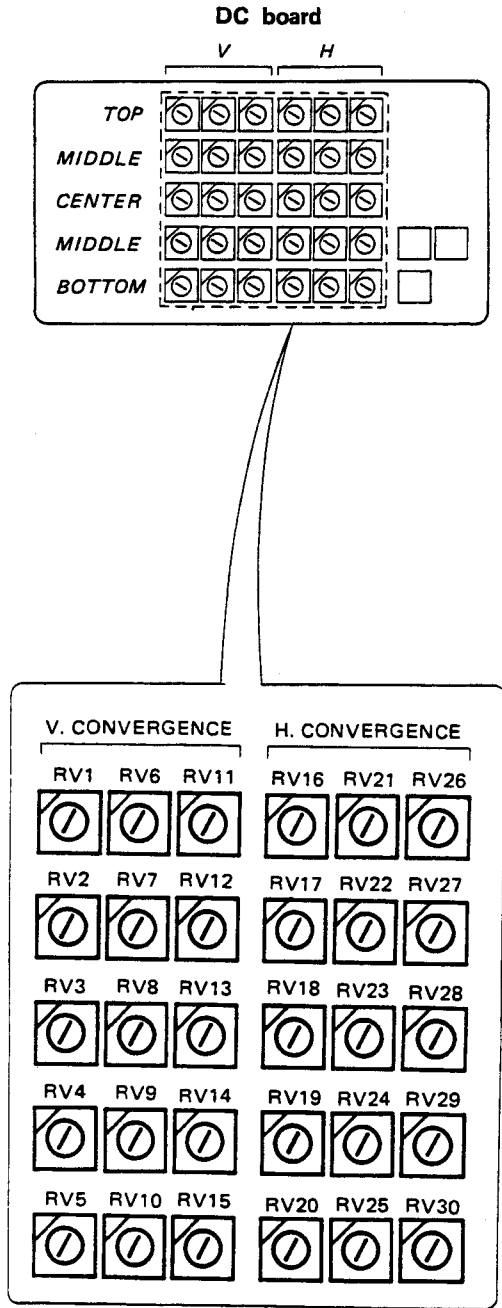


Fig. 1-10.

[CONVERGENCE PROCESS]

1. UNDER SCAN switch NOR (□)
2. Adjust RV23 and RV8 on the DC board to coincide with R, G and B dots at the center of the screen as shown in Fig. 1-11.

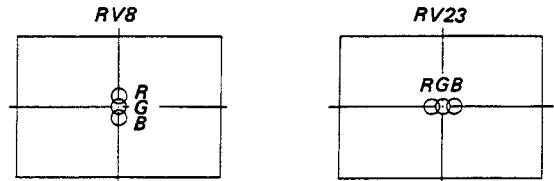


Fig. 1-11.

3. Adjust RV6, RV10, RV21 and RV25 on the DC board to coincide with the R, G and B dots as shown in Fig. 1-12.

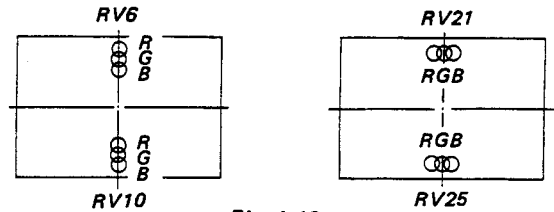


Fig. 1-12.

4. Adjust RV3, RV13 and RV18, RV28 on the DC board to coincide with the R, G and B dots as shown in Fig. 1-13.

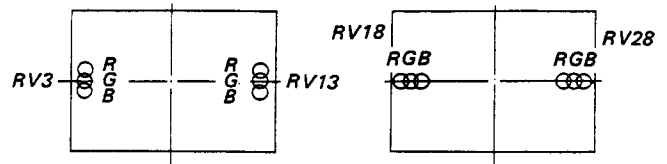


Fig. 1-13.

5. Adjust RV1, RV5 and RV11, RV15 on the DC board to coincide with the R, G and B dots as shown in Fig. 1-14.




Fig. 1-14.

6. Adjust RV16, RV20 and RV26, RV30 on the DC board to coincide with the R, G and B dots as shown in Fig. 1-15.

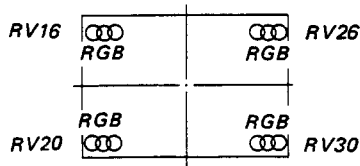


Fig. 1-15.

9. Adjust RV17, RV19 and RV27, RV29 on the DC board to coincide with the R, G and B dots as shown in Fig. 1-18.

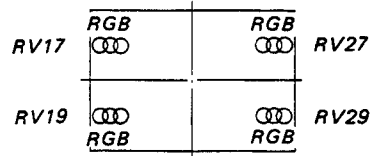


Fig. 1-18.

7. Adjust RV7, RV9 and RV22, RV24 on the DC board to coincide with the R, G and B dots as shown in Fig. 1-16.

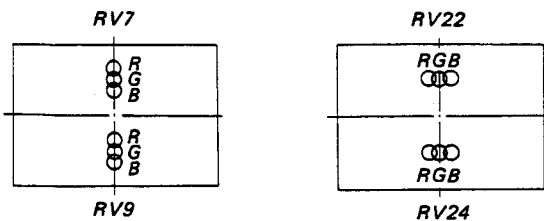


Fig. 1-16.

10. UNEDR SCAN switch UNDER (≡)
 11. Adjust RV31 (UNDER SCAN Y. BOW) on the DC board to coincide with the R, G and B dots as shown in Fig. 1-19.

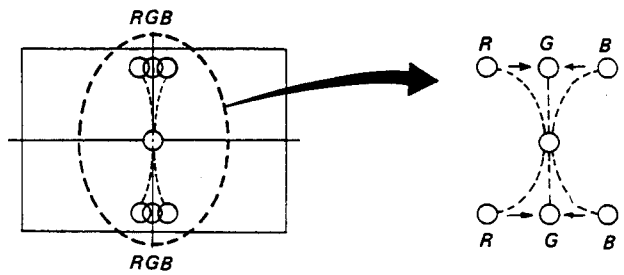


Fig. 1-19.

8. Adjust RV2, RV4 and RV12, RV14 on the DC board to coincide with the R, G and B dots as shown in Fig. 1-17.




Fig. 1-17.

12. Adjust RV32 and RV33 (UNDER SCAN H. AMP) on the DC board to coincide with the R, G and B dots as shown in Fig. 1-20.



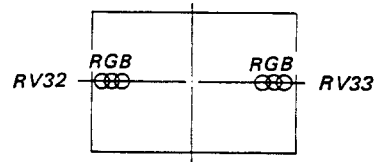


Fig. 1-20.

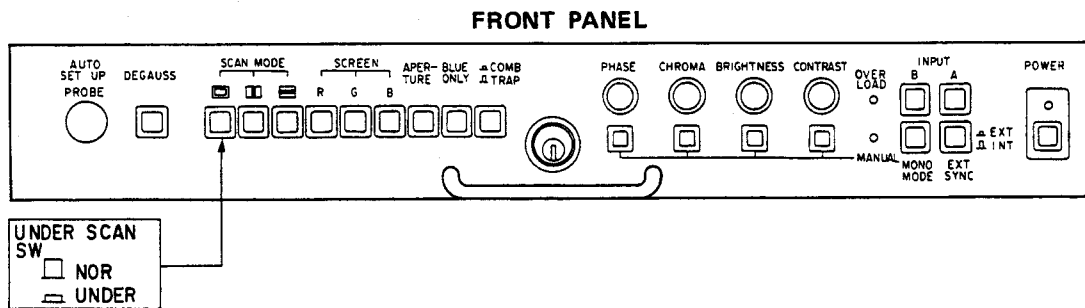


WHITE BALANCE ADJUSTMENT

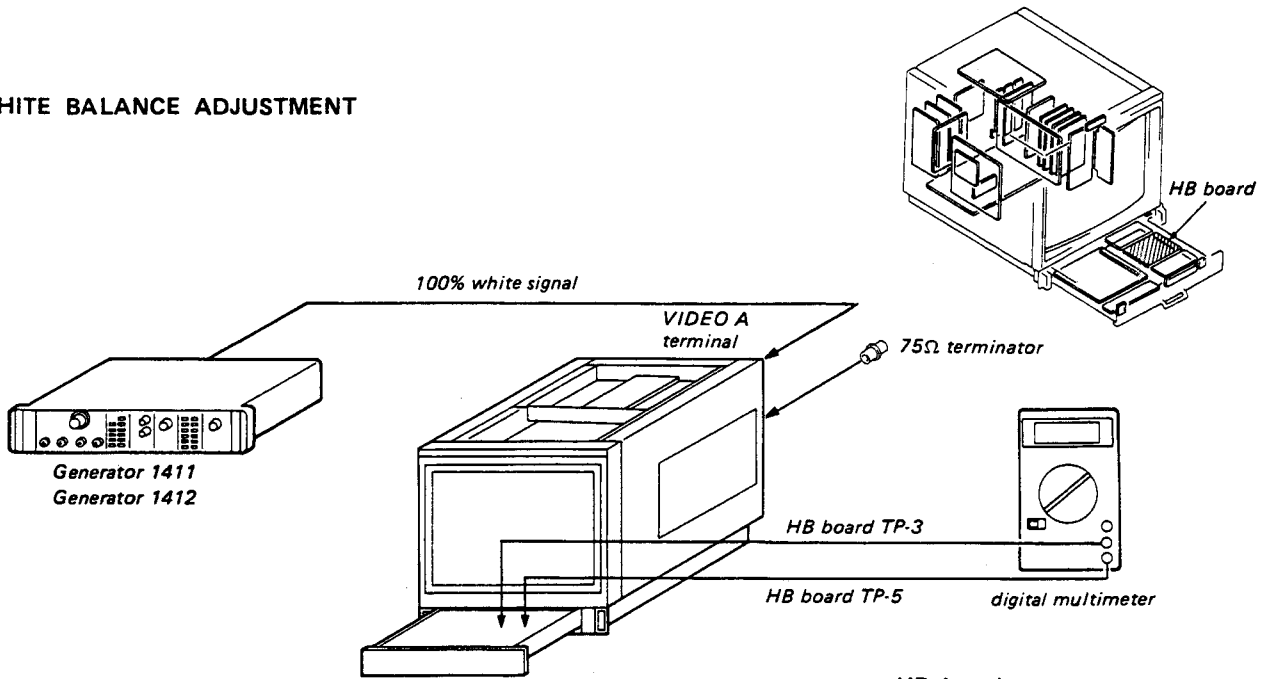

1. Input 100% white signal to VIDEO A connector.
2. WHITE/OPERATE/SET UP switch SET UP.
3. Connect the digital multimeter between the mechanical center of the RV2 and GND on the HD board. *1
4. BRIGHTNESS MANUAL switch MANUAL. (⏏)
5. Adjust with the BRIGHTNESS control so that the voltage of the digital multimeter becomes -0.7 vdc.
6. Turn BIAS controls (RV8: Red, RV9: Green, RV10: Blue) on the HB board to adjust the BRIGHTNESS to 0.5NIT and white balance using COLOR ANALYZER and check 0.5NIT by LUMINANCE METER.
7. BRIGHTNESS MANUAL switch PRESET (⏏)
8. WHITE/OPERATE/SET UP switch OPERATE.
9. Turn GAIN controls (RV5: Red, RV6: Green, RV7: Blue) on the HB board to adjust the BRIGHTNESS at HIGH LIGHT to 103 NIT and white balance using COLOR ANALYZER and check 103 NIT by LUMINANCE METER.
10. Repeat procedure steps 4 to 9 if necessary.

*1 HD board is replaced by HG board from the serial No. shown below.
In this case, connect the digital multimeter between the TP1 and GND on the HG board.


HB board

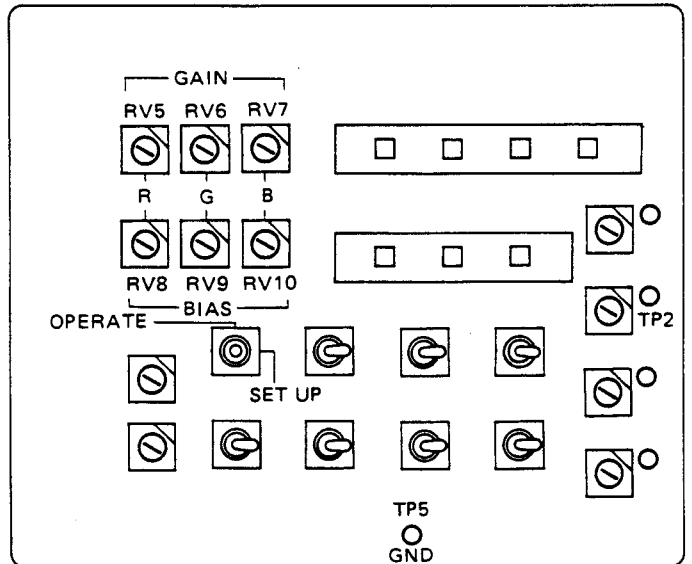


ADJUSTMENTS

HG board:
 (BVM-2010P ONLY Serial No. 2,001,081 and Higher)
 (BVM-2010PM ONLY Serial No. 2,000,004 and Higher)
 (BVM-2010PD ONLY Serial No. 2,000,042 and Higher)
 (BVM-2010PMD ONLY Serial No. 2,000,001 and Higher)

FRONT PANEL

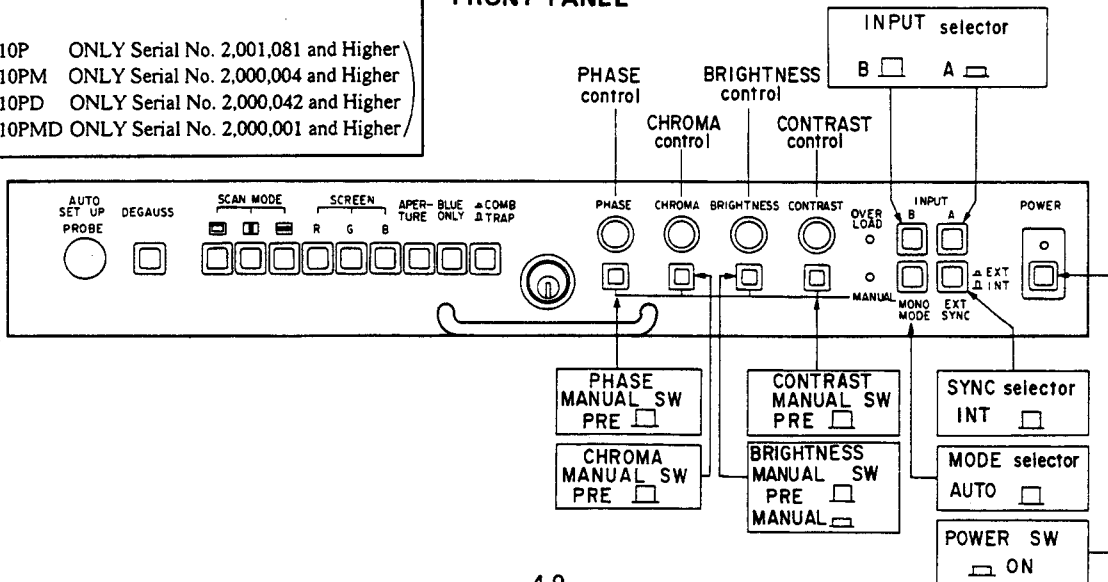



4-6. SAFETY RELATED ADJUSTMENTS

B+ PROTECTOR (R52, R53)


When replacing the following components (marked \blacksquare on the schematic diagram), make this confirmation.

- \blacksquare GA Board . . . Q13, Q14, R52, R53
- GB Board . . . D5, D6, D7, D8, Q3, Q4, Q5, R4, R5, R19, R20, R21, R22

It is necessary to use a digital multimeter for this confirmation.

Connect a digital multimeter to TP2 on GA Board.

1. Receive a color bar signal and set CONTRAST and BRIGHTNESS controls to preset position. (manual button is out \square)
2. Short-circuit R55 on GA Board.
3. Connect a 100k Ω variable resistor between TP2 and TP3 (GND) on GA board.
4. Confirm that the reading on the digital multimeter drops abruptly from +182.0V ~ +216.0V to 0V by turning the 100k Ω variable resistor so that the value of the resistor decrease from maximum value.
5. If step 4 isn't satisfied, select resistance values of R52 and R53 which satisfy the specifications.
6. Restore these to their original states and confirm that the voltage at TP2 is 150.0 \pm 1.0V.

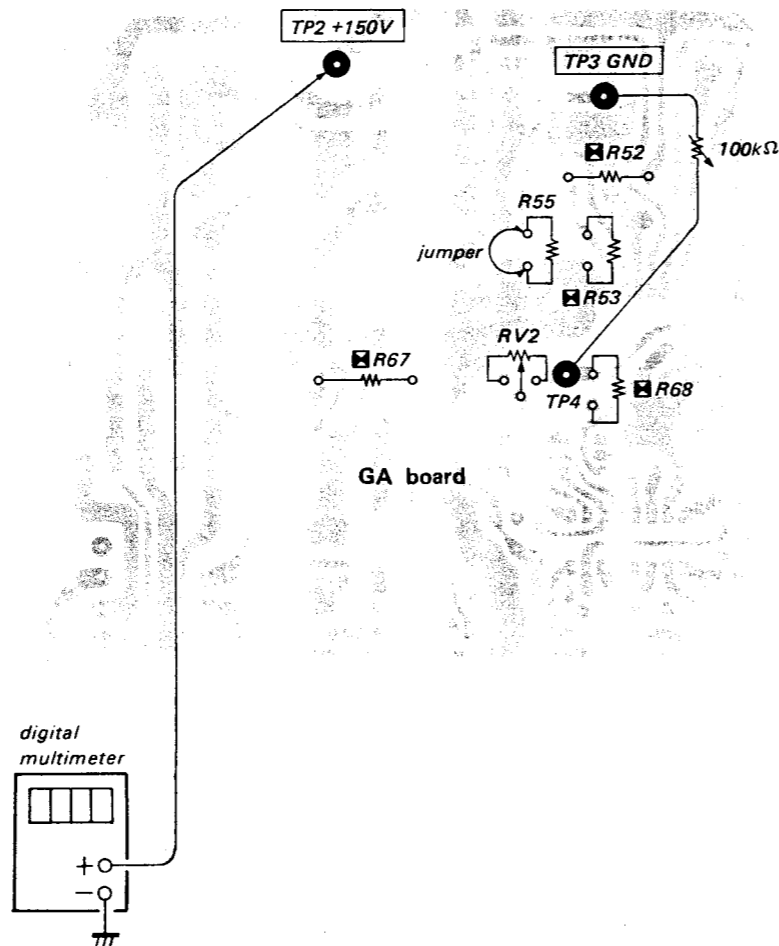

B+ MAX CONFIRMATION (R67, R68)

When replacing the following components (marked \blacksquare on the schematic diagram), make this confirmation.

- \blacksquare GA Board . . . C59, IC3, R67, R68, R78, RV2

It is necessary to use a digital multimeter for this confirmation.

Connect a digital multimeter to TP2 on GA Board.

1. Receive a color bar signal and set CONTRAST and BRIGHTNESS controls to preset position. (manual button is out \square)
2. Confirm that the reading on the digital multimeter is +165.0V \pm 13.0V when RV2 variable resistor is turned to fully clockwise.
3. If the specifications are not met, select resistance values for R67 and R68 which satisfy the specifications.
4. After confirmation, make the reading on the digital multimeter into +150.0V \pm 1.0V by adjusting RV2 on GA Board.


BEAM CURRENT PROTECTOR 1 CONFIRMATION (R222)

When replacing the following components (marked \blacksquare on the schematic diagram), make this confirmation.

- PA Board . . . D205, D206, D215, IC2, R201, R202, R213, R214, R220, R221, R222, R223, R224, R242

- PB Board . . . FBT, R1, R2, R5

1. Remove the PB-1 connector from PB board.
2. Connect a DC ammeter between Pin ① and Pin ② of the PB-1 connector and short-circuit Pin ③ and Pin ④ with a jumper.

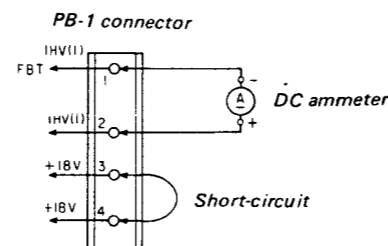

3. Connect a digital multimeter to TP2 and TP4 (GND) of PA board.
4. Select the built-in all-white signal (Set the WHITE/OPERATE/SET UP selector on HB board to WHITE). Don't do it in free run.
5. Confirm that the reading on the digital multimeter of TP2 on PA board is between +31.0V and +33.5V.
6. If the reading on the digital multimeter of TP2 is between +31.0V and +33.5V and more than 32.5V, mount a 1M Ω /4W resistor (metal-film) should be mounted at the portion of R222 on PA board. (Normally in this portion no component is mounted.)
7. Short-circuit R231 on PA board.
8. Short-circuit C1 on BI board.
9. Rotate the BRIGHTNESS and CONTRAST controls and confirm that the raster disappears when the value indicated on the DC ammeter is 2.20mA \pm 0.35mA.
10. Remove the short-circuit from R231 and C1 and restore the PB-1 connector to its original state.
11. Remove the jumpers and DC ammeter and reconnect the PB-1 connector.
12. Set the BRIGHTNESS and CONTRAST controls to their maximum positions and confirm that the ABL operates (OVERLOAD Lamp Lights up).

4. Select the built-in all-white signal (Set the WHITE/OPERATE/SET UP selector on HB board to WHITE). Don't do it in free run.
5. Confirm that the reading on the digital multimeter of TP3 on PA board is between +31.0V and +33.5V.
6. If the reading on the digital multimeter of TP3 is between +31.0V and +33.5V and more than 32.5V, mount a 1M Ω /4W resistor (metal-film) should be mounted at the portion of R239 on PA board. (Normally in this portion no component is mounted.)
7. Short-circuit R213 on PA board.
8. Short-circuit C1 on BI board.
9. Rotate the BRIGHTNESS and CONTRAST controls and confirm that the raster disappears when the value indicated on the DC ammeter is 2.20mA \pm 0.35mA.
10. Remove the short-circuit from R213 and C1 and restore the PB-1 connector to its original state.
11. Remove the jumpers and DC ammeter and reconnect the PB-1 connector.
12. Set the BRIGHTNESS and CONTRAST controls to their maximum positions and confirm that the ABL operates (OVERLOAD lamp lights up).


BEAM CURRENT PROTECTOR 2 (R239)

When replacing the following components (marked \blacksquare on the schematic diagram), make this confirmation.


- \blacksquare PA Board . . . D204, D216, R203, R204, R231, R232, R237, R238, R239, R240, R241, R247, IC3

- PB Board . . . R3, R4, R6, FBT


1. Remove the PB-1 connector from PB board.
2. Connect a DC ammeter between Pin ① and Pin ② of the PB-1 connector and short-circuit Pin ③ and Pin ④ with a jumper.

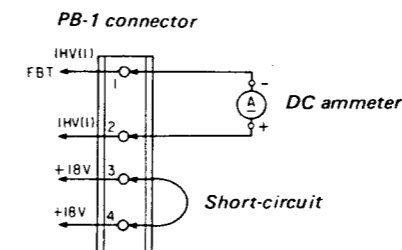

3. Connect a digital multimeter to TP3 and TP4 (GND) of PA board.

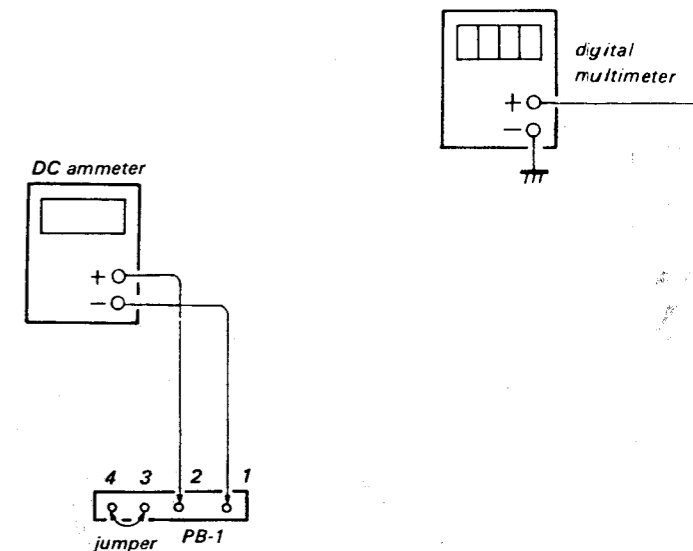


PB board

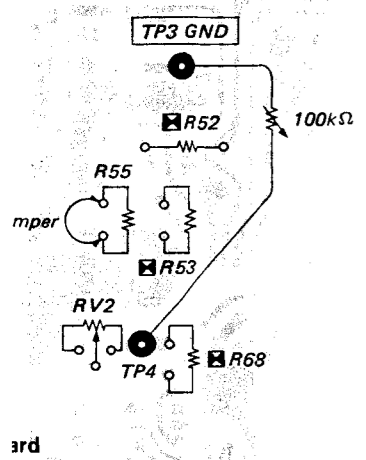

3. Connect a digital multimeter to TP2 and TP4 (GND) of PA board.
4. Select the built-in all-white signal (Set the WHITE/OPERATE/SET UP selector on HB board to WHITE). Don't do it in free run.
5. Confirm that the reading on the digital multimeter of TP2 on PA board is between +31.0V and +33.5V.
6. If the reading on the digital multimeter of TP2 is between +31.0V and +33.5V and more than 32.5V, mount a 1MΩ/4W resistor (metal-film) should be mounted at the portion of R222 on PA board. (Normally in this portion no component is mounted.)
7. Short-circuit R231 on PA board.
8. Short-circuit C1 on BI board.
9. Rotate the BRIGHTNESS and CONTRAST controls and confirm that the raster disappears when the value indicated on the DC ammeter is 2.20mA ±0.35mA.
10. Remove the short-circuit from R231 and C1 and restore the PB-1 connector to its original state.
11. Remove the jumpers and DC ammeter and reconnect the PB-1 connector.
12. Set the BRIGHTNESS and CONTRAST controls to their maximum positions and confirm that the ABL operates (OVERLOAD Lamp Lights up).

4. Select the built-in all-white signal (Set the WHITE/OPERATE/SET UP selector on HB board to WHITE). Don't do it in free run.
5. Confirm that the reading on the digital multimeter of TP3 on PA board is between +31.0V and +33.5V.
6. If the reading on the digital multimeter of TP3 is between +31.0V and +33.5V and more than 32.5V, mount a 1MΩ/4W resistor (metal-film) should be mounted at the portion of R239 on PA board. (Normally in this portion no component is mounted.)
7. Short-circuit R213 on PA board.
8. Short-circuit C1 on BI board.
9. Rotate the BRIGHTNESS and CONTRAST controls and confirm that the raster disappears when the value indicated on the DC ammeter is 2.20mA ±0.35mA.
10. Remove the short-circuit from R213 and C1 and restore the PB-1 connector to its original state.
11. Remove the jumpers and DC ammeter and reconnect the PB-1 connector.
12. Set the BRIGHTNESS and CONTRAST controls to their maximum positions and confirm that the ABL operates (OVERLOAD lamp lights up).

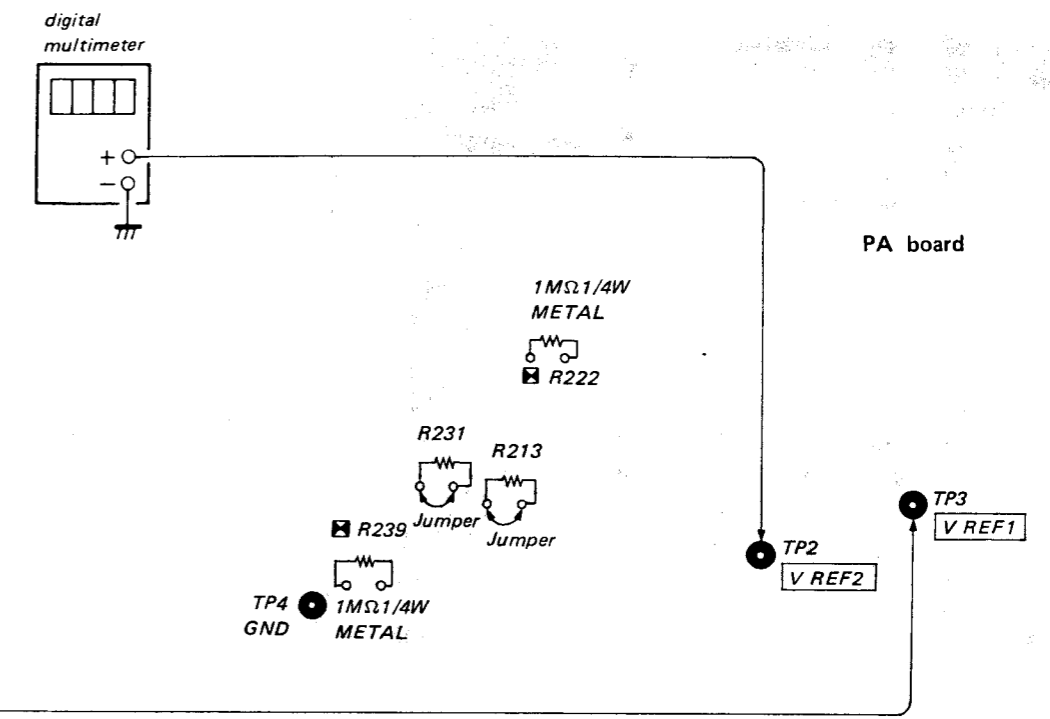



BEAM CURRENT PROTECTOR 2 (R239)

When replacing the following components (marked on the schematic diagram), make this confirmation.

PA Board . . . D204, D216, R203, R204, R231, R232, R237, R238, R239, R240, R241, R247, IC3

PB Board . . . R3, R4, R6, FBT

1. Remove the PB-1 connector from PB board.
2. Connect a DC ammeter between Pin ① and Pin ② of the PB-1 connector and short-circuit Pin ③ and Pin ④ with a jumper.

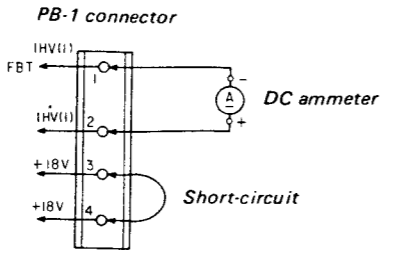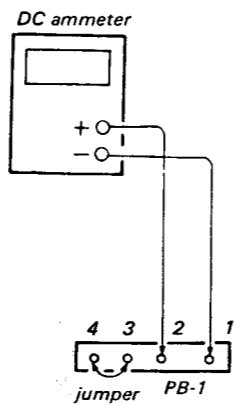

3. Connect a digital multimeter to TP3 and TP4 (GND) of PA board.


R 1 (R222)

Components (marked on the schematic diagram) on confirmation.

PA Board . . . IC2, R201, R202, R203, R204, R221, R222, R223,

on PB board.

Remove the PB-1 connector from the PB board and connect a DC ammeter between Pin ① and Pin ② of the circuit Pin ③ and Pin ④



Short-circuit



HIGH VOLTAGE HOLD DOWN ADJUSTMENT AND CONFIRMATION

(R227, R228)

When replacing the following components (marked on the schematic diagram), make this adjustment.

DCT block

PA Board . . .D205, D207, D215, IC2, R201, R202, R213, R214, R225, R226, R227, R228, R243, R245

It is necessary to use an electrostatic voltmeter or equivalent for this adjustment. Connect the electrostatic voltmeter to the anode cap.

Even though an electrostatic voltmeter may not be used, connect digital multimeter to ⑦ pin of IC4 on PA Board.

In case of using an electrostatic voltmeter

1. Connect the electrostatic voltmeter to the anode cap and connect a digital multimeter to TP1 and TP4 (GND) on PA board.


Note: Use an electrostatic multimeter which is calibrated and which has $2 \times 10^9 \Omega$ or more input impedance. (Example: ESH-27X or ESH-23X of the SINGER COMPANY)

Use a digital multimeter which has 4 digits or more.

2. Receive a color bar signal and set the CONTRAST and BRIGHTNESS controls to the preset positions. (manual switch is OUT.)
3. Determine the values of R227 and R228 as to get voltage of $9.55 \pm 0.13V$ at TP1.
4. Connect $500k\Omega$ variable resistor with R126 in parallel on PA board.
5. Confirm that the reading on the electrostatic voltmeter drops abruptly from $28.0kV \sim 30.0kV$ to $0V$ by turning slowly the $500k\Omega$ variable resistor so that the value of the resistor decrease from maximum value.
6. Remove the $500k\Omega$ variable resistor from R126 and confirm again that the voltage of the anode is $27.0kV \pm 0.1kV$.

In case of not using an electrostatic voltmeter (using a digital multimeter.)

1. Connect the digital multimeter to TP1 and TP4 (GND) and to Pin ⑦ of IC4 and TP4 (GND).
2. Receive a color bar signal and set the CONTRAST and BRIGHTNESS controls to the preset positions.
3. Determine the values of R227 and R228 as to get voltage of $9.40 \pm 0.13V$ at TP1.
4. Connect $500k\Omega$ variable resistor with R126 in parallel on PA board.
5. Confirm that the raster disappears when the voltage at Pin ⑦ of IC4 reaches $9.40 \pm 0.13V$ by turning slowly the $500k\Omega$ variable resistor so that the value of the resistor decrease from maximum value.
6. Remove the $500k\Omega$ variable resistor from R126.

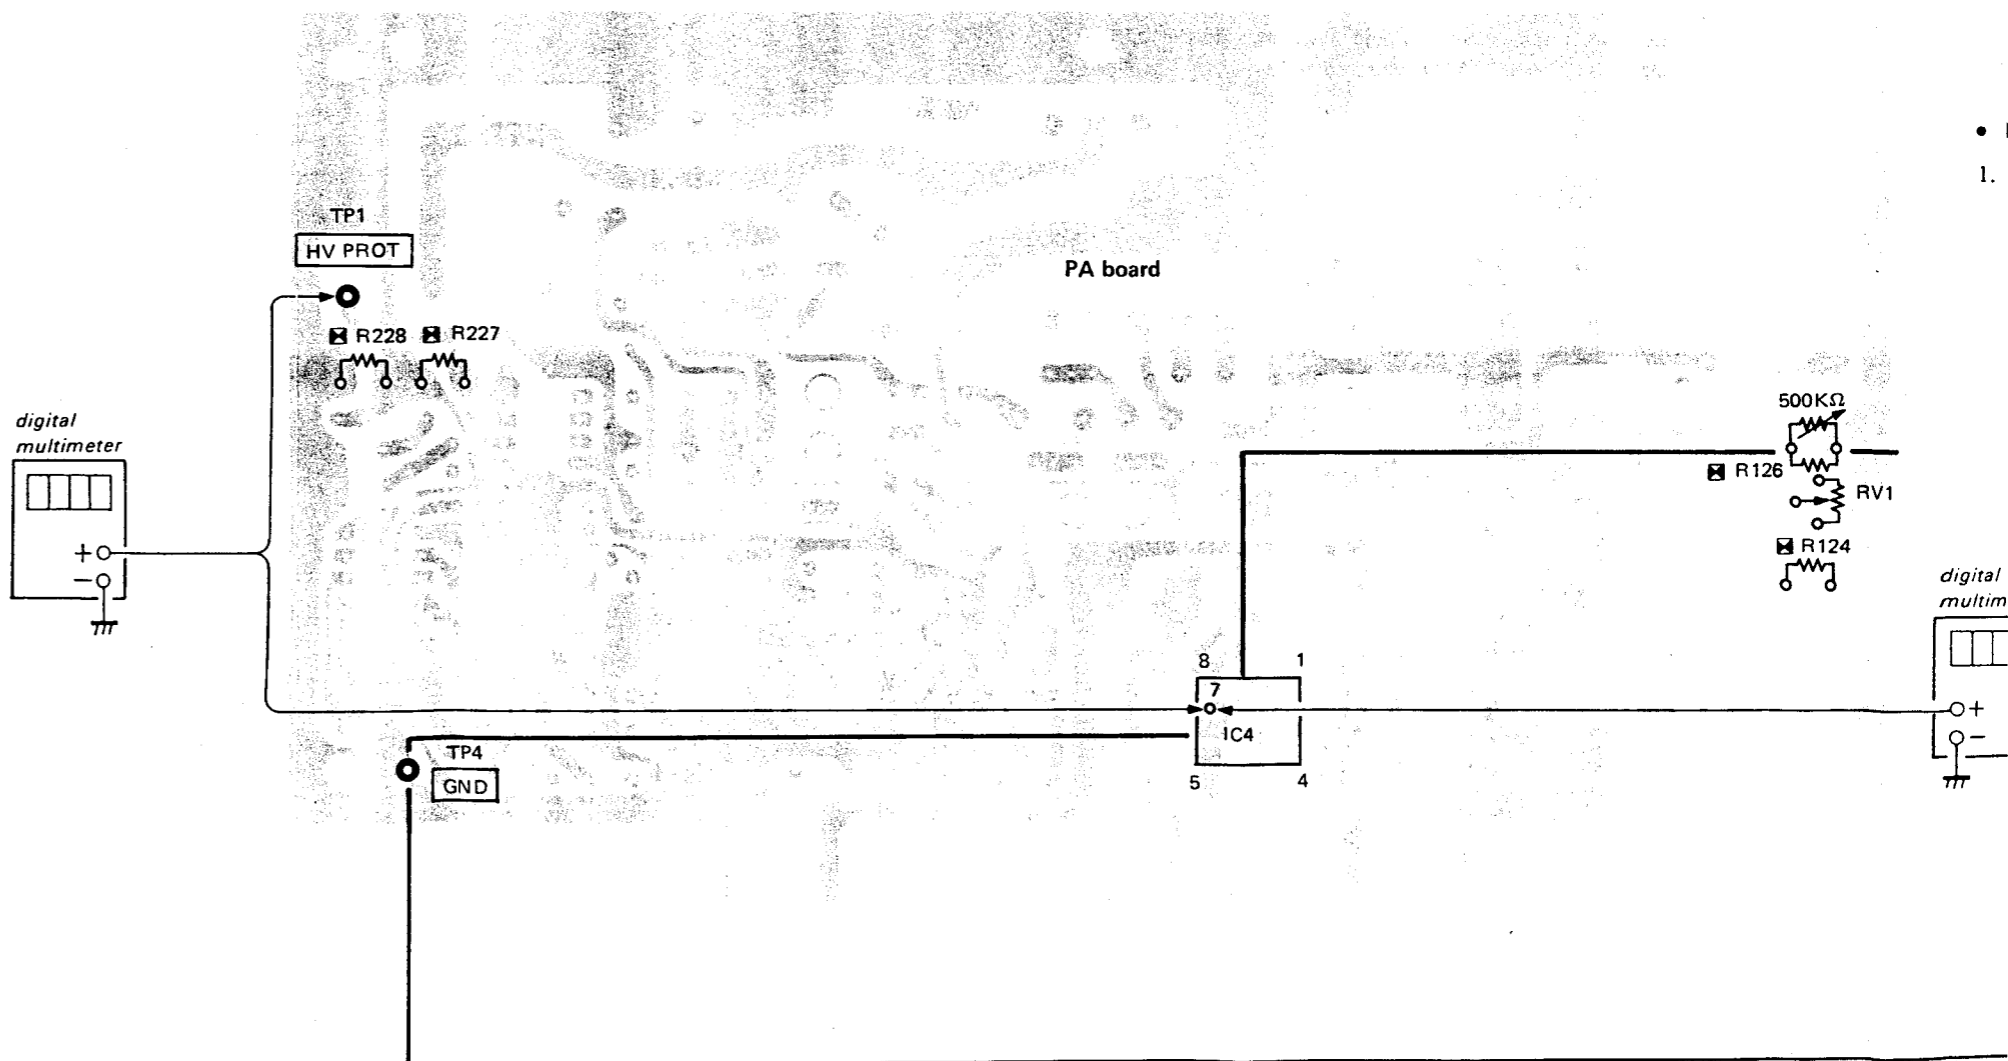

if not using an electrostatic voltmeter (using a multimeter.)

Connect the digital multimeter to TP1 and TP4 (GND) or Pin ⑦ of IC4 and TP4 (GND).


Receive a color bar signal and set the CONTRAST and BRIGHTNESS controls to the preset positions.

Determine the values of R227 and R228 as to get voltage of $9.40 \pm 0.13V$ at TP1.

Connect 500k Ω variable resistor with R126 in parallel on PA board.

Turn RV1 until the raster disappears when the voltage at Pin ⑦ of IC4 reaches $9.40 \pm 0.13V$ by turning slowly the 500k Ω variable resistor so that the value of the reading decreases from maximum value.

Remove the 500k Ω variable resistor from R126.

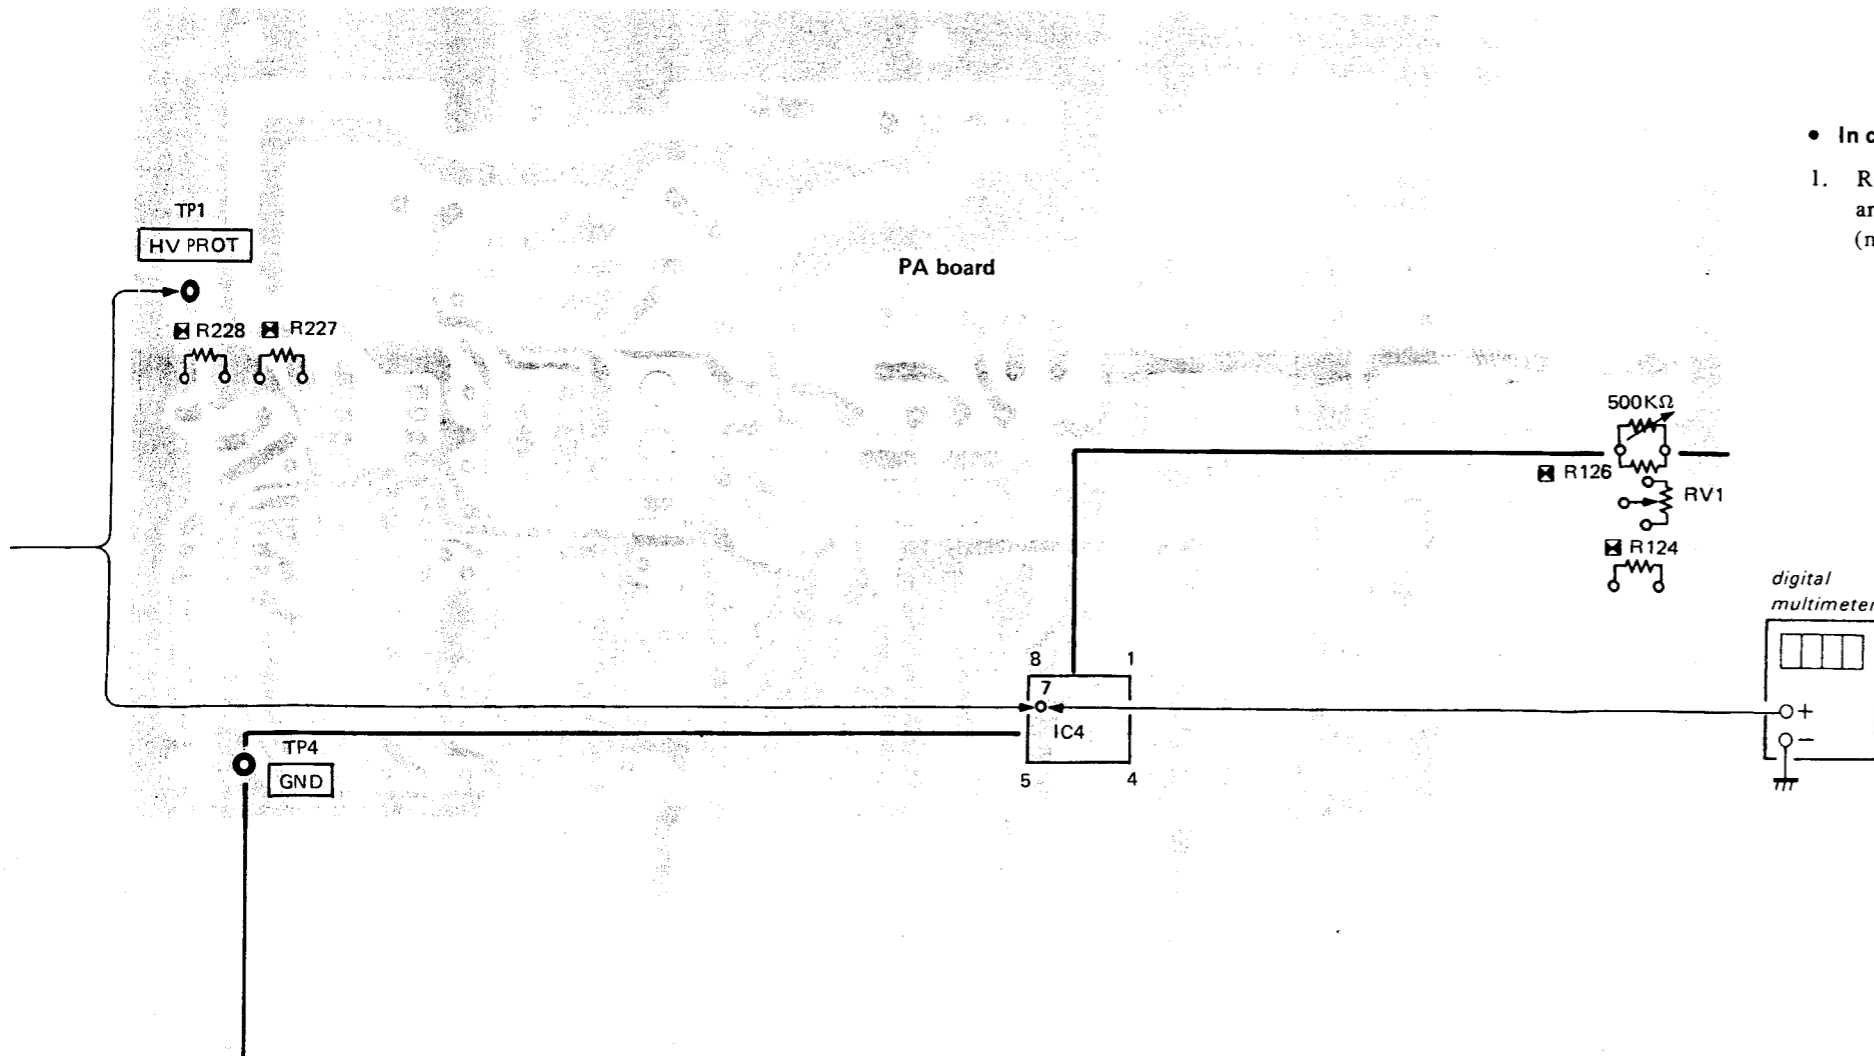

HIGH VOLTAGE REGULATOR CONFIRMATION

(R124, R126)

When replacing the following components (marked on the schematic diagram), make this adjustment.

DCT block

PA Board . . . D216, IC1, IC4, R123, R124, R125, R126, R136, R137, R138, R203, R204, RV1

It is necessary to use an electrostatic voltmeter or equivalent for this adjustment. Connect the electrostatic voltmeter to the anode cap.

Even though an electrostatic voltmeter may not be used, connect digital multimeter to ⑦ pin of IC4 on PA Board.

Note: Use an electrostatic voltmeter which is calibrated, and which has $2 \times 10^9 \Omega$ or more input impedance.

example: ESH-27X or ESH-23X of the SINGER COMPANY

Use a digital multimeter which has 4 digit or more.

• **In case of using an electrostatic voltmeter**

1. Receive a color bar signal and set CONTRAST and BRIGHTNESS controls to preset position. (manual switch is out)

2. Turn RV1 on the PA Board for a maximum reading on the electrostatic voltmeter. (Fully clockwise)
3. Confirm that the indicated value on the electrostatic voltmeter is $27.40kV \pm 0.1kV$ at this time.
4. If necessary, select the value of R124 and R126 (1/4W metal-film) and repeat above step 2 through 4.
5. After confirmation, adjust RV1 for $27.0kV \pm 0.1kV$ on the electrostatic voltmeter.

• **In case of using a digital multimeter**

1. Receive a color bar signal and set CONTRAST and BRIGHTNESS controls to preset position. (manual switch is out)
2. Connect the digital multimeter to Pin ⑦ of IC4 and TP4 (GND) on PA board.
3. Set RV1 on PA board to its mechanical center.
4. Select resistance values for R124 and R126 which provide a voltage reading of $8.75V \pm 0.1V$ at Pin ⑦ of IC4 and mount.

4-7. CIRCUIT ADJUSTMENTS

- To make the following adjustments, unless otherwise specified, the controls knobs and switches shall be preset as described below.



FRONT PANEL

- | | | |
|-------------------------------------|--------|-----------------|
| 1. INPUT selector | A | } HC board |
| 2. SYNC selector | INT | |
| 3. MODE selector | AUTO | |
| 4. CONTRAST MANUAL switch | PRESET | } HG board (HD) |
| 5. BRIGHTNESS MANUAL switch | PRESET | |
| 6. CHROMA MANUAL switch | PRESET | |
| 7. PHASE MANUAL switch | PRESET | |
| 8. SCAN MODE switch | | } HA board |
| <input type="checkbox"/> UNDER SCAN | NOR | |
| <input type="checkbox"/> H. DELAY | NOR | |
| <input type="checkbox"/> V. DELAY | NOR | |
| 9. SCREEN switch (R) | NOR | |
| 10. SCREEN switch (G) | NOR | |
| 11. SCREEN switch (B) | NOR | |
| 12. APT switch | NOR | |
| 13. BLUE ONLY switch | NOR | |
| 14. COMB/TRAP filter selector | TRAP | |


SUB CONTROL PANEL

- | | | | |
|-----------------------------------|---------|------------|----------|
| 15. INPUT SELECT buttons | B | } HB board | |
| 16. COLOR STANDARD buttons | PAL | | |
| 17. FILTER switch | OFF | | |
| 18. MATRIX switch | OFF | | |
| 19. PAL/SECAM mode selector | D(L) | | |
| 20. WHITE/OPERATE/SET UP selector | OPERATE | | |
| 21. SPLIT SCREEN switch | OFF | | |
| 22. CROSS HATCH switch | OFF | | |
| 23. VITC switch | OFF | | |
| 24. PIC. SET UP switch | OFF | | |
| 25. AFC switch | 2m sec | | DA board |


SUB CONTROL PANEL (HB board)

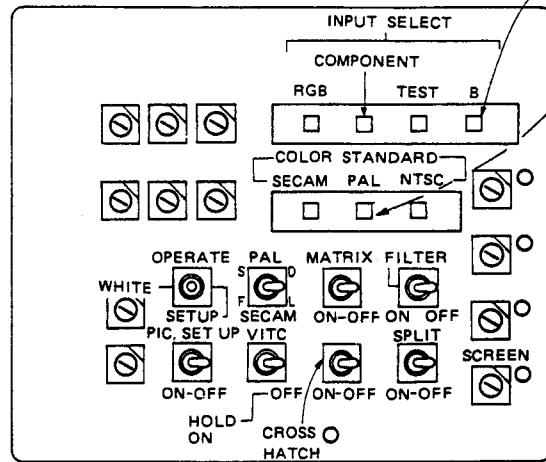

FRONT PANEL

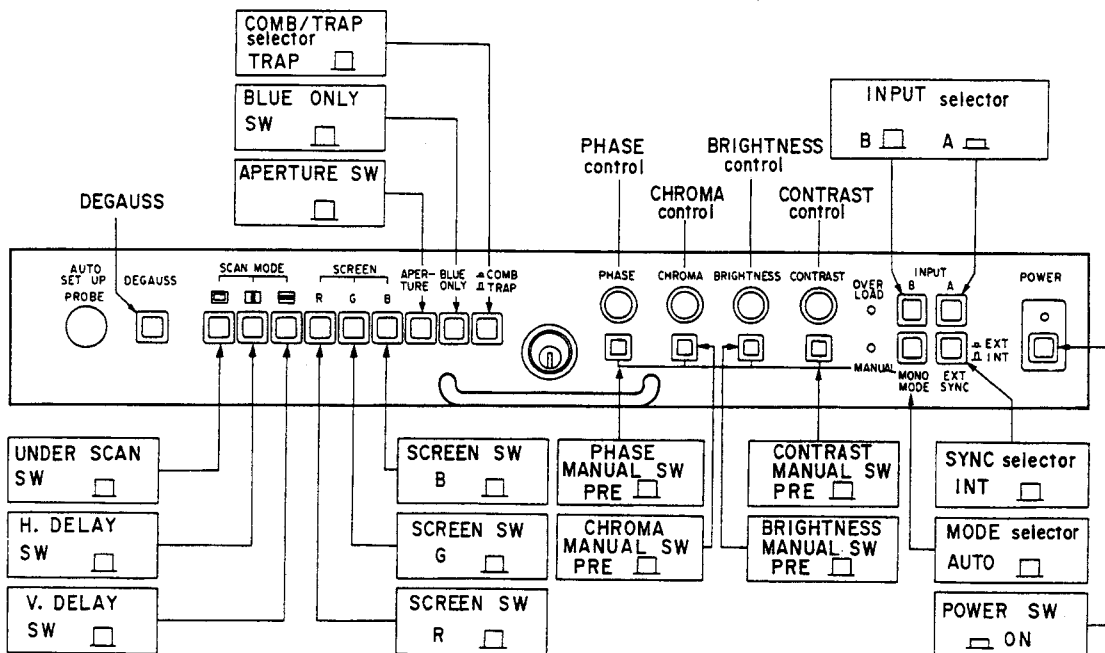


1. HB Board SUB CHROMA, SUB PHASE ADJUSTMENT

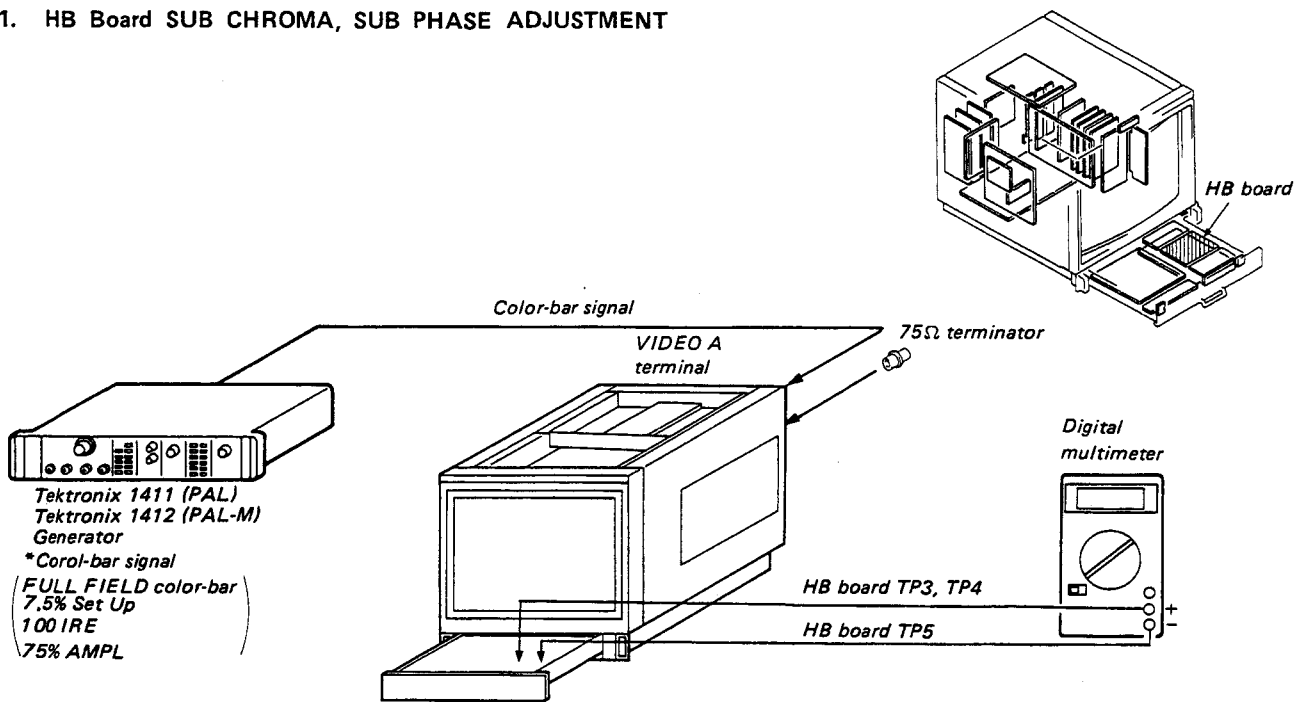


1. Connect a digital multimeter to the TP3 of HB board and TP5 (ground).
2. Adjust to -5.5V DC with RV3. (SUB CHROMA)
3. Connect a digital multimeter to the TP4 of HB board and TP5.
4. Adjust to 0V DC with RV4. (SUB PHASE) of HB board.

HB board

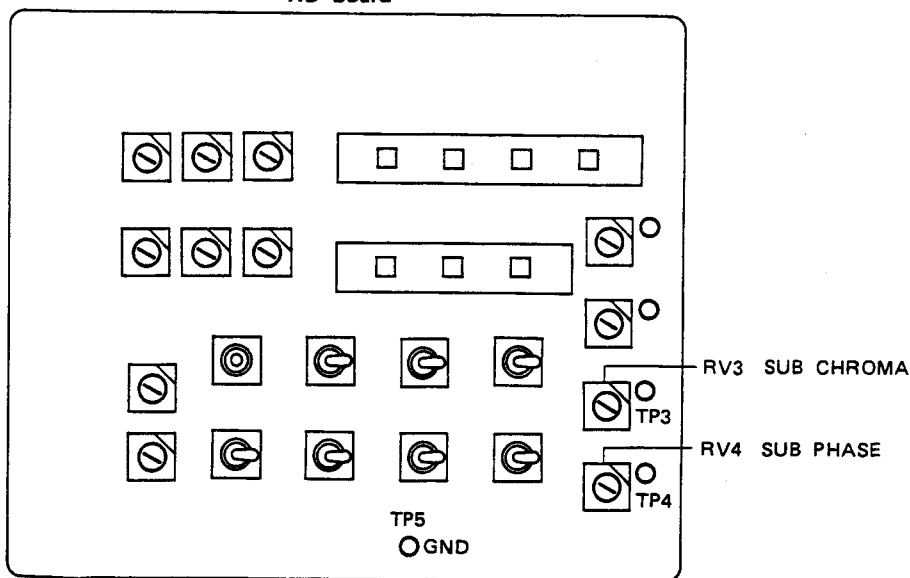

2. BJ Board BRT PULSE ADJUSTMENT

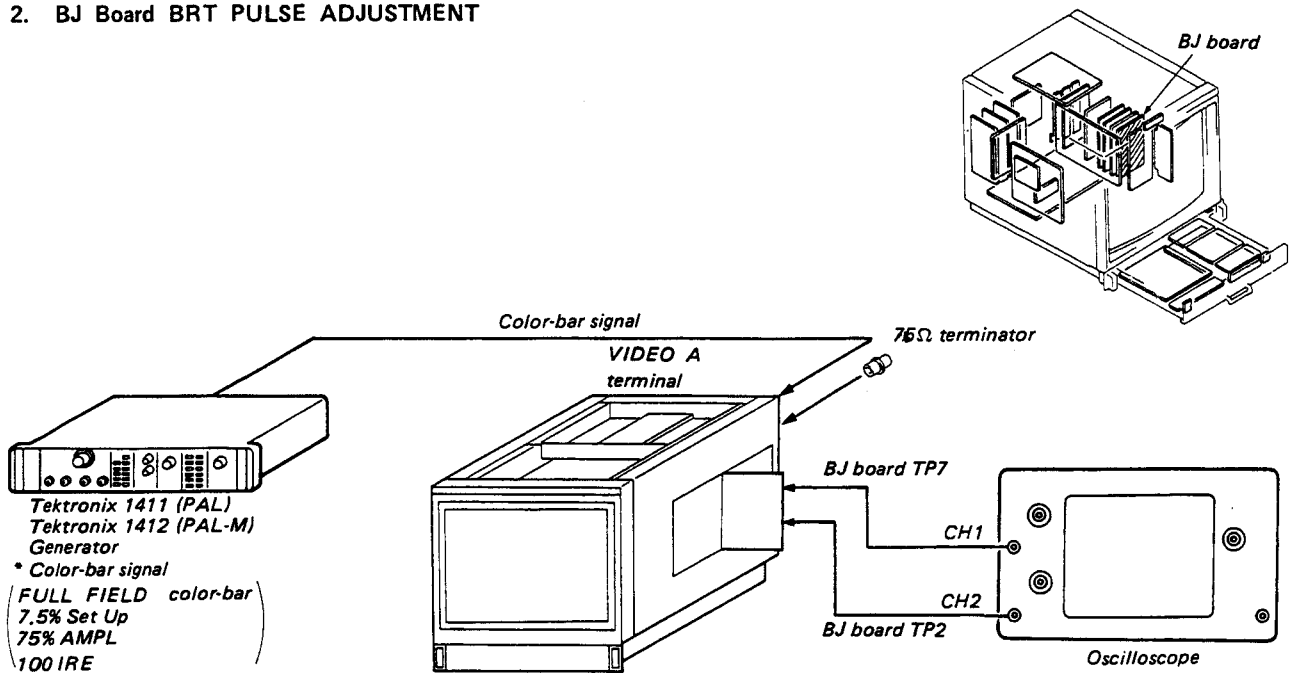

1. Input a color-bar signal to VIDEO A terminal of the set.
2. Connect an oscilloscope (CH1 probe) to the TP7 of BJ board and oscilloscope (CH2 probe) to the TP2 of BJ board.
3. Adjust RV7 to obtain the waveform on the oscilloscope as shown in Fig. 2-1.



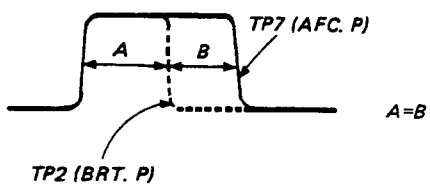


Fig. 2-1

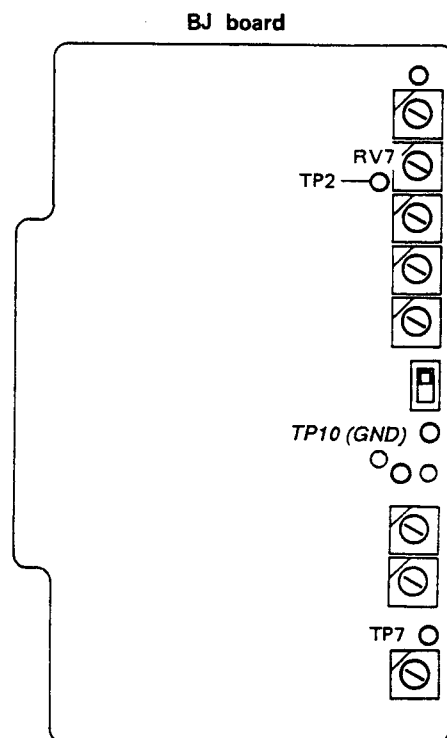

BJ Board SUMPRING PULSE ADJUSTMENT

4. ADJUSTMENTS

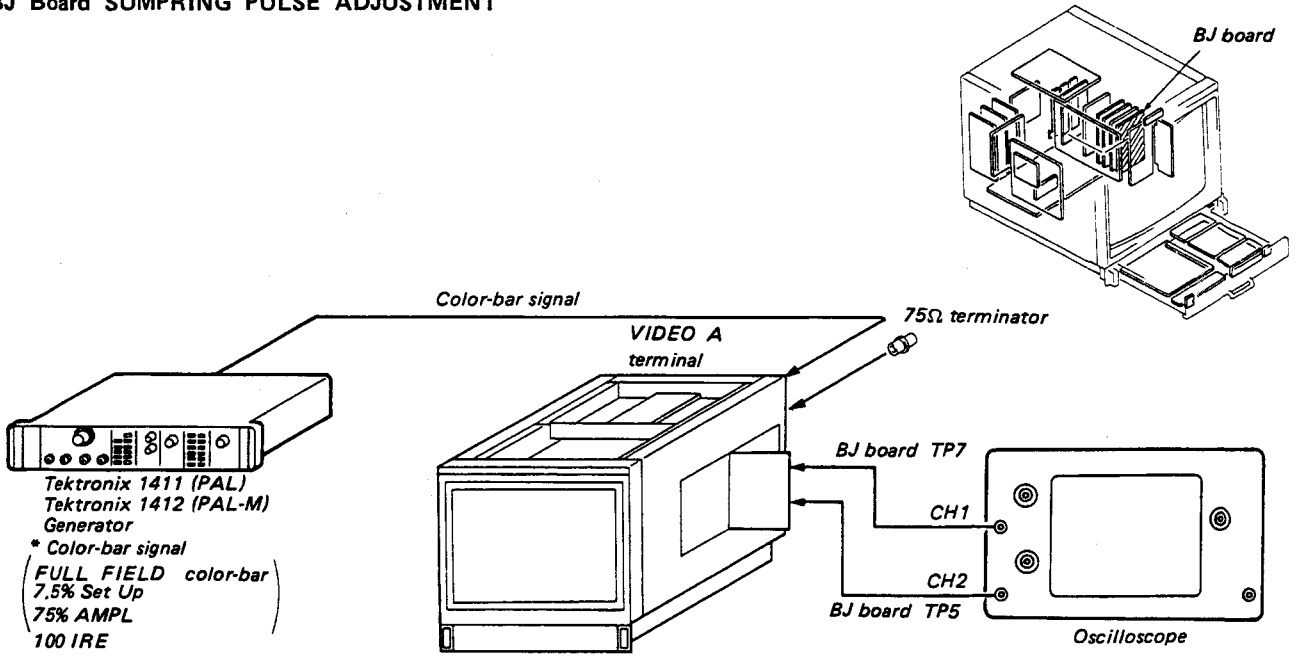

1. Input a color-bar signal to VIDEO A terminal of the set.
2. Connect an oscilloscope (CH 1 probe) to the TP7 of BJ board and Connect an oscilloscope (CH 2 probe) to the TP5 of BJ board.
3. Adjust RV5 to obtain the waveform on the oscilloscope as shown in Fig. 2-2.



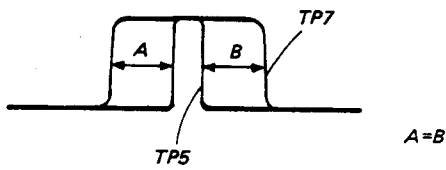


Fig. 2-2

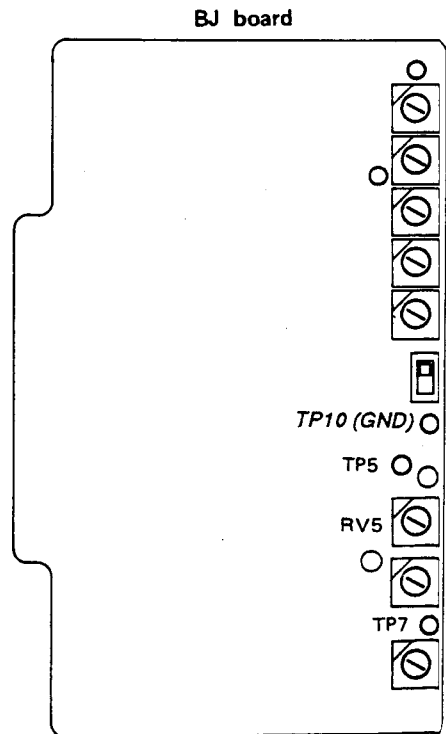


3. EACH CHANNEL LEVEL ADJUSTMENT

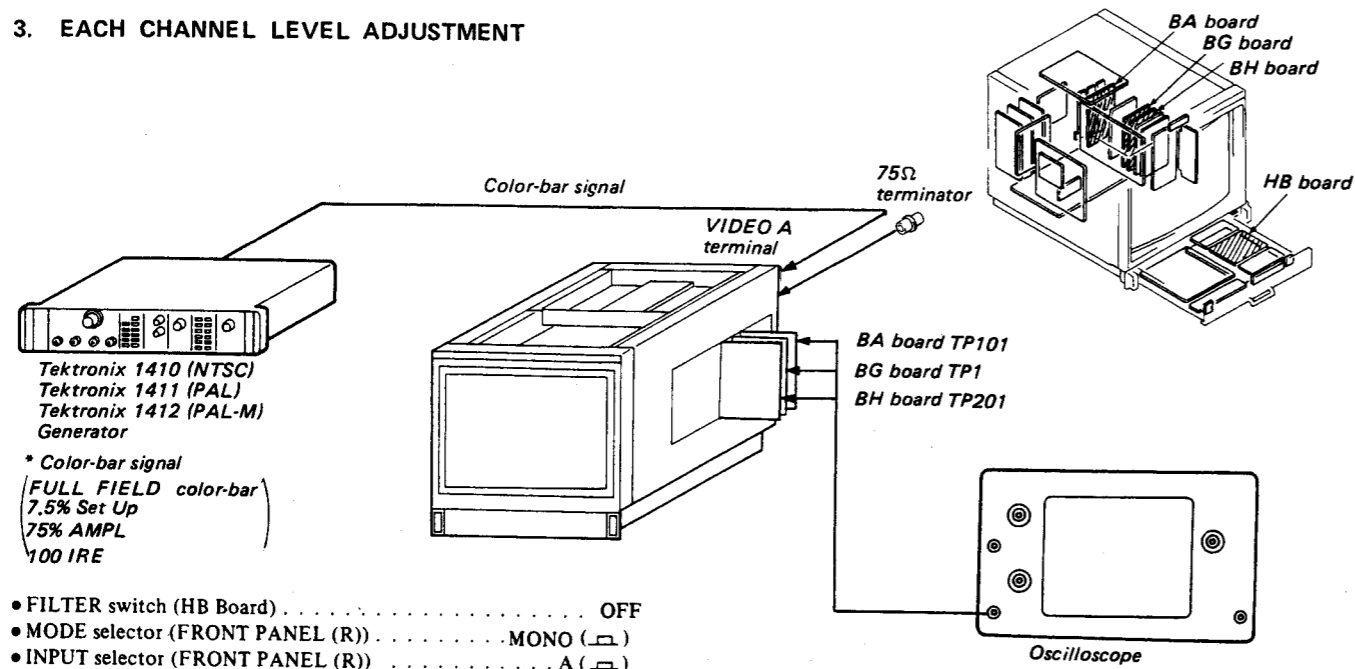

- FILTER switch (HB Board) OFF
- MODE selector (FRONT PANEL (R)) MONO (A)
- INPUT selector (FRONT PANEL (R)) A (A)

BA board

1. Input a color-bar signal to VIDEO A terminal to the set.
2. Connect an oscilloscope to the TP101 of BA board.
3. Adjust to 1.0Vp-p with RV101 of BA board as shown in Fig. 3-1.

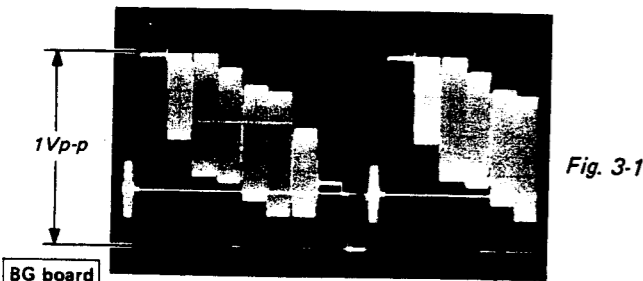


BG board

4. Connect an oscilloscope to the TP1 of BG board.
5. Adjust to 1.0Vp-p with RV3 of BG board as shown in Fig. 3-1.
6. Connect an oscilloscope to the TP201 of BH board.

HB board


7. Adjust RV2 (SUB BRT) of HB board so that (A) (black level) is 0V DC as shown in Fig. 3-2.
8. Adjust RV1 (SUB CONT) of HB board so that (B) (100% white level) is -0.7V DC as shown in Fig. 3-2.

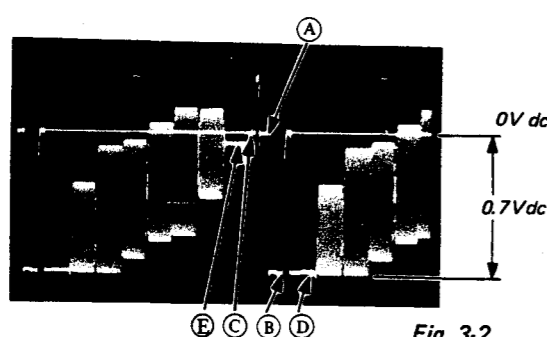

- (A) Black level
- (B) 100% White level
- (C) 0 IRE level
- (D) 100 IRE level
- (E) 7.5 IRE level




BH board

9. S2 (BH Board) 0 IRE
Adjust RV1 of BH board so that the (C) (0 IRE level) coincides with (A) (Black level) as shown in Fig. 3-3.
10. Adjust RV3 of BH board so that the (D) (100 IRE level) coincides with (B) (100% white level) as shown in Fig. 3-3.

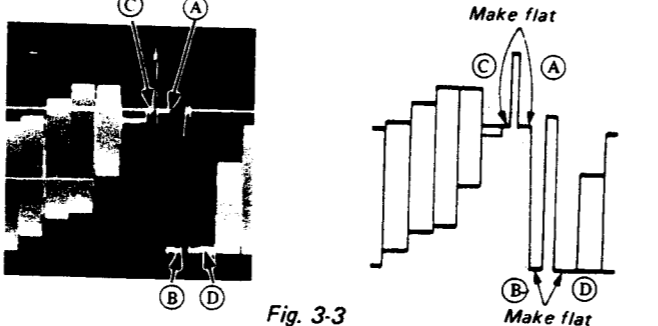


BH board


11. S2 (BH Board) 7.5 IRE
Adjust RV2 of BH board so that the (E) (7.5 IRE level) coincides with (A) (Black level) as shown in Fig. 3-4.
12. Set S2 (BH Board) to 0 IRE.

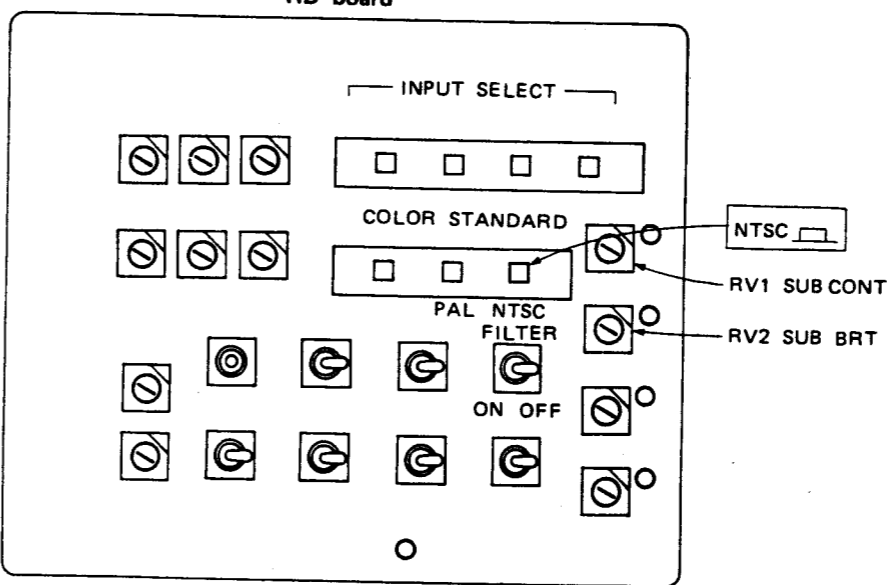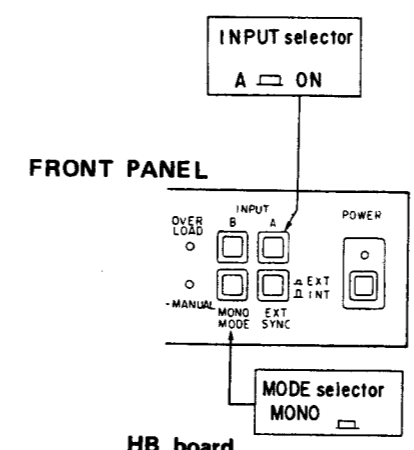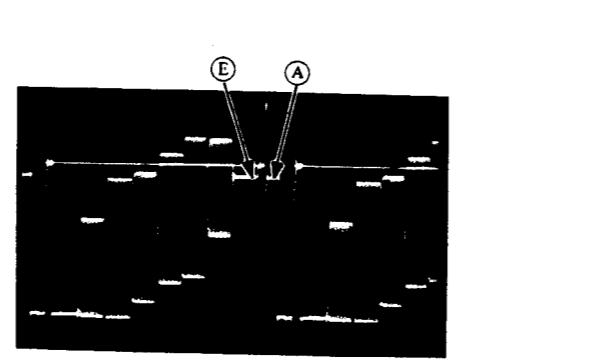


BG board

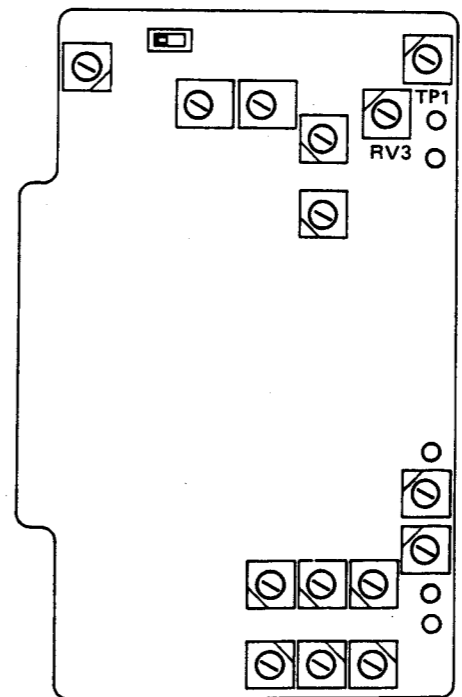

BA board

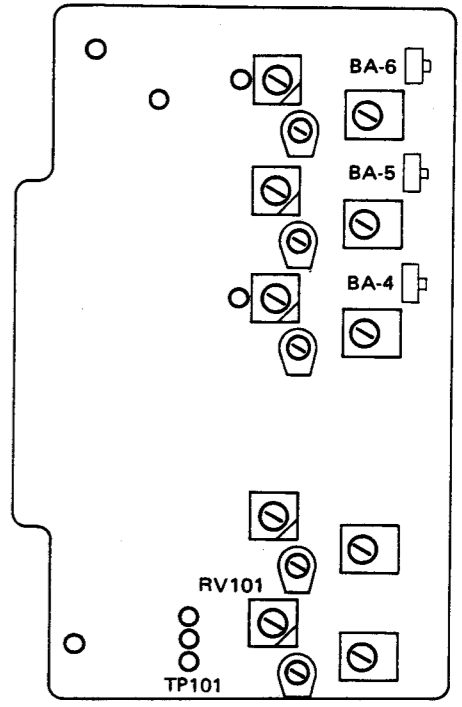



BH board

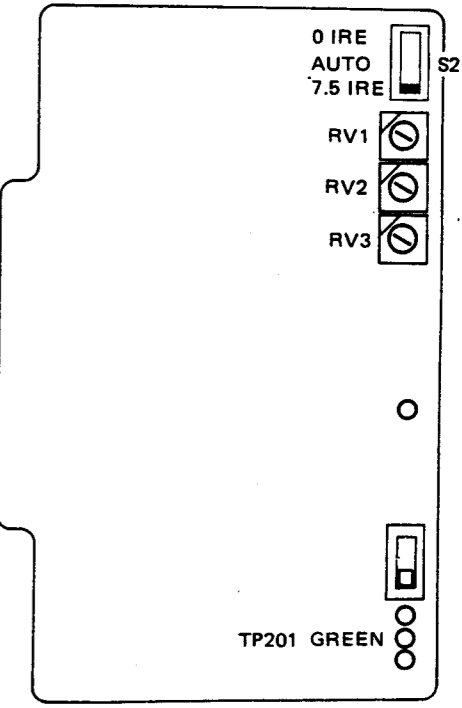

BA board

14. Input color-bar signal to R.G.B terminal (QB-board) of this set, also EXT-COMP-SYNC signal to COMP VIDEO terminal (QA-board).

- INPUT selector (FRONT PANEL (R)) B ()
- SYNC selector (FRONT PANEL (R)) EXT ()
- INPUT SELECT buttons (SUB CONTROL PANEL (R)) RGB ()

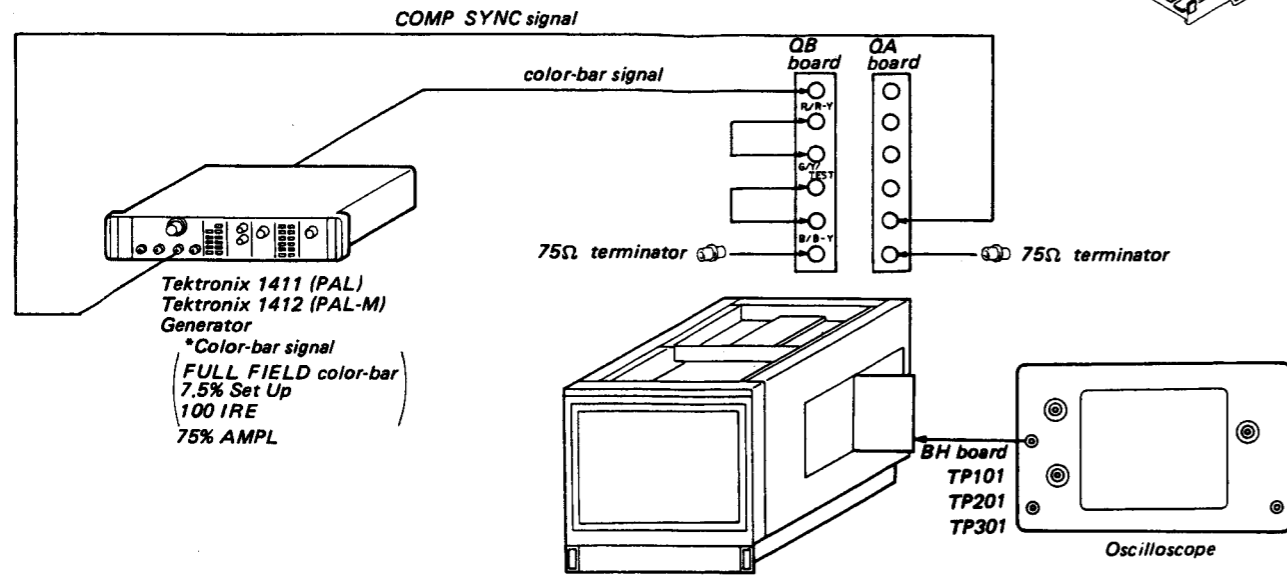


15. Connect an oscilloscope to TP101 of BH board.
16. Adjust RV401 of BA board so that the ① (100 IRE level) coincides with ② (100% white level) as shown in Fig. 3-5.
17. Connect an oscilloscope to TP201 of BH board.
18. Adjust RV501 of BA board so that the ① (100 IRE level) coincides with ② (100% white level) as shown in Fig. 3-5.
19. Connect an oscilloscope to TP101 of BH board.
20. Adjust RV601 of BA board so that the ① (100 IRE level) coincides with ② (100% white level) as shown in Fig. 3-5.




Fig. 3-5



① ②

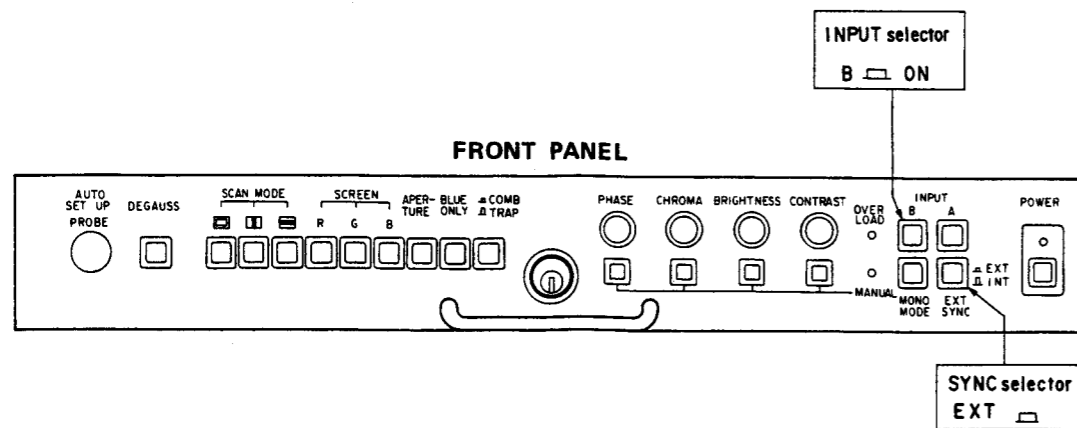

BH board

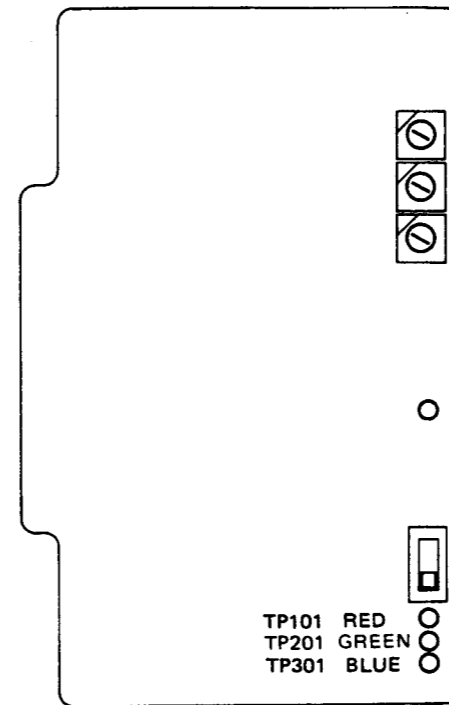

BA board

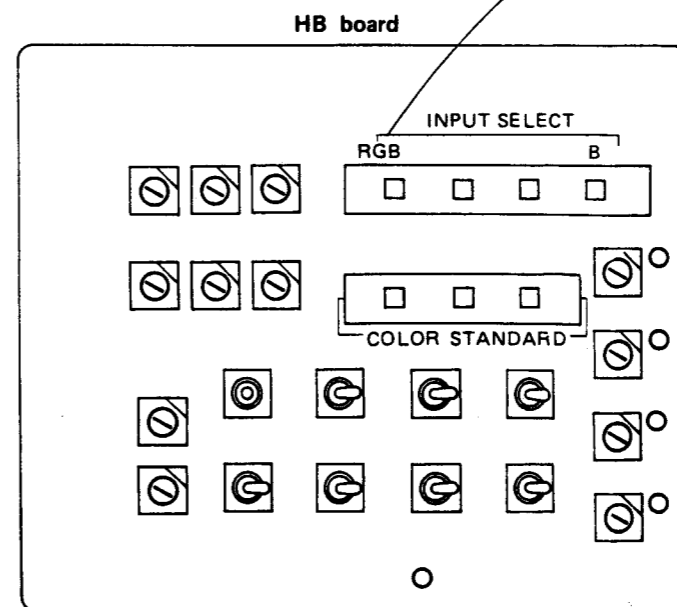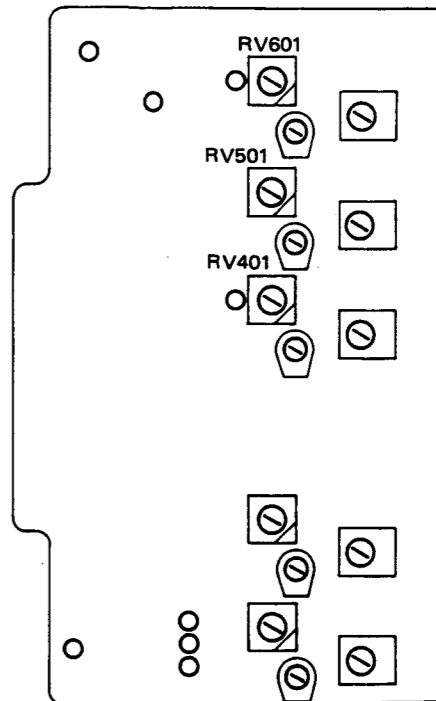

4. BA Board INPUT CIRCUIT FREQUENCY CHARACTERISTIC ADJUSTMENT

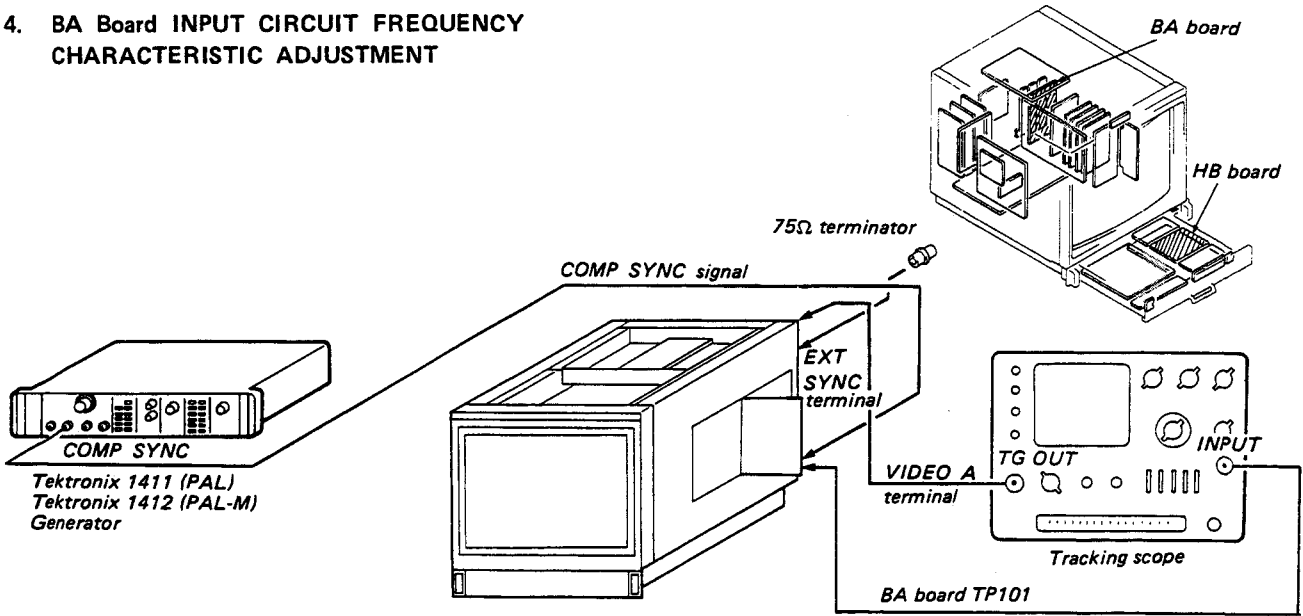


Fig. 4-1

- Complete the connection as shown in Fig. 4-1.
 - INPUT selector A (ON)
 - SYNC selector EXT (ON)
 - CONTRAST control Minimum
 - BRIGHTNESS control Minimum
- Adjust CV101 so that minimum as shown in Fig. 4-2.




Fig. 4-2

- Adjust output waveform peak to 12MHz with CV102 of the BA board as shown in Fig. 4-3.




Fig. 4-3

- Adjust CV101 of the BA board so that the output waveform becomes flat in a range of 0 to 10MHz as shown in Fig. 4-4.







Fig. 4-4

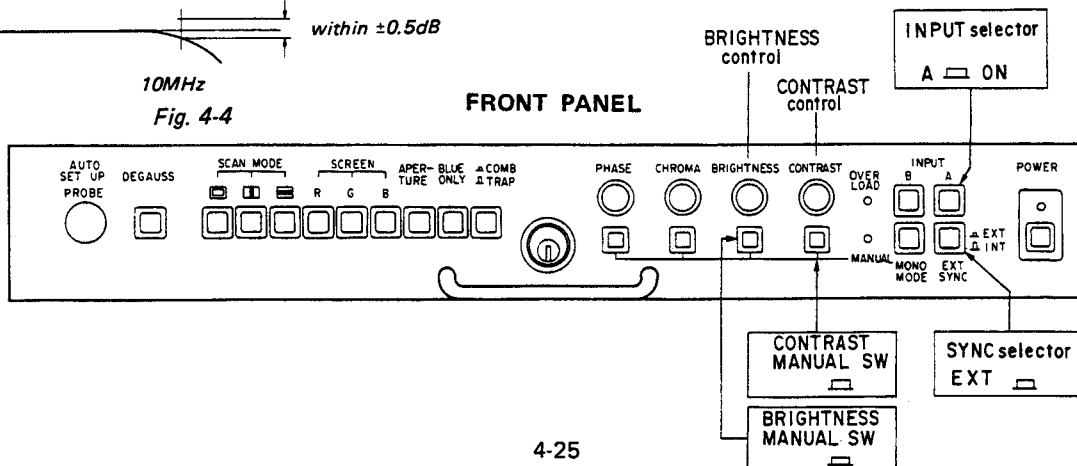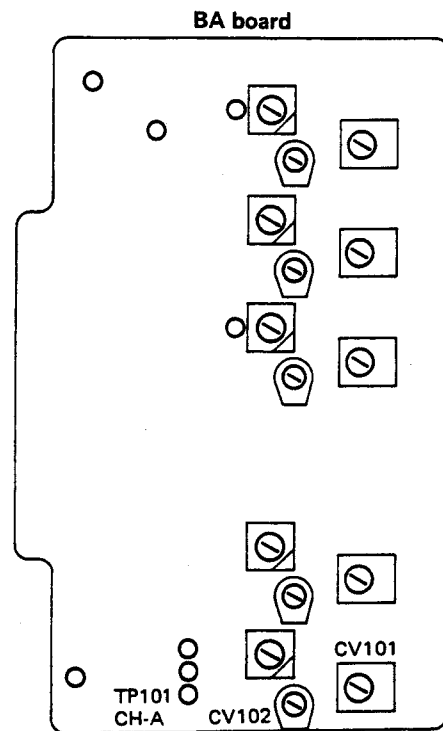


5. In the same way, perform the adjustment for B CH. under the following conditions.

INPUT	INPUT selector (FRONT PANEL (A))	INPUT SELECT buttons (SUB CONTROL PANEL)	TP (BA board)	CV (BA board)
B	B	B	TP201	CV201, 202
R/R-Y	B	RGB	TP401	CV401, 402
G/Y/TEST	B	RGB	TP501	CV501, 502
B/B-Y	B	RGB	TP601	CV601, 602


HB board

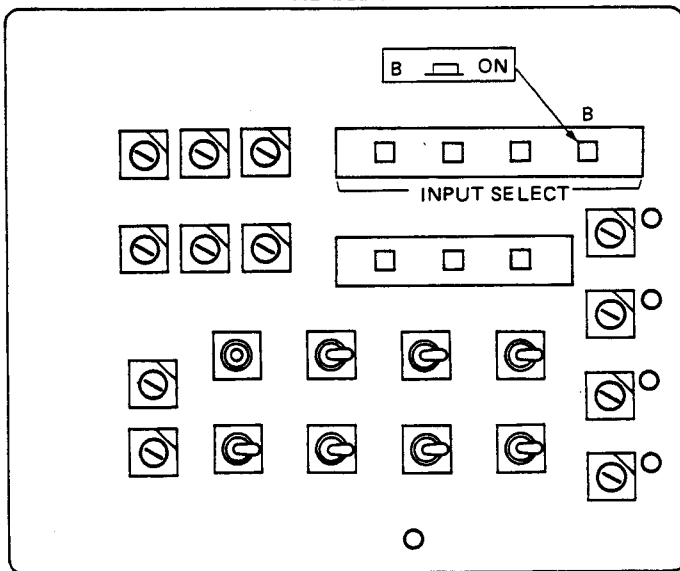

BA board

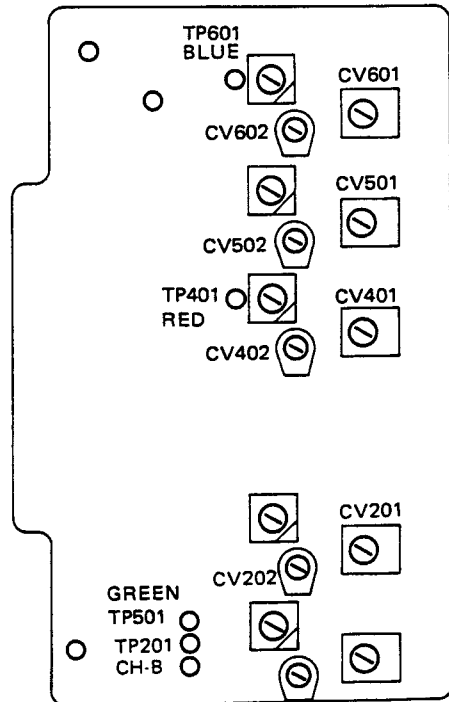

FRONT PANEL

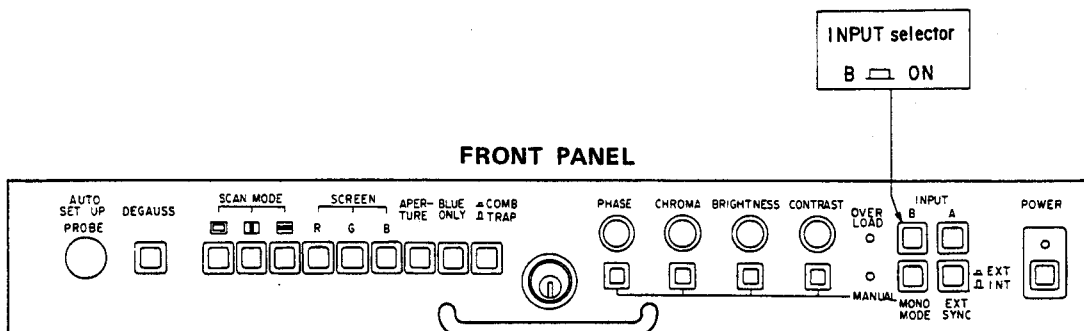

5. BG BOARD FREQUENCY CHARACTERISTIC ADJUSTMENT


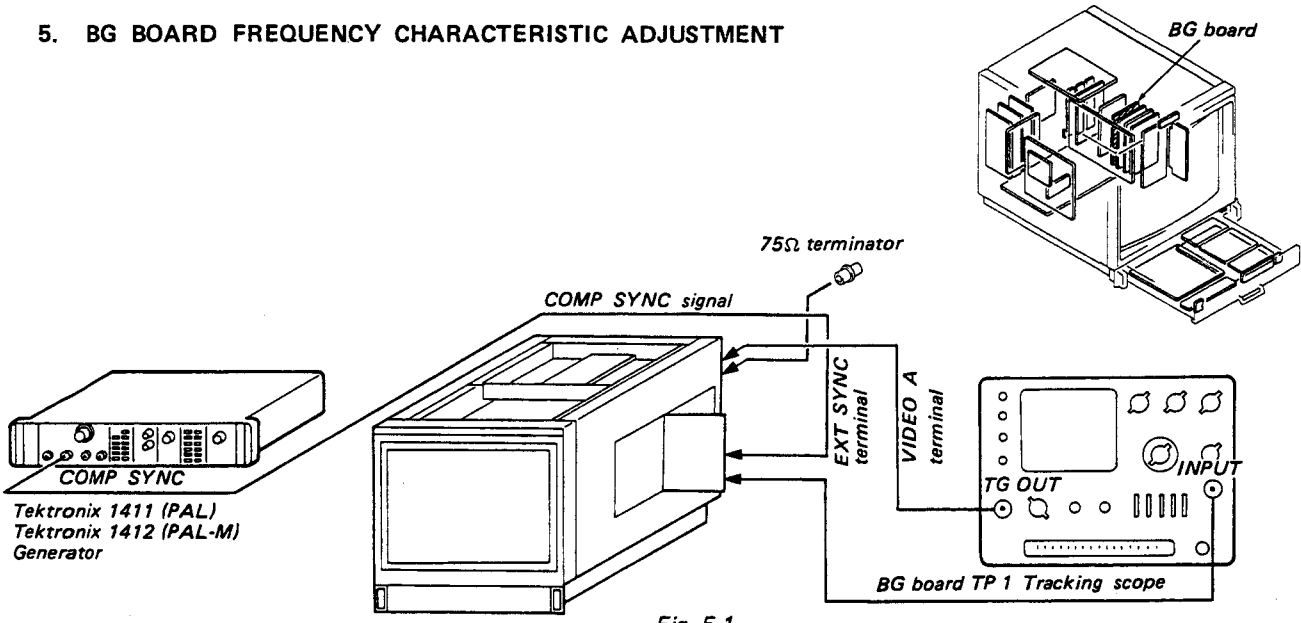


Fig. 5-1


- Complete the connections as shown in Fig. 5-1.
 - INPUT selector (FRONT PANEL) A ()
 - SYNC selector (FRONT PANEL) EXT ()
 - CONTRAST control Minimum
 - BRIGHTNESS control Minimum
 - S1 (BG Board) 4.5MHz (4.5 6.5)
- Adjust RV1, CV2 and CV3 of the BG board so that the output waveform becomes flat in a range of 0 to 10MHz as shown in Fig. 5-2. (within $0 \pm 0.5\text{dB}$)

*Waveform movement by RV1, CV2, CV3

< RV1 >



< CV2 >



< CV3 >




Fig. 5-2

- Adjust with RV2 (BG board) to the position in which the APT (Fig. 5-3.) begins to become effective.






Fig. 5-3

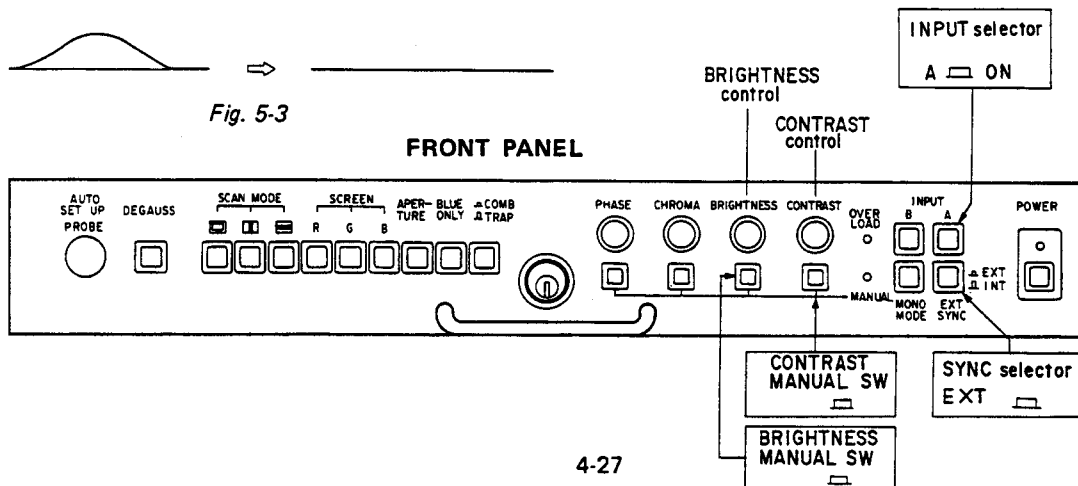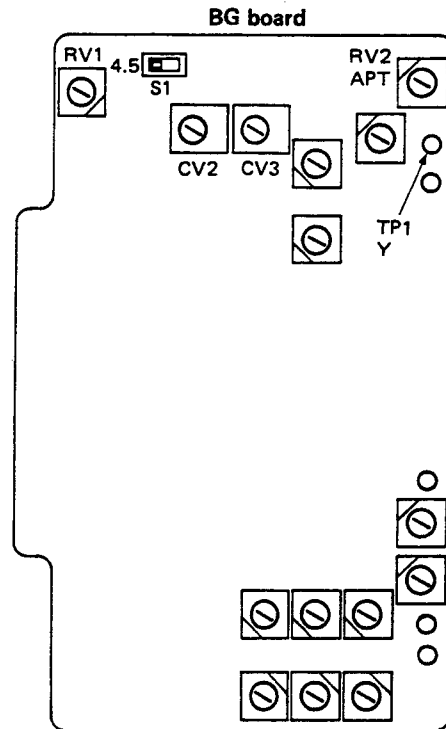

6. COMPONENT INPUT LEVEL ADJUSTMENT

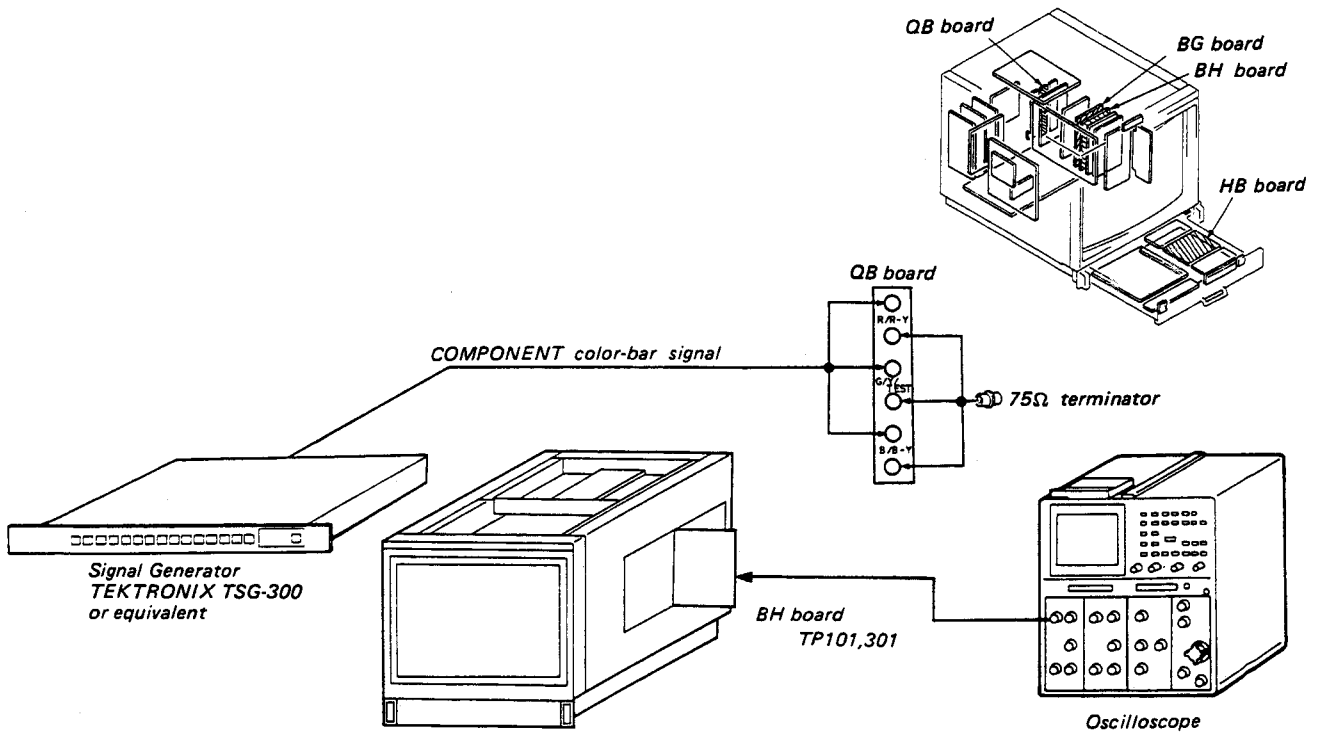


Fig. 6-1

- Complete the connections as shown in Fig. 6-1.
 - INPUT selector B (FRONT PANEL (R))
 - INPUT SELECT buttons (RIGHT SIDE DRAWER) (HB board) COMPONENT
- Connect an oscilloscope to the TP-101 of BH board.
- Adjust RV21 of BG board so that the output waveform becomes flat. (Fig. 6-2)
- Connect an oscilloscope to the TP301 of BH board.
- Adjust RV22 of BG board so that the input waveform becomes flat. (Fig. 6-3)

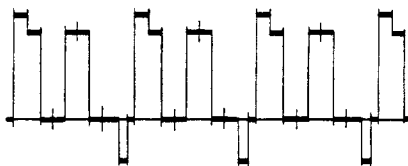


Fig. 6-2



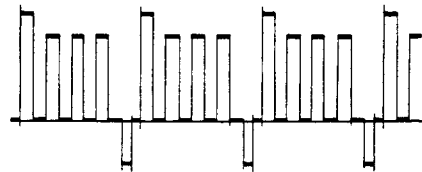



Fig. 6-3

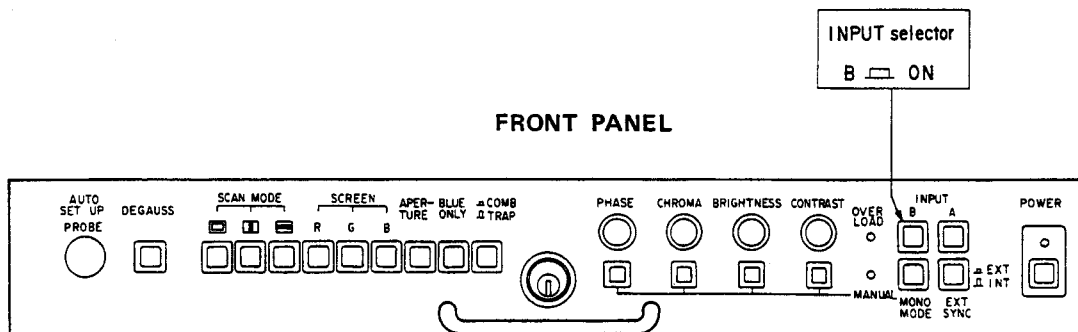


BH board

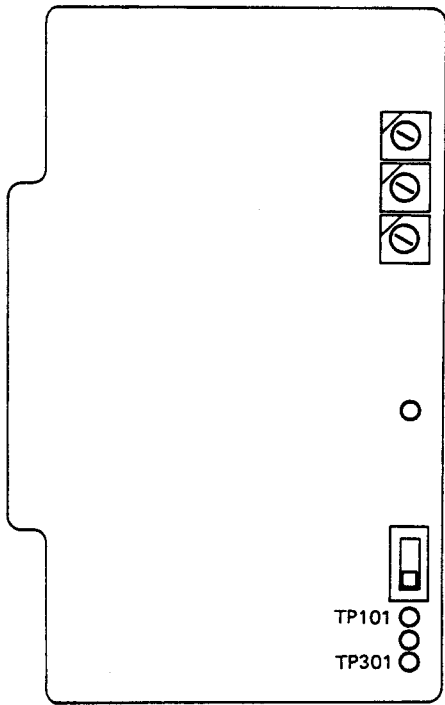


BG board

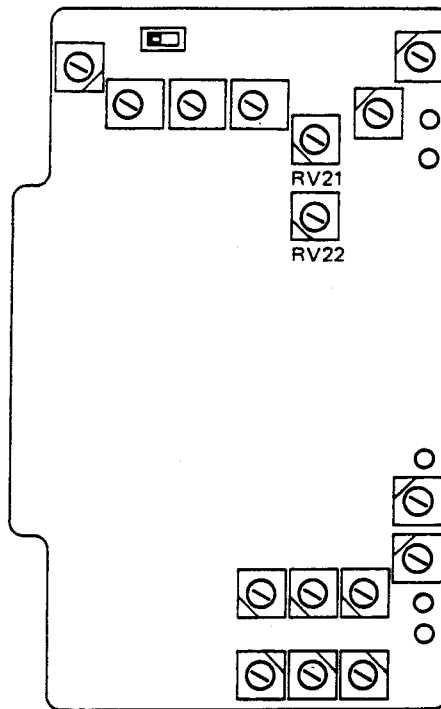


HB board

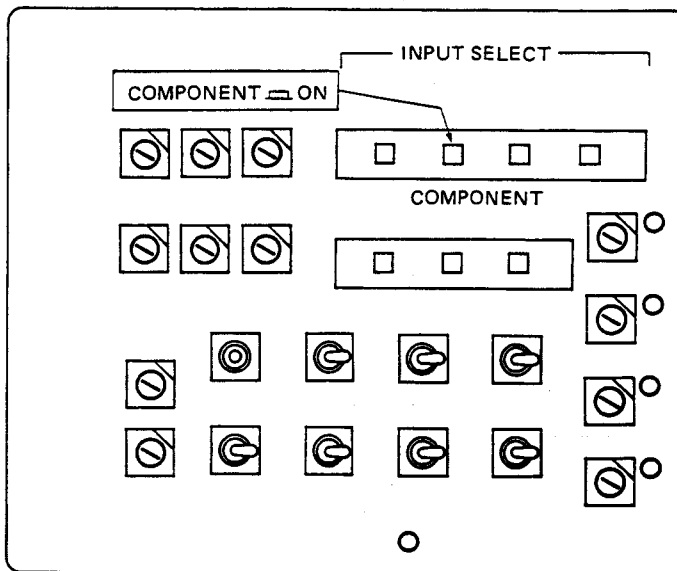

7. BJ Board BURST GATE PULSE ADJUSTMENT

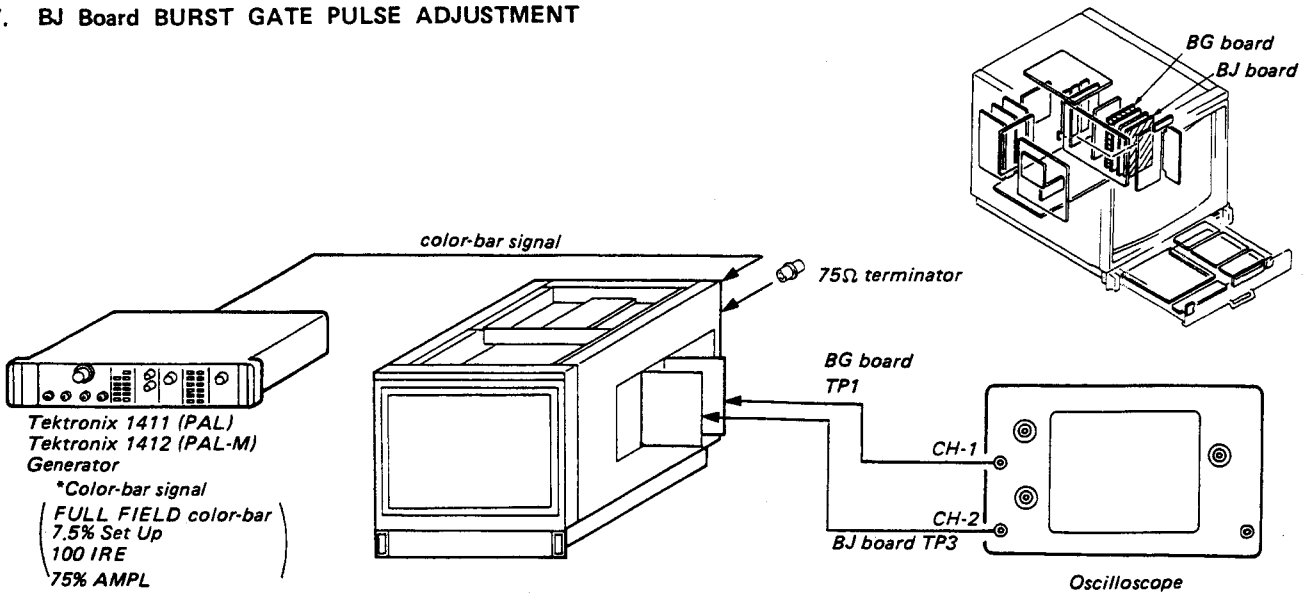

1. Input a color-bar signal to the VIDEO A terminal of the set.
2. Connect an oscilloscope (CH-1 probe) to the TP1 of BG board and connect an oscilloscope (CH-2 probe) to the TP3 of BJ board.
3. Adjust RV8 of BJ board so that the width A is $4.3\mu\text{s}$ as shown in Fig. 7-1.

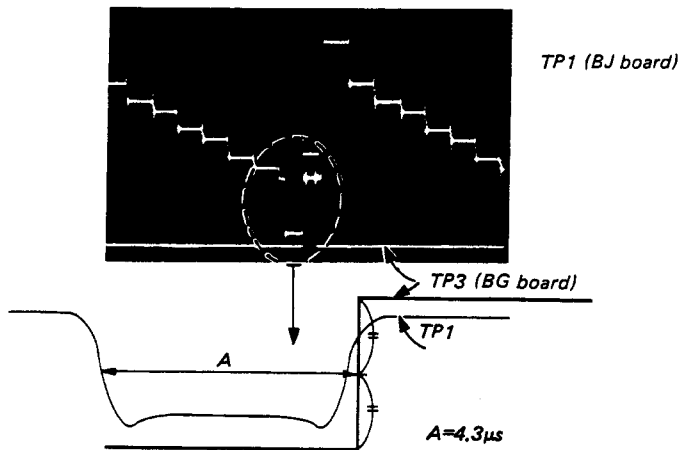

* Adjust (A), from SYNC fall to B.G.P. (BURST GATE PULSE) rise, to $4.3\mu\text{s}$.

Fig. 7-1

4. Adjust RV4 of BJ board so that the burst gate pulse width is $3.9\mu\text{s}$ as shown in Fig. 7-2.



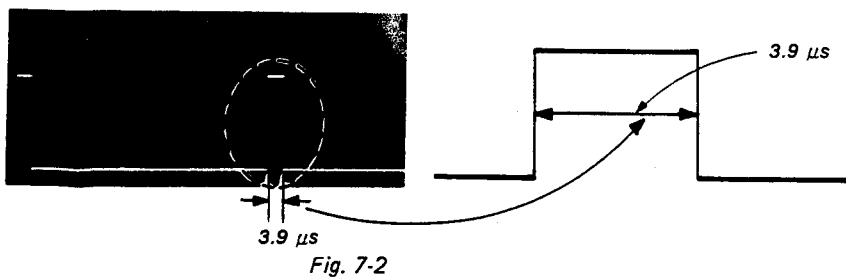


Fig. 7-2

8. BD (PAL) OR BM (PAL-M) BOARD BPF ADJUSTMENT

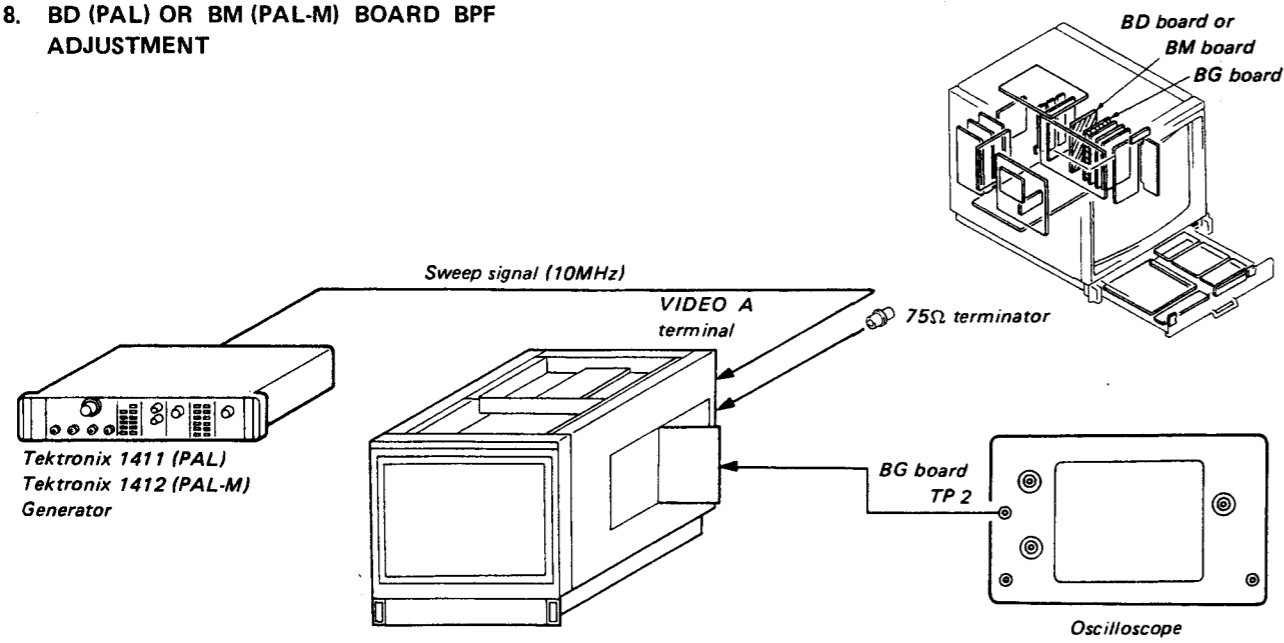

- * Set the PAL switch of the BVM-2010P or 2010PM to the S position.
1. Input SWEEP signal (10MHz) to the VIDEO A terminal of the set.
 2. Connect an oscilloscope to the TP2 on the BG board.
 3. Make the V/div of oscilloscope into VARIABLE, and match the upper section of waveform to 7 div as shown in Fig. 8-1.

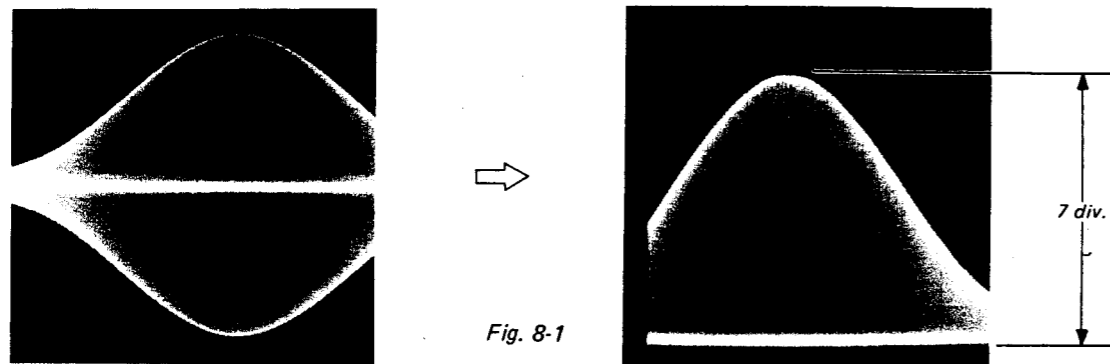

4. Adjust L3 on the BD board so that A is equal to B as shown in Fig. 8-2.


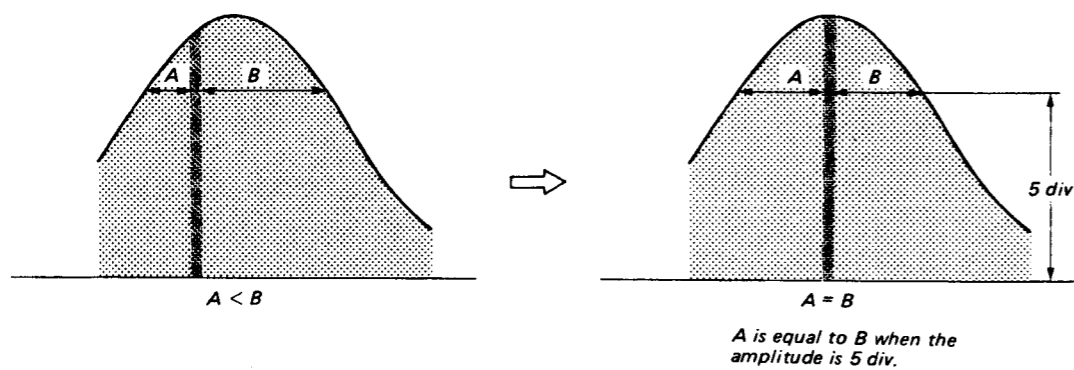


Fig. 8-2

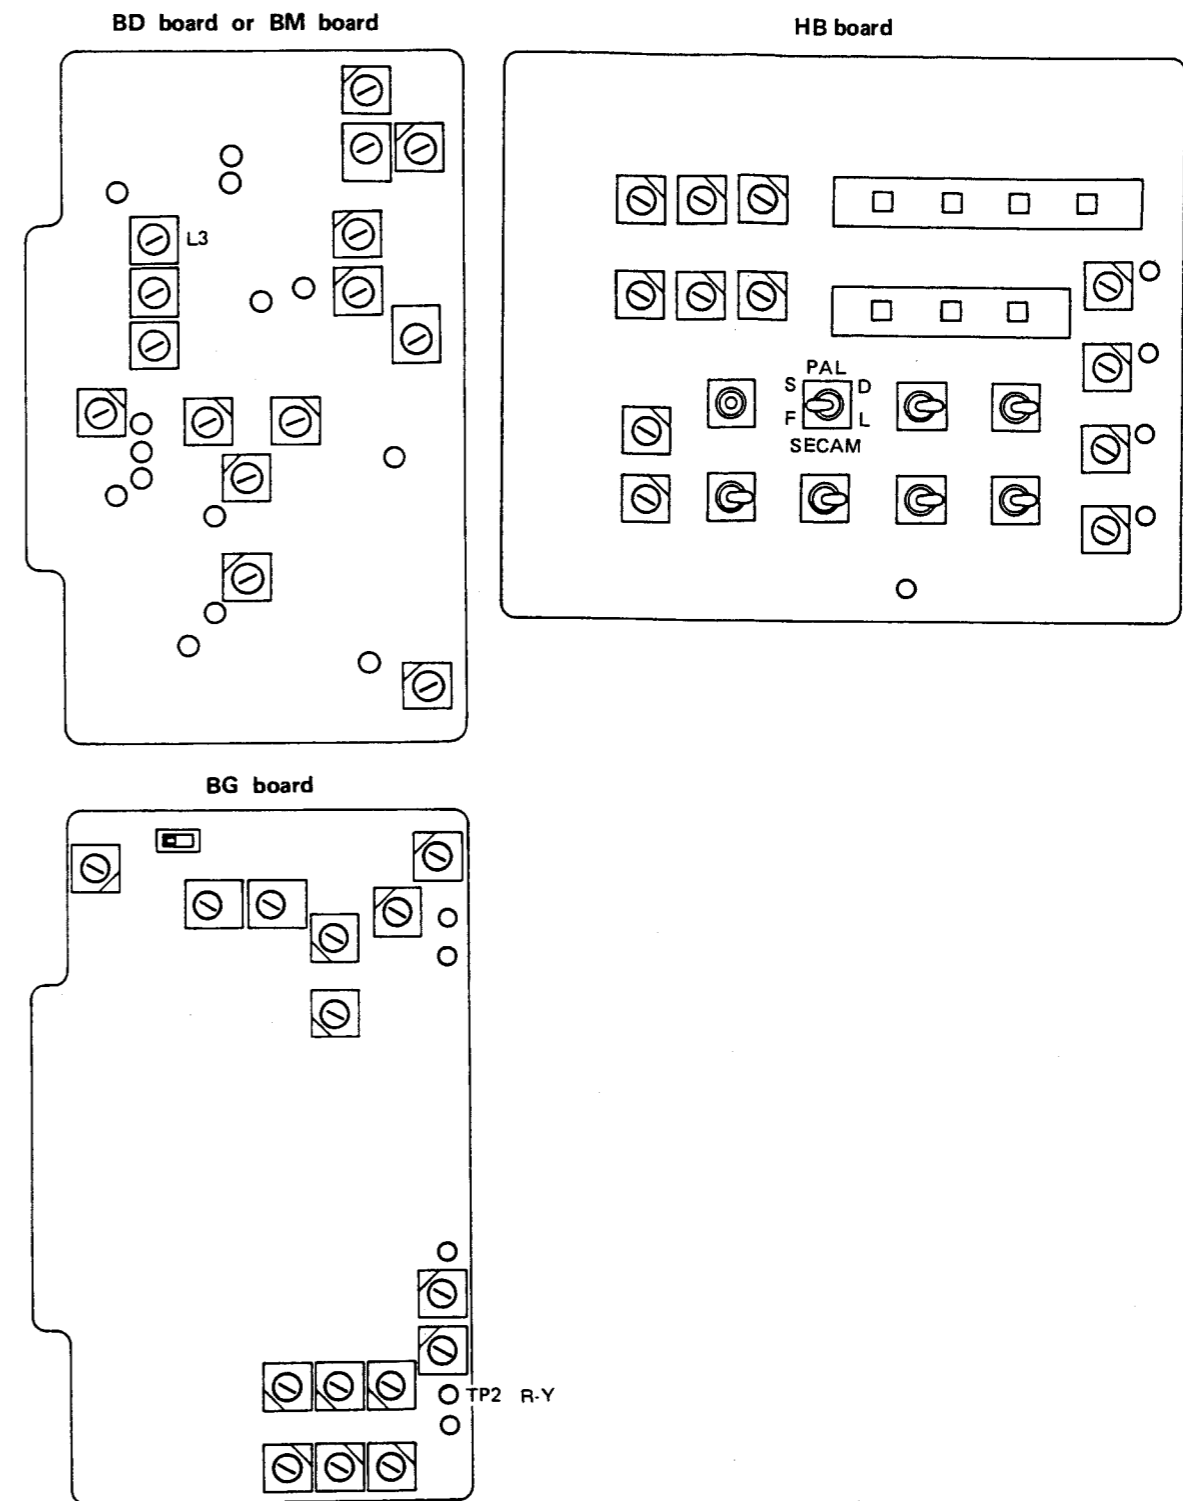

9. BD (PAL) OR BM (PAL-M) BOARD PHASE SHIFT ADJUSTMENT

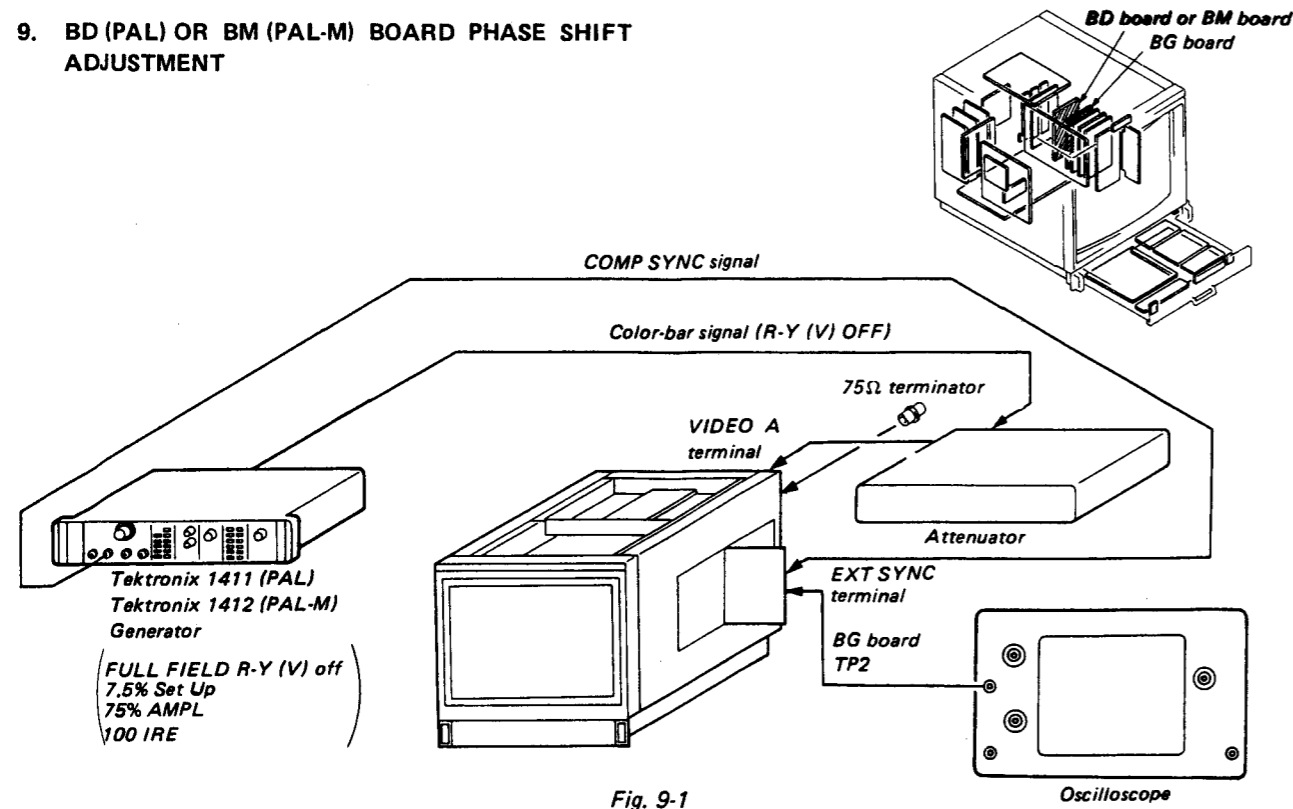


Fig. 9-1

- * Set the PAL switch of the BVM-2010P or 2010PM to the S position and RV2, CV1, CV2 on the BD or BM board to mechanical midposition.
- 1. Complete the connection as shown in Fig. 9-1.
 - INPUT selector (FRONT PANEL (R)) ... A ()
 - SYNC selector (FRONT PANEL (R)) ... EXT ()
- 2. Connect an oscilloscope to the TP2 on the BG board.
- 3. Make the waveform flat with the PHASE control of front panel (R) as shown in Fig. 9-2.

- 4. Attenuate the signal by 10dB by using attenuator.
- 5. Adjust RV2 on the BD or BM board so that the output waveform becomes flat as shown in Fig. 9-2.
- 6. Restore the attenuator to 0dB.
- 7. Repeat the steps 3 to 5.





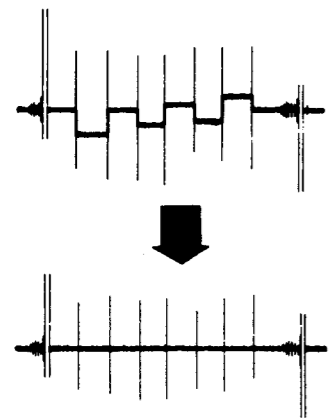


Fig. 9-2

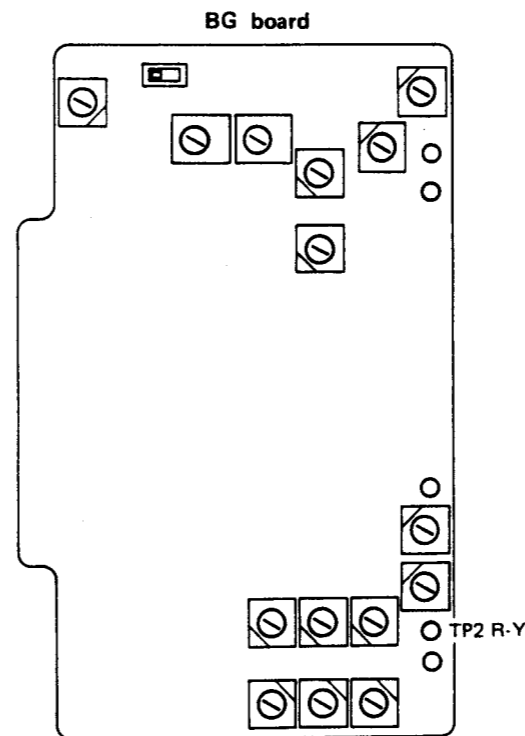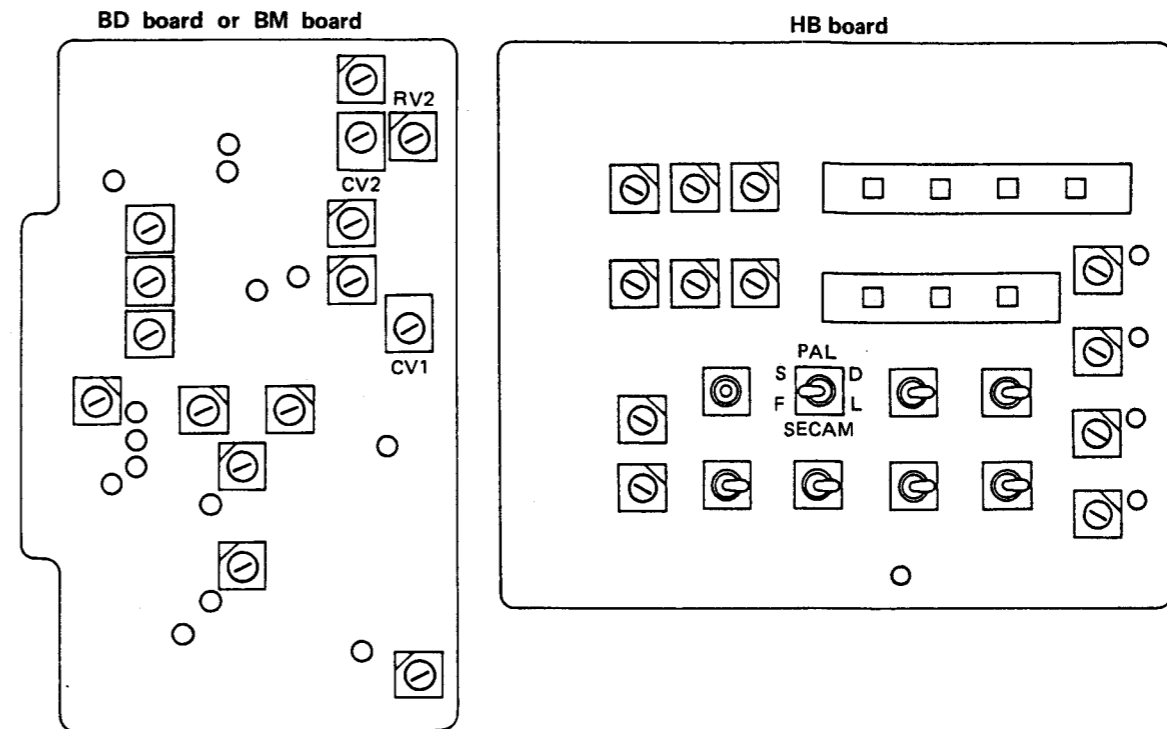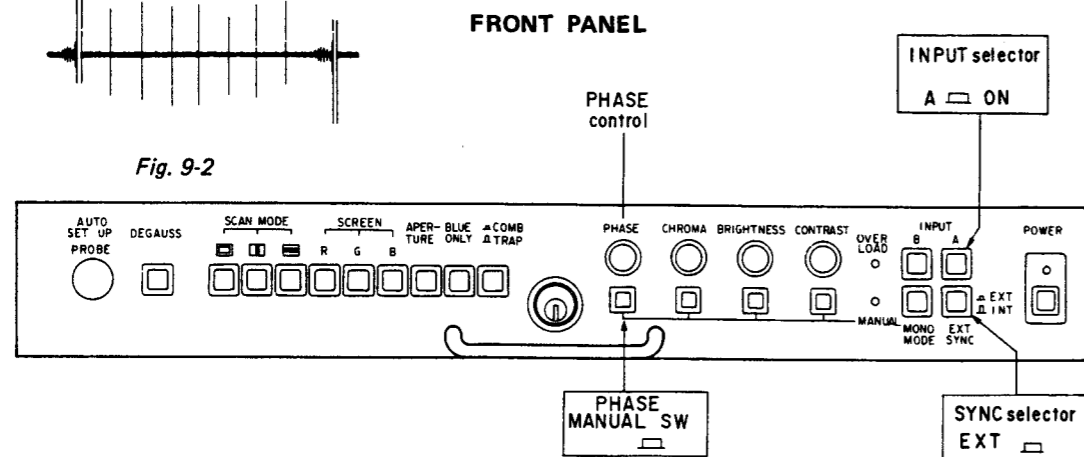

10. BD BOARD 4.43MHz (PAL) or BM BOARD
3.58MHz (PAL-M) fo ADJUSTMENT

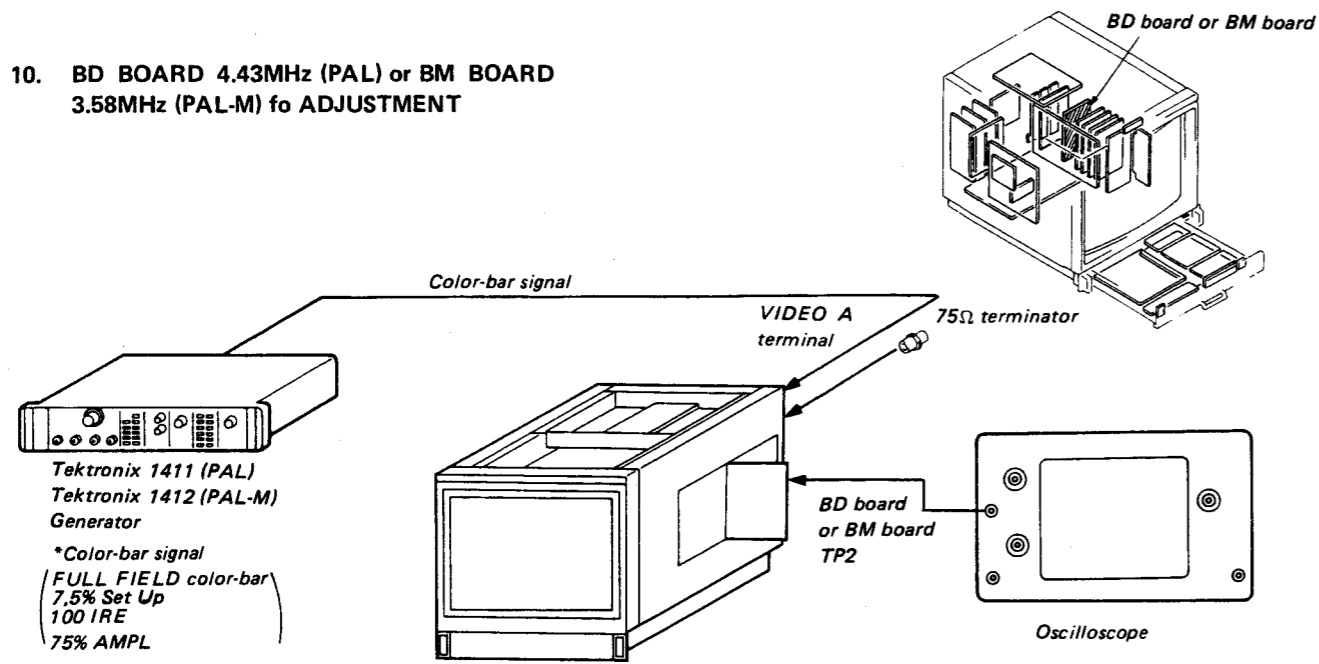

1. Input color-bar signal to the VIDEO A terminal of the set.
2. Connect an oscilloscope to the TP2 of BD or BM board.
3. Short-circuit between TP11, 12 of BD or BM board with a jumper wire.
4. Adjust CV2 of BD or BM board so that the output waveform is shifted slowly as shown in Fig. 10-1.
5. Turn off the power of this monitor, and disconnect TP11, 12 of BD or BM board.


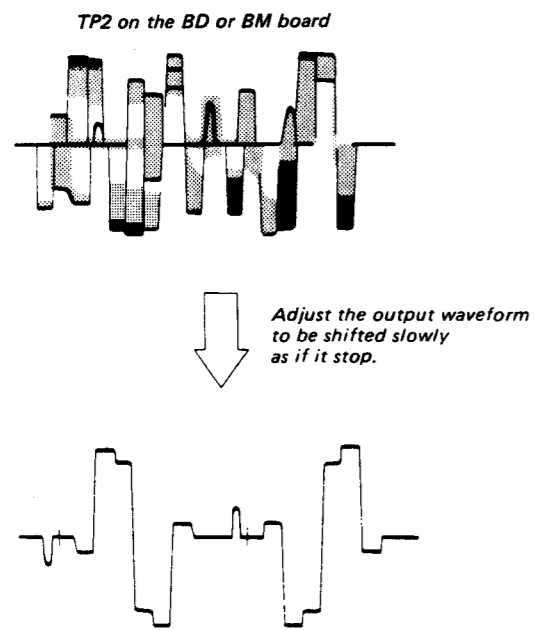


Fig. 10-1

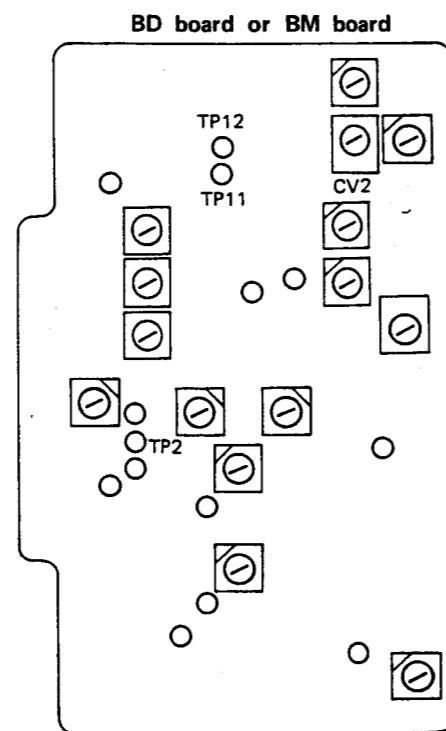

11. BD BOARD (PAL) or BM BOARD (PAL-M)
COLOR DIFFERENCE PHASE ADJUSTMENT

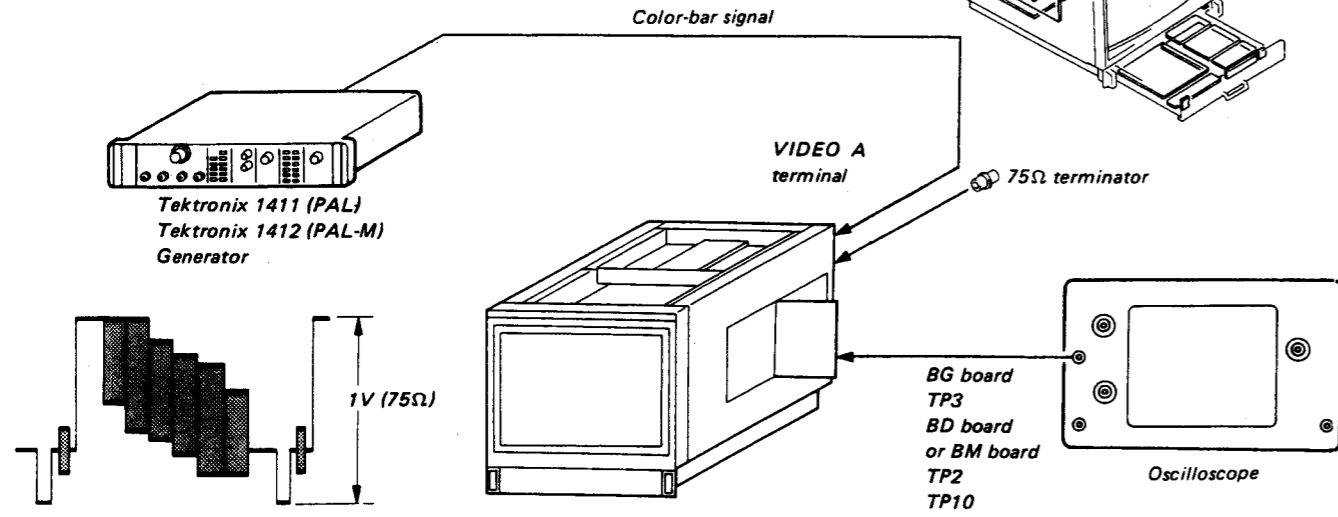


Fig. 11-1

1. Complete the connections as shown in Fig. 11-1.
2. Turn on the power of this monitor. Set the INPUT switch to the A position, the SYNC switch to the INT position, and the PAL switch to the S position.

B-Y System Adjustment

3. Connect the oscilloscope probe to TP3 on the BG board, and turn off the U (B-Y) signal of the signal generator.
4. Set the oscilloscope sensitivity to 20mV/DIV, and adjust RV8 on the BD or BM board so that the output waveform is flat. (See Fig. 11-2.)


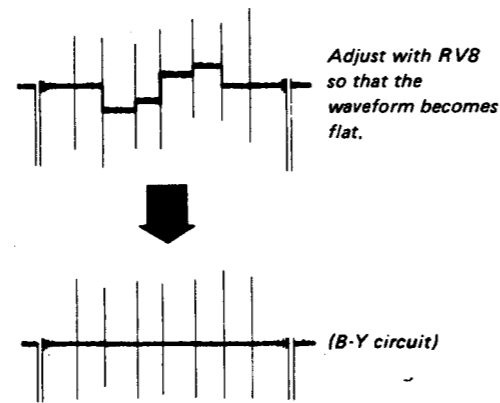


Fig. 11-2

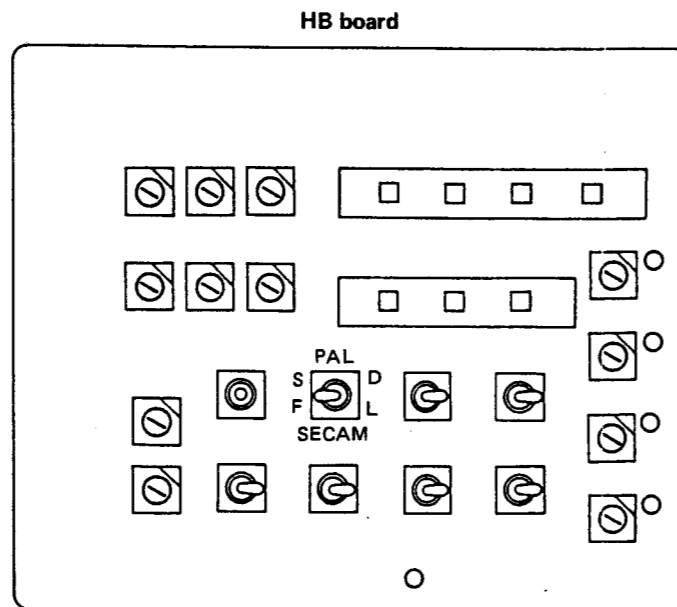

Quad Adjustment

5. Connect the oscilloscope probe to TP2 on the BD or BM board. Turn on the U signal of the signal generator, and turn off the V (R-Y) signal. Then adjust CV1 on the BD or BM board so that the output waveform is flat. (See Fig. 11-3.)
6. Repeat the steps 3 to 6.



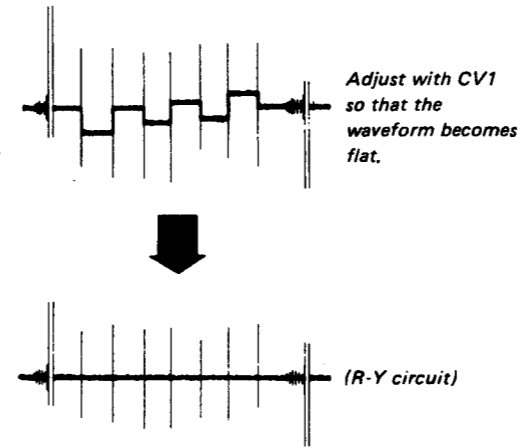



Fig. 11-3

PAL-D Phase Adjustment


7. Set the PAL switch to the D position and turn on the V signal of the signal generator, and turn off U signal.
8. Connect the oscilloscope probe to TP10 on the BD or BM board.
9. Adjust RV7 on the BD board so that the output waveform is flat. (See Fig. 11-2.)
10. Finally, perform the adjustments of 3 and 4 by directly mounting the BD or BM board to the set, without using the extension board.

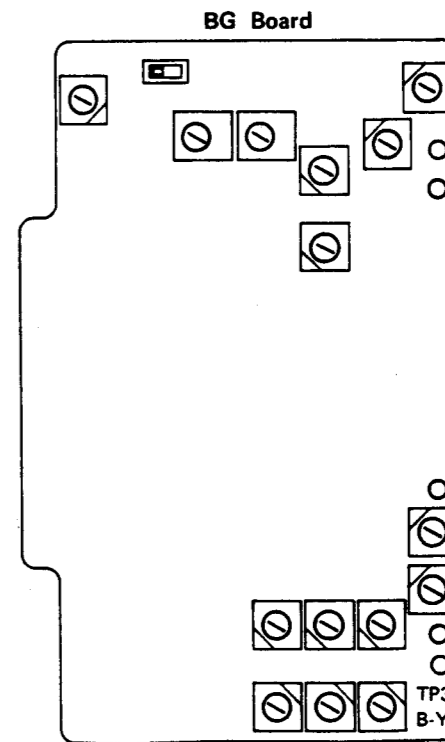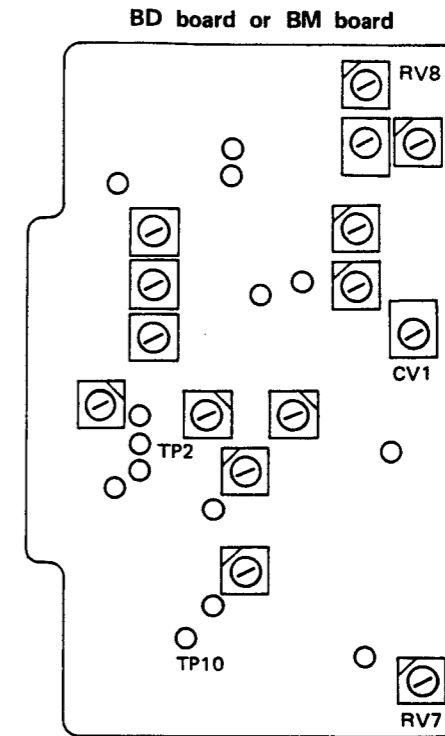

12. BD (PAL) OR BM (PAL-M) BOARD COLOR DIFFERENCE LEVEL ADJUSTMENT

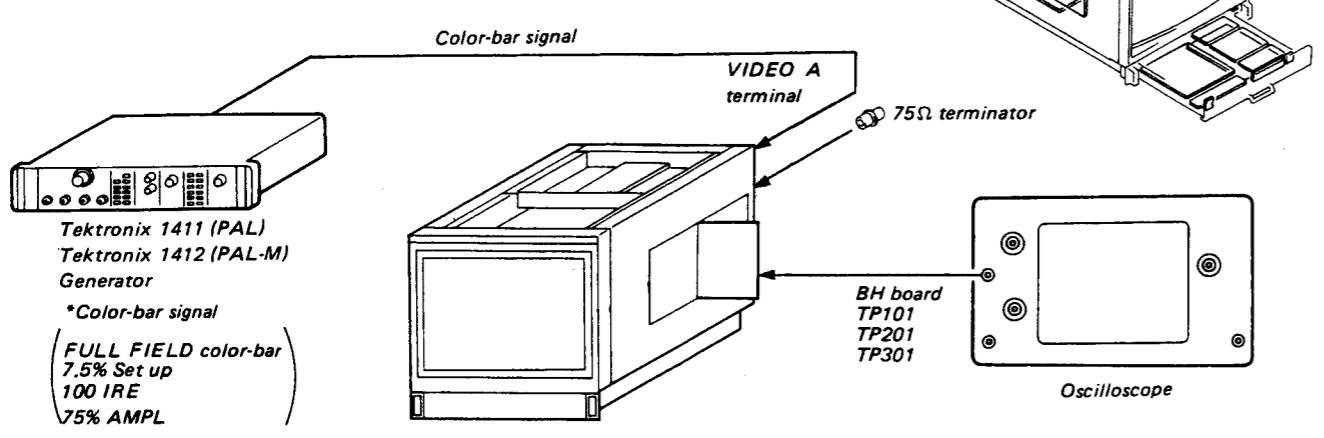


- * Set the PAL switch of the BVM-2010P or 2010PM to the S position.
- 1. Input color-bar signal to the VIDEO A terminal of the set.
- 2. Connect an oscilloscope to the TP101 of BH board.
- 3. Adjust RV3 of BD or BM board so that the levels with * is flat as shown in Fig. 12-1.

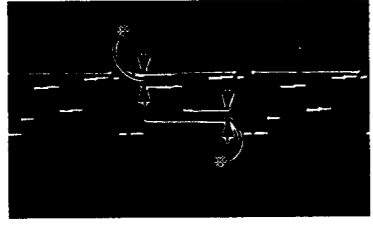

TP101 R OUT
Fig. 12-1

* Adjust the levels with * to be flat respectively using RV3 of BD or BM board.

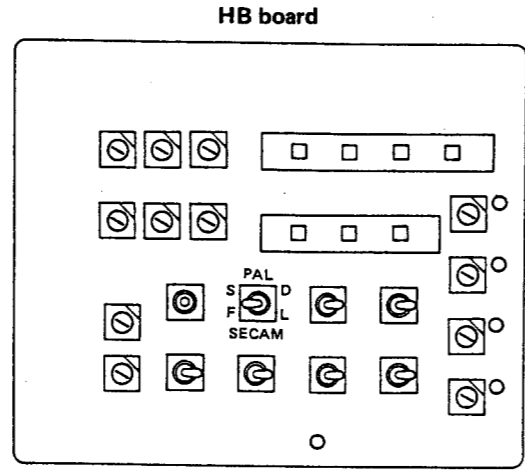

- 4. Connect an oscilloscope to the TP301 of BH board.
- 5. Adjust RV4 of BD or BM board so that the output waveform as shown in Fig. 12-2.


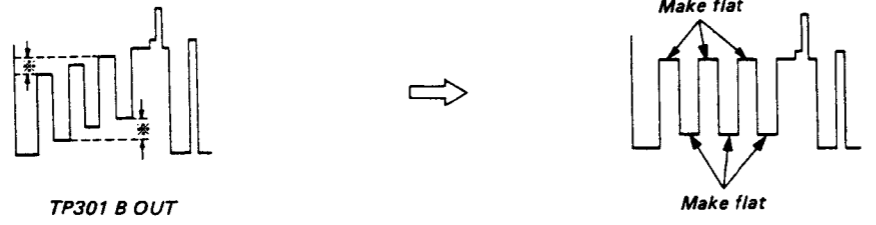


Fig. 12-2

- 6. Connect an oscilloscope to the TP201 of BH board.
- 7. Adjust RV4 and RV5 of BG board so that the INPUT waveform becomes flat as shown in Fig. 12-3.

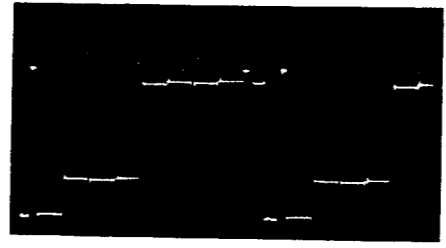

TP201 G OUT




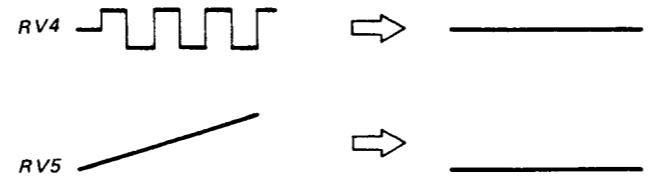


Fig. 12-3

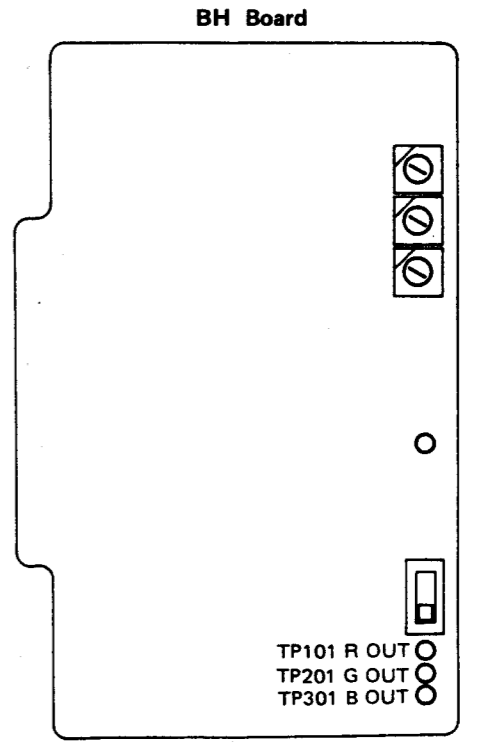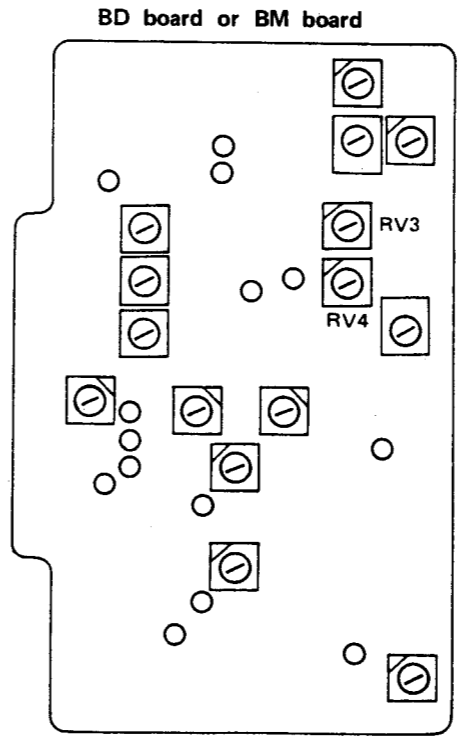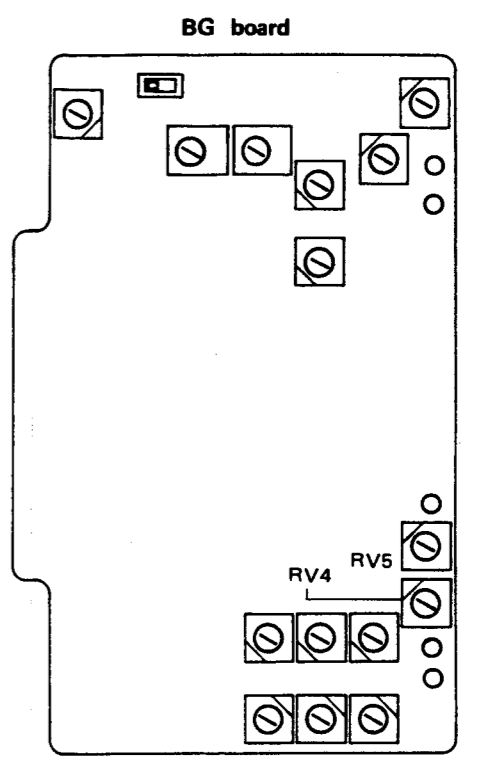

13. BD BOARD (PAL) OR BM BOARD (PAL-M)
PAL-D GAIN AND CCD BIAS ADJUSTMENT



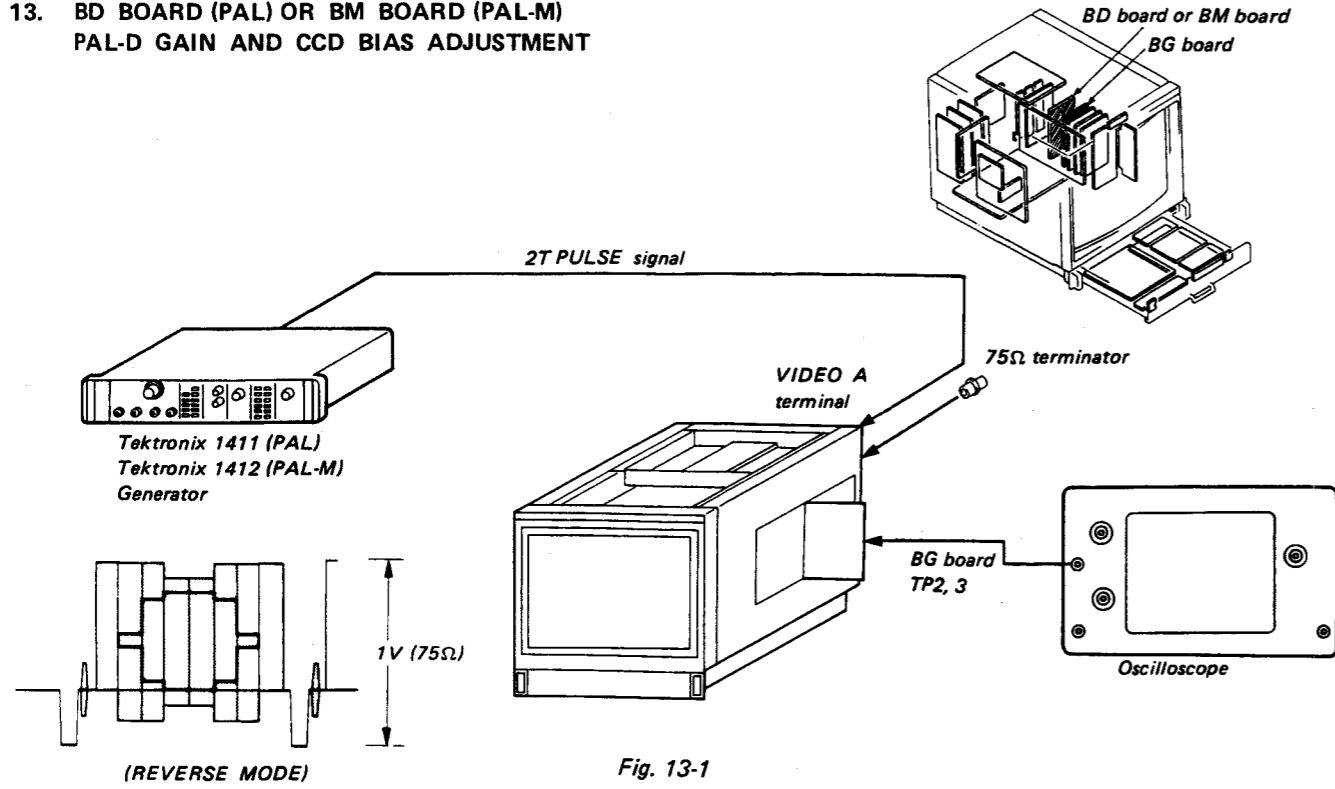


Fig. 13-1

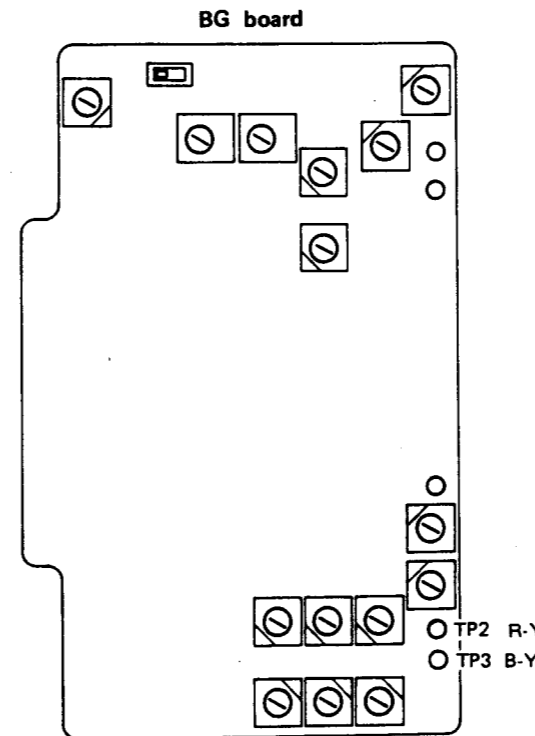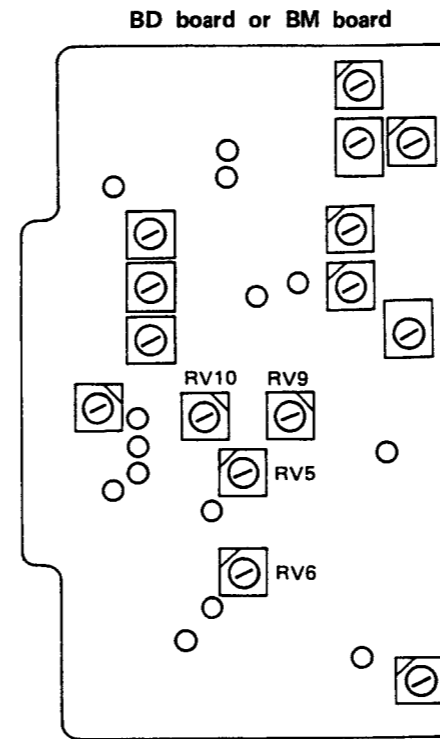

- * Set the PAL switch of BVM-2010P or 2010PM to the D position.
1. Complete the connections as shown in Fig. 13-1. Turn on the power of this monitor. Set the INPUT switch to the A position, and the SYNC switch to the INT position.
 2. Connect the oscilloscope probe to TP2 on the BG board.
 3. Turn RV5 and RV6 on the BD or BM board fully clockwise.
 4. By observing the waveform shown in Fig. 13-2, adjust RV9 on the BD or BM board so that it becomes A = B.
 5. Adjust RV5 on the BD or BM board so that the waveform shown in Fig. 13-2 becomes flat.
 6. Connect the probe of the oscilloscope to TP3 on the BG board and observe the section shown in Fig. 13-3.
 7. Adjust RV10 on the BD or BM board so that the waveform of the oscilloscope becomes A = B.
 8. Adjust RV6 on the BD or BM board so that the waveform shown in Fig. 13-3 becomes flat.

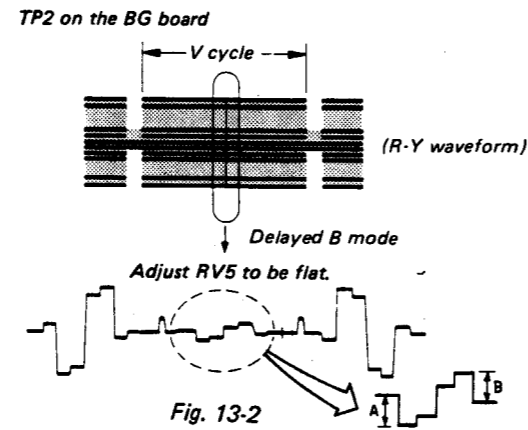


Fig. 13-2


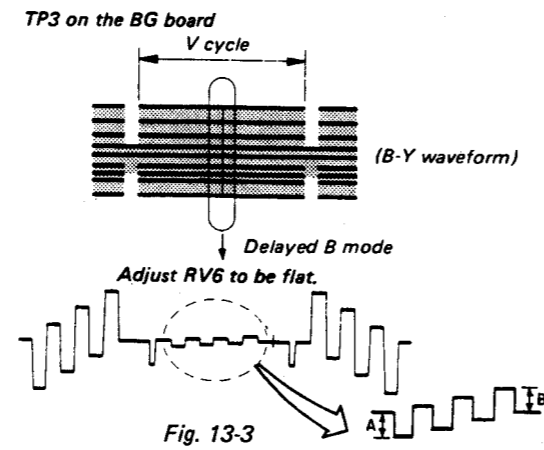


Fig. 13-3

**14. BD BOARD (PAL) OR BM BOARD (PAL-M)
Y TRAP ADJUSTMENT**

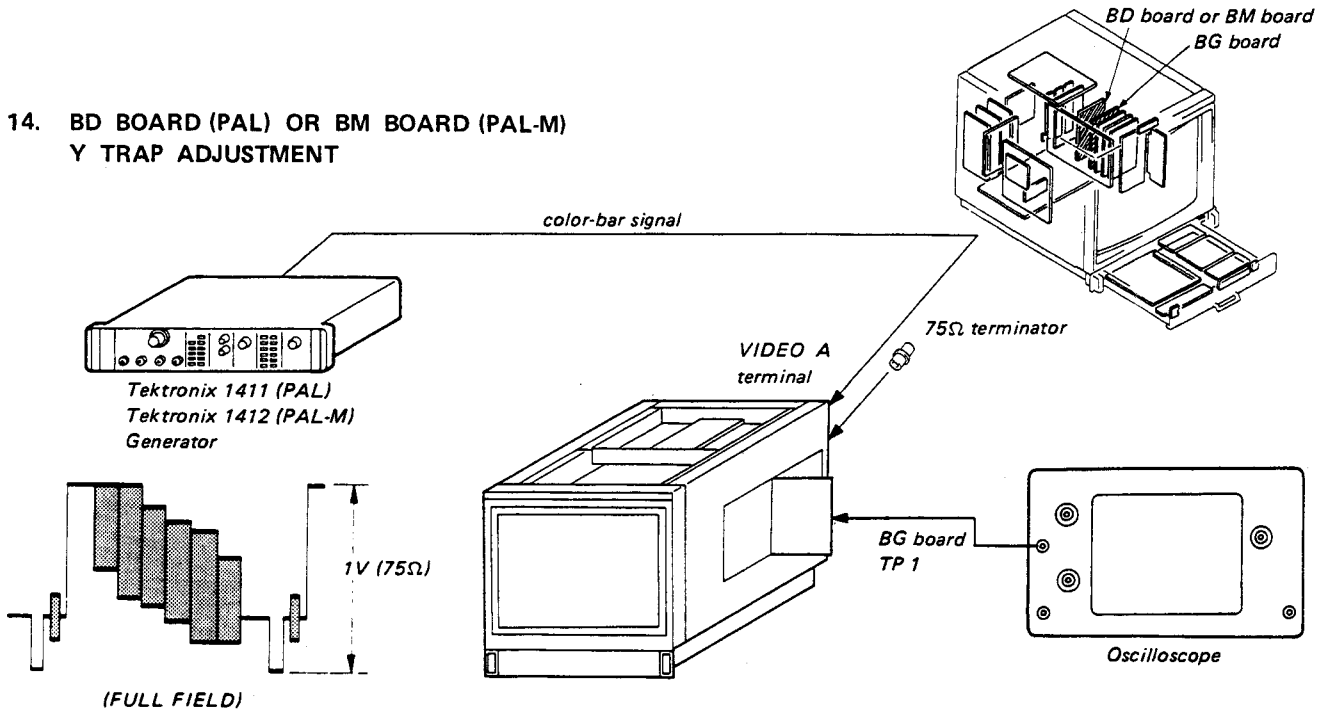

1. Input color-bar signal to VIDEO A terminal of the set.
2. Connect an oscilloscope to the TP1 of BG board.
3. Adjust L1 of BD or BM board so that 4.43 MHz (PAL) or 3.58 MHz (PAL-M) subcarrier is minimum as shown in Fig. 14-1.



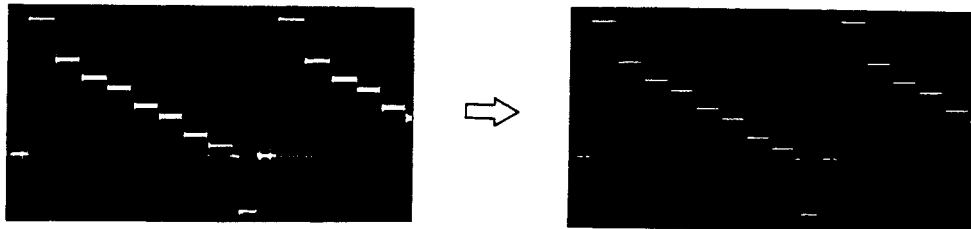


Fig. 14-1

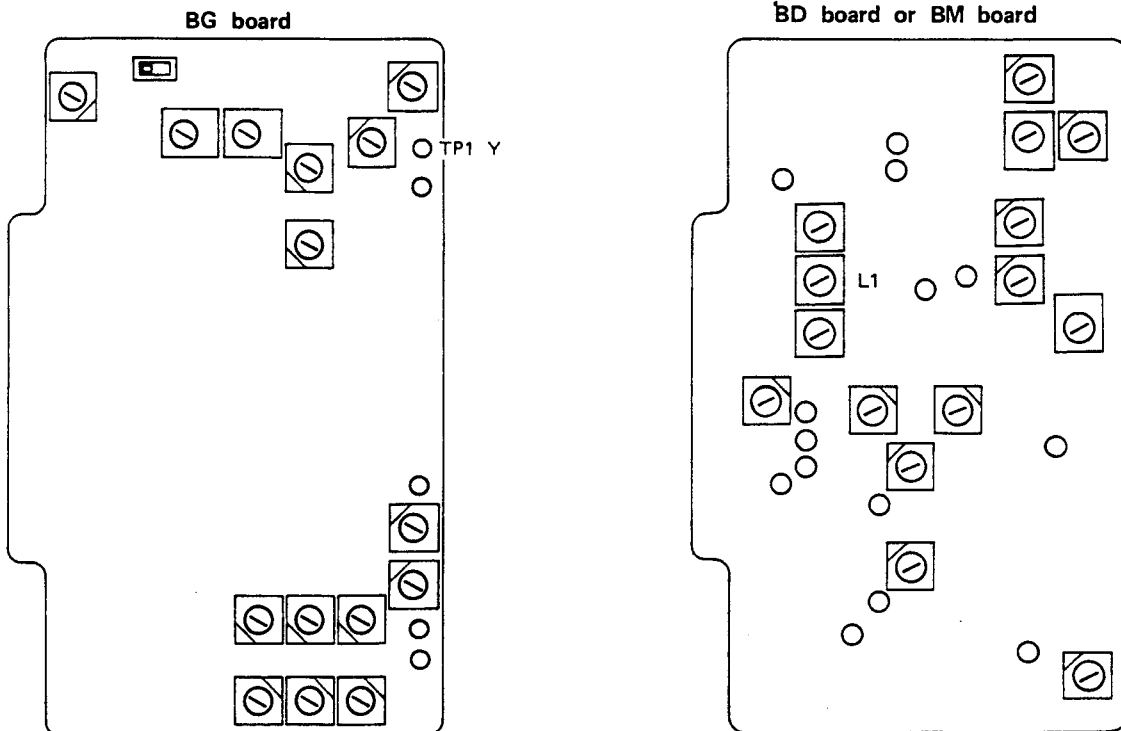

15. BD BOARD (PAL) OR BM BOARD (PAL-M) Y-C DELAY TIME ADJUSTMENT

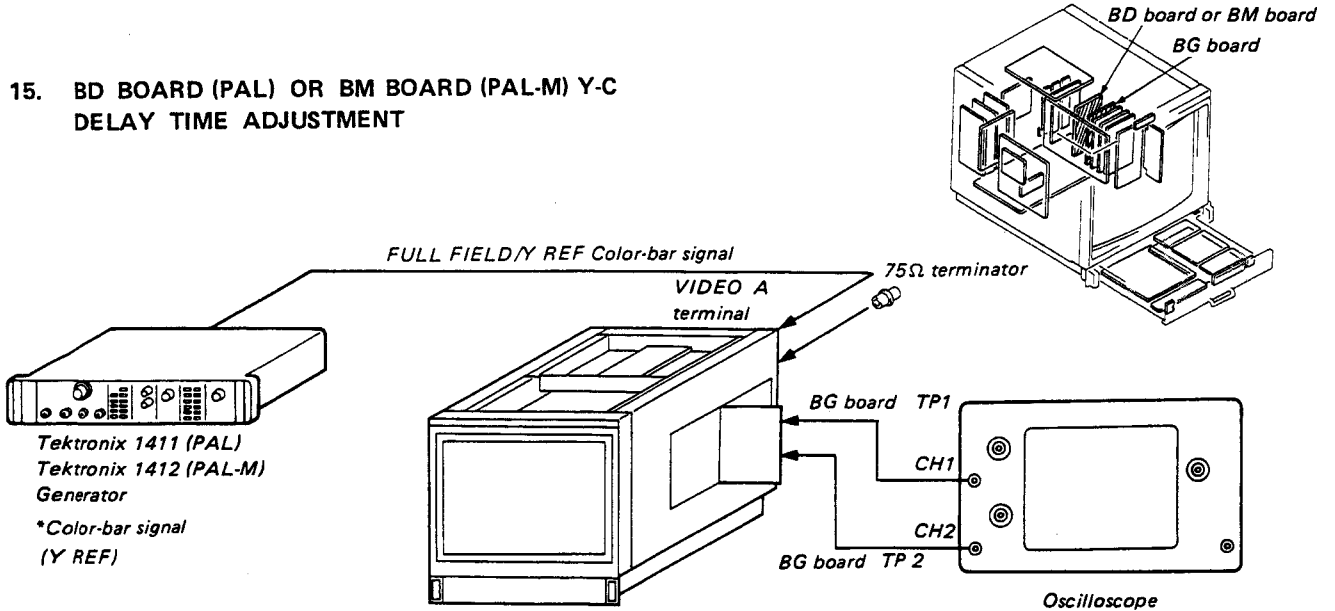

- * Set the PAL switch of the BVM-2010P or 2010PM to the S position.
- 1. Input color-bar signal (FULL FIELD/Y REF) to the VIDEO A terminal of the set.
- 2. Connect an oscilloscope (CH-1 probe) to the TP1 of BG board and connect an oscilloscope (CH-2 probe) to the TP2 of BG board (VERT mode of the oscilloscope is CHOP).
- 3. Adjust RV1 of BD or BM board so that the output waveform as shown in Fig. 15-1.




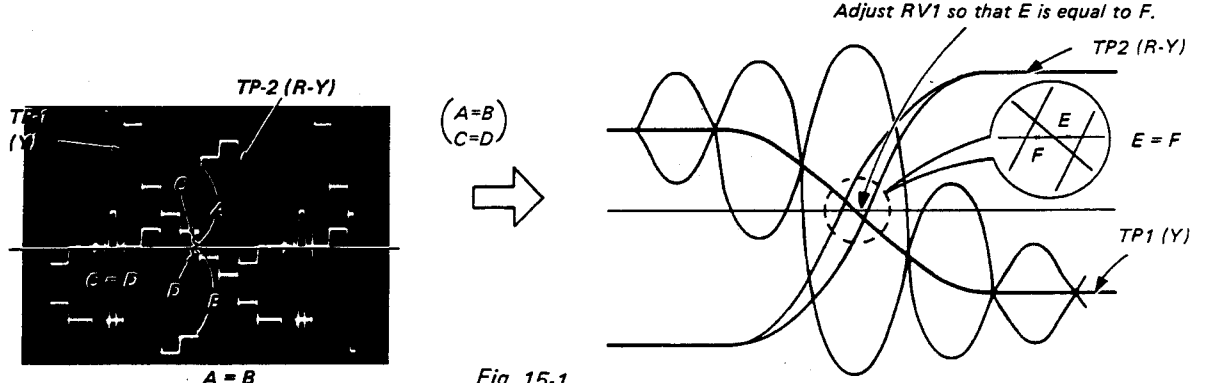


Fig. 15-1

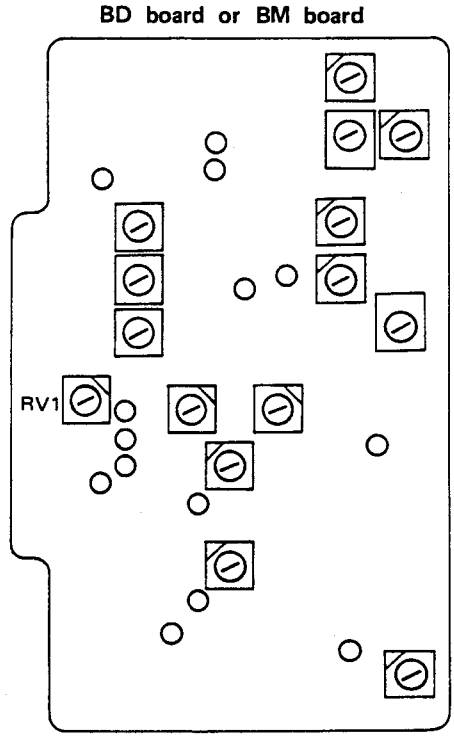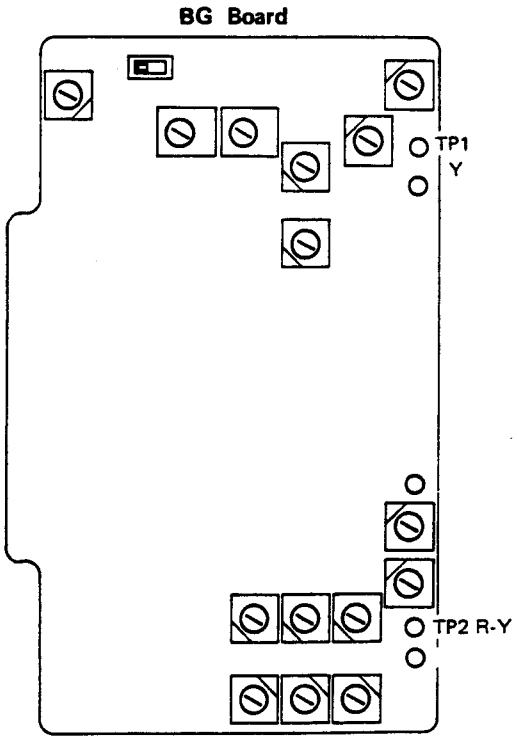

16. BD BOARD (PAL) OR BM BOARD (PAL-M) 2T PULSE CORRECTION ADJUSTMENT

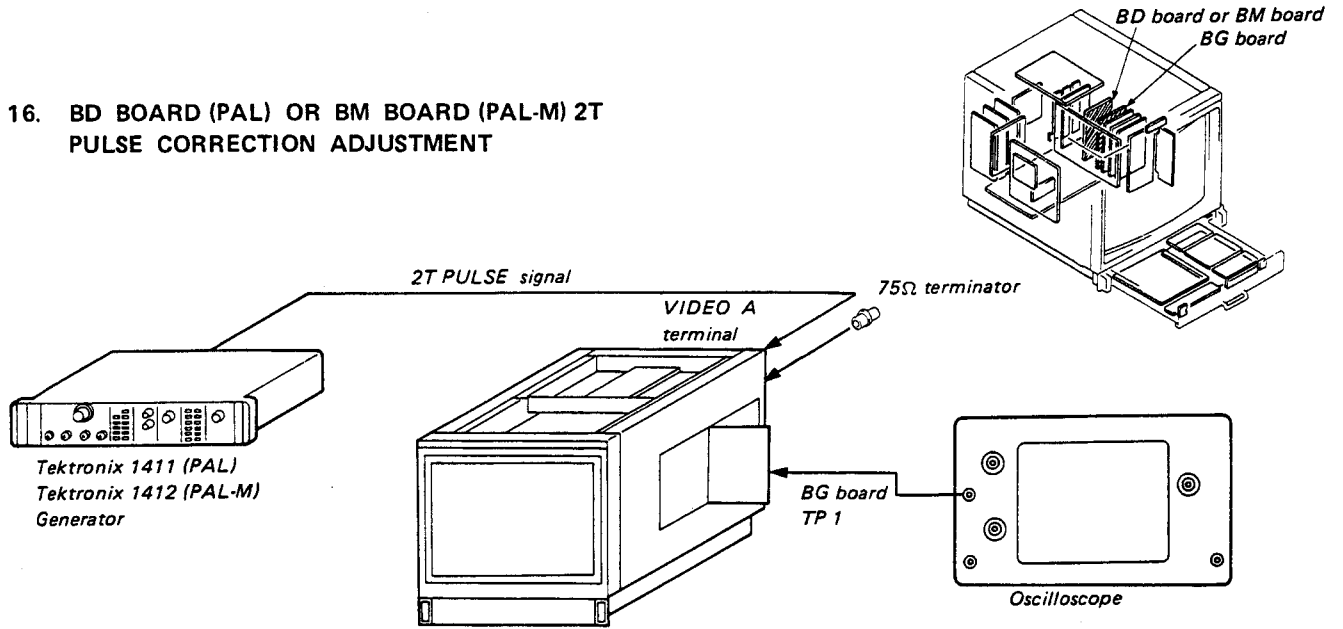

1. Input 2T pulse signal to VIDEO A terminal of the set.
2. Connect an oscilloscope to the TP1 of BG board.
3. Adjust L2 of BD or BM board so that A is equal to B as shown in Fig. 16-1.
4. Change the input signal from 2T pulse to T pulse, and make sure the waveform balance is not lost extremely as shown in Fig. 16-1.




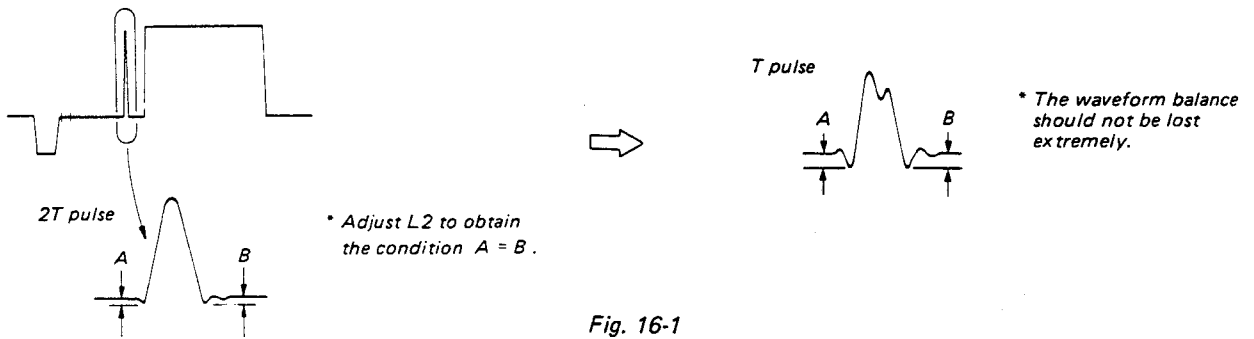


Fig. 16-1

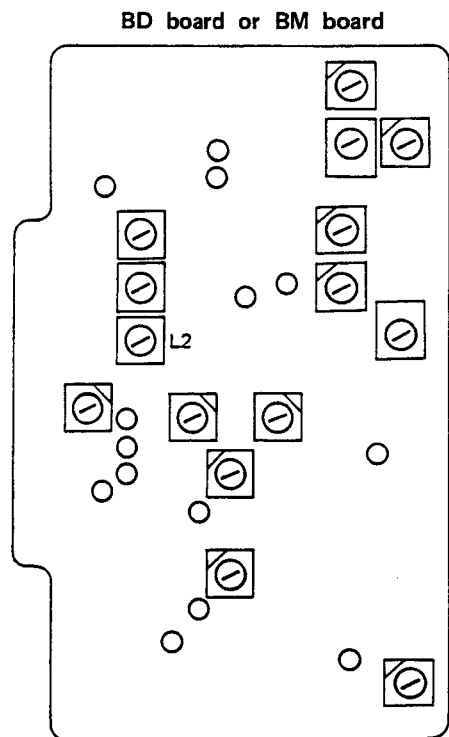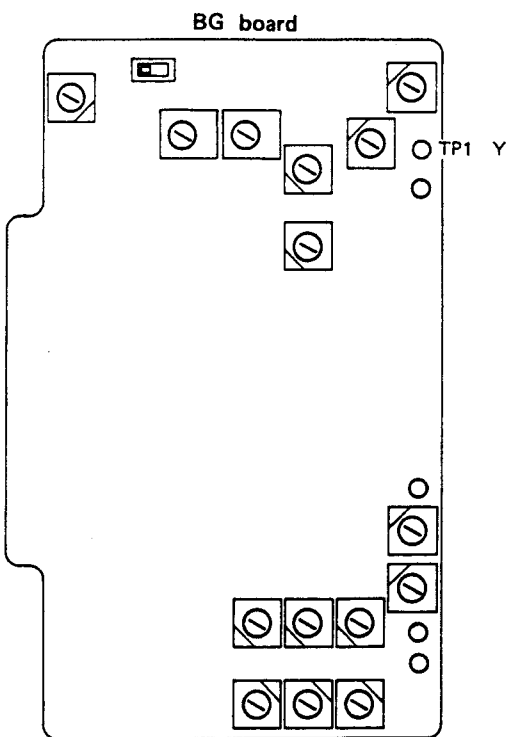

17. BJ Board INTERLACE ADJUSTMENT

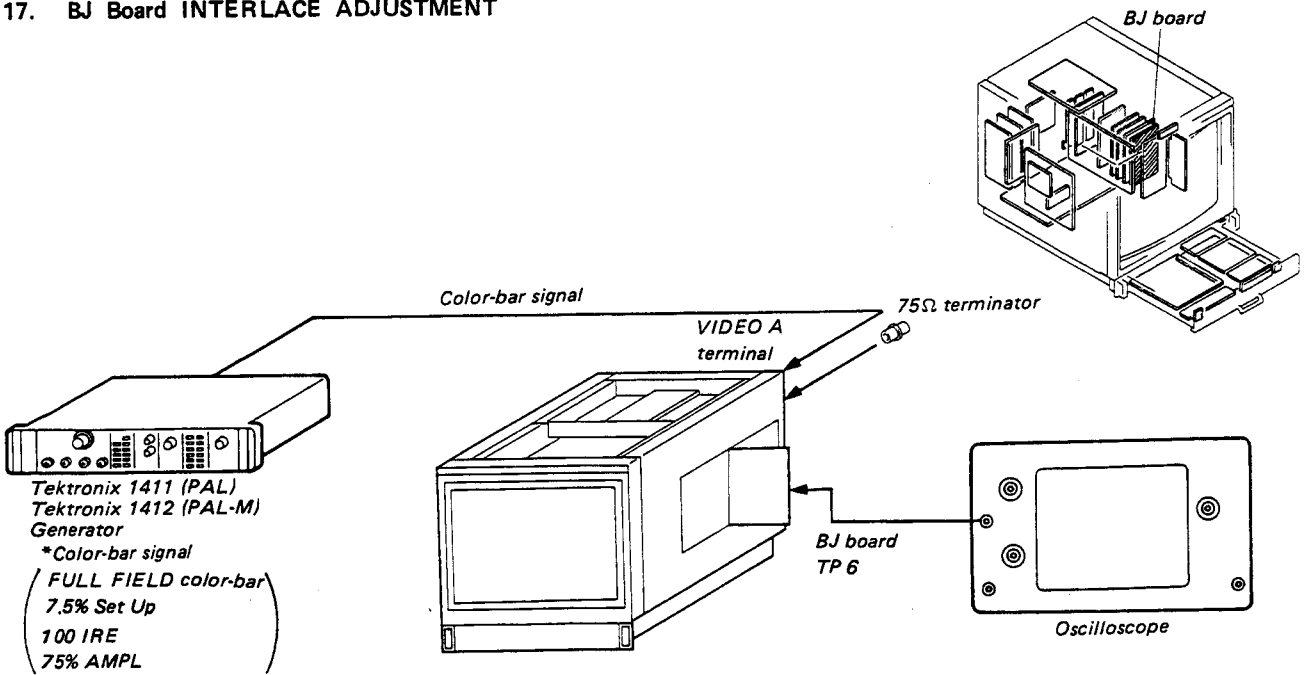

1. Input color-bar signal to the VIDEO A terminal of the set.
2. Connect an oscilloscope to the TP6 on the BJ board.
3. Adjust RV6 to obtain the waveform on the oscilloscope as shown in Fig. 17-1.




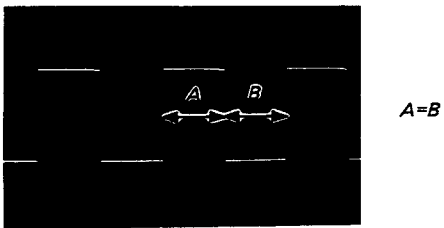


Fig. 17-1

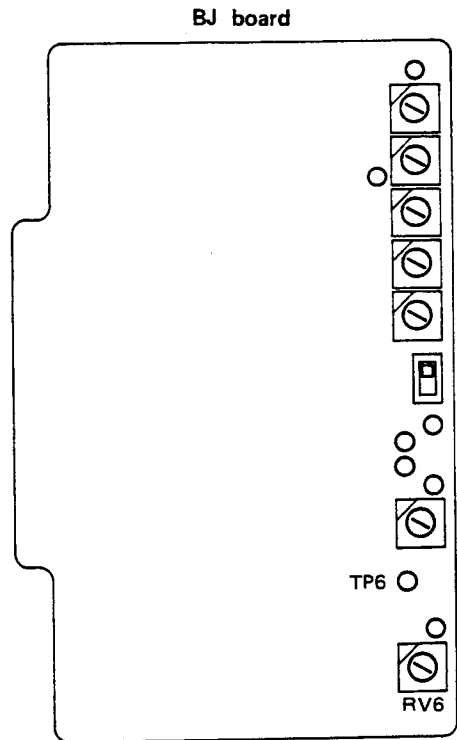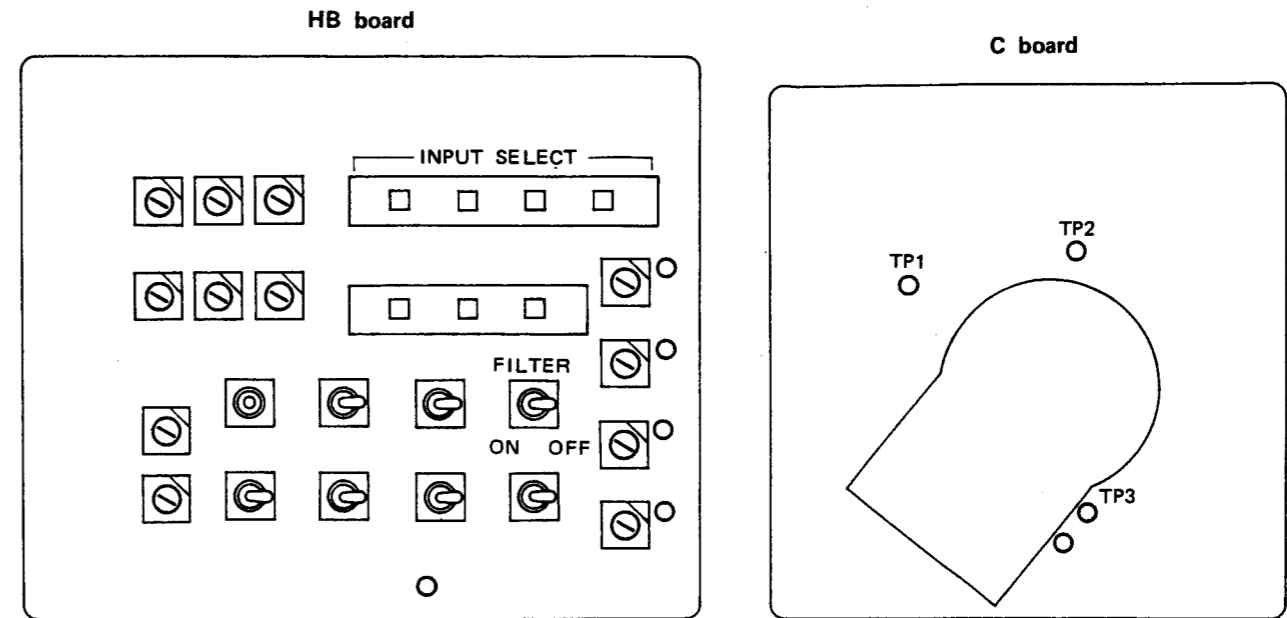

18. BK Board FREQUENCY CHARACTERISTIC ADJUSTMENT

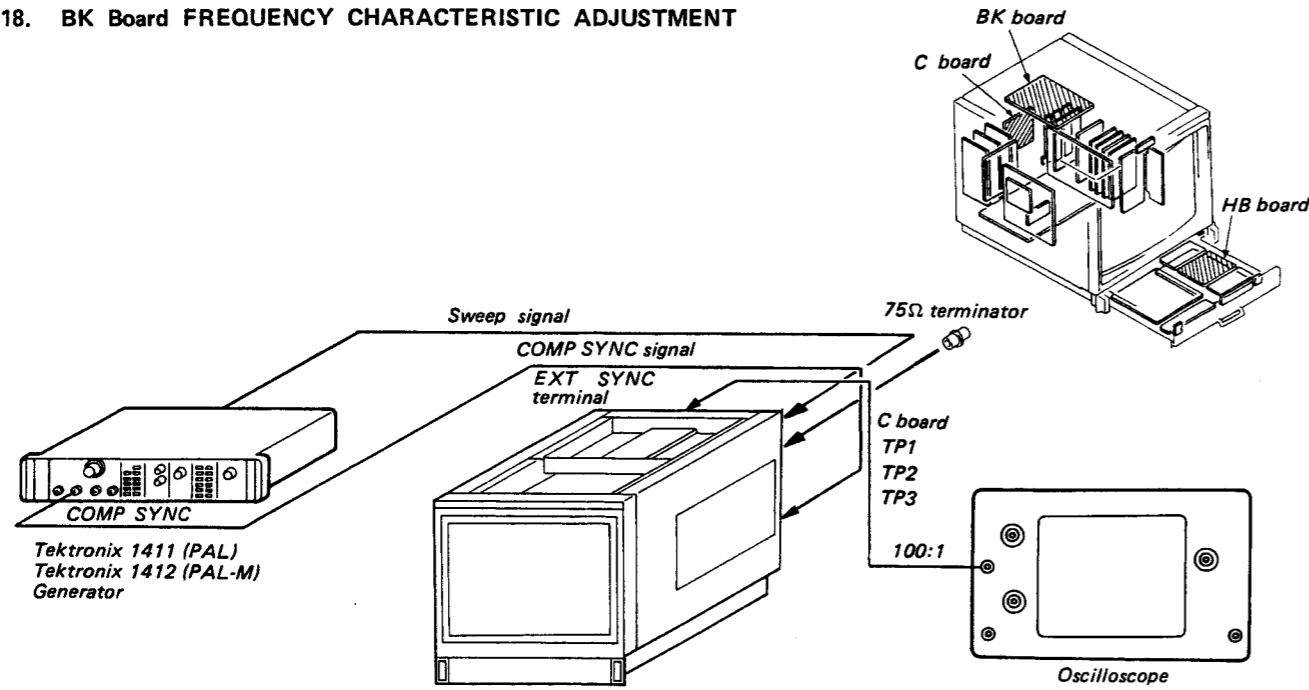

1. Input SWEEP signal to VIDEO A terminal of the set, and input COMP SYNC signal to EXT SYNC terminal of the set.
2.
 - INPUT selector (FRONT PANEL) A (A)
 - SYNC selector (FRONT PANEL) EXT (EXT)
 - MODE selector (FRONT PANEL) MONO (MONO)
 - FILTER SW. (HB board S8) OFF
3. Connect an oscilloscope to the TP1 on the C board.
*Probe: 100:1
4. Adjust CV101 and CV102 on the BK board so that output waveform becomes flat in a range of 0 to 10MHz as shown in Fig. 18-1.
5. Connect an oscilloscope to the TP2 on the C board.
6. Adjust CV201 and CV202 on the BK board so that output waveform becomes flat in a range of 0 to 10MHz as shown in Fig. 18-1.
7. Connect an oscilloscope to the TP3 on the C board.
8. Adjust CV301 and CV302 on the BK board so that output waveform becomes flat in a range of 0 to 10MHz as shown in Fig. 18-1.



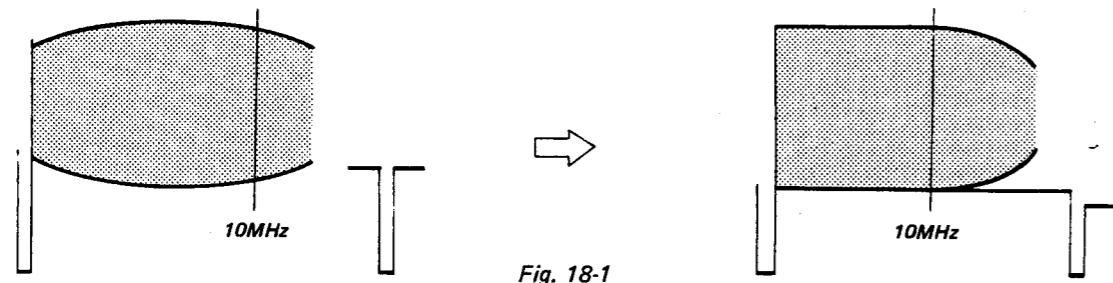


Fig. 18-1

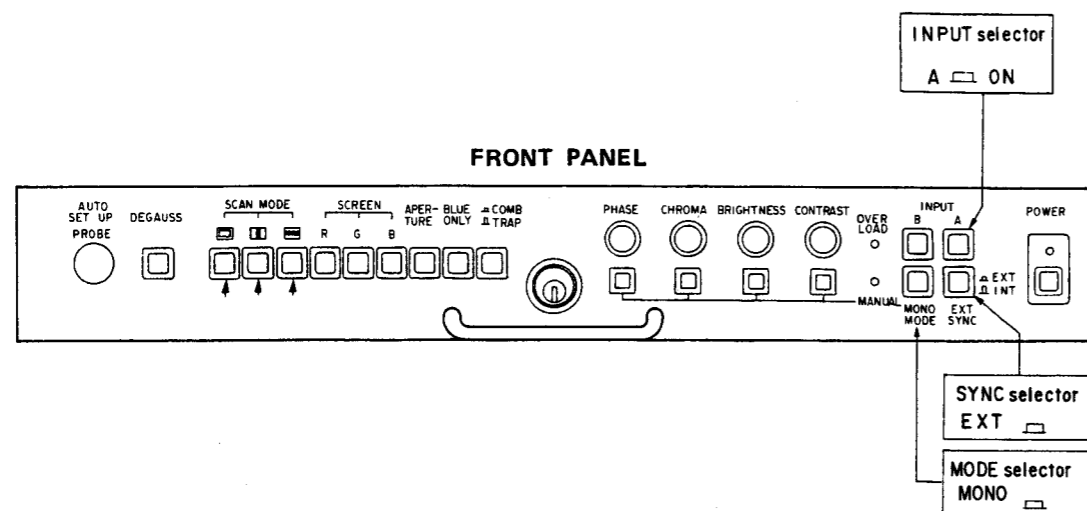

BK board

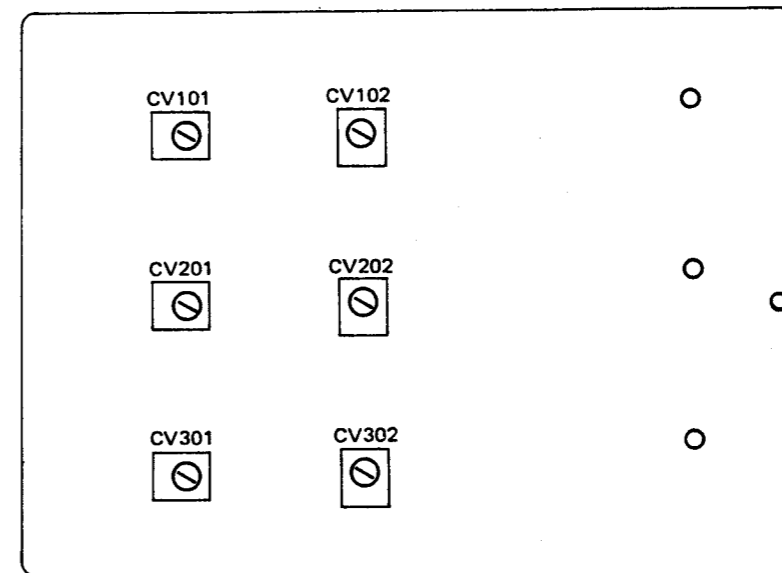

19. VECTOR OUTPUT ADJUSTMENT

PAL


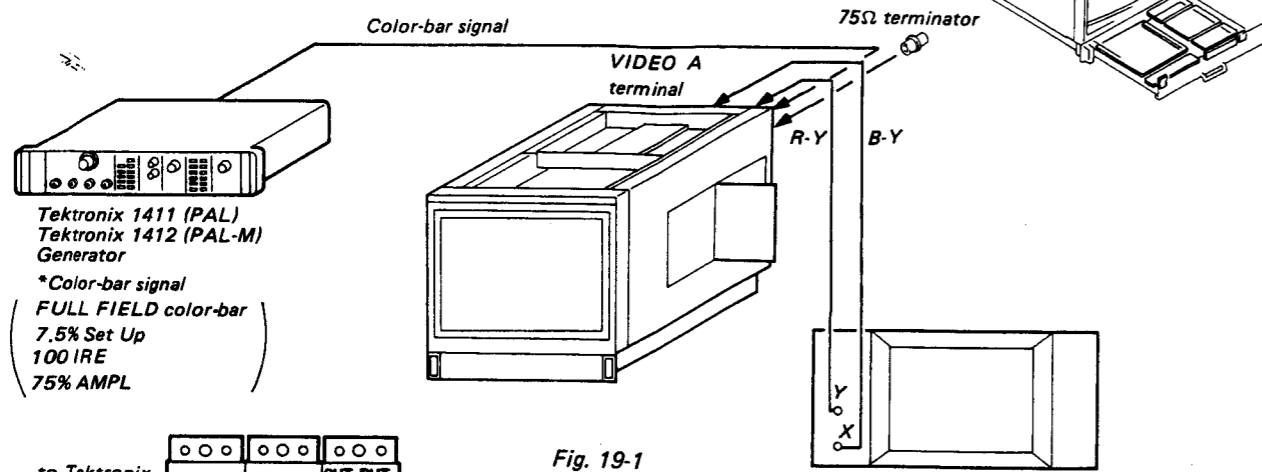


Fig. 19-1

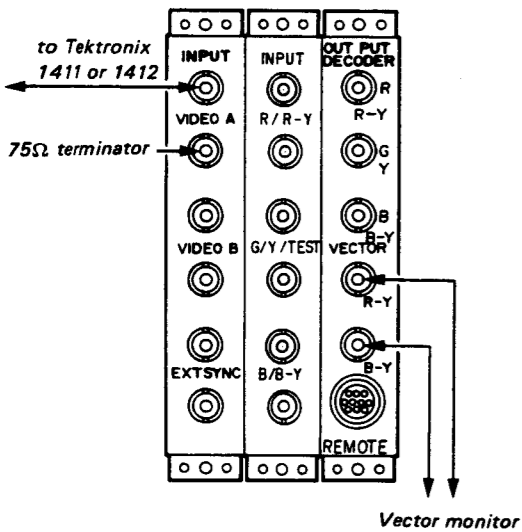

1. Complete the connections as shown in Fig. 19-1.
2. Adjust RV-12 (R-Y) and RV-15 (B-Y) on the BG board so that the areas (6) indicated with arrows Fig. 19-2 enter its center as far as possible.


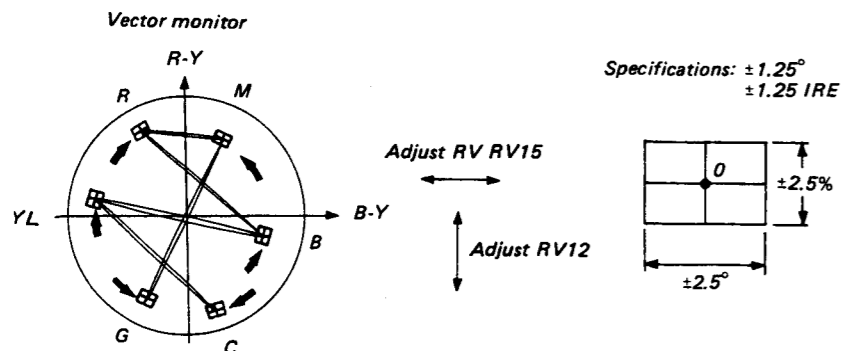


Fig. 19-2
4-49

20. DA Board V. LEVEL ADJUSTMENT

PAL

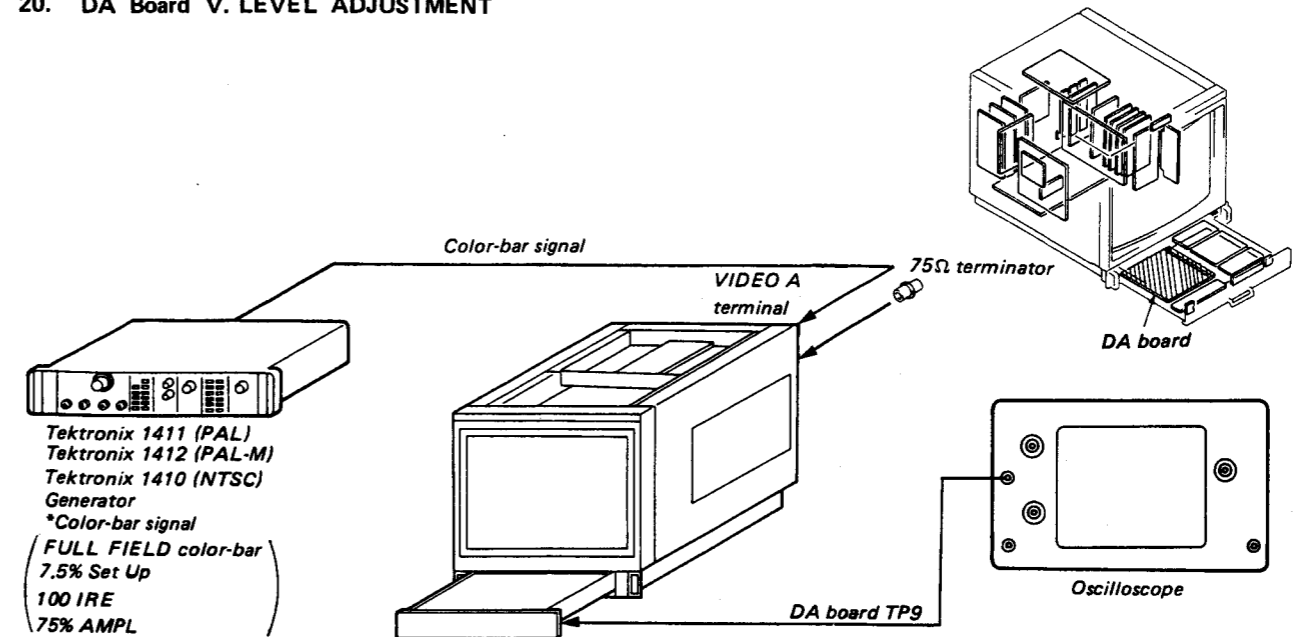

1. Input color-bar signal to the VIDEO A terminal of the set.
2. Connect an oscilloscope to the TP9 on the DA board.
3. Adjust RV18 on the DA board so that output waveform is 12.0Vp-p as shown in Fig. 20-1.


The following adjustment is required when a PAL-M or NTSC system signal is received.

PAL-M NTSC


4. Input color-bar signal (TEK-1412 or TEK-1410) to the VIDEO A terminal of the set.
5. Connect an oscilloscope to the TP9 on the DA board.
6. Adjust RV17 on the DA board so that output waveform is 12.0Vp-p.



Fig. 20-1

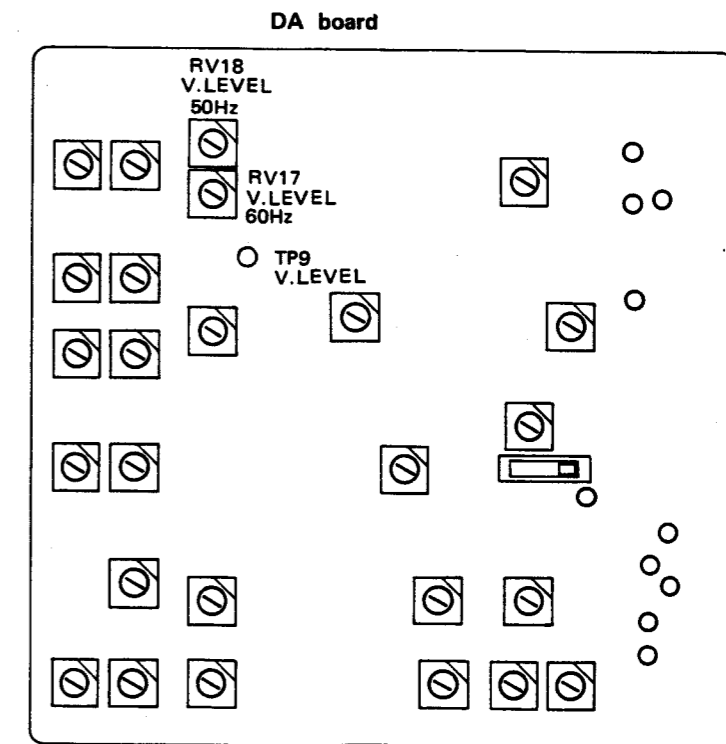

21. DA Board LINEARITY ADJUSTMENT

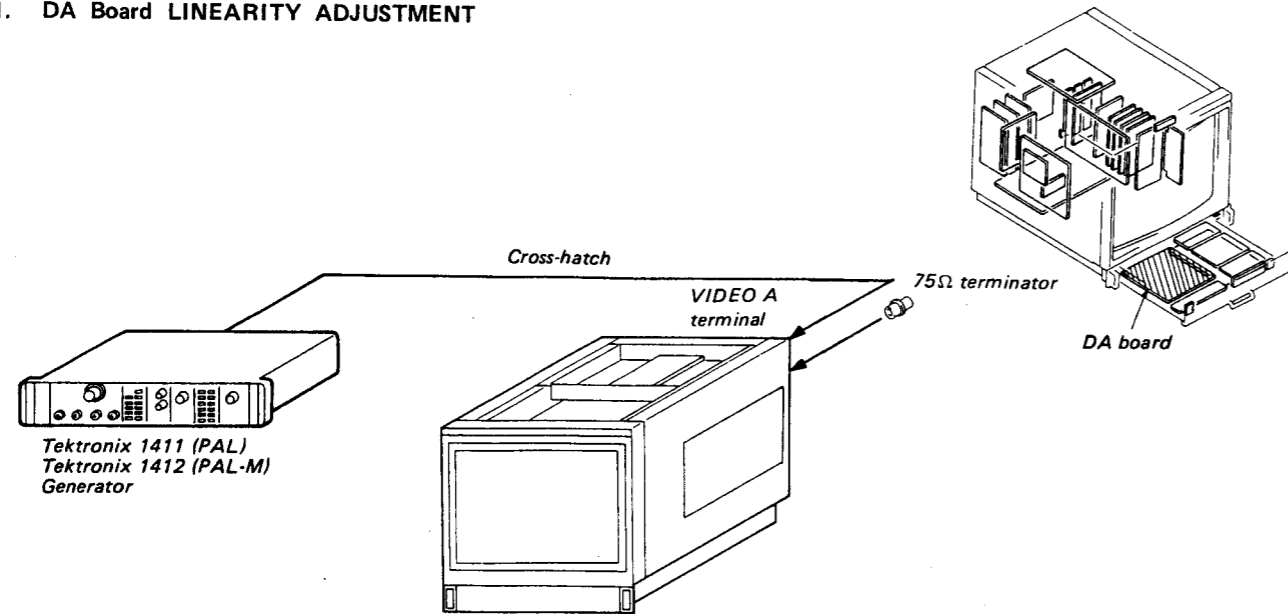

TOP AND BOTTOM PIN ADJUSTMENT

1. Receive cross-hatch signal and with H-LINE only.
2. Adjust T&B pin distortion H PHASE by turning DA board RV27 (TRAPEZOID) as shown in Fig. 21-1.
3. Adjust T&B pin distortion gain by turning DA board RV13 as shown in Fig. 21-1.
4. Adjust T&B pin distortion vertical balance by turning DA board RV10 as shown in Fig. 21-1.
5. Adjust PARALLELO GRAM distortion by turning DA board RV28 (PARALLEL) as shown in Fig. 21-1.
6. Mark tracking by repeating 2 through 5.
7. UNDER SCAN switch (front panel) UNDER (⊖).
8. Adjust T&B distortion gain by turning DA board RV14.



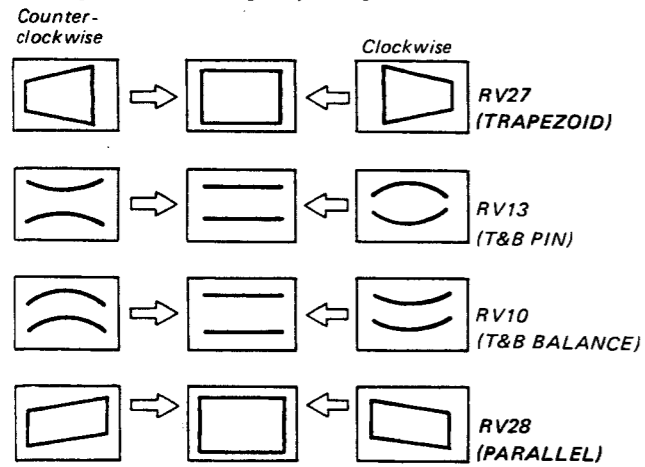


Fig. 21-1

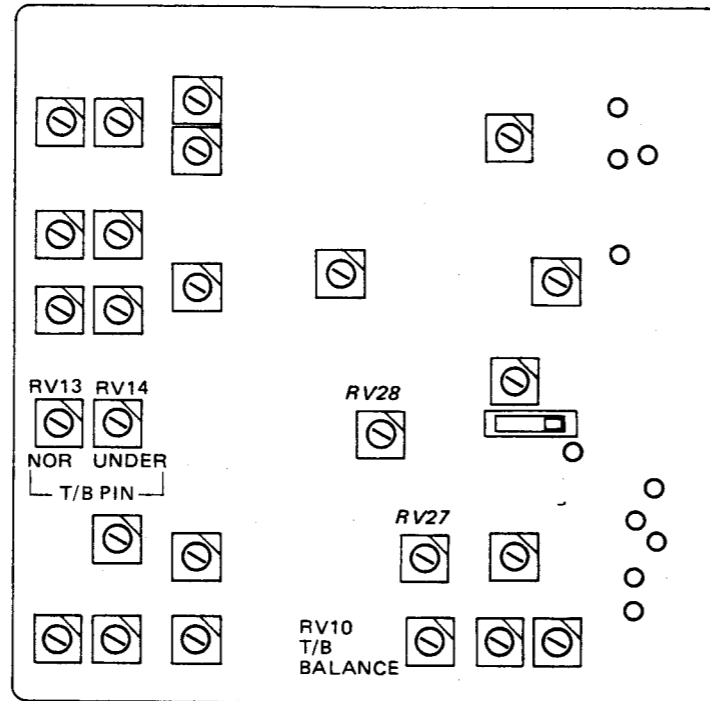

FRONT PANEL

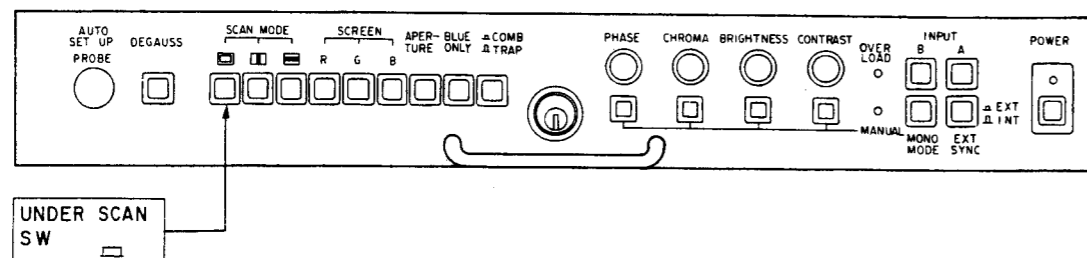

V. LINEARITY ADJUSTMENT

1. Receive cross-hatch signal and with H-LINE only.
2. Adjust V. CENTER by turning DA board RV21.
3. Adjust V. LIN BALANCE by turning DA board RV20 as shown in Fig. 21-1.
4. Adjust V. LIN GAIN by turning DA board RV22 as shown in Fig. 21-1.
5. Adjust V. HEIGHT by turning DA board RV23.
6. Mark tracking by repeating steps 2. through 5.

RV20..... V LIN BALANCE




Fig. 21-2

RV22..... V LIN GAIN




Fig. 21-3

SIDE PIN ADJUSTMENT

1. Receive cross-hatch signal and with V. LINE only.
2. Adjust SIDE PIN by turning DA board RV15 as shown in Fig. 21-4.
3. Adjust SIDE PIN TILT by turning DA board RV19 as shown in Fig. 21-5.
4. Adjust H. CENTER LINE by turning DA board RV25 as shown in Fig. 21-6.

RV15 (SIDE PIN)




Fig. 21-4

RV19 (SIDE PIN TILT)




Fig. 21-5

RV25 (H. CENTER LINE)






Fig. 21-6

5. UNDER SCAN switch (Front panel (L)) UNDER (⊖)
6. Adjust SIDE PIN by turning DA board RV16.

FRONT PANEL

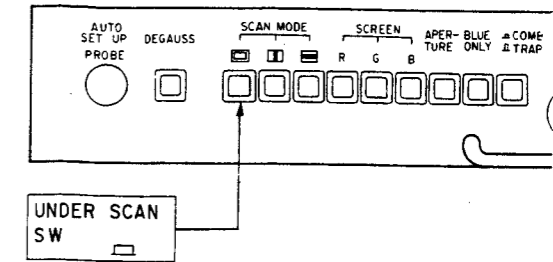

DA board

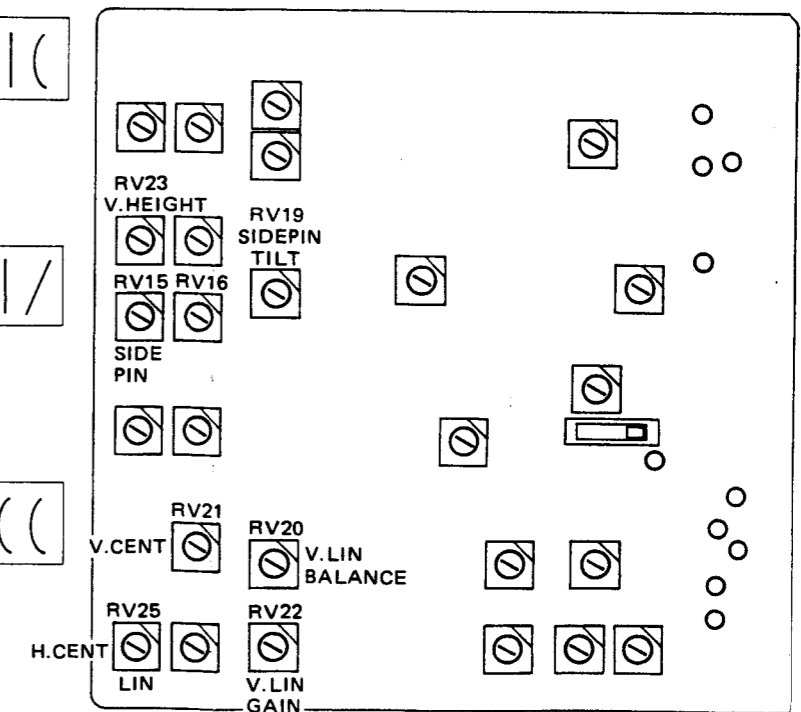

H. LINEARITY ADJUSTMENT

1. Receive cross-hatch signal and with V-LINE only.
2. Adjust H. LINEARITY by turning DA board RV6 (H LIN GAIN) as shown in Fig. 21-7.





Fig. 21-7

22. H. FREQ ADJUSTMENT

1. Receive cross-hatch signal, and SYNC selector to EXT (EXT).
2. Adjust until the picture stops drifting or moves slowly by turning DA board RV5 as shown in Fig. 22-1.

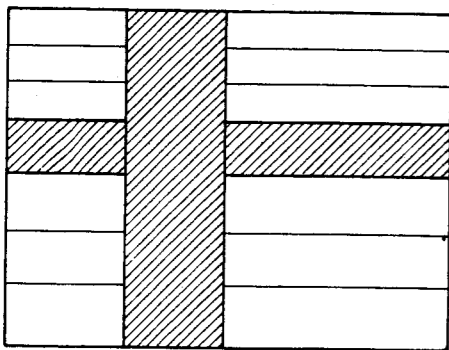

* Adjust so that the picture either stops drifting or moves slowly.

Fig. 22-1

23. DA Board H.CENTER, BLK, H.PHASE ADJUSTMENT

1. Receive monoscope signal, and UNDER SCAN switch to UNDER (UNDER).
2. Picture tube
 - V. DELAY switch IN (IN)
3. Adjust RV1 and RV7 on the DA board so that the raster can all be seen by RV1 and RV7 as shown in Fig. 23-1.

H. CENTER

4. Adjust RV26 on the DA board so that the outside portions of the raster become equal at the right and the left sides as shown in Fig. 23-1.




Fig. 23-1

H. BLK Adjustment

5. Connect an oscilloscope to the TP1 on the DA board.
6. Adjust RV1 on the DA board so that the H. BLK pulse width is 9.8μs. Fig. 23-2.





Fig. 23-2

H. BLK PHASE Adjustment

7. Adjust RV7 on the DA board so that the blanking width at the right and the left sides are equal to as shown in Fig. 23-3.

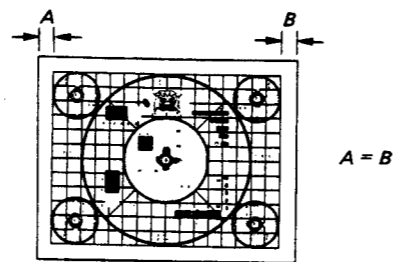


monoscope pattern

Fig. 23-3

H. PHASE Adjustment


8. Adjust RV26 on the DA board so that the outside raster portions of the picture become equal at the right and the left sides as shown in Fig. 23-4.

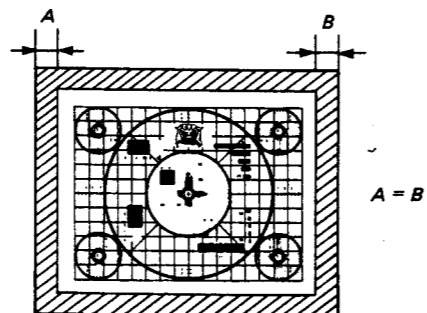


monoscope pattern

Fig. 23-4


FRONT PANEL

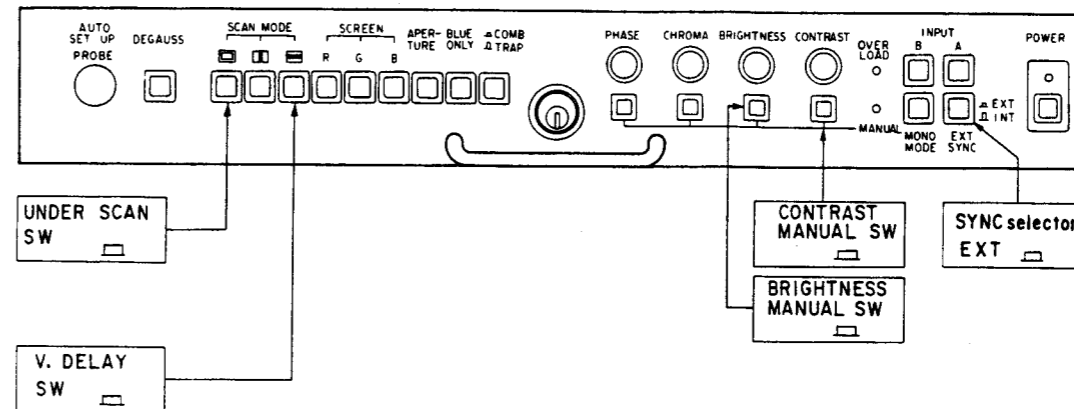

DA board

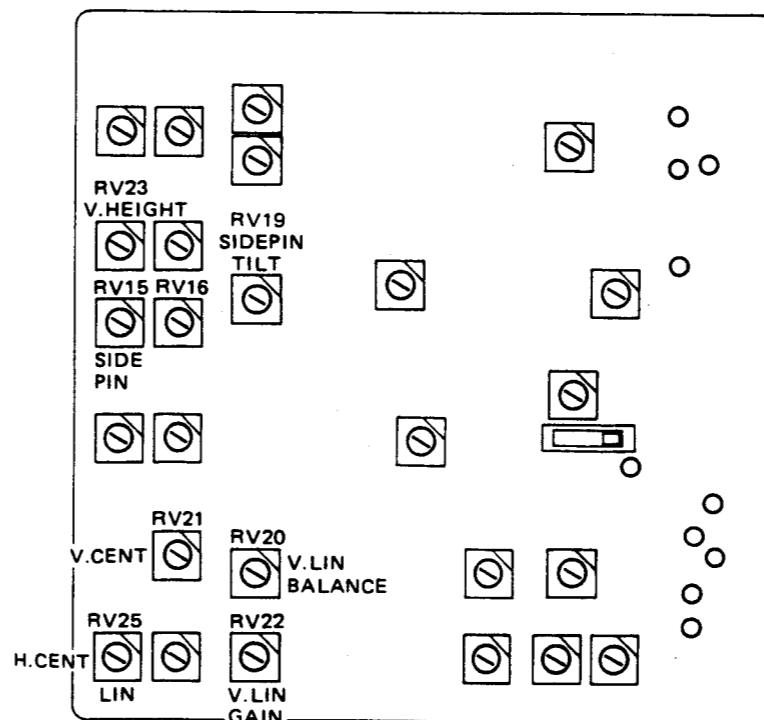

24. DA Board H DELAY POSITION ADJUSTMENT

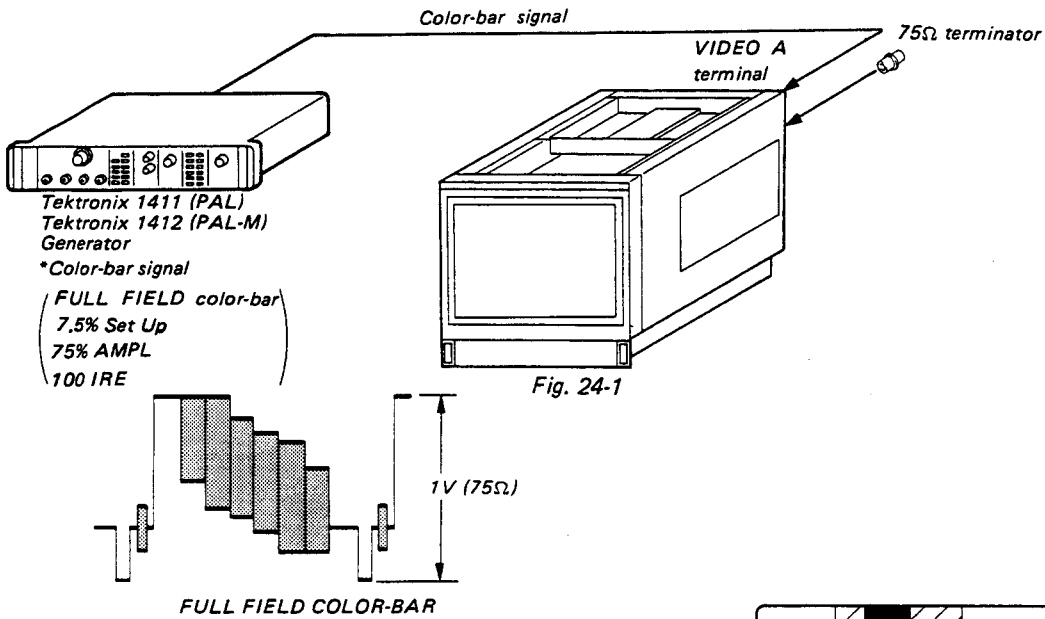

H. DELAY PULSE WIDTH ADJUSTMENT

1. Connect an oscilloscope to the TP2 on the DA board.
2. Adjust RV3 on the DA board so that PULSE width is equal when switching H-DELAY switch IN and OUT.

H. DELAY POSITION

1. Connect as shown in Fig. 24-1.
2. Turn the INPUT selector to "A" () SYNC selector to "INT" () and, H DELAY & V DELAY SW to "IN" () (pulse close position).
3. Adjust the H-DELAY position as shown in Fig. 24-2 by turning DA Board RV2.



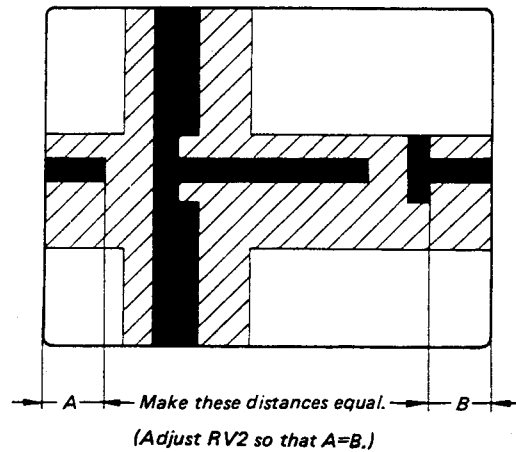



Fig. 24-2

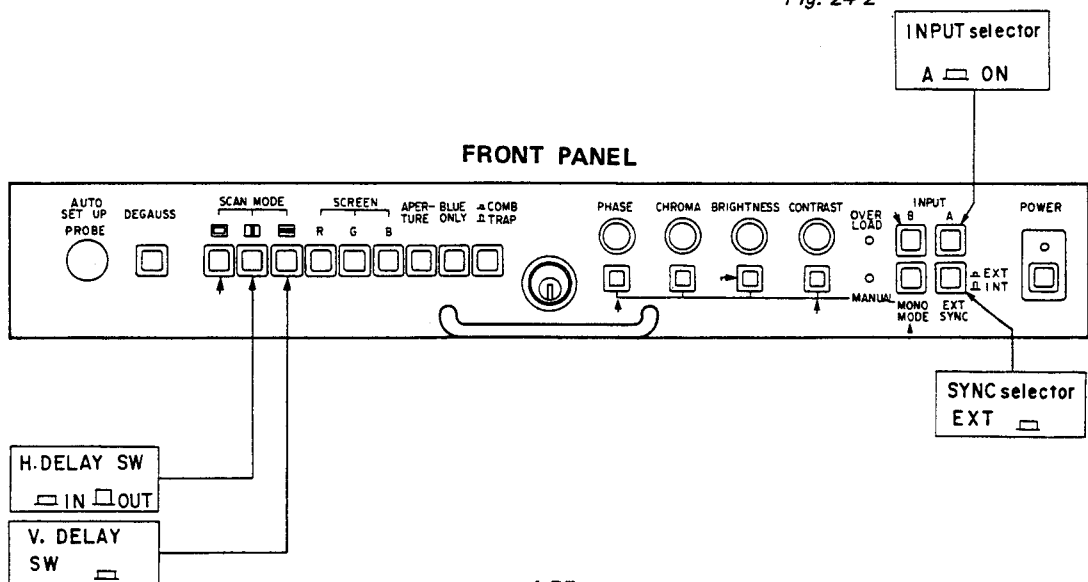

DA board

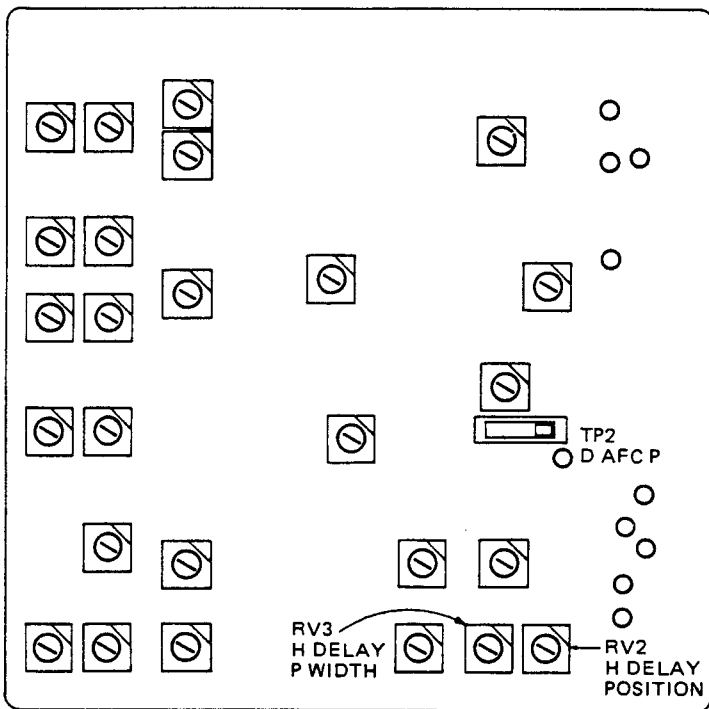

25. BR BORAD Y LEVEL ADJUSTMENT (BVM-2010PD/PMD ONLY)

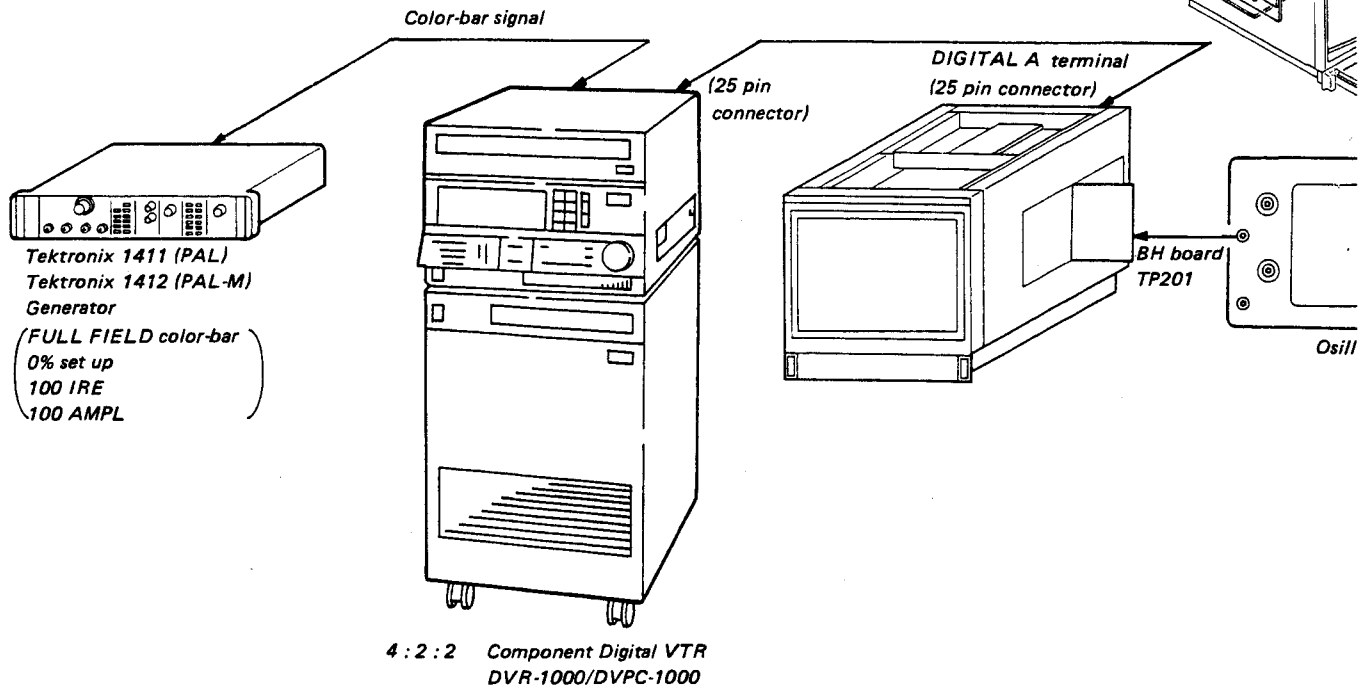

1. Receive color-bar signal (100/0/100).
 - COLOR STANDARD SELECTOR (SUB CONTROL PANEL)
..... DIGITAL (NTSC)
 - DIGITAL TV STANDARD SELECTOR (BR BOARD S1)
..... LOWER (625/50)
 - COLOR STANDARD SELECTOR (BR BOARD S3)
..... UPPER (NTSC)
2. Connect an oscilloscope to TP201 on the BH board.
3. Adjust with RV301 on the BR board so that the levels of A and B become equivalent as shown in Fig. 29-1.






Fig. 29-1

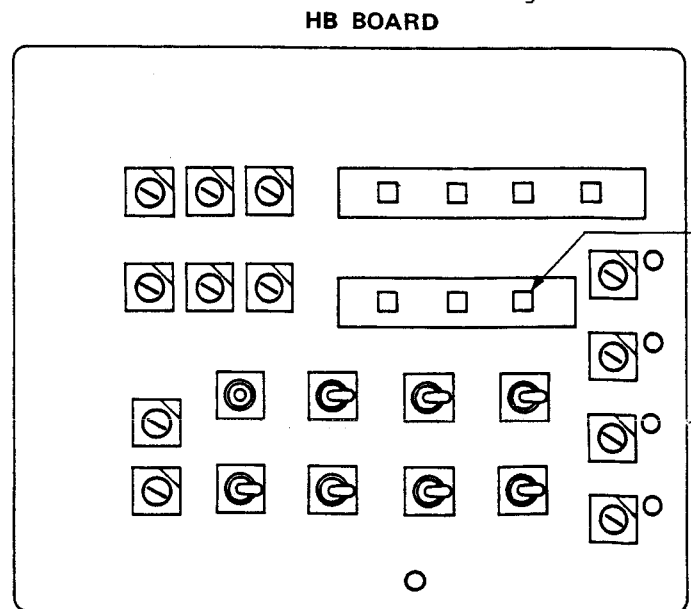


board


BH board



BH BOARD

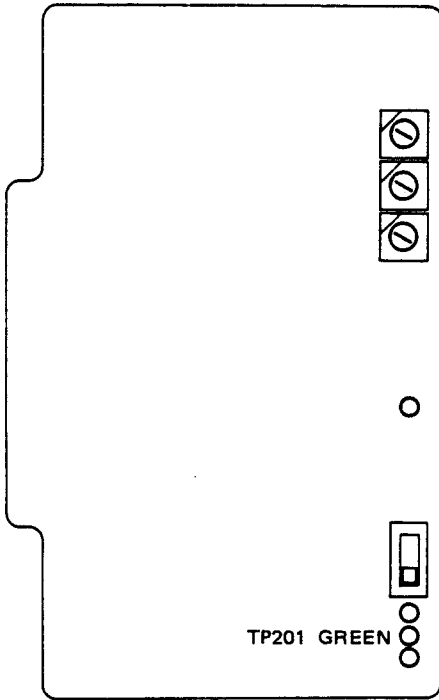


BR BOARD

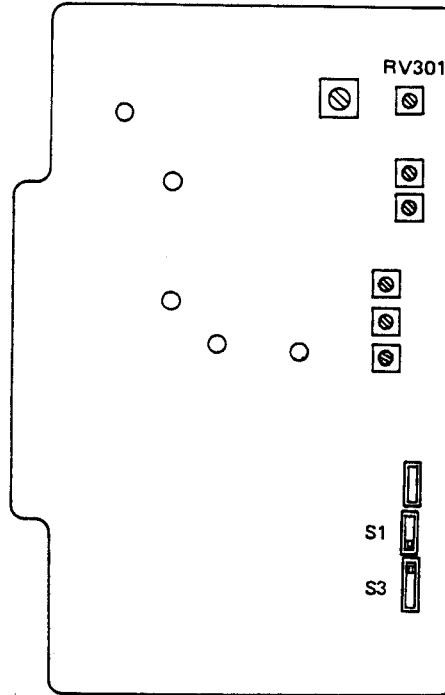

ALD ON

26. BR BOARD Y FREQUENCY CHARACTERISTICS ADJUSTMENT (BVM-2010PD/PMD ONLY)

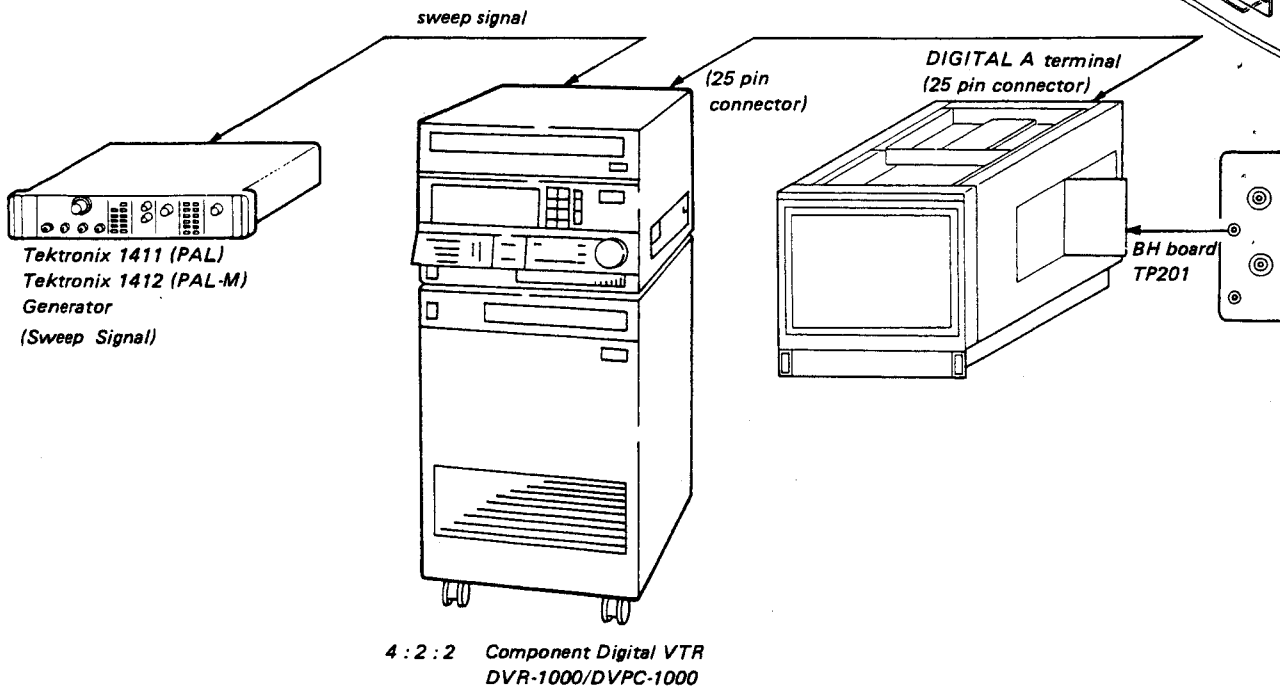

1. Receive sweep signal.
 - COLOR STANDARD SELECTOR (SUB CONTROL PANEL)
 - DIGITAL (NTSC)
 - DIGITAL TV STANDARD SELECTOR (BR BOARD S1)
 - LOWER (625/50)
 - COLOR STANDARD SELECTOR (BR BOARD S3)
 - UPPER (NTSC)
2. Connect an oscilloscope to TP201 on the BH board.
3. Adjust with CV301 on the BR board so that the output waveform of 0 to 5 MHz range becomes flat as shown in Fig. 30-1.




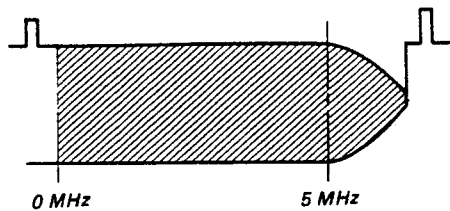


Fig. 30-1


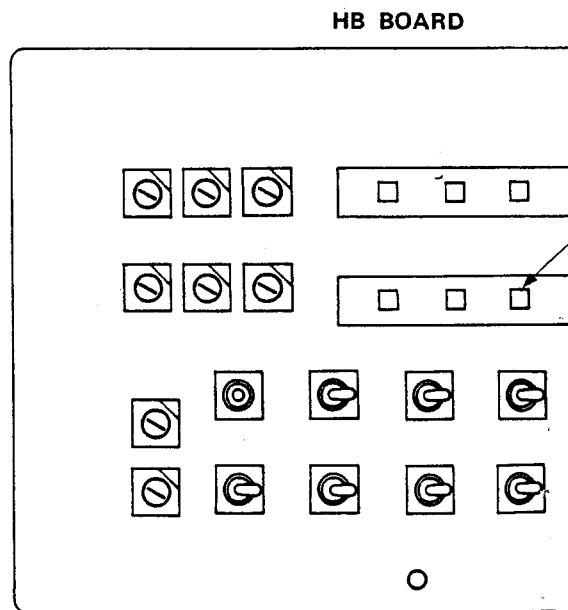


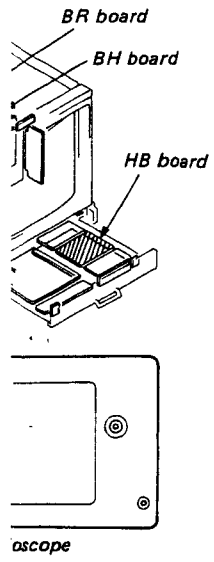


BH BOARD

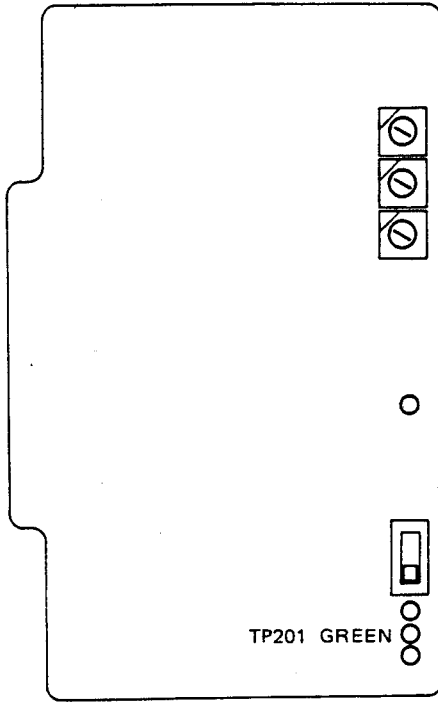

BR BOARD

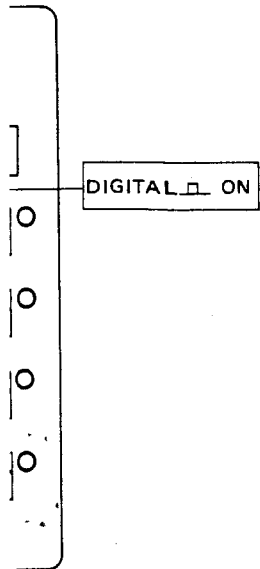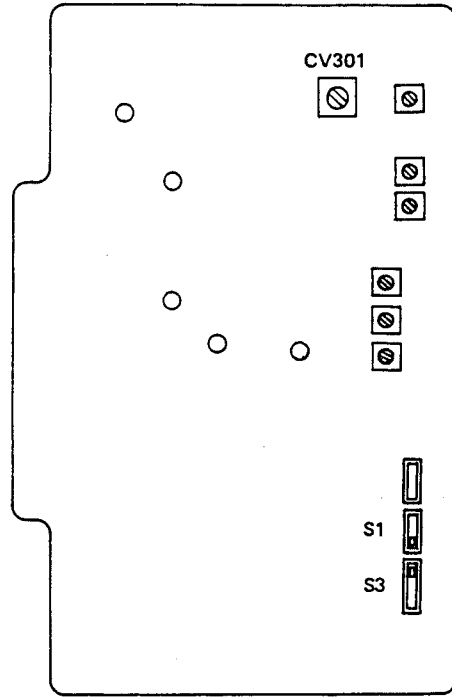

27. BR BOARD R-Y LEVEL ADJUSTMENT (BVM-2010PD/PMD ONLY)

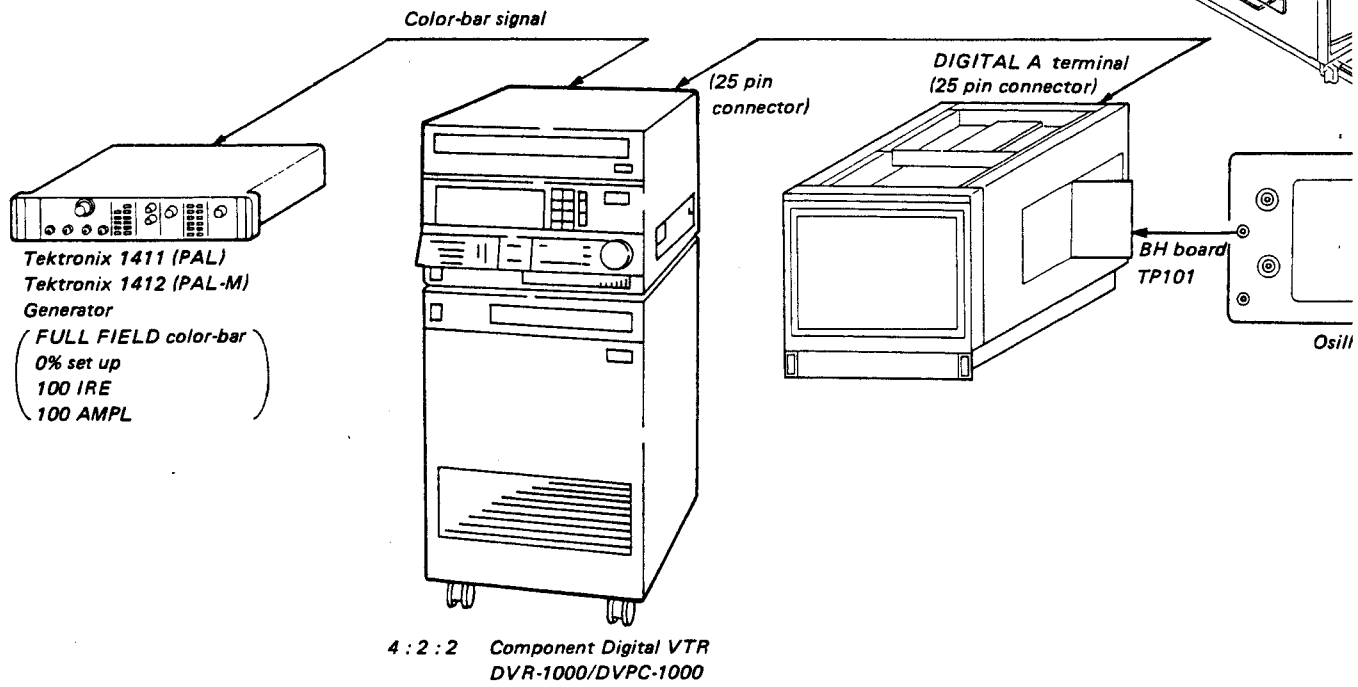

1. Receive color-bar signal (100/0/100).
 - COLOR STANDARD SELECTOR (SUB CONTROL PANEL)
.....DIGITAL (NTSC)
 - DIGITAL TV STANDARD SELECTOR (BR BOARD S1)
..... LOWER (625/50)
 - COLOR STANDARD SELECTOR (BR BOARD S3)
..... UPPER (NTSC)
2. Connect an oscilloscope to TP101 on the BH board.
3. Adjust with RV101 on the BR board so that it becomes as shown in Fig. 31-1.



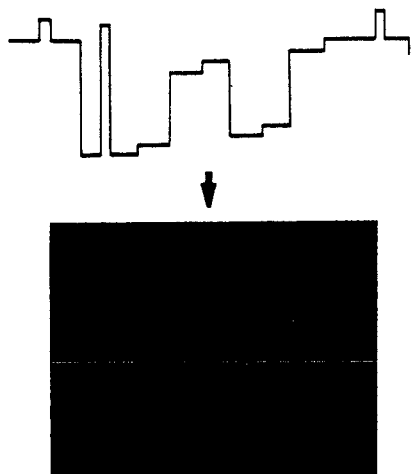


Fig. 31-1

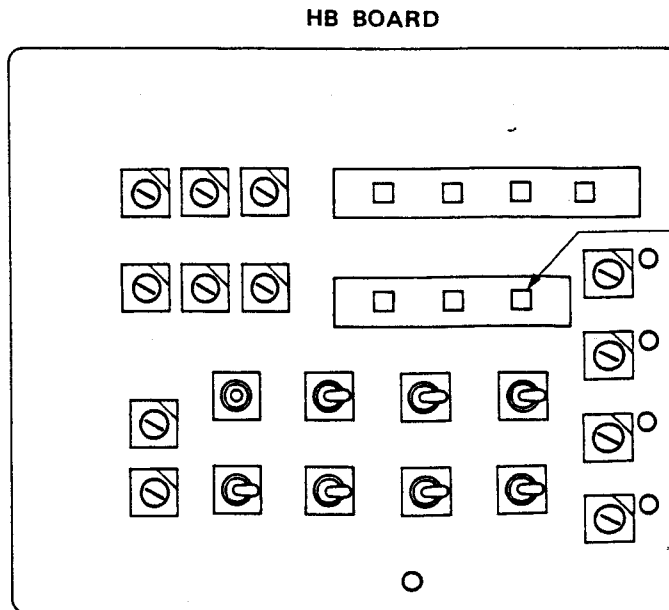

board


BH board




HB board



BH BOARD

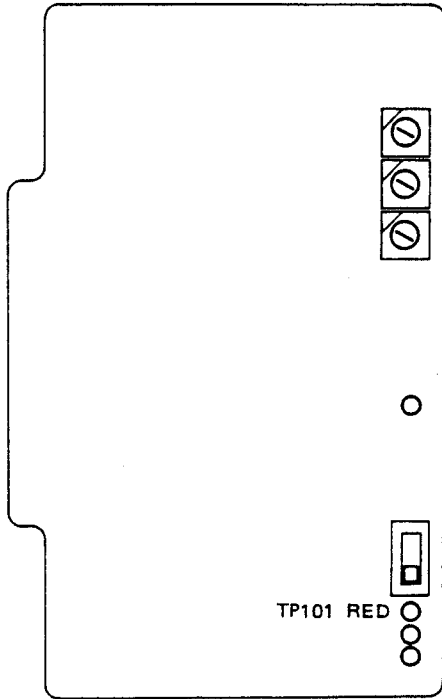


BR BOARD

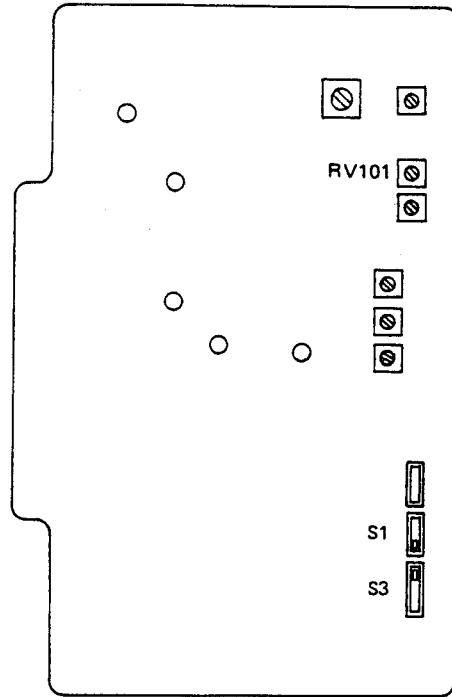

TAL ON

28. BR BOARD B-Y LEVEL ADJUSTMENT (BVM-2010PD/PMD ONLY)

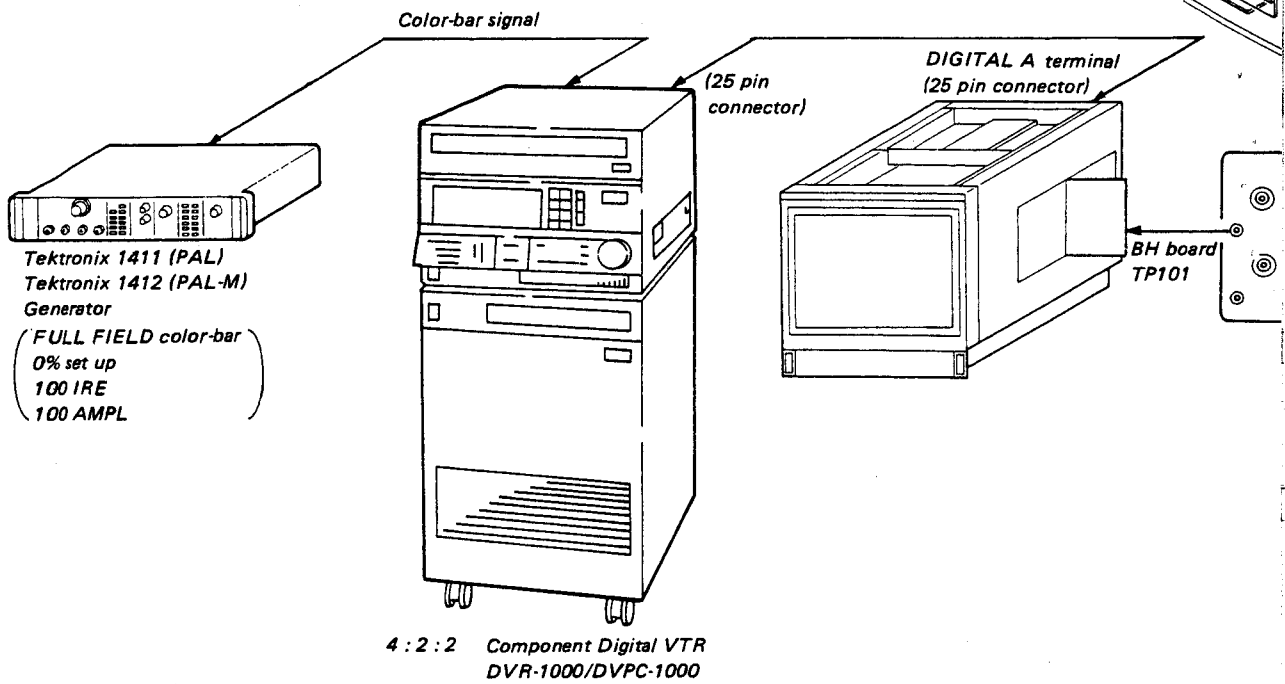

1. Receive color-bar signal
 - COLOR STANDARD SELECTOR (SUB CONTROL PANEL)
..... DIGITAL (NTSC)
 - DIGITAL TV STANDARD SELECTOR (BR BOARD S1)
..... LOWER (625/50)
 - COLOR STANDARD SELECTOR (BR BOARD S3)
..... UPPER (NTSC)
2. Connect an oscilloscope to TP301 on the BH board.
3. Adjust with RV201 so that it becomes as shown in Fig. 32-1.





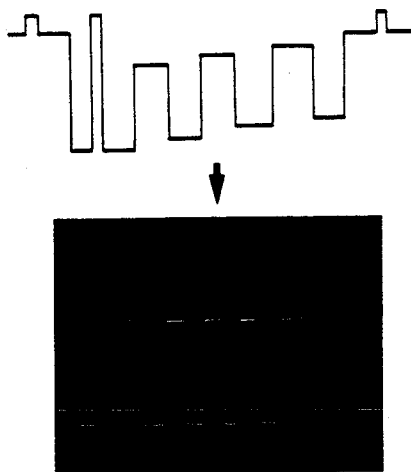


Fig. 32-1

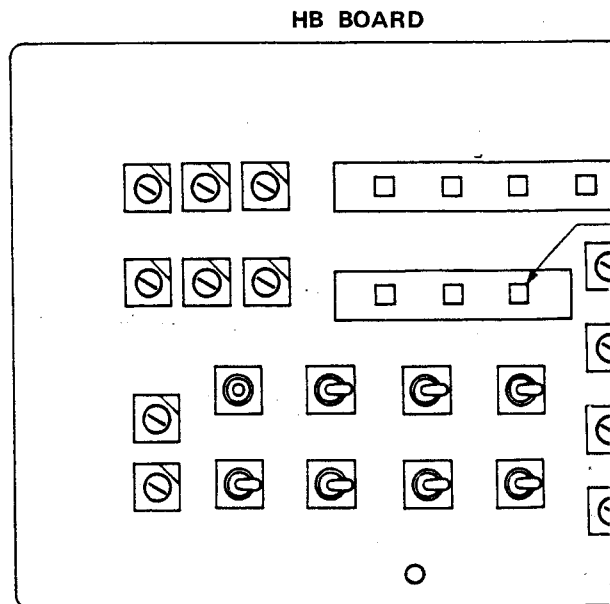




BH BOARD

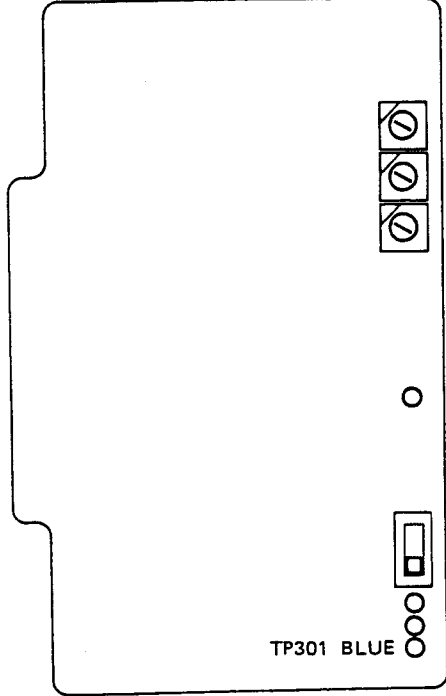


BR BOARD

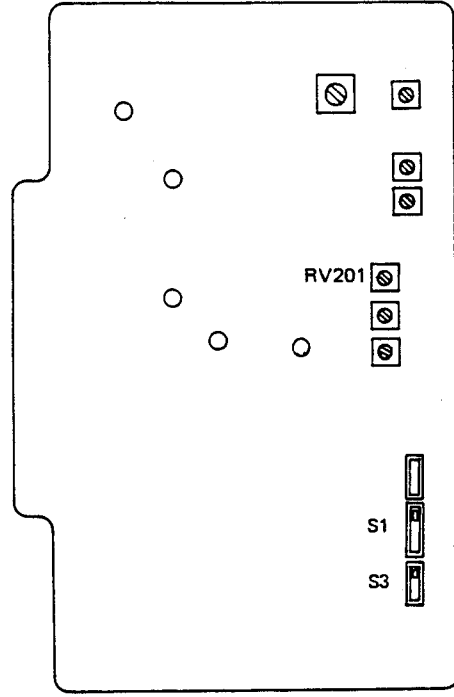

DIGITAL ON

29. BR BOARD Y-(R-Y) [Y-(B-Y)] DELAY TIME ADJUSTMENT (BVM-2010PD/PMD ONLY)

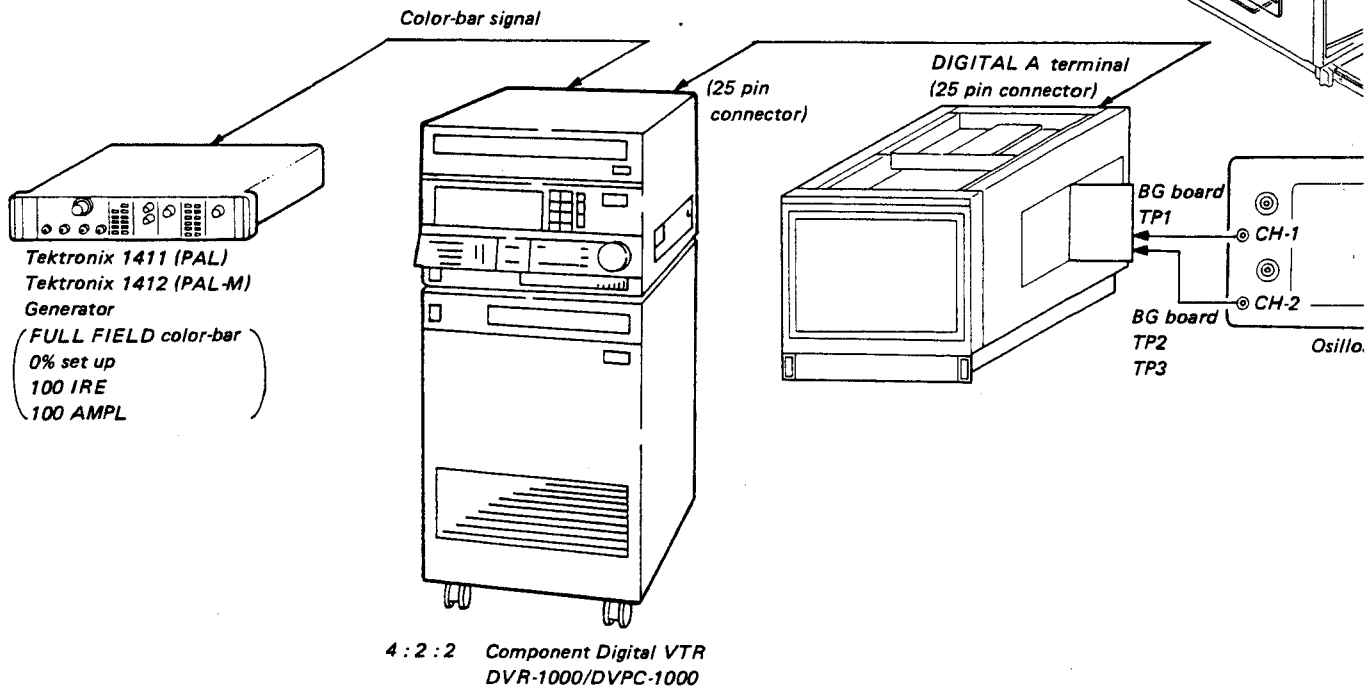

1. Receive color-bar signal
 - COLOR STANDARD SELECTOR (SUB CONTROL PANEL)
..... DIGITAL (NTSC)
 - DIGITAL TV STANDARD SELECTOR (BR BOARD S1)
..... LOWER (625/50)
 - COLOR STANDARD SELECTOR (BR BOARD S3)
..... UPPER (NTSC)
2. Connect CH1 probe of oscilloscope to TP1 on the BG board and CH2 probe to TP2 (TP3) on the BG board.
3. Adjust the respective positions of oscilloscope so that the waveform of CH1 becomes $a = a'$ and that of CH2 becomes $b = b'$ against the center scale as shown in Fig 33-1.
4. Enlarge $a - a'$ and $b - b'$ sections in Fig 33-1.
5. Adjust with RV102 and RV202 on the BR board so that the intersecting point of waveforms CH1 and CH2 becomes on the center scale.


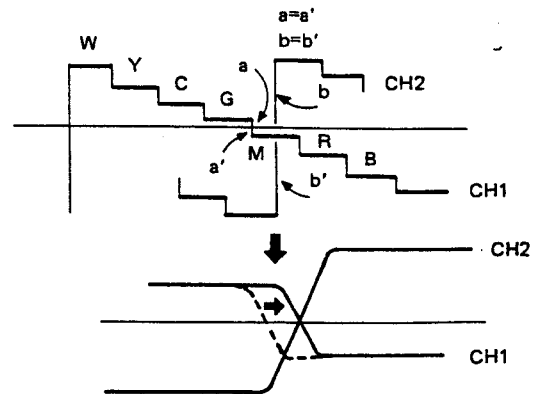



Fig. 33-1

board


BG board




HB BOARD

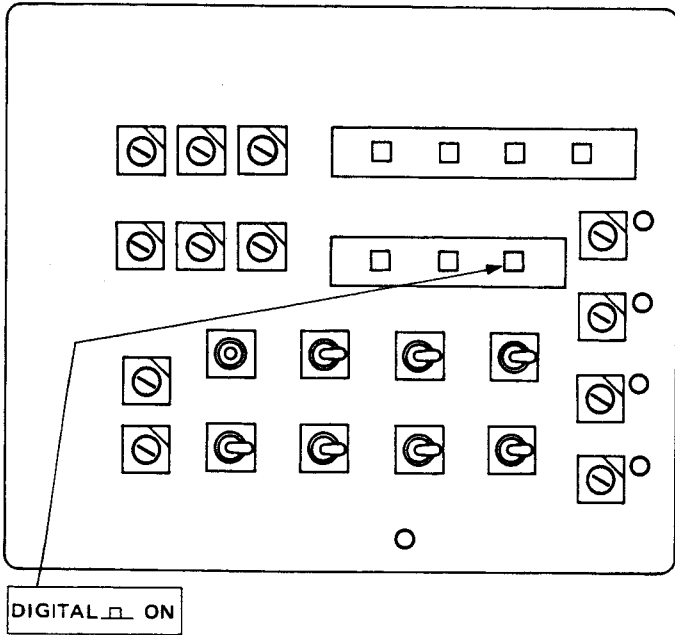

BG BOARD

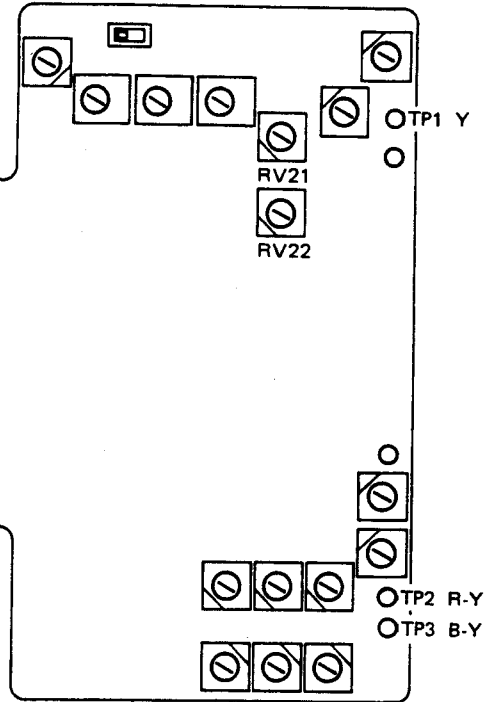


BR BOARD

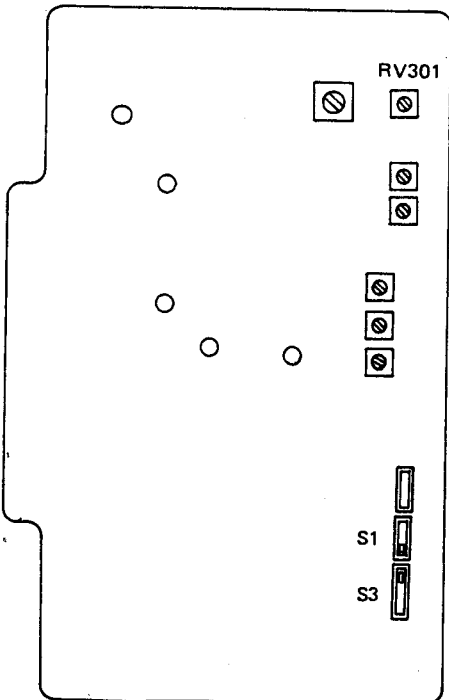


BLOCK DIAGRAM BLOCK DIAGRAM

SECTION 5 DIAGRAMS

5-1. BLOCK DIAGRAM
SIGNAL PROCESSING BLOCK DIAGRAM
*■■■■ BVM-2010PD/PMD only

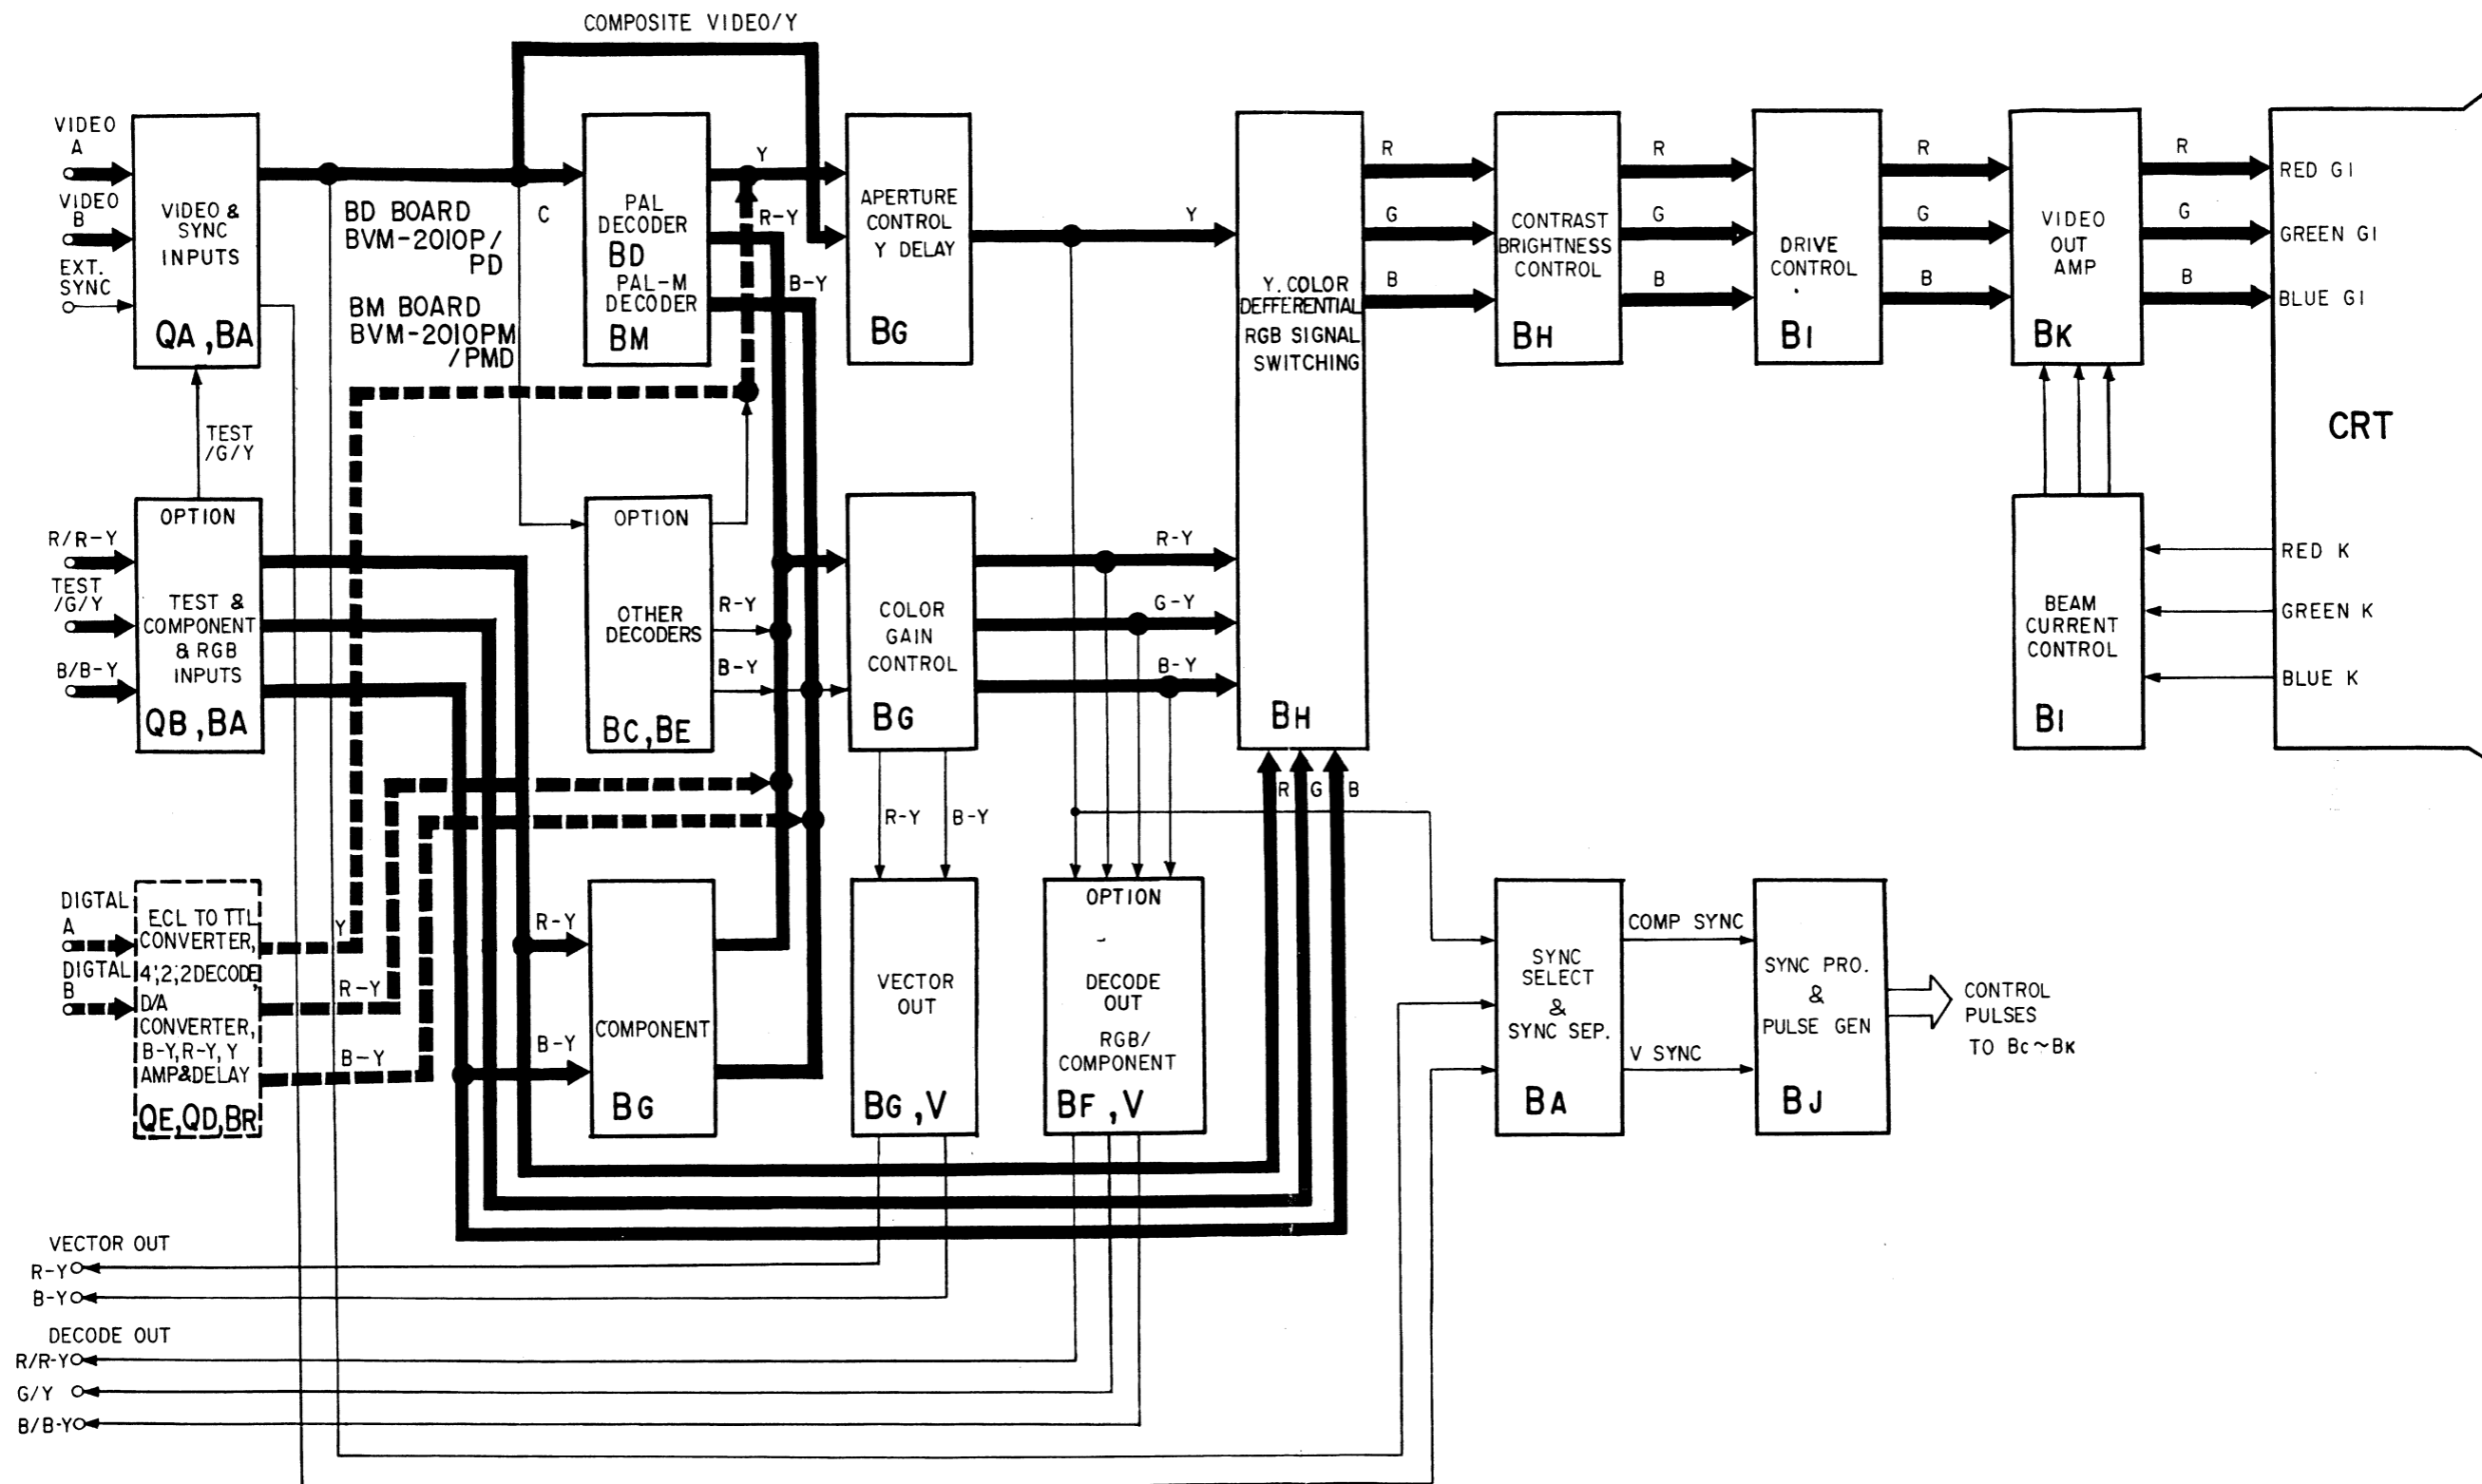


FRAME FRAME

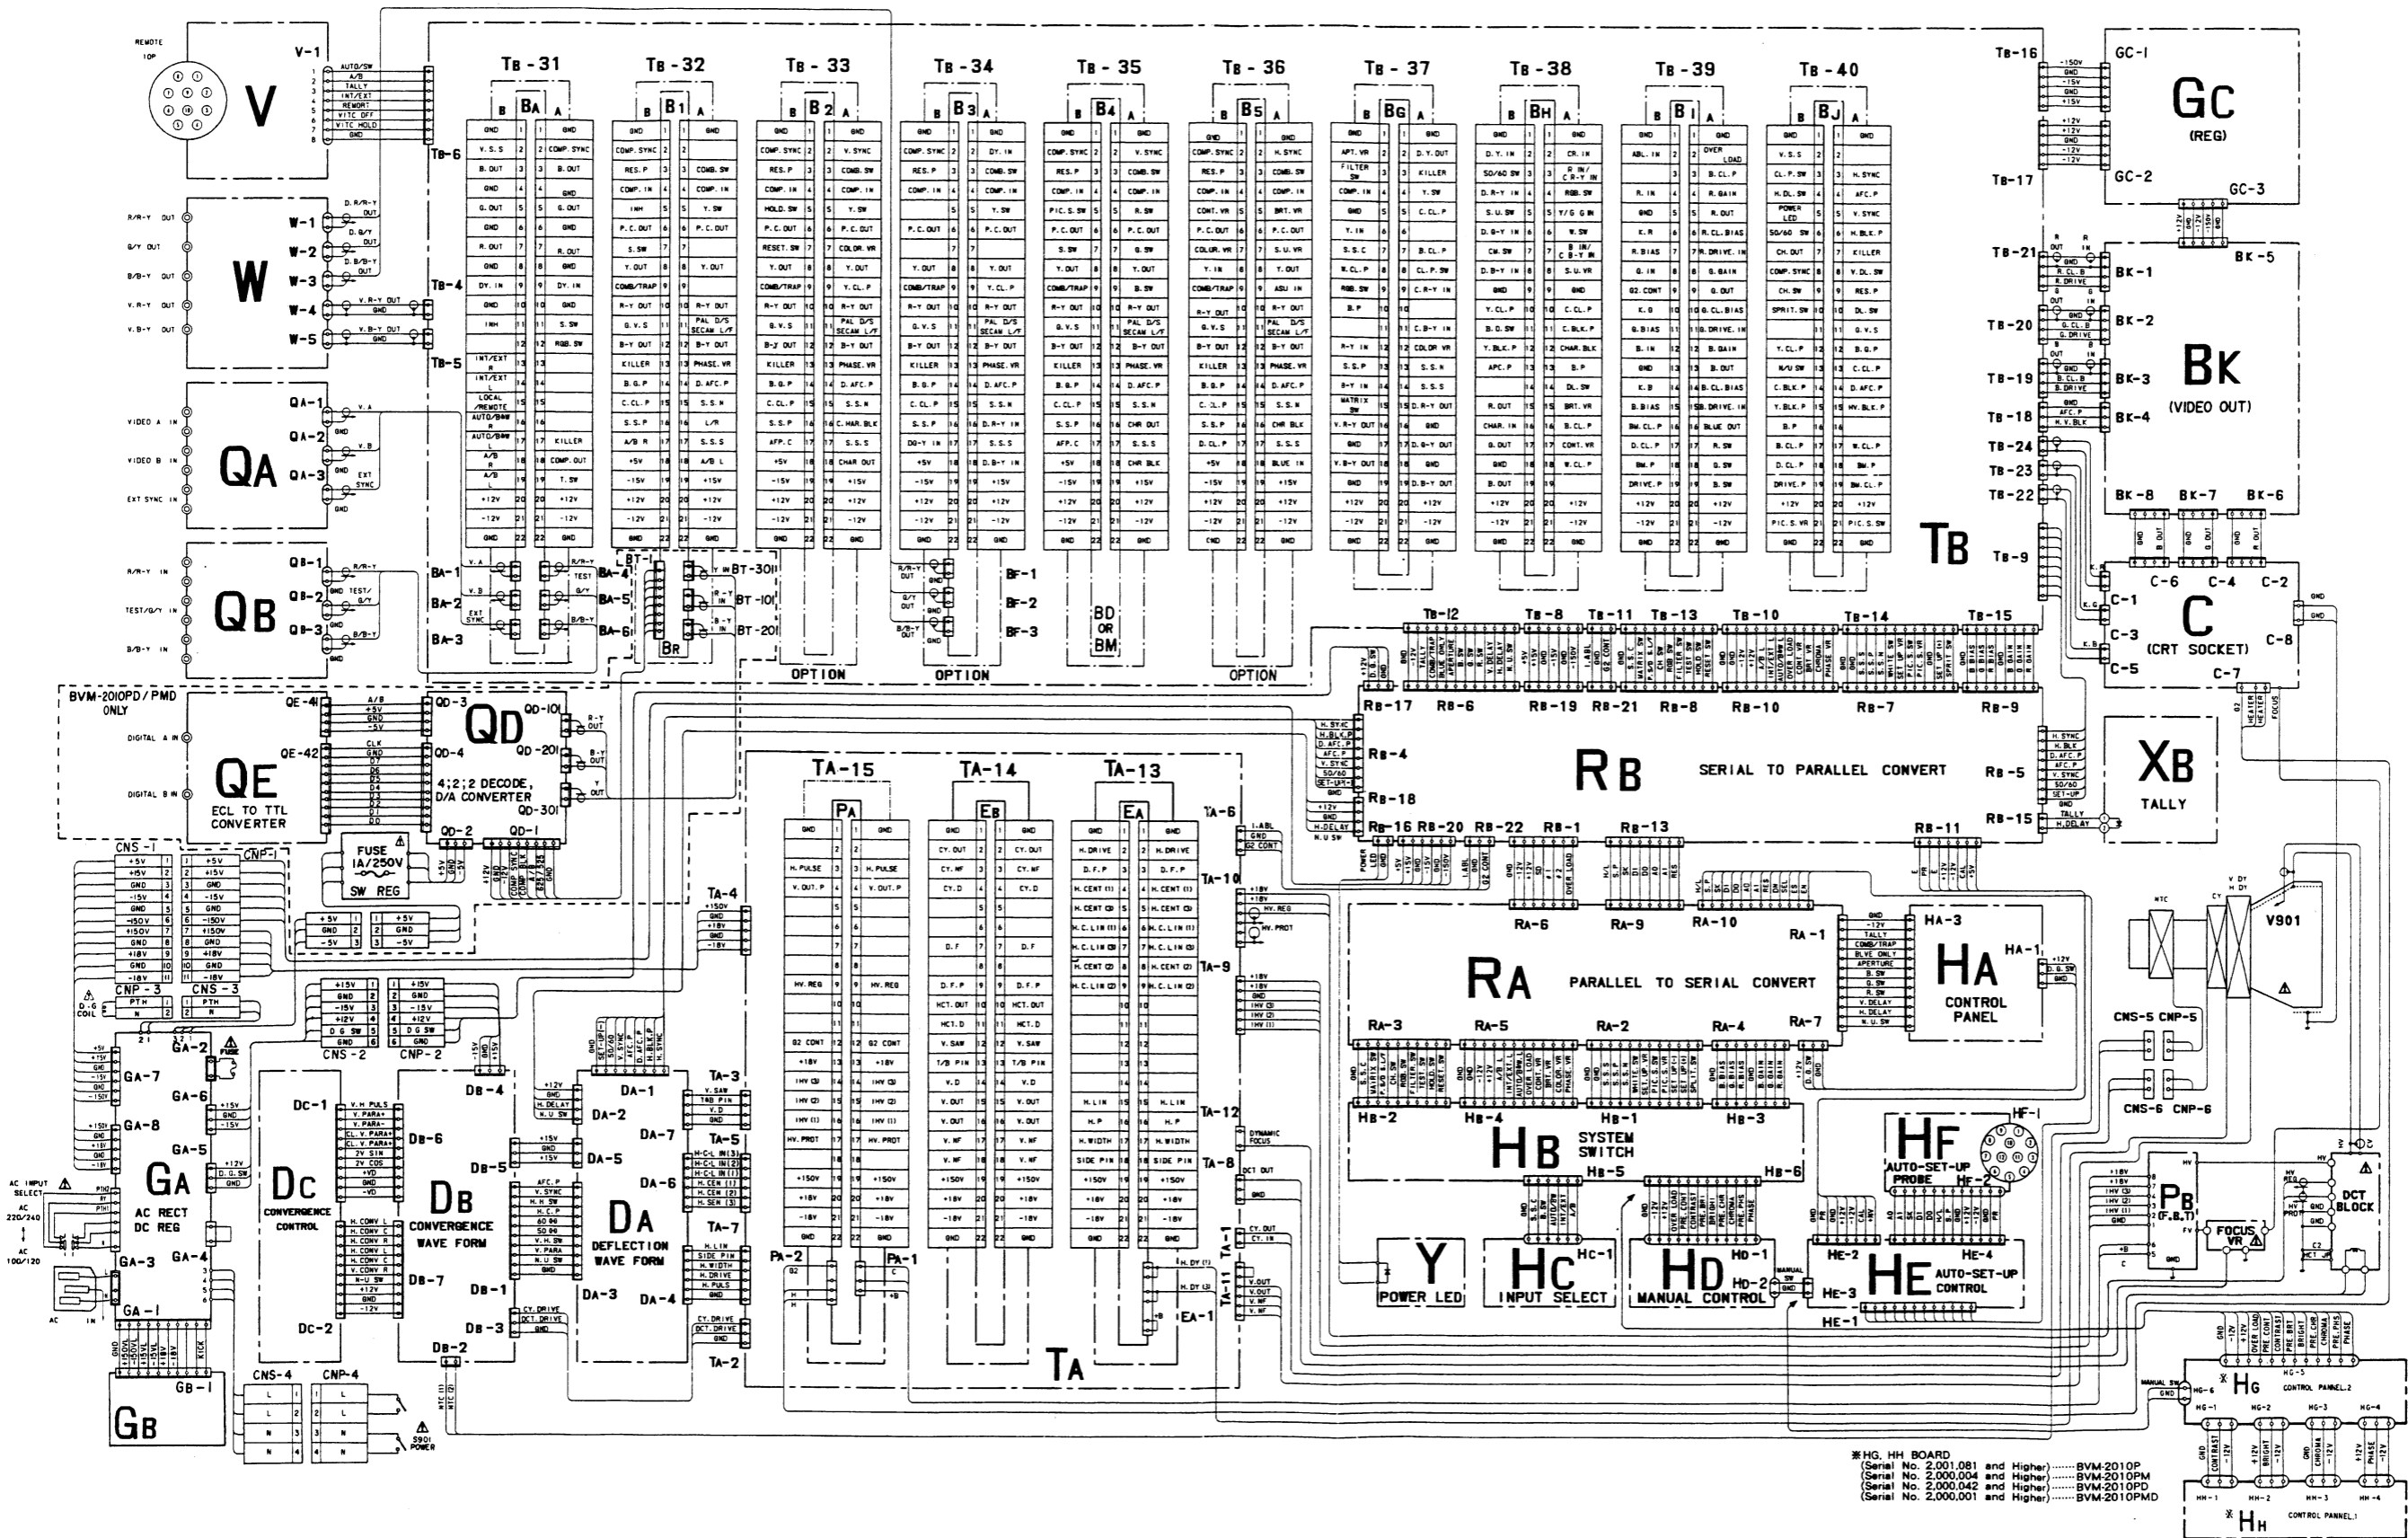









*HG, HH BOARD
 (Serial No. 2,001,081 and Higher) BVM-2010P
 (Serial No. 2,000,004 and Higher) BVM-2010PM
 (Serial No. 2,000,042 and Higher) BVM-2010PD
 (Serial No. 2,000,001 and Higher) BVM-2010PMD

5-3. MOUNTING AND SCHEMATIC DIAGRAMS



Note:




Note: The components identified by shading and mark  are critical for safety. Replace only with part number specified.

- All capacitors are in μF unless otherwise noted. p : μF 50 WV or less are not indicated except for electrolytics.
- All resistor are in ohms, 1/2W on the C board and 1/4W on the rest of the boards unless otherwise specified. $k\Omega = 1000\Omega$, $M\Omega = 1000k\Omega$
-  : nonflammable resistor.
- Δ : internal component.
-  : direct connection to points marked  on the chassis
-  : panel designation.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- The components identified by  in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.
When replacing components identified by , make the necessary adjustments indicated. If results do not meet the specified value, change the component identified by  and repeat the adjustment until the specified value is achieved.
Refer to R52, R53, R67, R68, R124, R126, R222, R227, R228 and R239.
Adjust on page 4-11 ~ 4-16.
When replacing the part in below table, be sure to perform the related adjustment.
-  Selected to yield optimum performance.

Reference information

- RESISTOR : RN METAL FILM
 : RC SOLID
 : FPRD NONFLAMMABLE CARBON
 : FUSE NONFLAMMABLE FUSIBLE
 : RS NONFLAMMABLE WIREWOUND
 : RB NONFLAMMABLE CEMENT
- COIL : LF-8L MICRO INDUCTOR
- CAPACITOR: TA TANTALUM
 : PS STYROL
 : PP POLYPROPYLENE
 : PT MYLAR
 : MPS METALIZED POLYESTER
 : MPP METALIZED POLYPROPYLENE
 : ALB BIPOLAR
 : ALT HIGH TEMPERATURE
 : AIR HIGH RIPPLE

Part replaced ()	Adjustment ()
C59, IC3, R67, R68, R78, RV2 ... (GA board)	+B MAX (R67, R68) Page 4-11.
Q13, Q14, R52, R53 ... (GA board) D5, D6, D7, D8, Q3, Q4, Q5, R4, R5, R19, R20, R21, R22 ... (GB board)	+B PROTECTOR (R52, R53) Page 4-11.
D216, IC1, IC4, R123, R124, R125, R126, R136, R137, R138, R203, R204, RV1 ... (PA board) DCT BLOCK	HV REG (R124, R126) Page 4-16.
D205, D207, D215, IC2, R201, R202, R213, R214, R225, R226, R227, R228, R243, R245 ... (PA board) DCT BLOCK	HV HOLD DOWN (R227, R228) Page 4-14.
D205, D206, D215, IC2, R201, R202, R213, R214, R220, R221, R222, R223, R224, R242 ... (PA board) T1 (FBT), R1, R2, R5 ... (PB board)	BEAM CURRENT PROTECTOR-1 (R222) Page 4-11~4-13.
D204, D216, IC3, R203, R204, R231, R232, R237, R238, R239, R240, R241, R247 ... (PA board) T1 (FBT), R3, R4, R6 ... (PB board)	BEAM CURRENT PROTECTOR-2 (R239) Page 4-12~4-13.

-  : adjustment for repair.
-  : B+ bus.
-  : B- bus.
- Circled numbers are waveform references.
- Waveforms are taken with a color-bar signal input and with a 75 Ω terminator connected to an open terminal.

- Switches and controls are set as follows unless otherwise noted.



FRONT PANEL

- INPUT selector A
- SYNC selector INT } HC board
- MODE selector AUTO } }
- CONTRAST MANUAL switch PRESET } HG board
- BRIGHTNESS MANUAL switch PRESET (HD)
- CHROMA MANUAL switch PRESET } }
- PHASE MANUAL switch PRESET } }
- SCAN MODE switch
- UNDER SCAN NOR
- H. DELAY NOR
- V. DELAY NOR
- SCREEN switch (R) NOR } HA board
- SCREEN switch (G) NOR } }
- SCREEN switch (B) NOR } }
- APT switch NOR } }
- BLUE ONLY switch NOR } }
- COMB/TRAP filter selector TRAP

SUB CONTROL PANEL


- INPUT SELECT buttons B
- COLOR STANDARD buttons NTSC
- FILTER switch OFF
- MATRIX switch OFF
- PAL/SECAM mode selector D(L)
- WHITE/OPERATE/SET UP selector OPERATE } HB board
- SPRIT SCREEN switch OFF
- CROSS HATCH switch OFF
- VITC switch OFF
- PIC. SET UP switch OFF
- AFC switch 2m sec } DA board

Note:

-  : Conductor side pattern
-  : Component side pattern

TA TA


TA board (MOTHER BOARD)

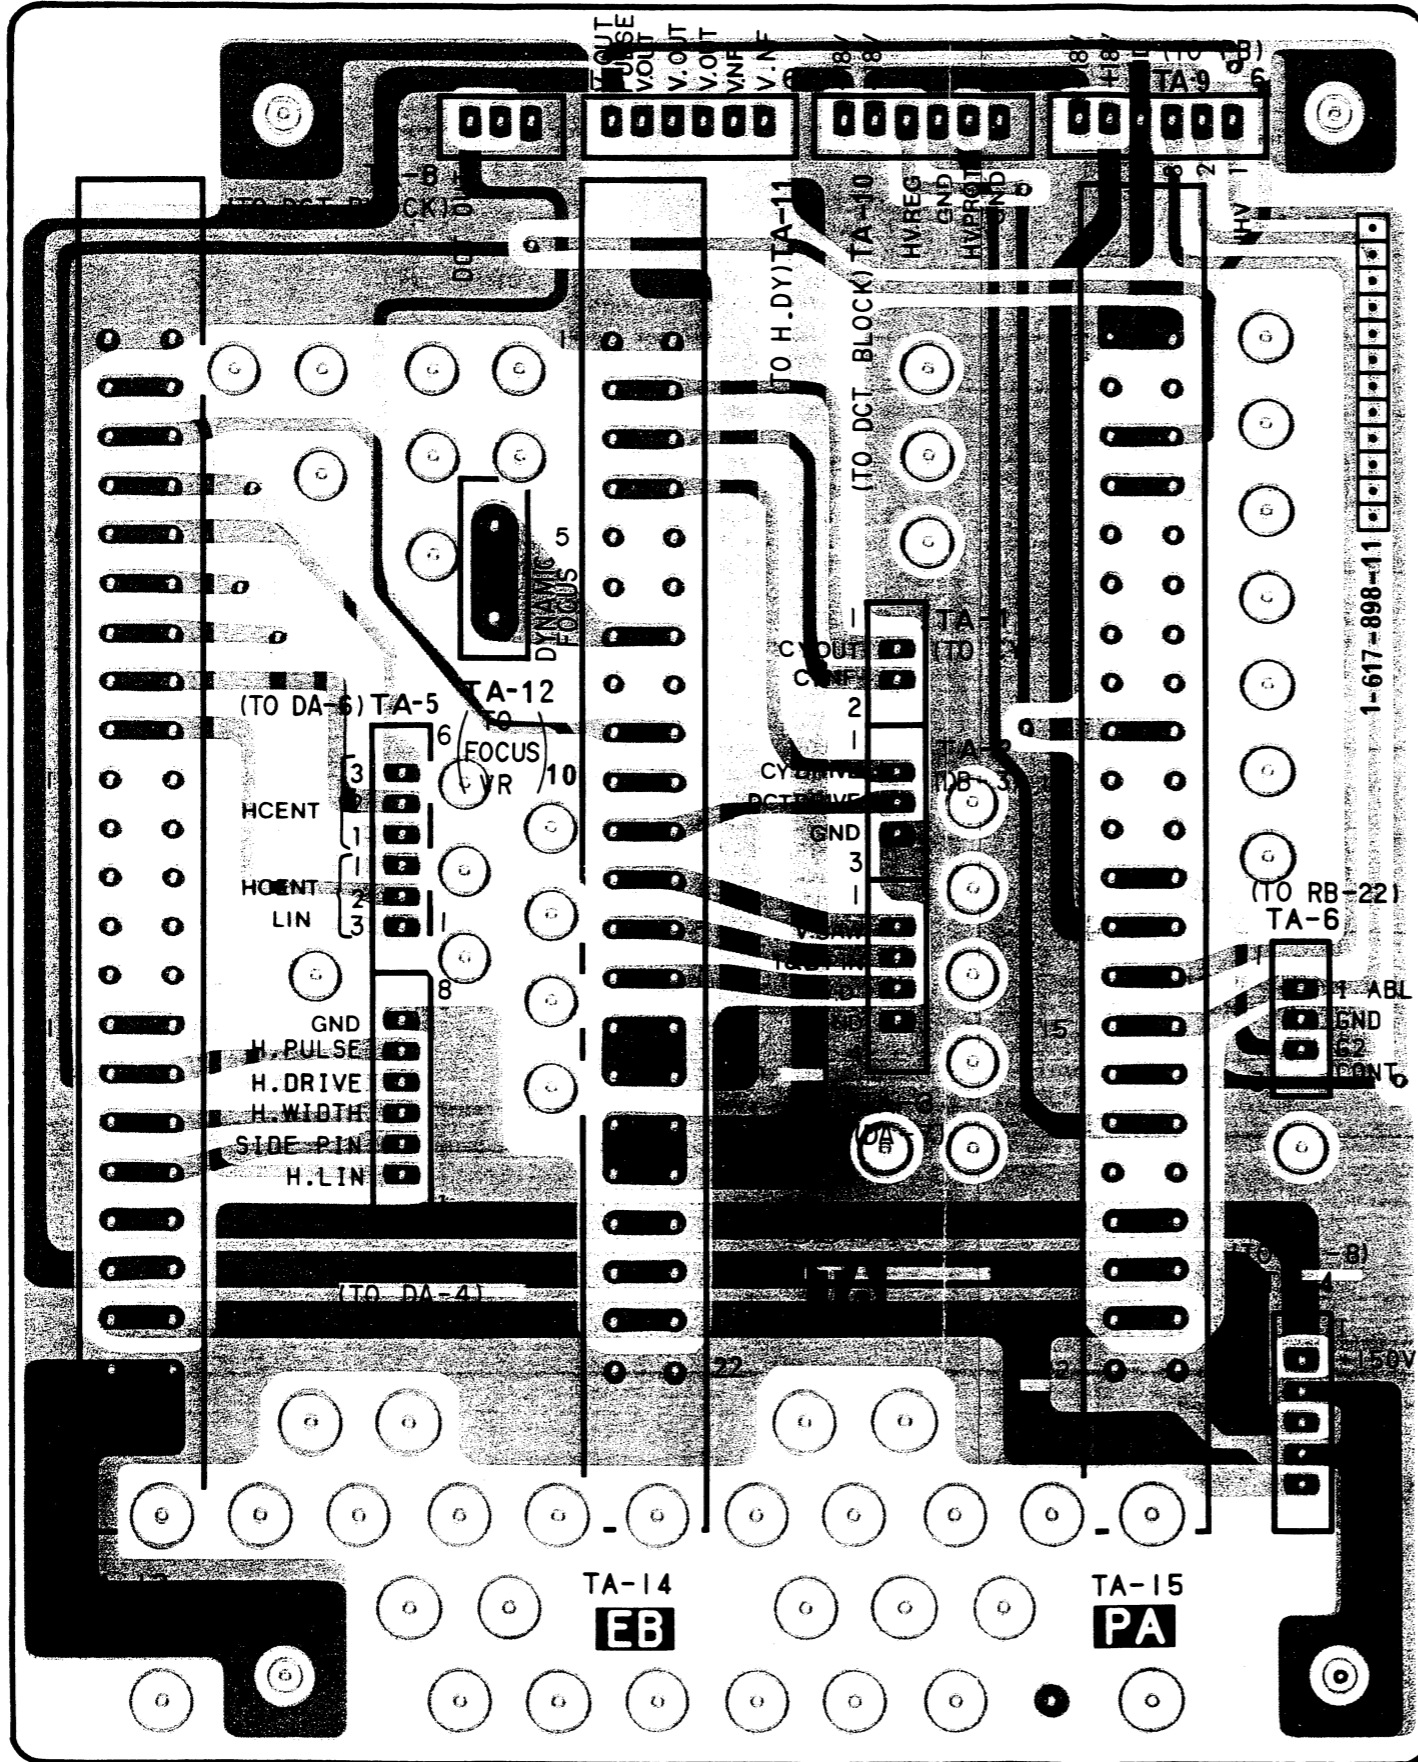

- [Solid black area] : Conductor side pattern
- [Stippled area] : Component side pattern


TA TA

TA board (MOTHER BOARD)

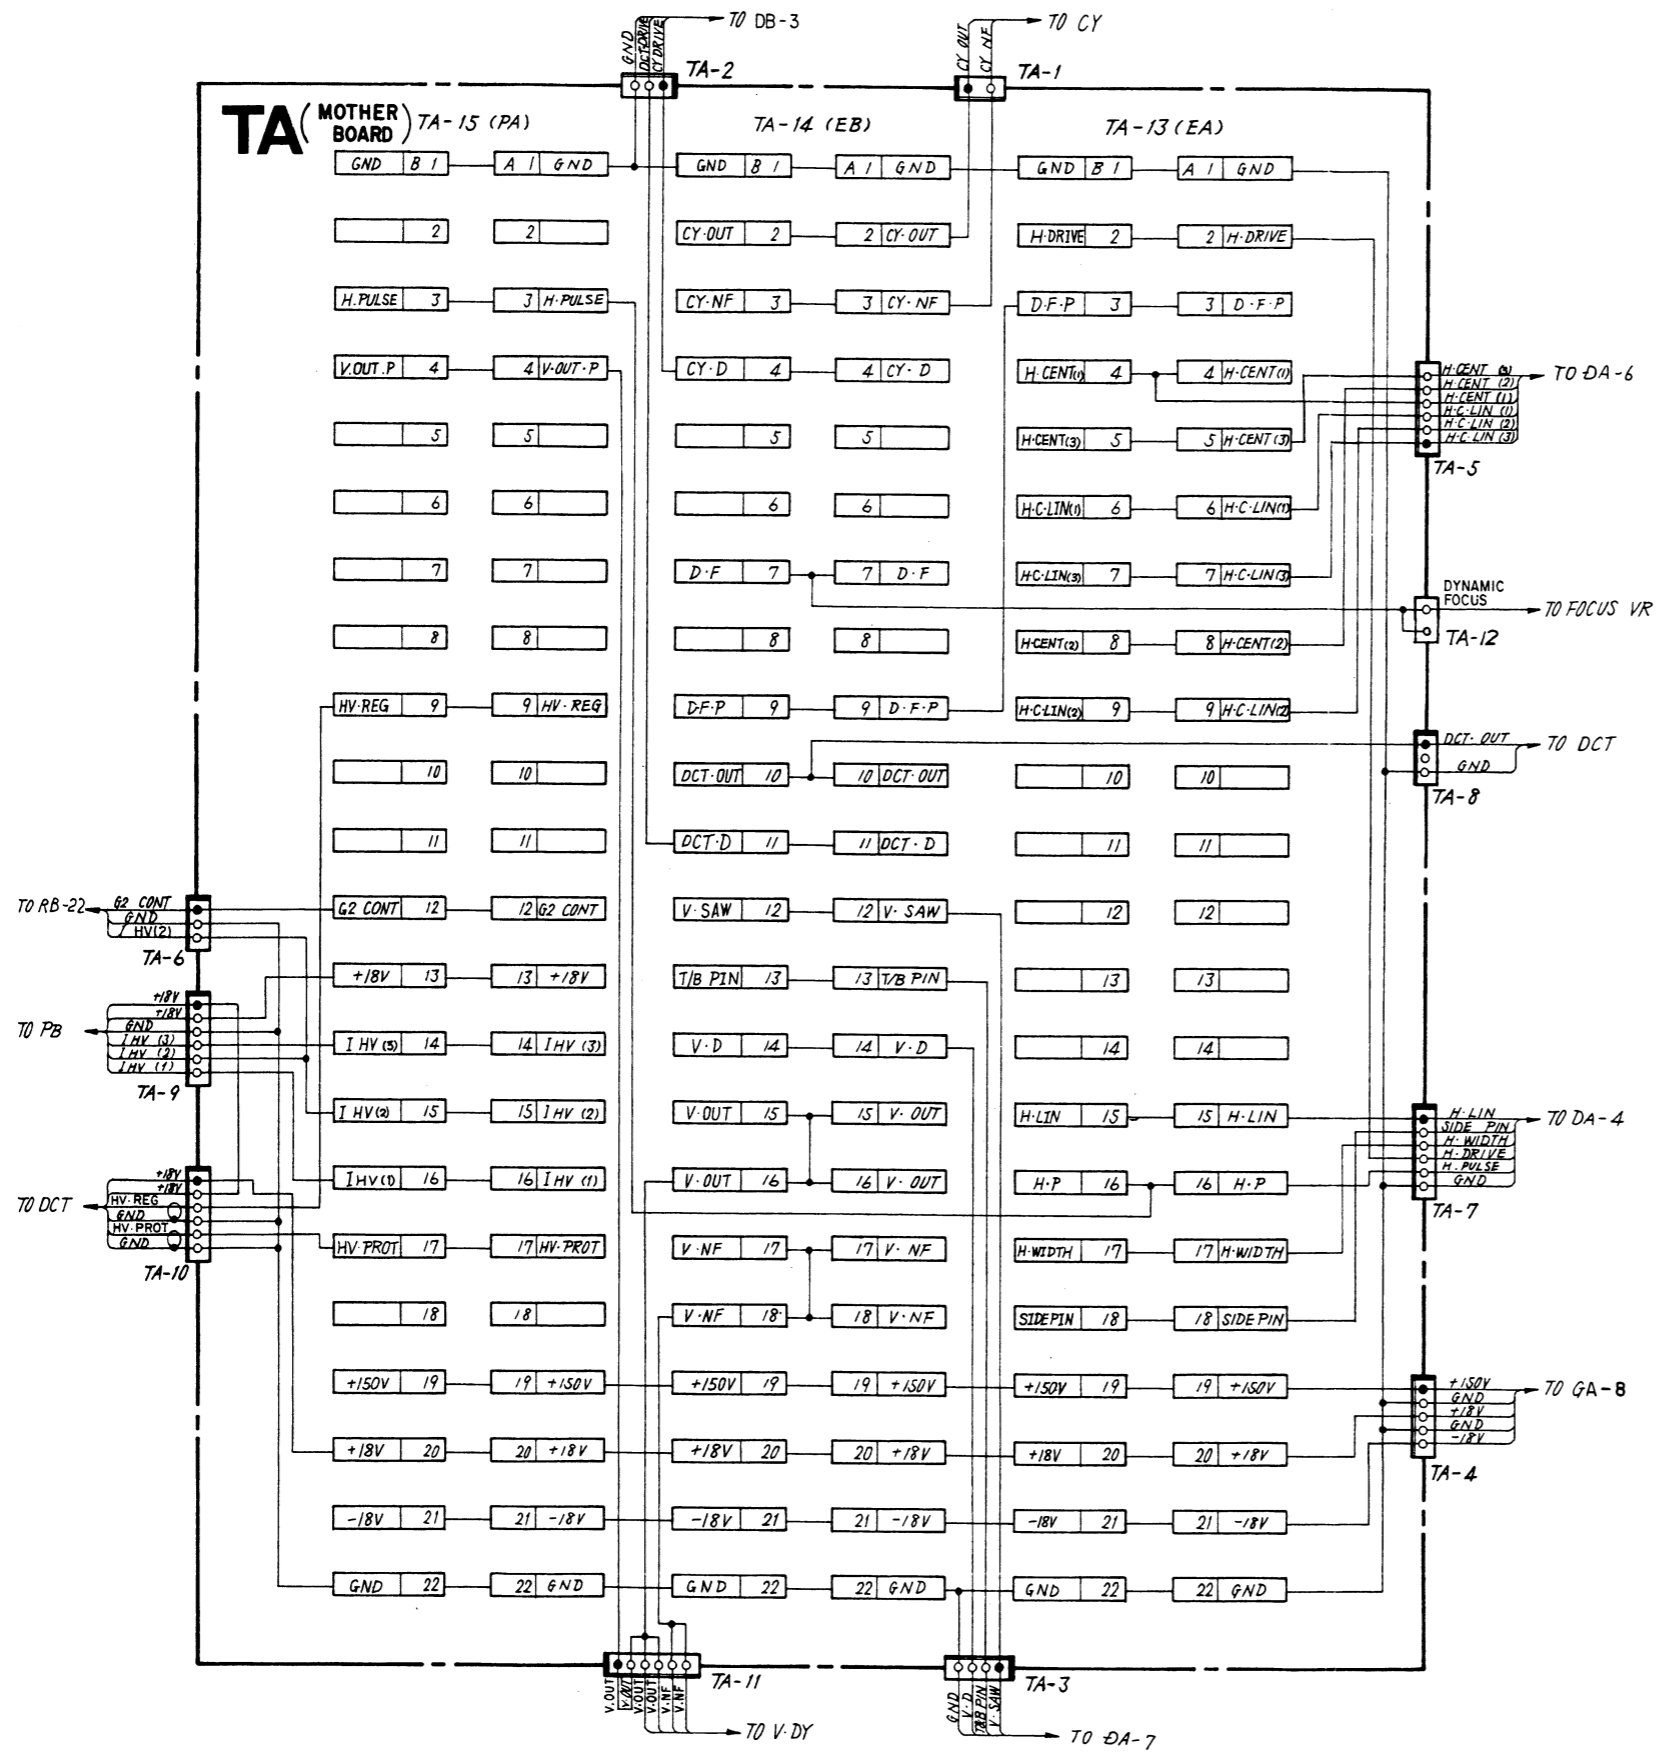

TB TB


TB board (MOTHER BOARD)

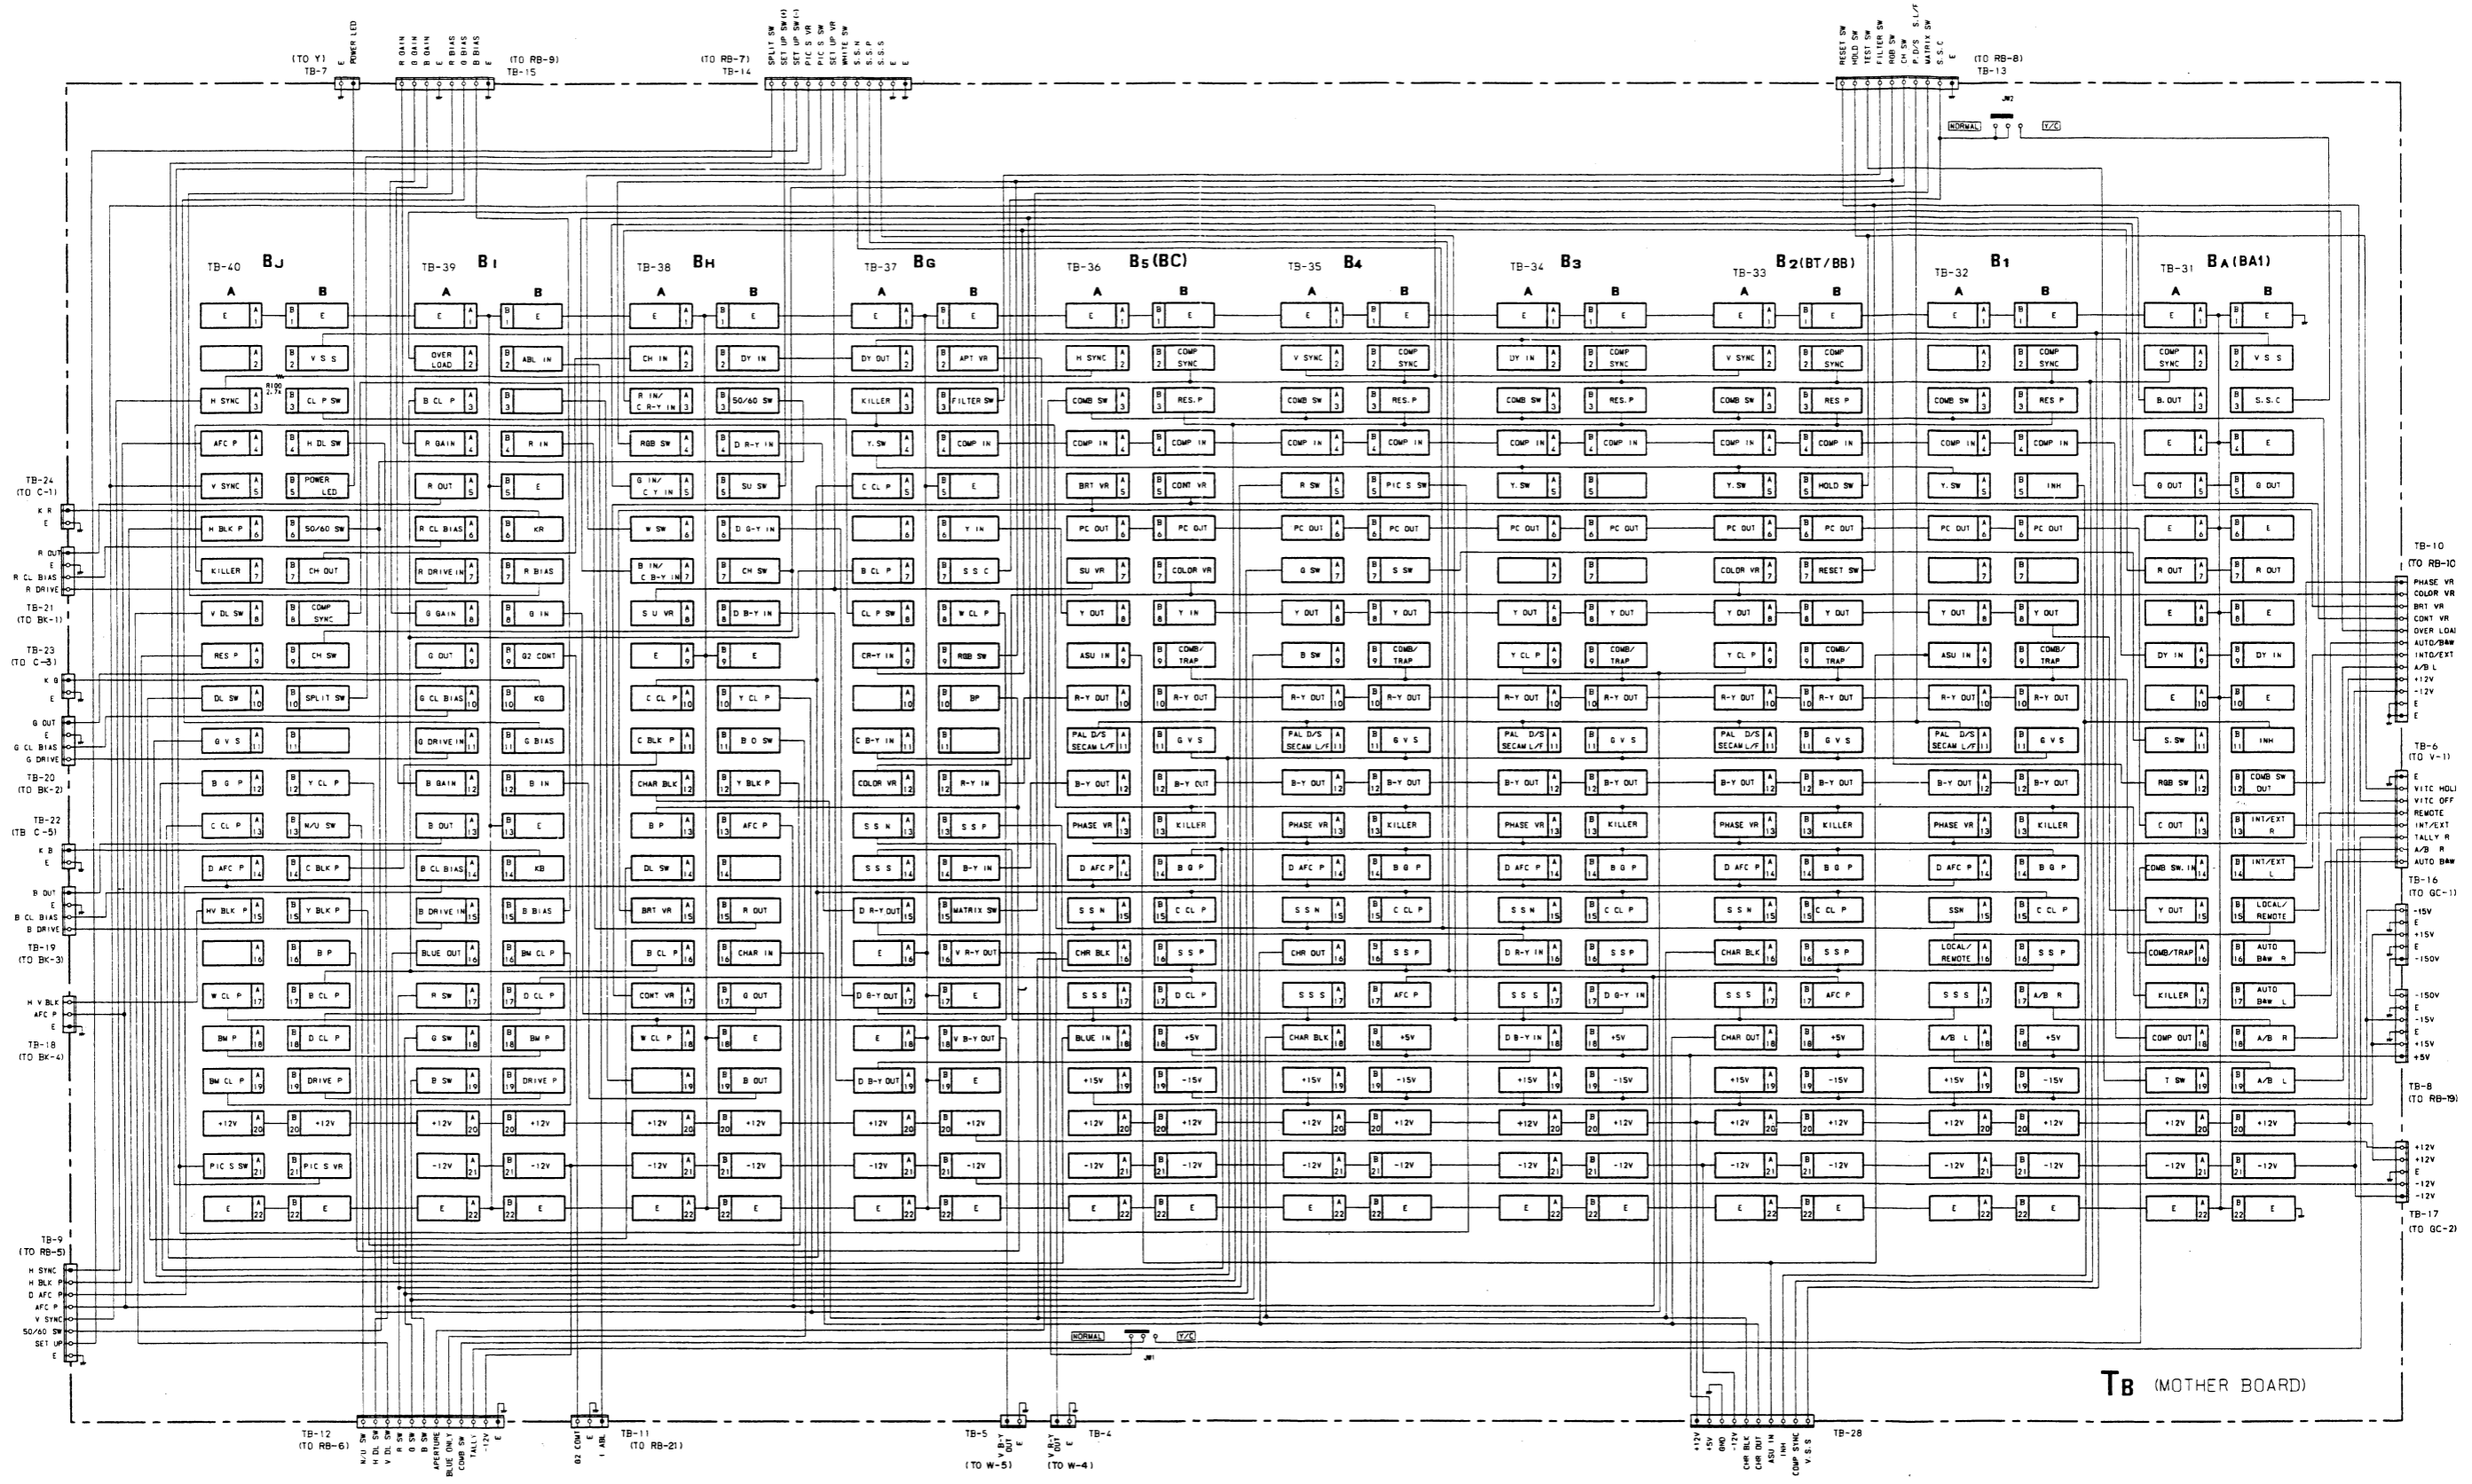

BA BA

BA board (SYNC SELECT & SYNC SEP, HOOK UP)


IC											2	3											1				
Q	717	716		715		713	708	711		707		706	703	705	702	5		3	4				2				1
				710		709		712					701														
	605					505				405				305						205				105			
	604				504				404				304						204				104				
	603				503				403				303						203				103				
		602					502				402				302						202			102			
		601					501				401				301						201			101			
D											708	707	706	703	705	710		101	709	4						2	
													704					702									
TP	TP702					TP701					TR401						TP2					RV201		TP501	TP201	TP101	
ADJ		TP601					RV501			RV401												RV201		RV101		CV102	
		RV601					CV502			CV501					CV402							CV202		CV201		CV101	
			CV602											CV401													
			CV601																								

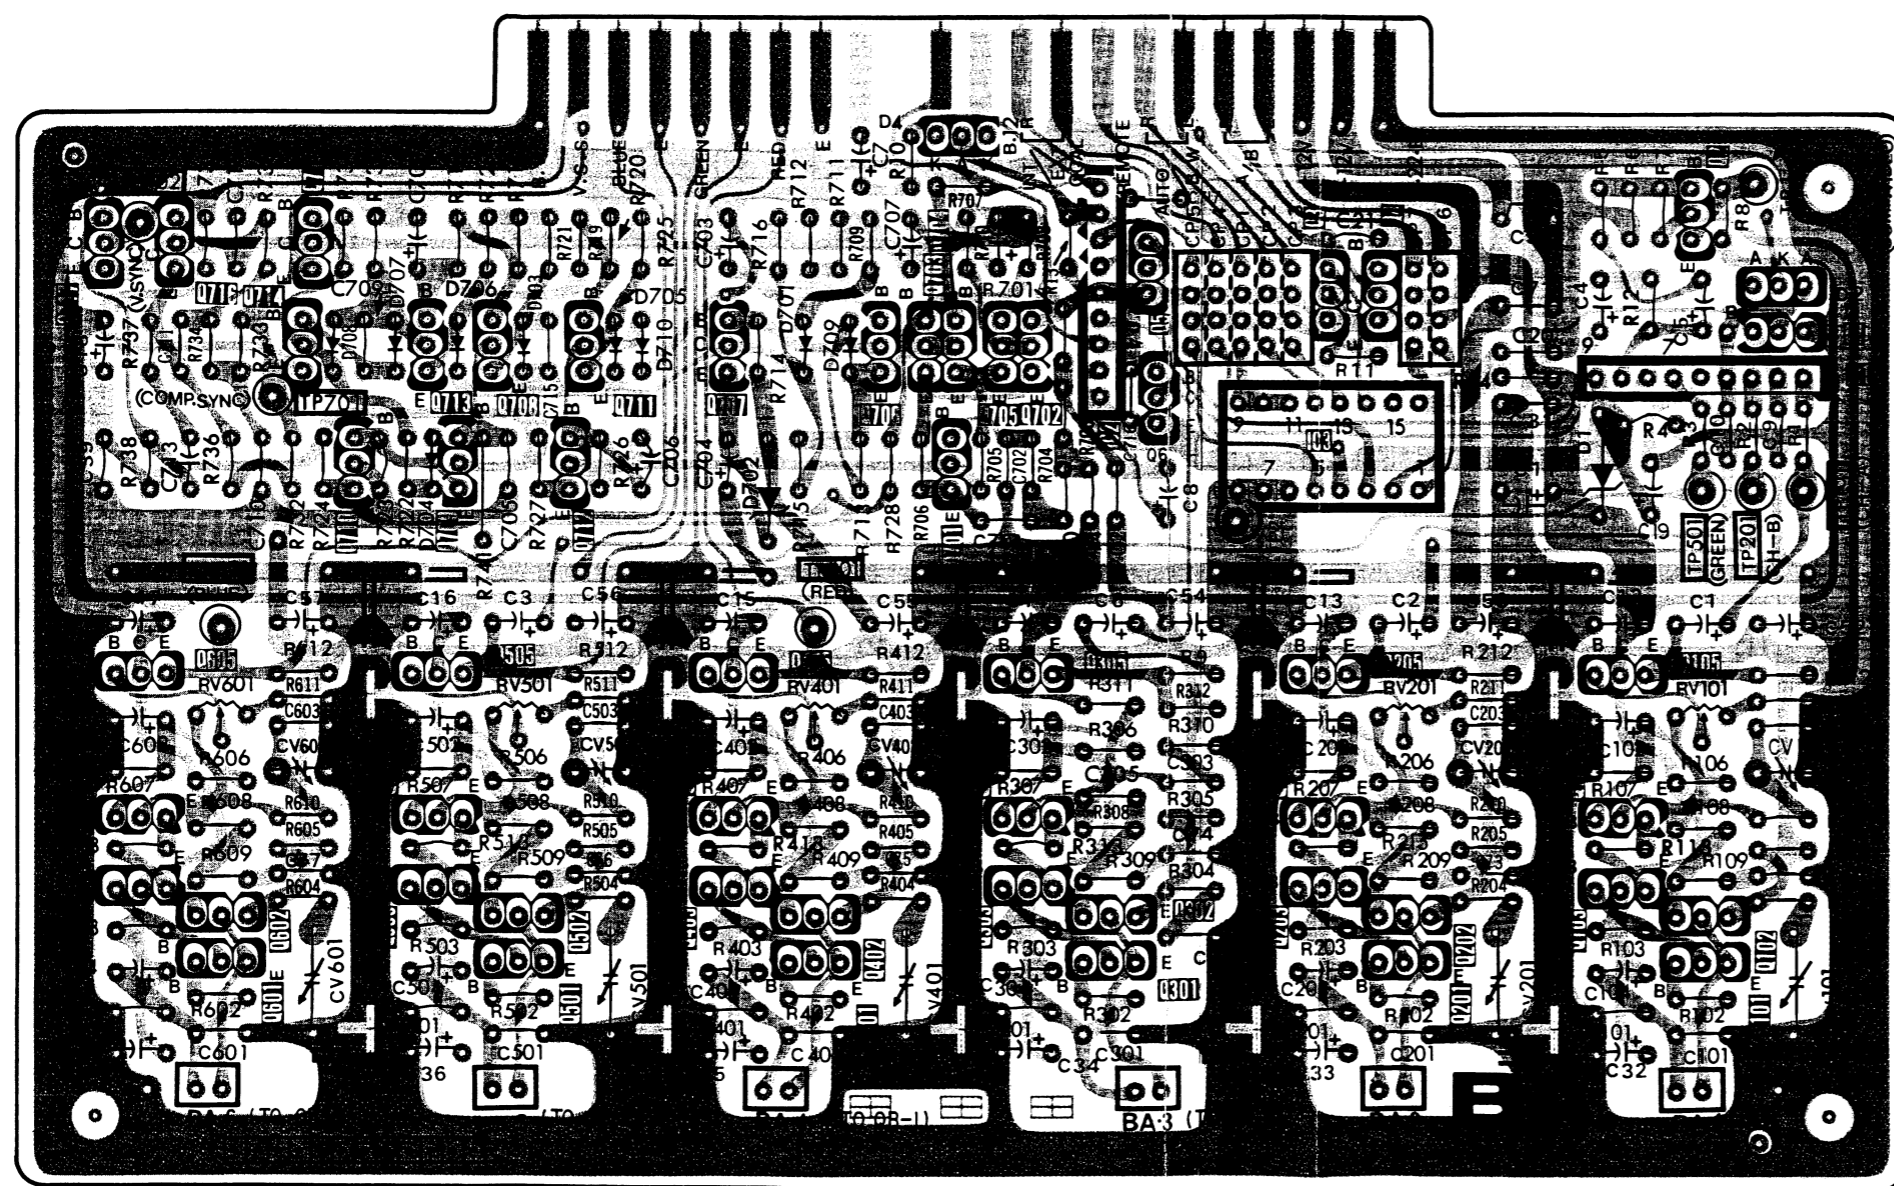

- [Pattern] : Conductor side pattern
- [Pattern] : Component side pattern


BA BA

BA board (SYNC SELECT & SYNC SEP, HOOK UP)

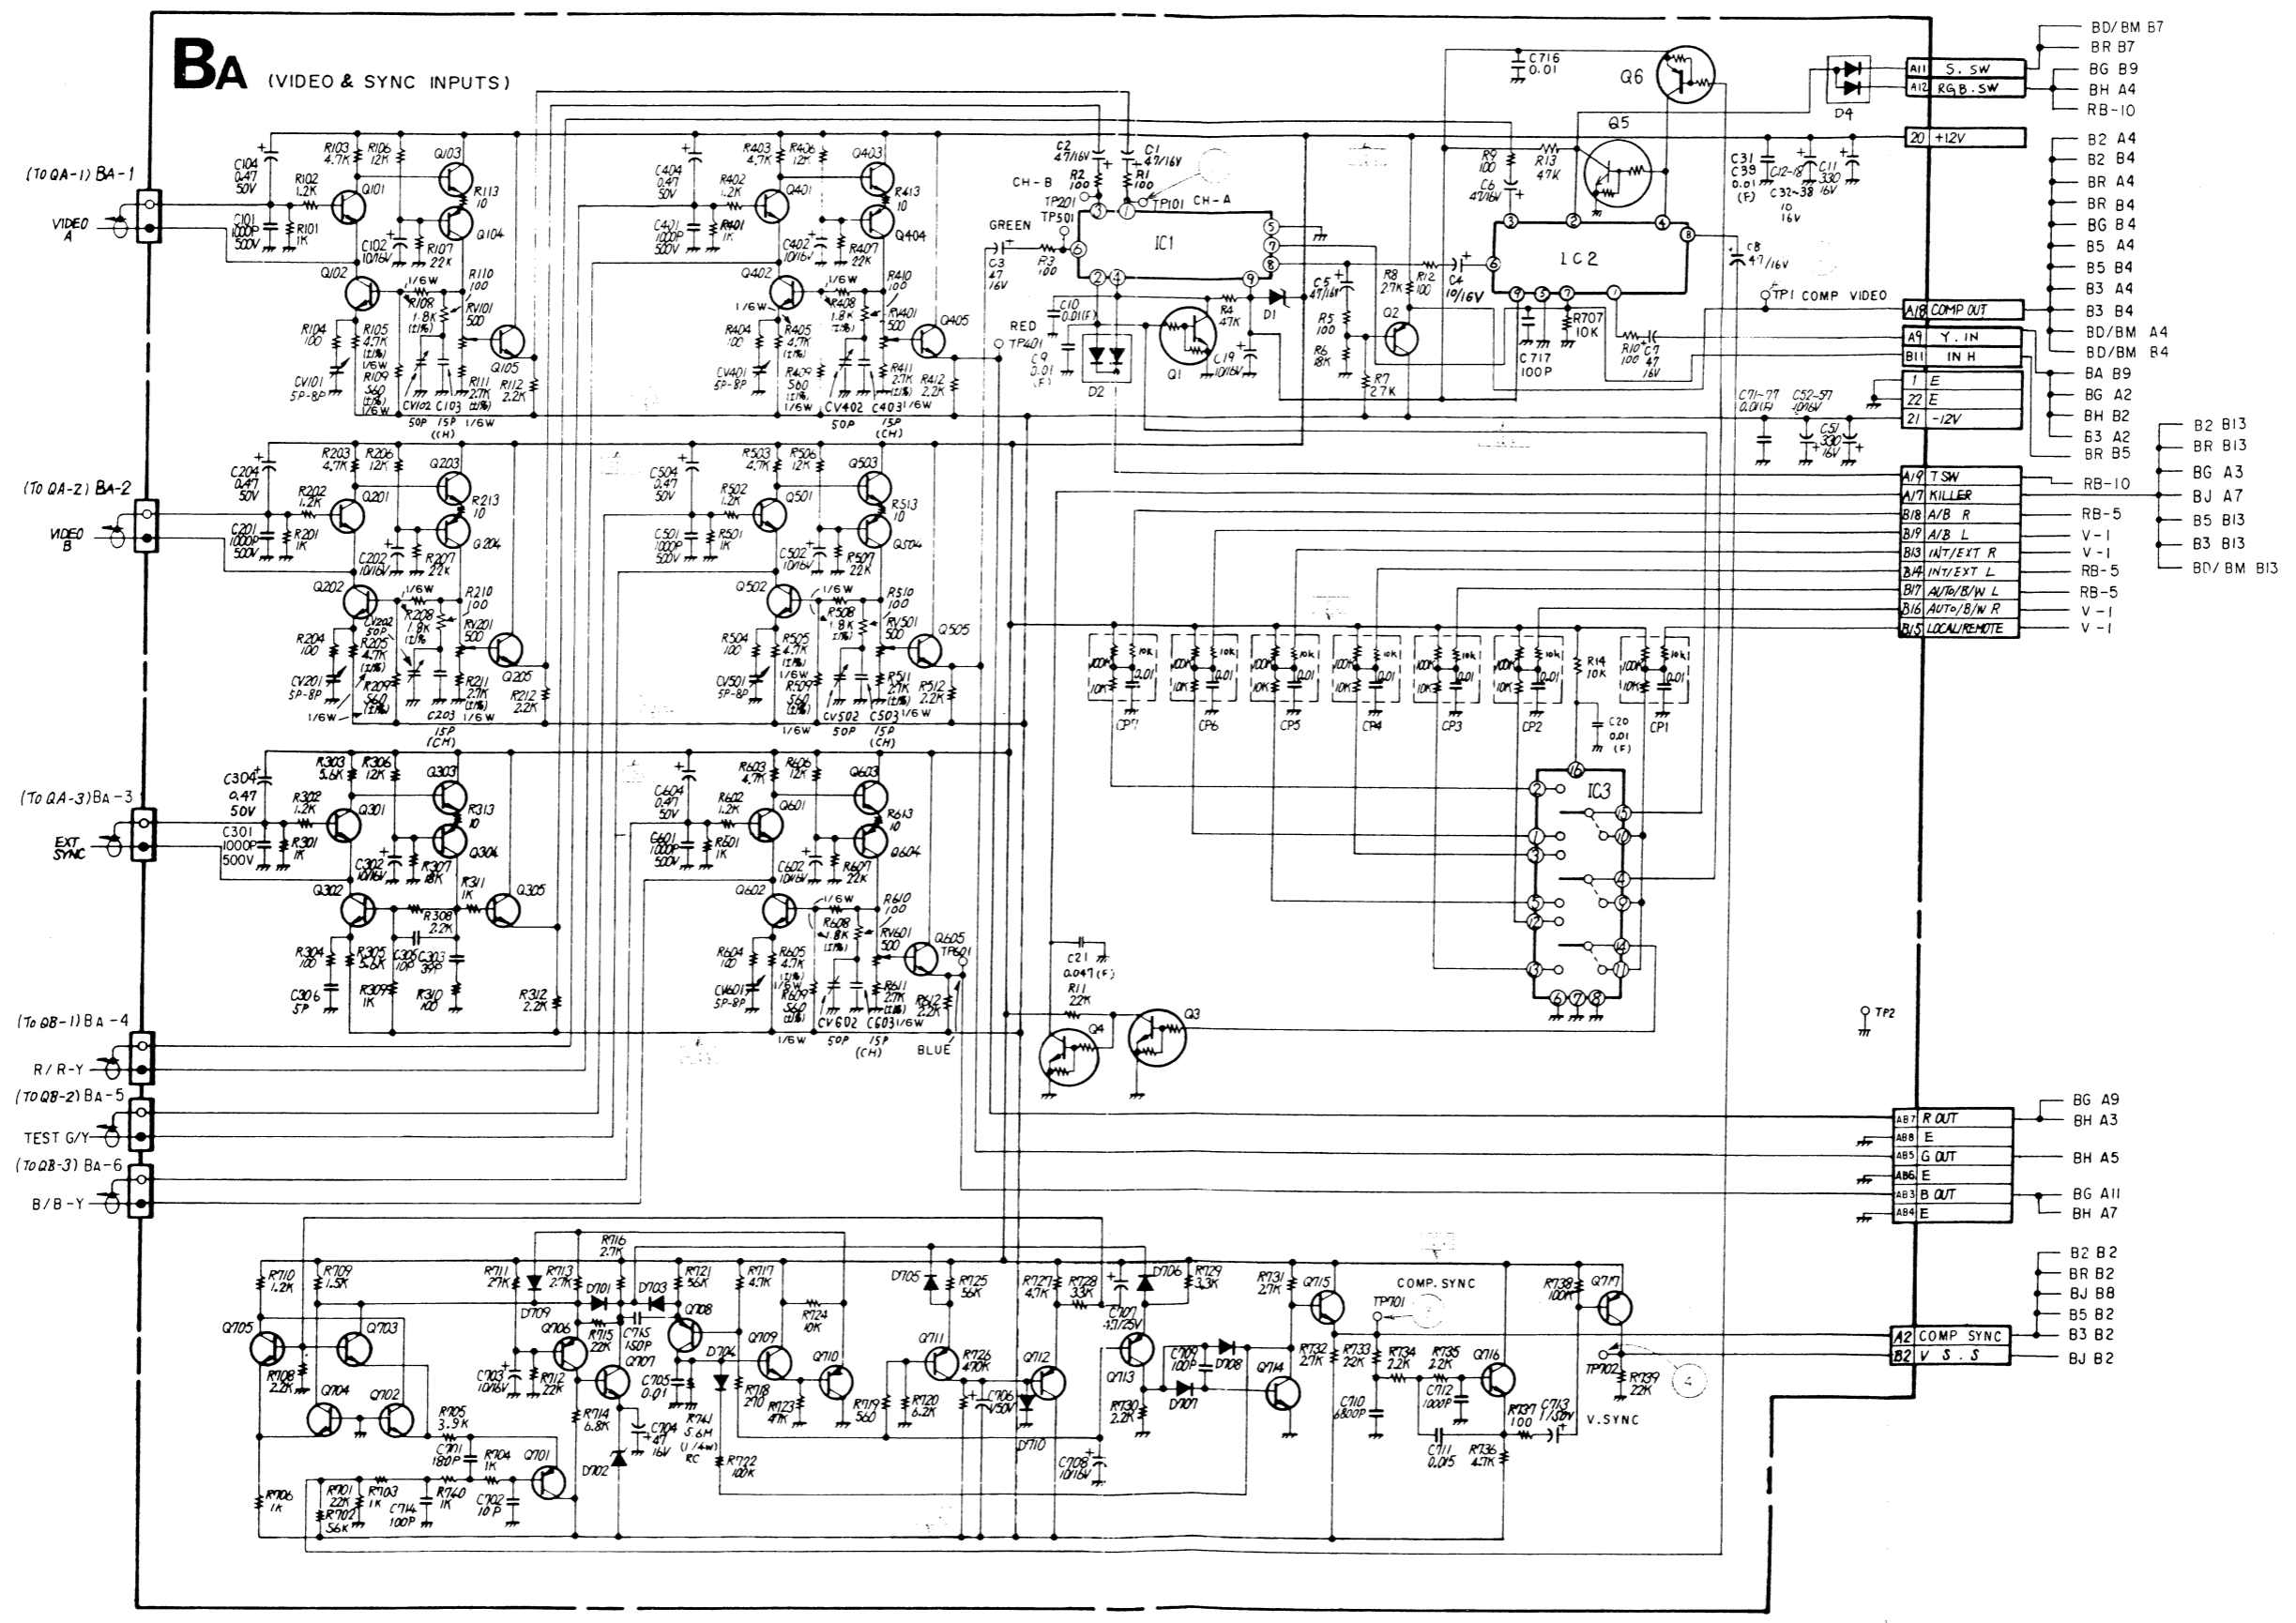


1	BD/BM B7
2	BR B7
3	BG B9
4	BH A4
5	RB-10
6	B2 A4
7	B2 B4
8	BR A4
9	BG B4
10	B5 A4
11	B5 B4
12	B3 A4
13	B3 B4
14	BD/BM A4
15	BD/BM B4
16	BA B9
17	BG A2
18	BH B2
19	B3 A2
20	BR B5
21	RB-10
22	BG A3
23	BU A7
24	RB-5
25	B5 B3
26	B3 B3
27	BD/BM B13
28	BG A9
29	BH A3
30	BH A5
31	BG A11
32	BH A7
33	B2 B2
34	BR B2
35	BU B8
36	B5 B2
37	B3 B2
38	BU B2

BA BOARD

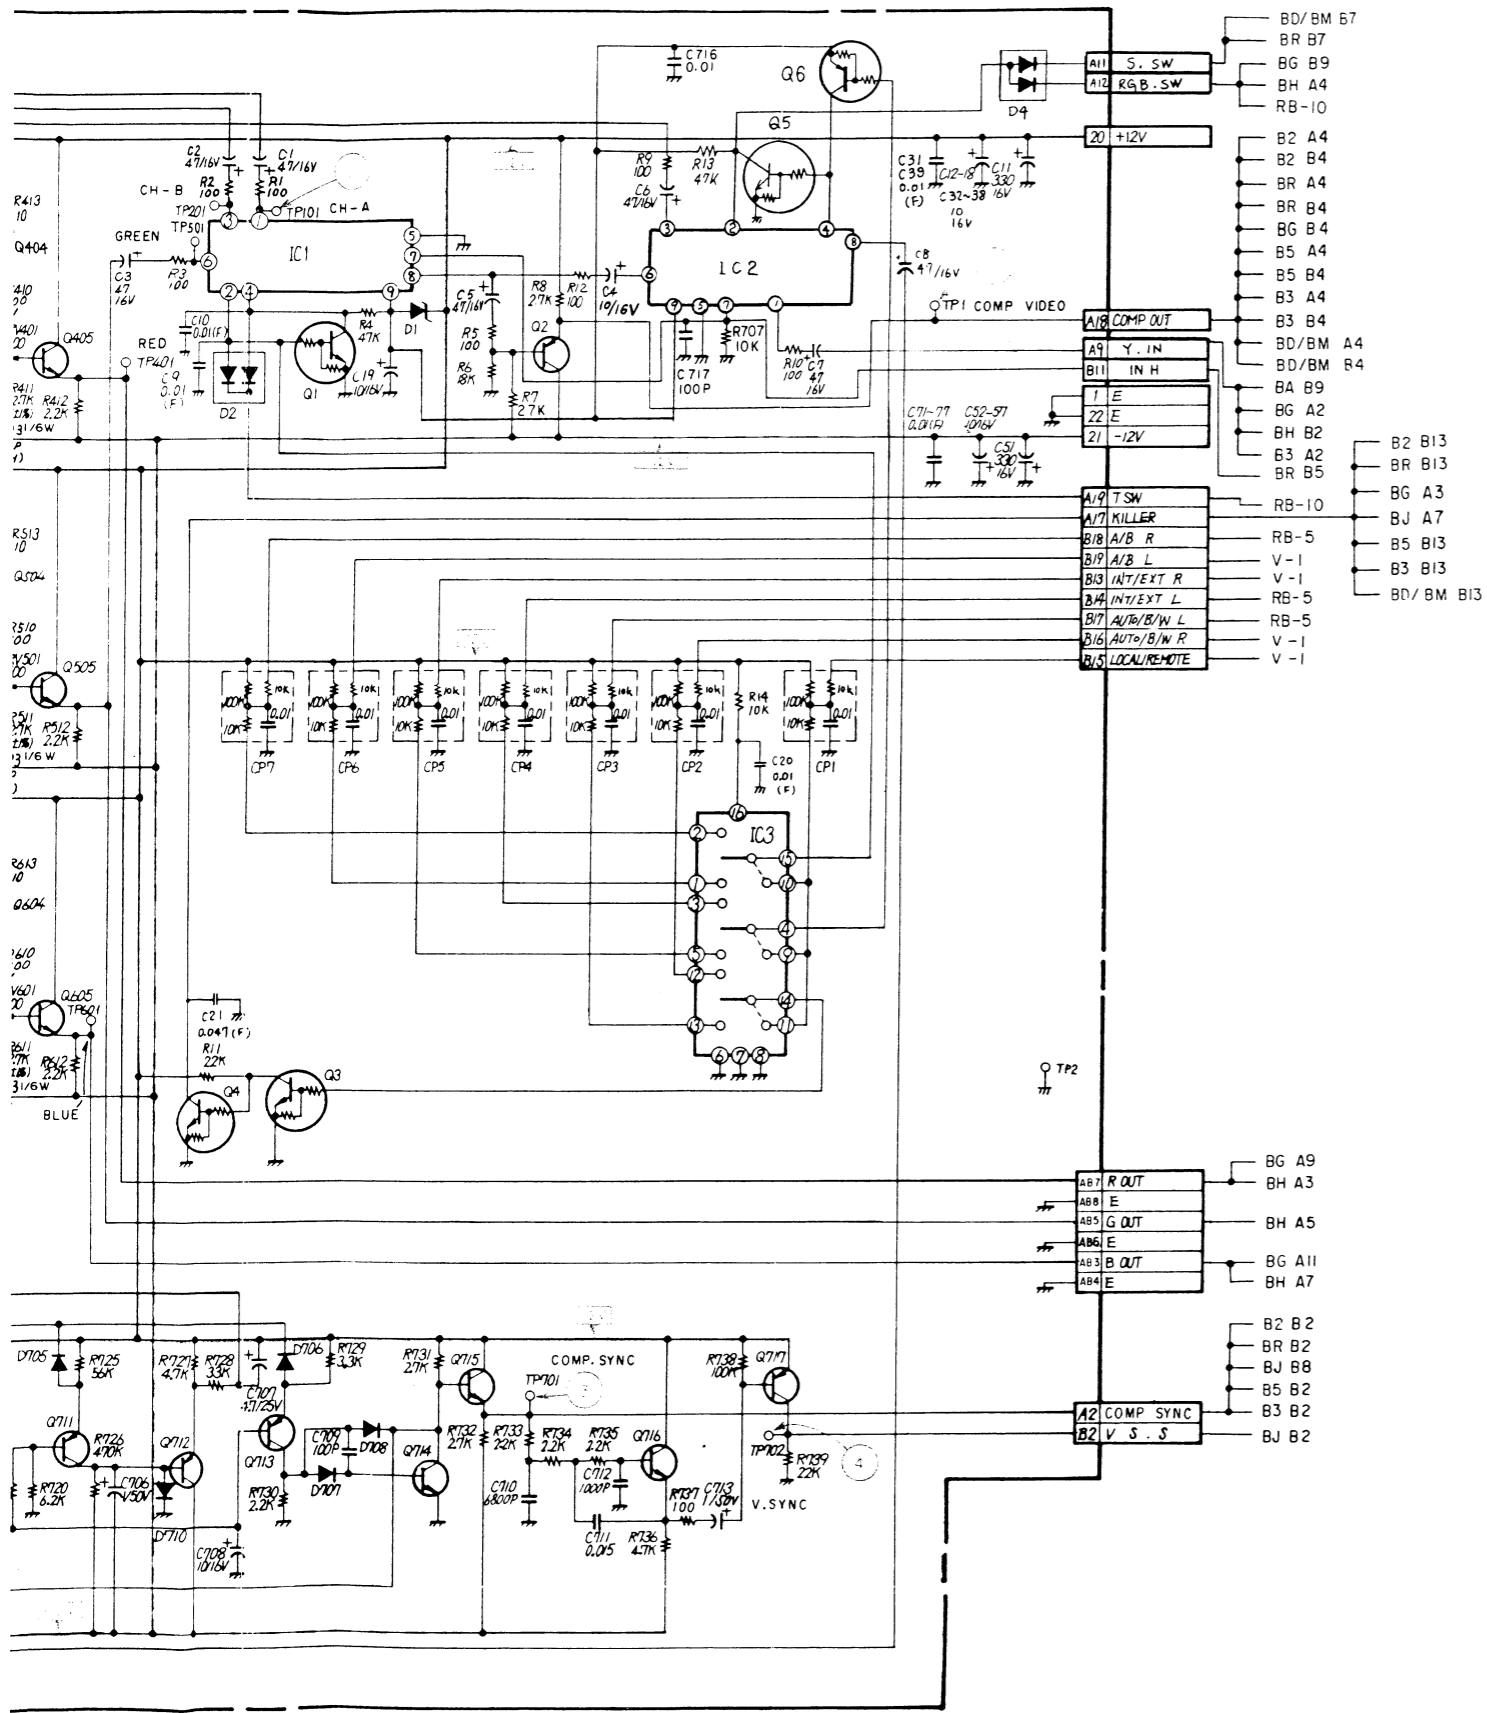


IC1	CX894	INPUT SELECT
2	CX894	SYNC SELECT
3	MC14053BCP	LOCAL/REMOTE SW
Q1	DTC144ES	INPUT SELECT CONTROL
2	2SA844	BUFF
3	DTC144ES	KILLER
4	DTC144ES	KILLER
5	DTC144ES	SYNC SELECT CONTROL
6	DTA144ES	INT/EXT CONTROL
101	2SC2668	VIDEO A AMP
102	2SC2668	VIDEO A AMP
103	2SC2668	VIDEO A AMP
104	2SA844	VIDEO A AMP
105	2SC2668	VIDEO A AMP
201	2SC2668	VIDEO B AMP
202	2SC2668	VIDEO B AMP
203	2SC2668	VIDEO B AMP
204	2SA844	VIDEO B AMP
205	2SC2668	VIDEO B AMP
301	2SC2668	EXT SYNC AMP
302	2SC2668	EXT SYNC AMP
303	2SC2668	EXT SYNC AMP
304	2SA844	EXT SYNC AMP
305	2SC2668	EXT SYNC AMP
401	2SC2668	R-Y/R AMP
402	2SC2668	R-Y/R AMP
403	2SC2668	R-Y/R AMP
404	2SA844	R-Y/R AMP
405	2SC2668	R-Y/R AMP
501	2SC2668	TEST/Y/G AMP
502	2SC2668	TEST/Y/G AMP
503	2SC2668	TEST/Y/G AMP
504	2SA844	TEST/Y/G AMP
505	2SC2668	TEST/Y/G AMP
601	2SC2668	B-Y/B AMP
602	2SC2668	B-Y/B AMP


Q603	2SC2668	B-Y/B AMP
604	2SA844-E	B-Y/B AMP
605	2SC2668	B-Y/B AMP
701	2SA1048	SYNC AGC
702	2SC2785	SYNC AGC
703	2SC2785	SYNC AGC
704	2SC2785	SYNC AGC
705	2SC2785	SYNC AGC
706	2SA1115	SYNC AGC
707	2SC3068	SYNC AGC
708	2SA1115	SYNC AGC
709	2SC2785	SYNC AGC
710	2SA1115	SYNC AGC
711	2SA1115	SYNC AGC
712	2SA1115	SYNC AGC
713	2SA1115	COMP SYNC SEP
714	2SC2785	COMP SYNC SEP
715	2SC3068	COMP SYNC SEP
716	2SC3068	V SYNC SEP
717	2SA1115	V SYNC SEP
D1	RD3.0E-B	+9V REG
2	MC921	INPUT SELECT CONTROL
4	MC911	SYNC SELECT CONTROL
701	1SS119	SYNC AGC
702	RD4.3E-B	-7.5V REG
703	1SS119	SYNC AGC
704	1SS119	SYNC AGC
705	1SS119	SYNC AGC
706	1SS119	SYNC AGC
707	1SS119	COMP SYNC SEP
708	1SS119	COMP SYNC SEP
709	1SS119	SYNC AGC
710	1SS119	SYNC AGC



1Vp-p (H)
2.1Vp-p (H)




12Vp-p (V)




12Vp-p (H)

BD board (PAL DECODER Y.TRAP)
 BM board (PAL-M DECODER Y.TRAP)

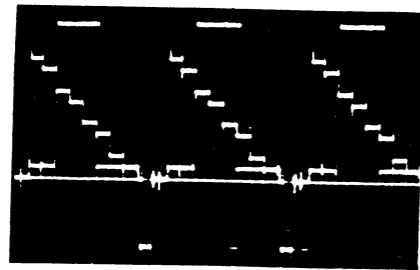

1 1Vp-p (H)

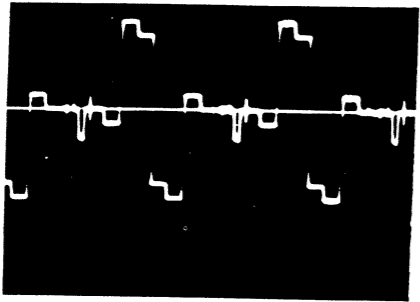


2 0.3Vp-p

3 0.32Vp-p

4 0.32Vp-p

5 0.36Vp-p

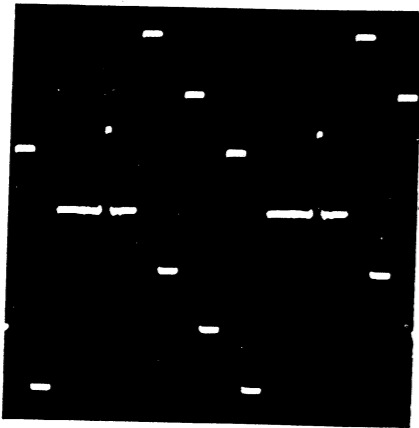


6 0.38Vp-p

7 0.38Vp-p

8 0.39Vp-p

9 0.42Vp-p




10 0.26Vp-p (H)

11 0.26Vp-p (H)

NOTE

Model Ref	BD (PAL)			BM (PAL-M)		
	Value	Tolerance	Voltage	Value	Tolerance	Voltage
C1	10P	0.5P	50V	15P	5%	50V
C2	10P	0.5P	50V	15P	5%	50V
C3	33PF	5%	50V			
C4	47P	5%	50V	39P	5%	50V
C6	68P	5%	50V	56P	5%	50V
C7	33P	5%	50V	39P	5%	50V
C8	6P	0.5P	50V	2P	0.25P	50V
C19	1-102-668-00 15P 5% (RH) 50V			1-102-880-00 15P 5% (UJ) 50V		
C20	68P	5%	50V	56P	5%	50V
C23	ELECT 1 20% 50V			FILM 0.01 5% 50V		
C26	160P	1%	500V	130P	1%	500V
C30	160P	1%	500V	130P	1%	500V
C62	24P	5%	50V			JW
C80				1	20%	50V
C304	10P	0.5P	50V			
C316	2P	0.25P	50V	10P	0.5P	50V
C350	33P	5%	50V	22P	5%	50V
D15						1SS119
L3			33μH			68μH
R4	1.5K	1%	1/6W	1K	1%	1/6W
R5	82	1%	1/6W	110	1%	1/6W
R8	1.2K	1%	1/6W	1.8K	1%	1/6W
R11	56	1%	1/6W	130	1%	1/6W
R12	1.8K	1%	1/6W	2.2K	1%	1/6W
R23	6.8K	1%	1/6W	5.6K	1%	1/6W
R28	1.8K	5%	1/4W	3.3K	5%	1/4W
R34	270	1%	1/6W	680	1%	1/6W
R35	270	1%	1/6W	680	1%	1/6W
R40	1K	1%	1/6W	1K	5%	1/4W
R41	2.2K	1%	1/6W	2.2K	5%	1/4W
R42	10K	1%	1/6W	10K	5%	1/4W
R43	1K	1%	1/6W	1K	5%	1/4W
R55	750	1%	1/6W	910	1%	1/6W
R60	750	1%	1/6W	910	1%	1/6W
R64	220K	1%	1/6W	1K	5%	1/4W
R65	3.9K	1%	1/6W	2.2K	1%	1/6W
R115	5.1K	1%	1/6W	2.2K	1%	1/6W
R116	5.1K	1%	1/6W	2.2K	1%	1/6W
R130	220K	1%	1/6W	470K	1%	1/6W
R309	10	5%	1/4W			
R320	130K	1%	1/6W	360k	1%	1/6W
TH1						THERMISTOR S-10K
X1			4.43MHz			3.58MHz
X2			10.64MHz			10.717MHz
C113	ELECT 33 20% 16V					
R25	6.8K	5%	1/4W	4.7K	5%	1/4W
R26	680	5%	1/4W	1.2K	5%	1/4W
R39	1.5K	1%	1/6W	2.2K	1%	1/6W
C18	13PF	5%	50V	15PF	5%	50V

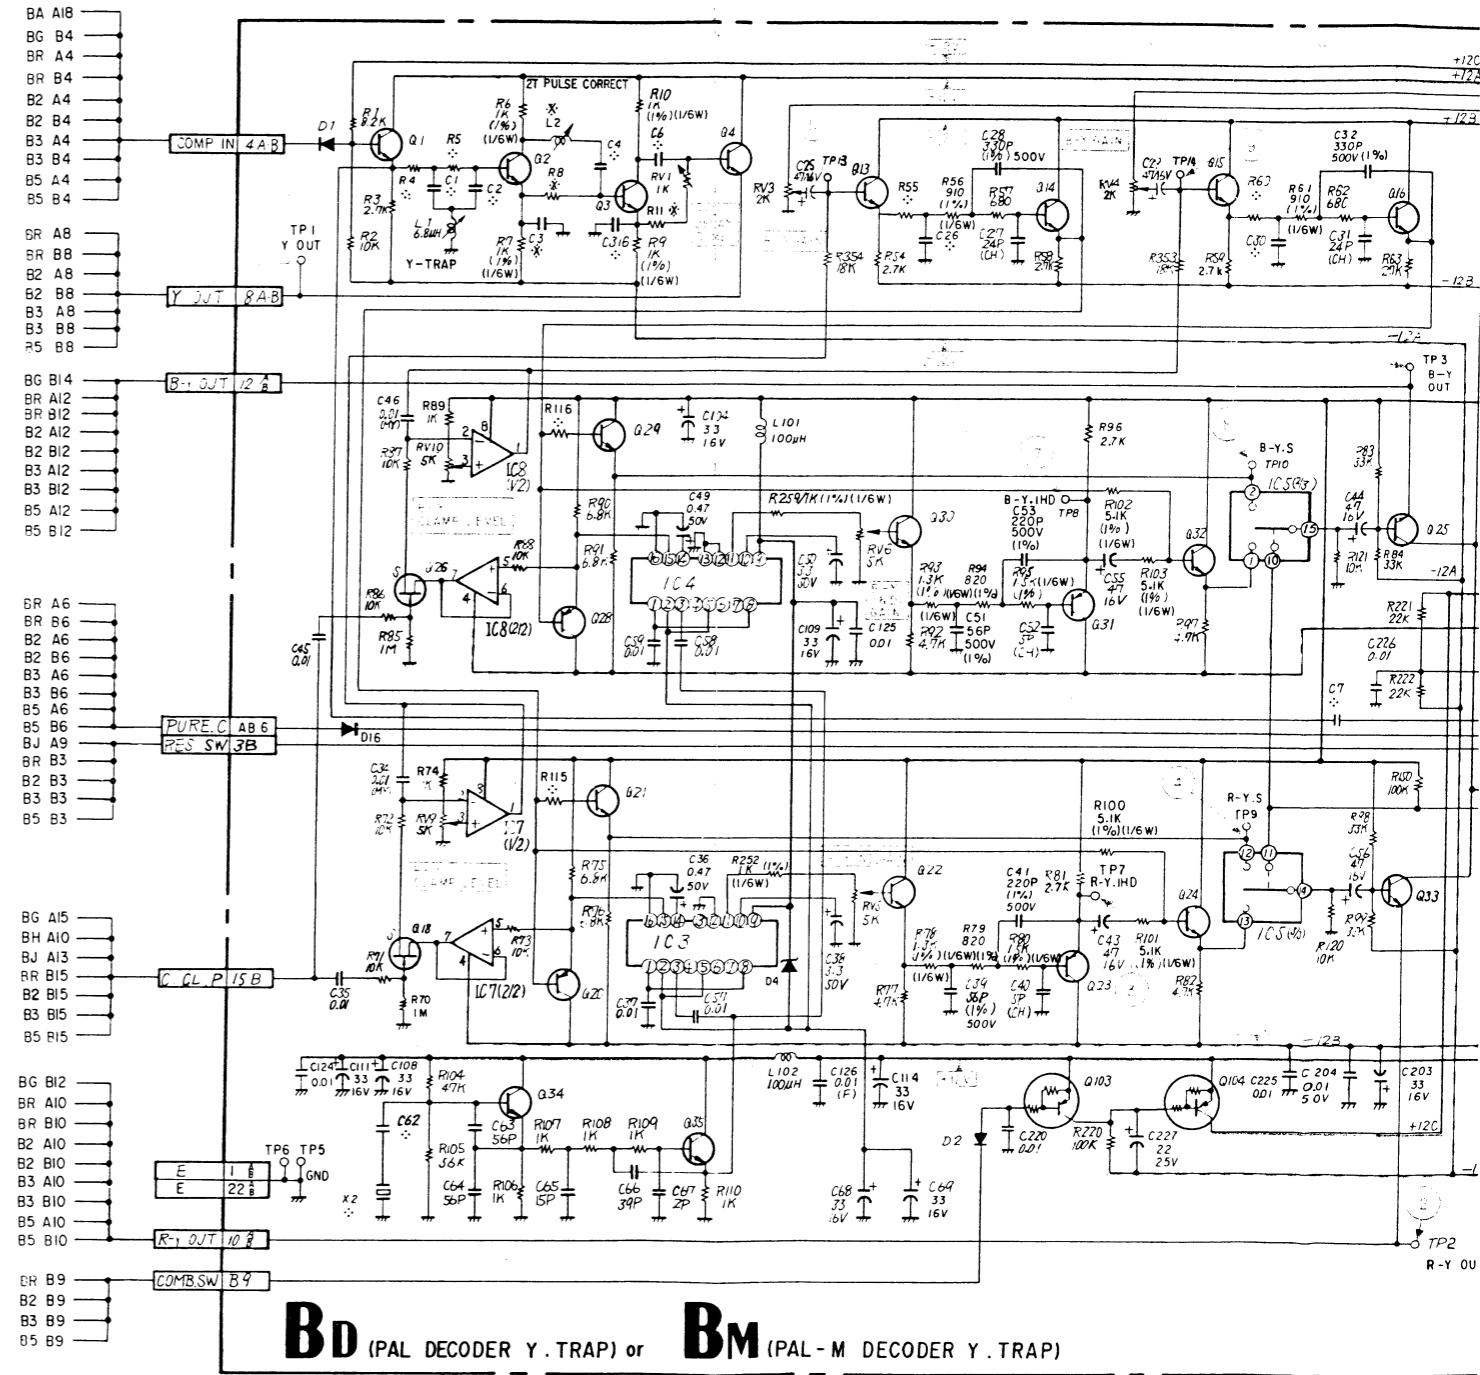

BD or BM BD or BM

BD board (PAL DECODER Y.TRAP)
 BM board (PAL-M DECODER Y.TRAP)

BM (PAL-M)		
15P	5%	50V
15P	5%	50V

39P	5%	50V
BR A4		
B2 A4		
B2 A4		
B3 A4		
B3 A4		
B5 A4		

1-102-880-00		
15P	5%	(UJ) 50V
56P	5%	(UJ) 50V

FILM		
0.01	5%	50V
130P	1%	500V
130P	1%	500V

JW		
1	20%	50V

10P	0.5P	50V

1SS119		

68μH		
1K	1%	1/6W
B2 A6		
B2 B6		
B3 A6		
B3 B6		
B5 A6		
B5 B6		
BJ A9		
BR B3		
B2 B3		
B3 B3		
B5 B3		

BG A15		
BH A10		
BJ A13		
BR B15		
B2 B15		
B3 B15		
B5 B15		

BG B12		
BR A10		
BR B10		
B2 A10		
B2 B10		
B3 A10		
B3 B10		
B5 A10		
B5 B10		

470K	1%	1/6W

BR B9		
B2 B9		
B3 B9		
B5 B9		


360k 1% 1/6W		

THERMISTOR S-10K		

3.58MHz		

10.717MHz		

4.7K	5%	1/4W
1.2K	5%	1/4W
2.2K	1%	1/6W
15PF	5%	50V

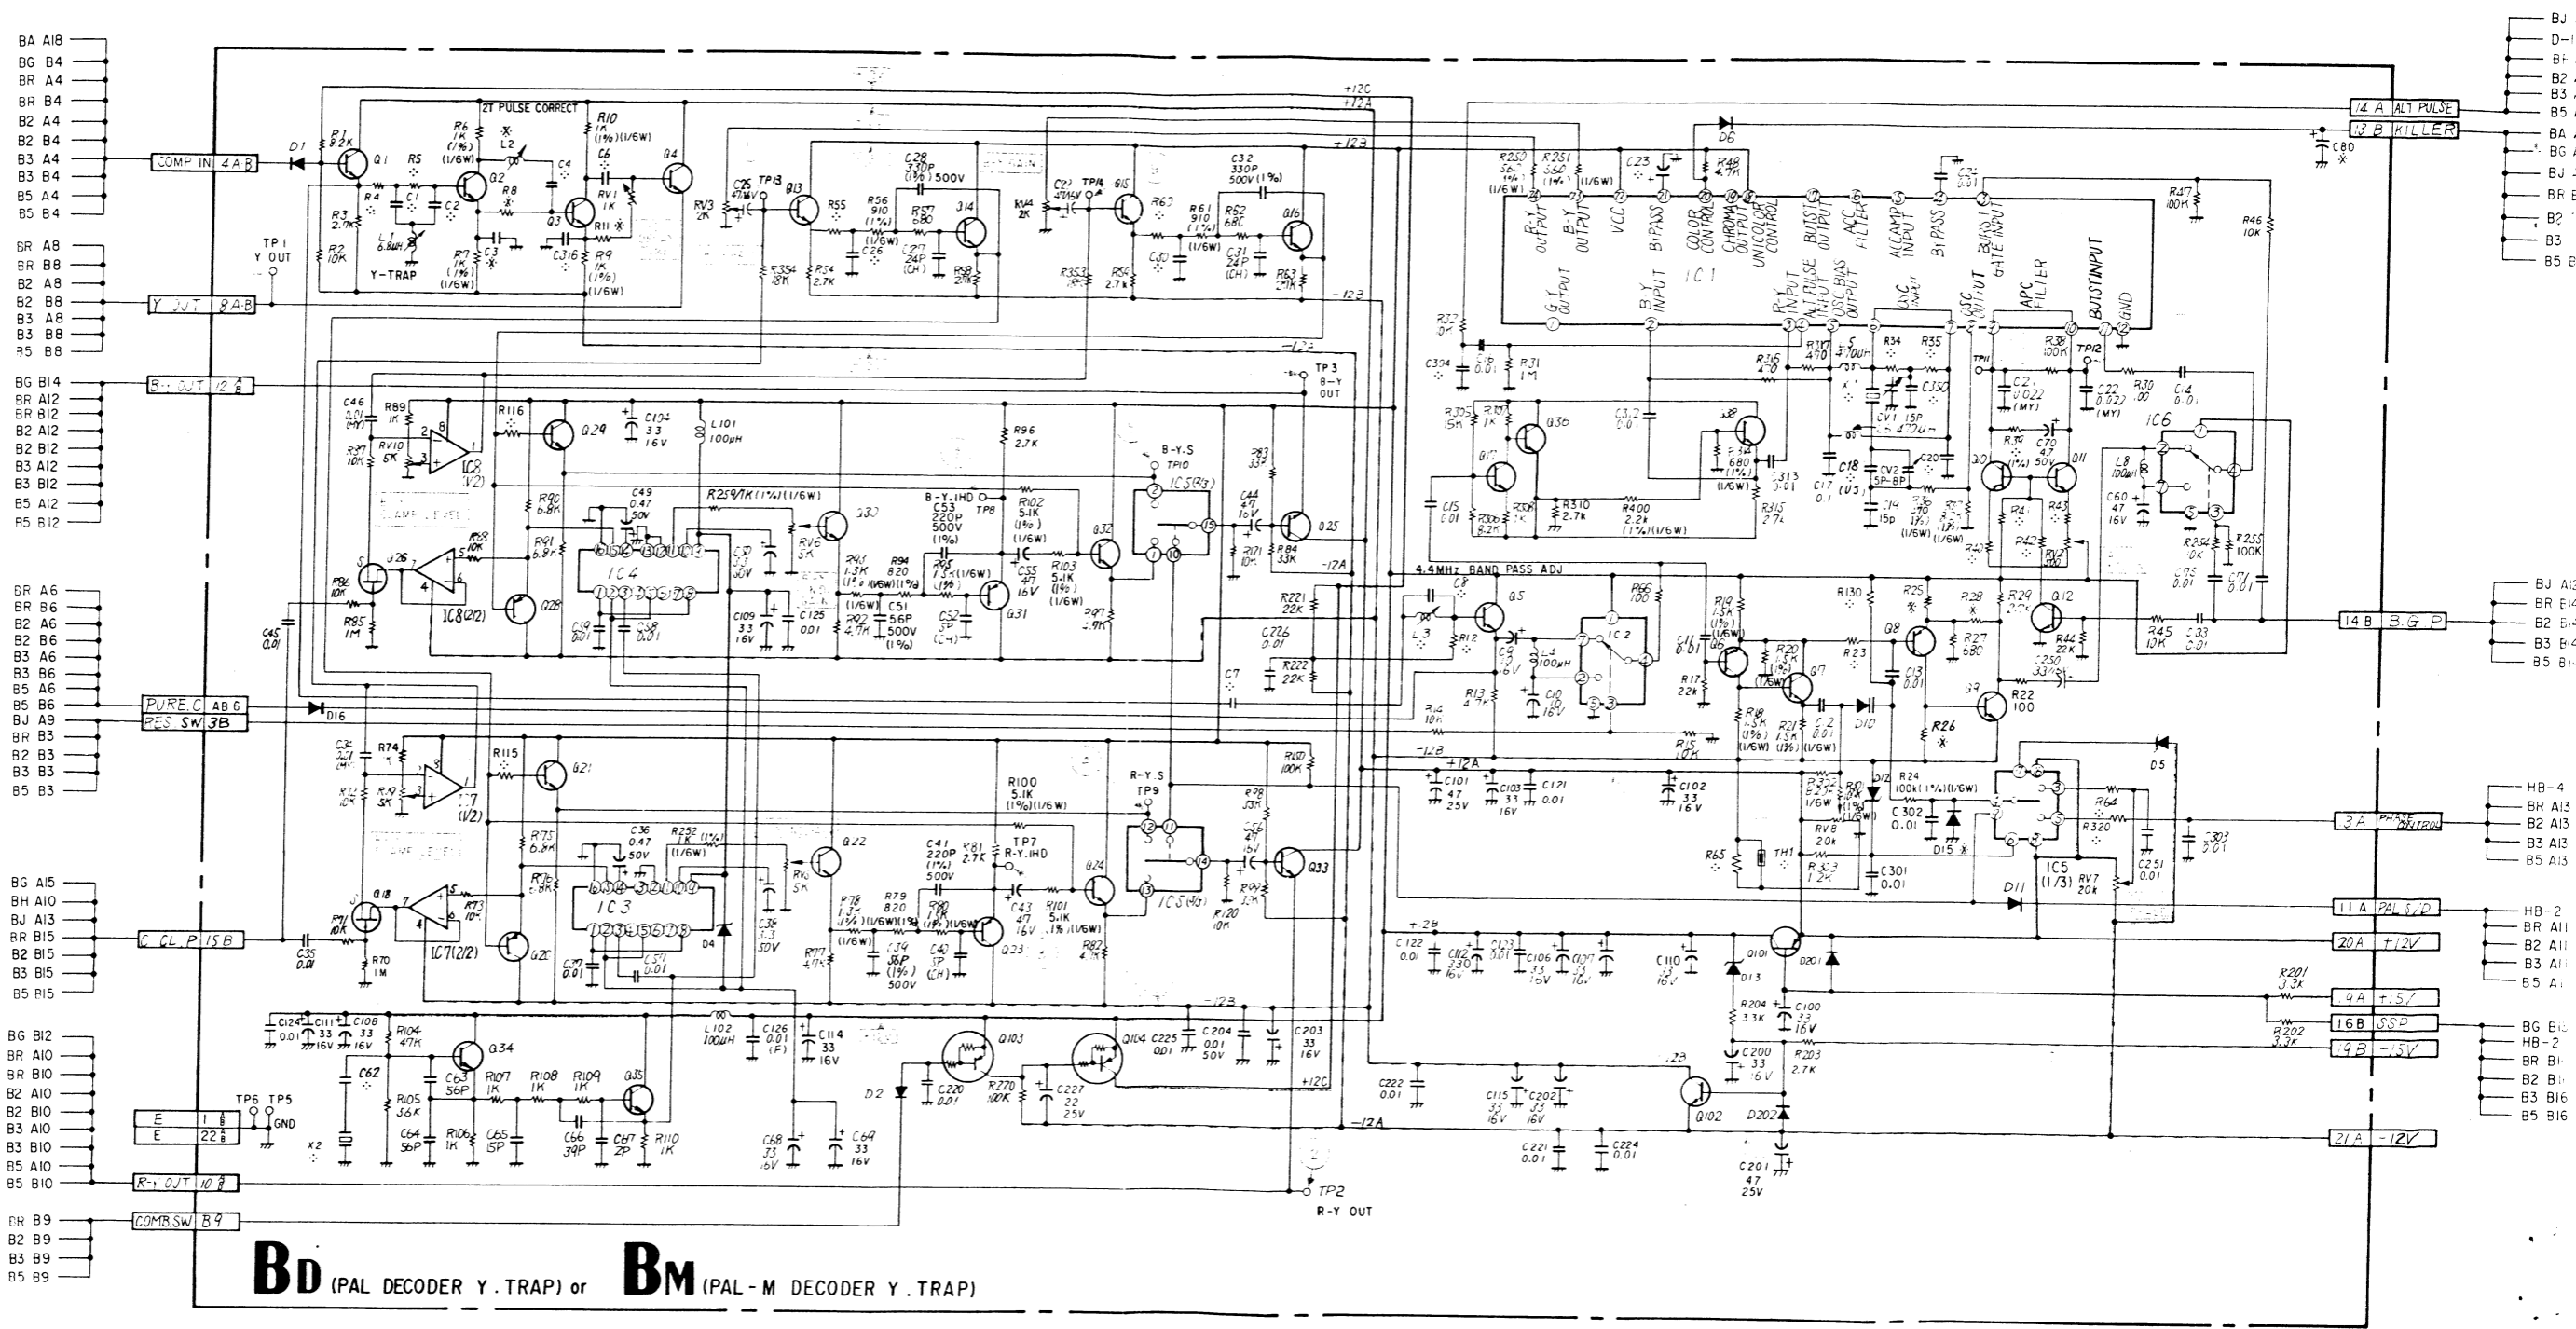


BD or BM BD or BM

BD board (PAL DECODER Y. TRAP) 1-619-138-15
 BM board (PAL-M DECODER Y. TRAP) 1-619-138-24

IC	5	4	3	7	1	6
		34	35			10 11 12
Q				21 20 18	14 13	38
	33	32 31	30 24 23	22 29 28 26	16 15	9
	101	102 104 103		4 3 2 1 5	36,17	8 7 6
D	15 12 11 13	4			6	
	RV7	201 202	2		1 16	10
ADJ	TP5		TP9	CV1	RV4 RV3	RV2 RV8
TP		RV6	RV5 RV9	TP13 TP14	CV2	
	TP10	TP8	TP7 TP3 TP2	RV10 TP1		TP11 TP12

IC1	TA7193P	PAL DEMODULATOR
2	LA7016	RESIDUAL SWITCH
3	TL8608P	1H DELAY LINE
4	TL8608P	1H DELAY LINE
5	MC14053BCP	ANALOG SWITCHER
6	LA7016	BURST GATE
7	RC4558P	R-Y CLAMP
8	RC4558P	B-Y CLAMP
Q1	2SC403SP	BUFFER
2	2SC403SP	ACTIVE FILTER
3	2SC403SP	Y-DELAY CORRECTER
4	2SC3068	BUFFER
5	2SC3068	BUFFER
6	2SA844	PHASE CONTROLLER
7	2SC403SP	PHASE CONTROLLER
8	2SA844	PHASE CONT. AMP.
9	2SC403SP	PHASE CONT. AMP.
10	2SA1175	APL FILTER
11	2SA1175	APL FILTER
12	2SC403SP	APL FILTER SWITCH
13	2SC403SP	R-Y L.P.F
14	2SC403SP	R-Y L.P.F
15	2SC403SP	B-Y L.P.F
16	2SC403SP	B-Y L.P.F
17	2SC403SP	AMPLIFIER
18	2SK381	R-Y CLAMP
20	2SA1175	BUFFER
21	2SC403SP	BUFFER
22	2SC403SP	CCD OUT L.P.F
23	2SA844	CCD OUT L.P.F
24	2SC403SP	BUFFER
25	2SC3068	BUFFER
26	2SK381	B-Y CLAMP
28	2SA1175	BUFFER
29	2SC403SP	BUFFER
30	2SC403SP	CCD OUT L.P.F
31	2SA1175	CCD OUT L.P.F
32	2SC403SP	BUFFER
33	2SC3068	BUFFER
34	2SC403SP	CCD CLOCK GEN
35	2SC403SP	CCD CLOCK GEN
36	2SC403SP	BUFFER
38	2SC403SP	BUFFER
101	2SB734	SYSTEM SWITCH
102	2SD789	SYSTEM SWITCH
103	DTA124ES	COMB. SWITCH
104	DTA124ES	COMB. SWITCH
D1	1SS119	SYSTEM SWITCH
2	1SS119	COMB. SWITCH
4	RD3.0EB1	CCD BIAS
5	RD9.1EB2	SWITCH BIAS
6	1SS119	KILLER SWITCH
10	1T25	PHASE CONTROL
11	1SS119	PAL S/D SWITCH
12	RD12EB2	PHASE SWITCH
13	RD12EB2	SYSTEM SWITCH
15	1SS119	
16	1SS119	COMB SW
201	1SS119	PROTECTOR
202	1SS119	PROTECTOR

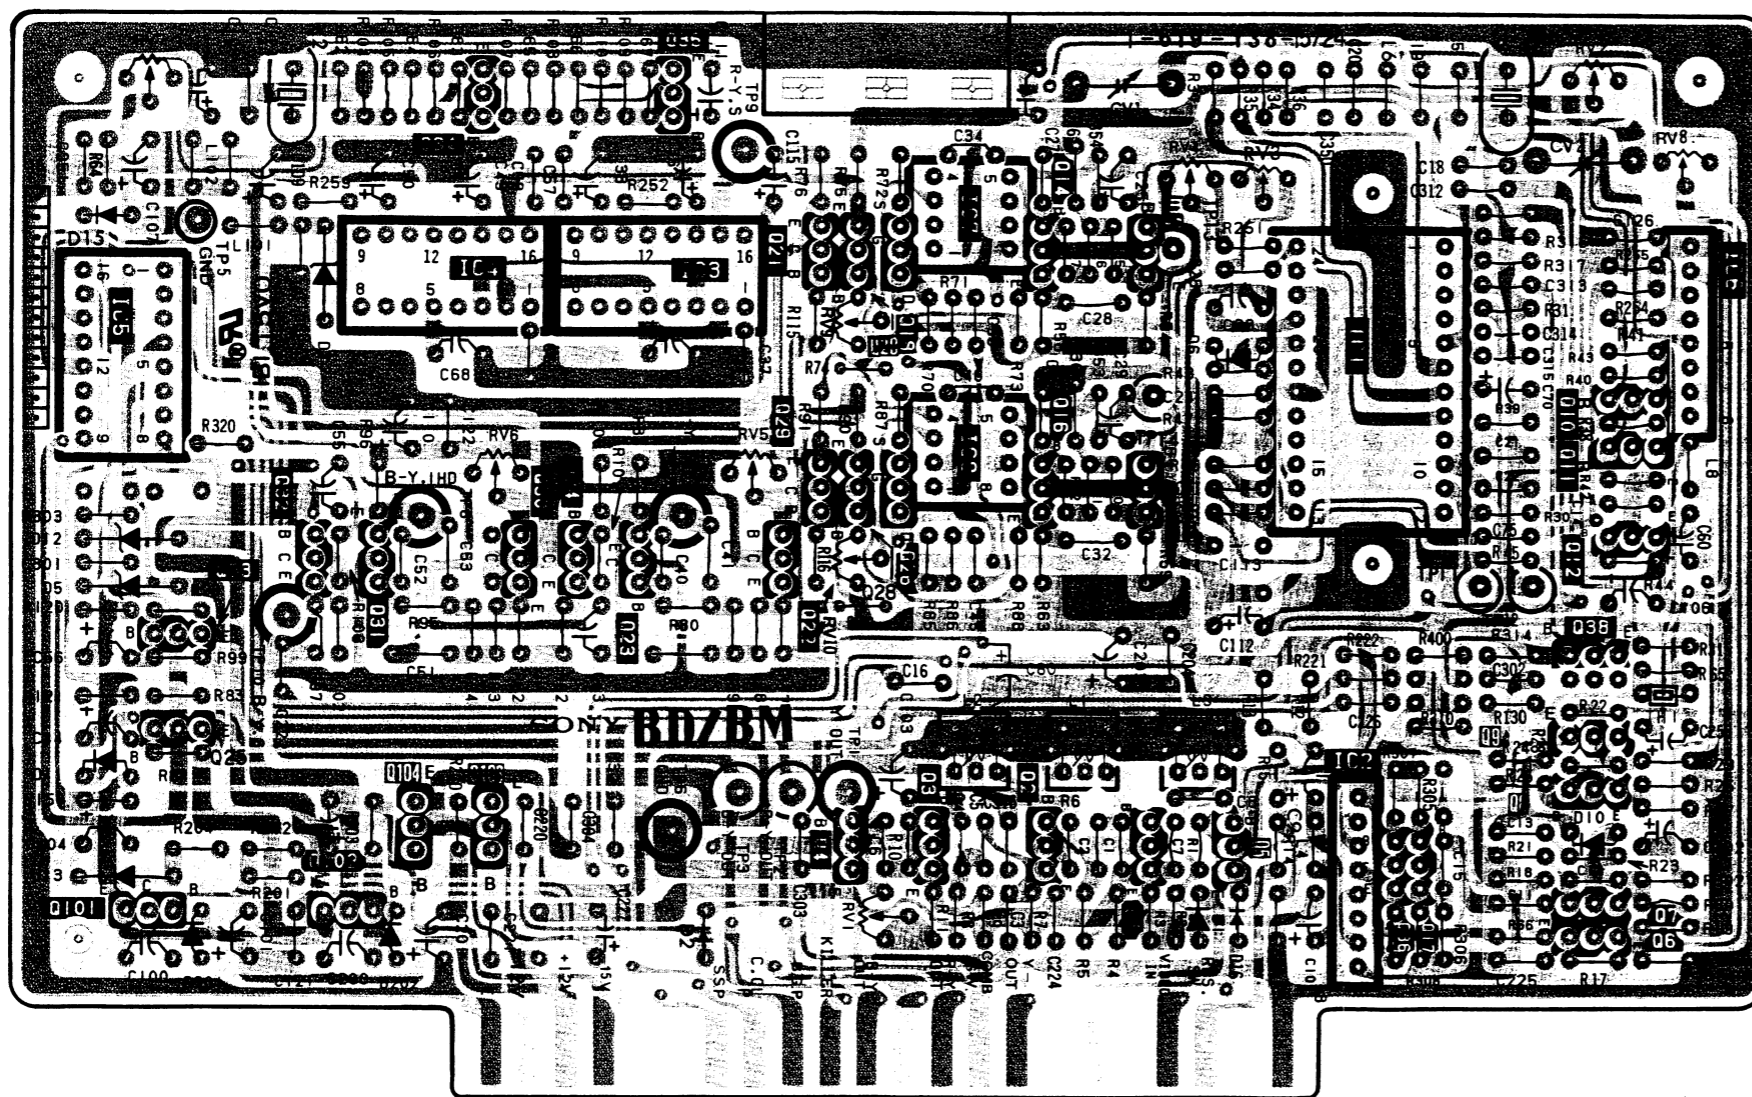


• Conductor side pattern
 • Component side pattern

BG BG

BG board (COLOR GAIN CONTROL, COMPONENT R-Y AMP & DELAY, APERTURE CONTROL, Y DELAY, VECTOR OUT, NTSC MATRIX SW, G-Y MATRIX AMP)

IC	1	3 4	7	5	8 9			
Q	5 8 10 11 12	7 9 72 71 73 74 75	13 14 76 78 81 82 83 84 85	21 24 22 23 25 26 27 28 41	34 31 32 33 35 36 37 38 42 43	40 50 30 39 29 49 45 44	54 55 51 52 53 56 57 58	59 60
D		17 6	1 7 2 14 15 16	12	3 11 13 4 8			
TP ADJ	RV1	CV2 CV3 RV3 RV21 RV2	RV22	TP5 RV5	RV7 RV12 RV13 RV4 TP2	TP3	RV14 RV15 RV16	

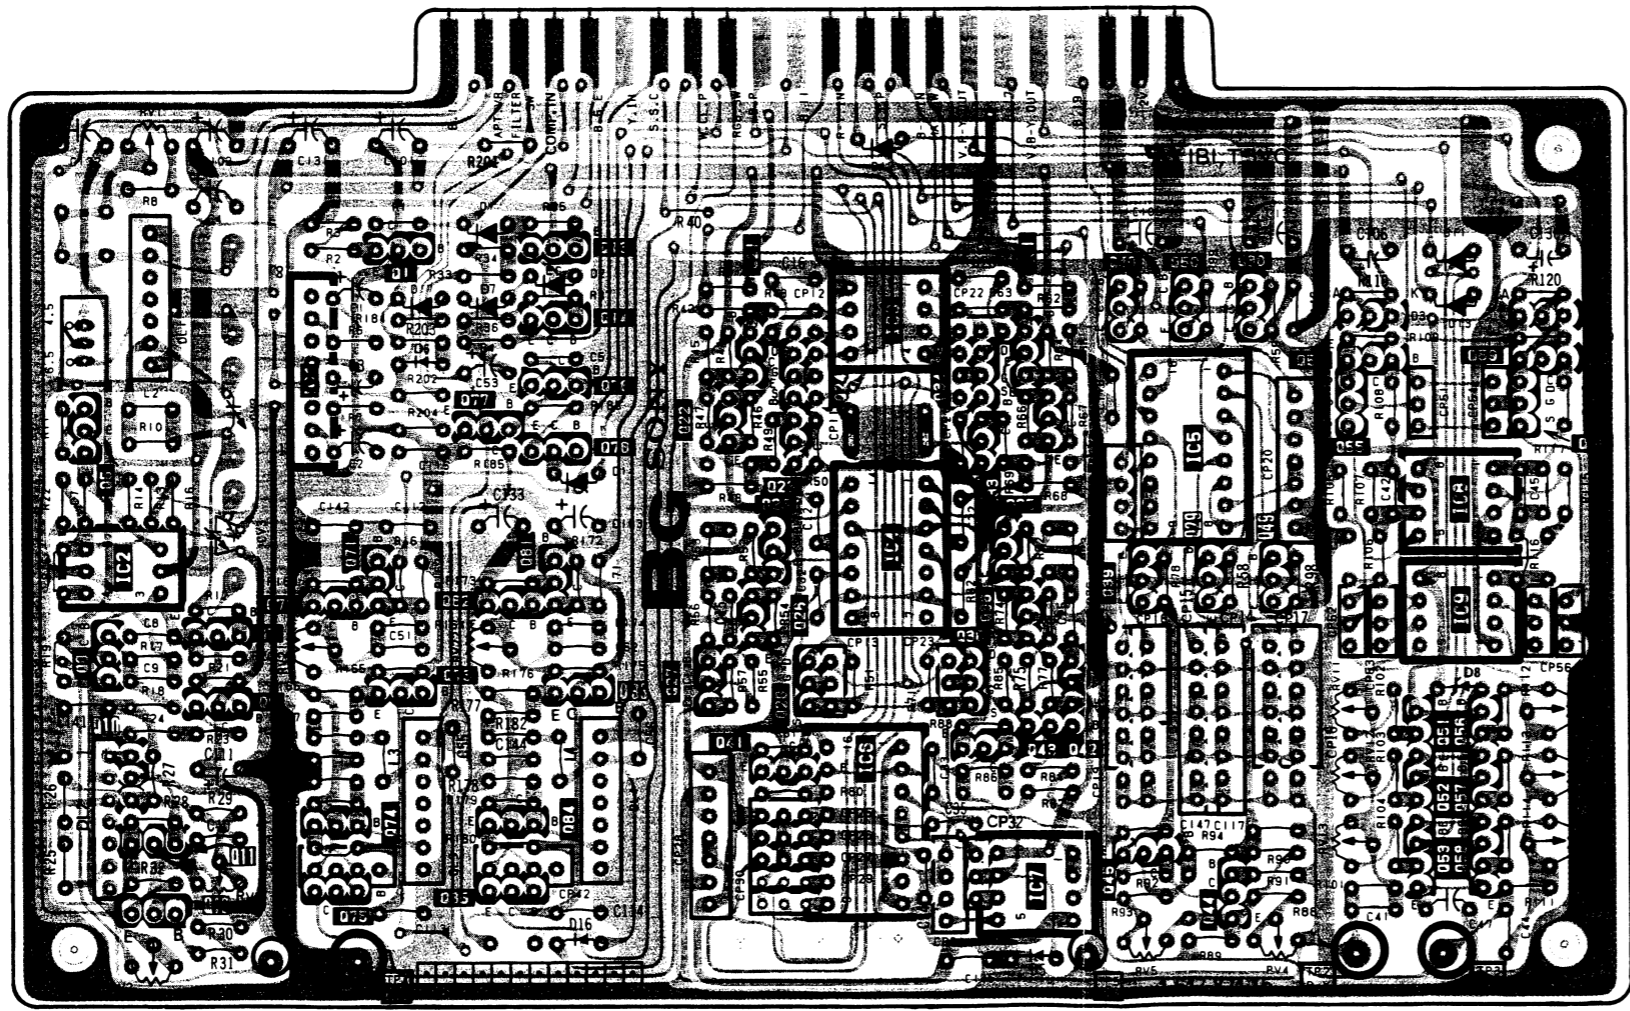


- [Pattern]: Conductor side pattern
- [Pattern]: Component side pattern

BG BG

BG board (COLOR GAIN CONTROL, COMPONENT R-Y AMP & DELAY, APERTURE CONTROL, Y DELAY, NTSC MATRIX SW, G-Y MATRIX AMP)


BG B0.

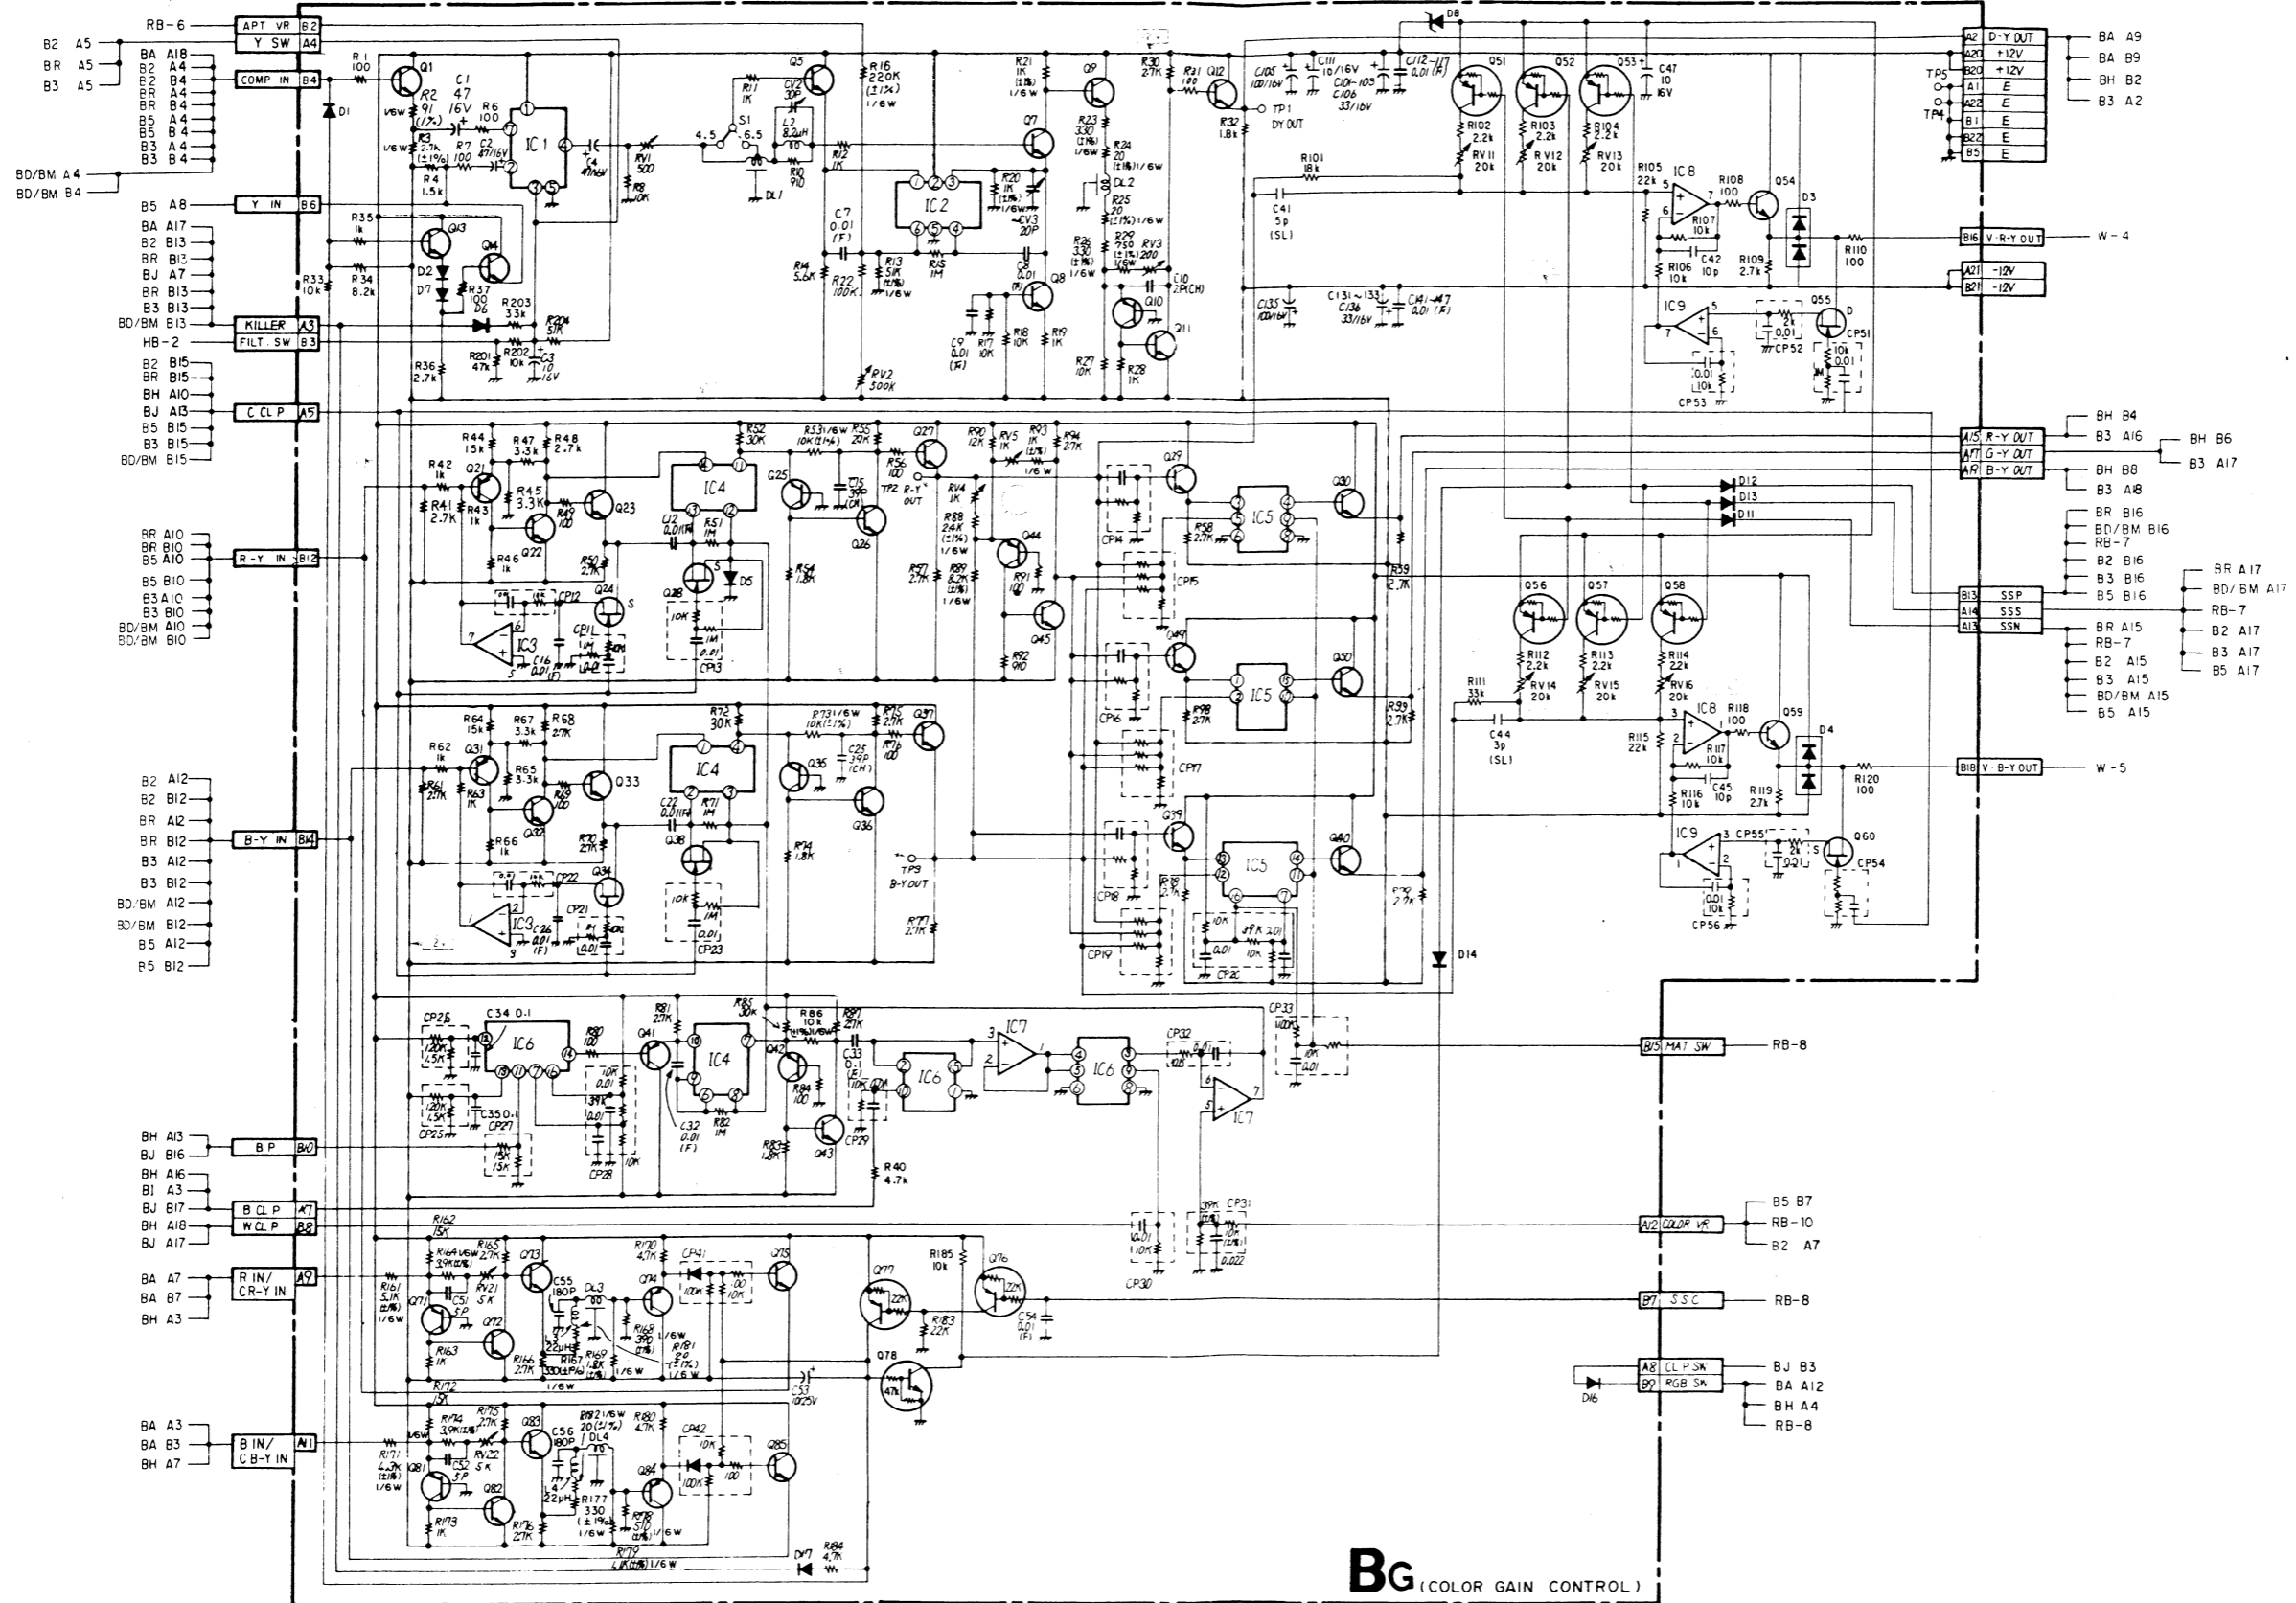

IC1	2
2	3
3	4
4	5
5	6
6	7
7	8
8	9
9	10
10	11
11	12
12	13
13	14
14	15
15	16
16	17
17	18
18	19
19	20
20	21
21	22
22	23
23	24
24	25
25	26
26	27
27	28
28	29
29	30
30	31
31	32
32	33
33	34
34	35
35	36
36	37
37	38
38	39
39	40
40	41
41	42
42	43

BG BG

B

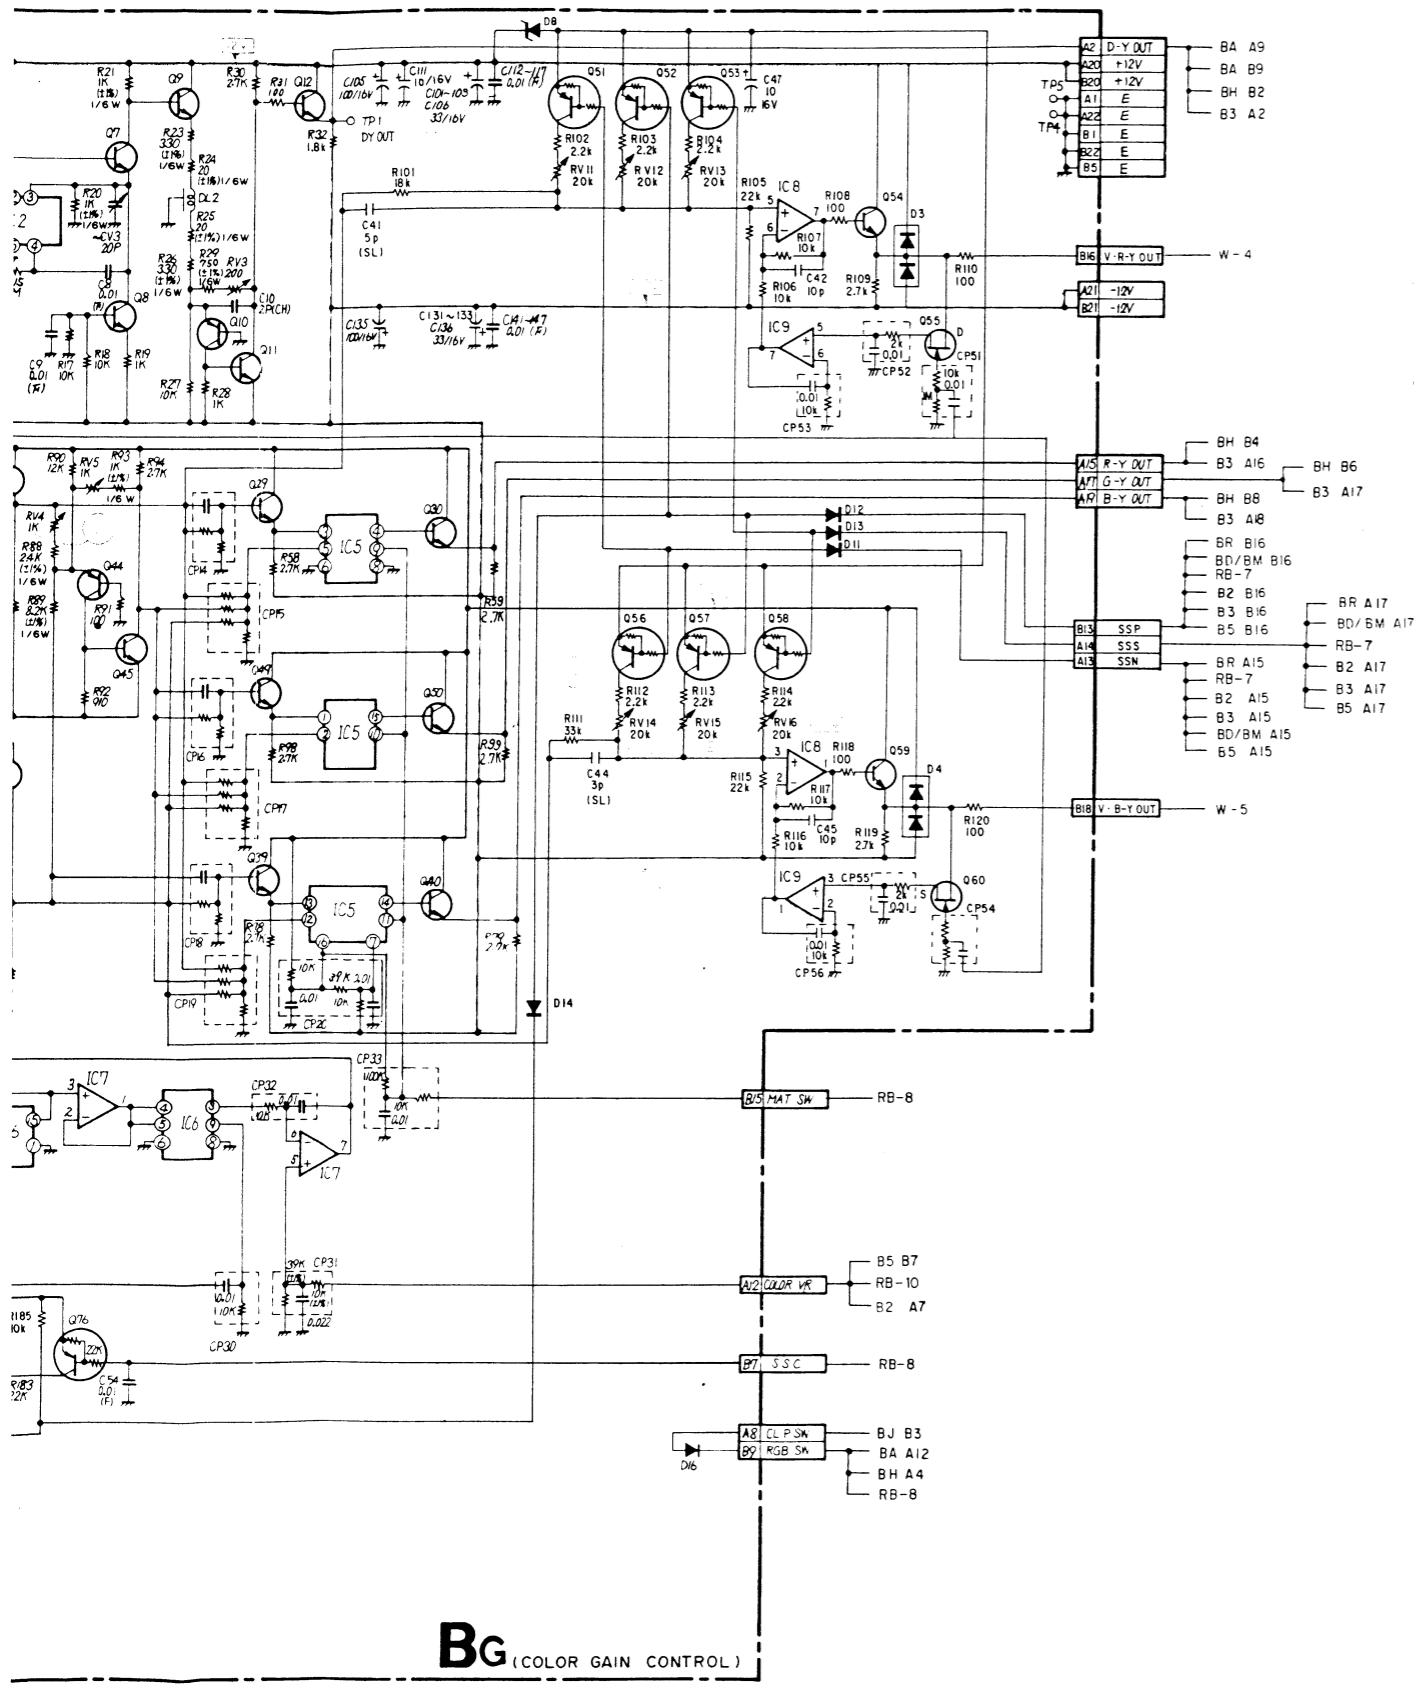


BG (COLOR GAIN CONTROL)


BG BOARD

IC1	LA7016	FILTER SW
2	TX-429M	APERTURE
3	RC4558DQ	COLOR DIFFERENCE CLAMP
4	CX-718D	CHROMA CONTROL
5	MC14053BCP	MATRIX SW
6	MC14053BCP	CHROMA CONTROL
7	TL082CF	CHROMA CONTROL
8	TL082CP	VECTOR OUTPUT
9	TL082CP	VECTOR OUTPUT
Q1	2SC403SP	BUFF
5	2SC403SP	APERTURE
7	2SC403SP	APERTURE
8	2SC403SP	APERTURE
9	2SC403SP	Y DELAY
10	2SA844	Y AMP
11	2SC403SP	Y AMP
12	2SC403SP	Y AMP
13	2SC403SP	BUFF
14	2SC3068	BUFF
21	2SA844	R-Y AMP
22	2SC403SP	R-Y AMP
23	2SC403SP	R-Y CLAMP
24	2SK381	R-Y CLAMP
25	2SA844	R-Y CHROMA CONTROL
26	2SC403SP	R-Y CHROMA CONTROL
27	2SC403SP	R-Y CHROMA CONTROL
28	2SK381	R-Y CHROMA CONTROL
29	2SC403SP	R-Y BUFF
30	2SC403SP	R-Y BUFF
31	2SA844	B-Y AMP
32	2SC403SP	B-Y AMP
33	2SC403SP	B-Y CLAMP
34	2SK381	B-Y CLAMP
35	2SA844	B-Y CHROMA CONTROL
36	2SC403SP	B-Y CHROMA CONTROL
37	2SC403SP	B-Y CHROMA CONTROL
38	2SK381	B-Y CHROMA CONTROL
39	2SC403SP	B-Y BUFF
40	2SC403SP	B-Y BUFF
41	2SA844	CHROMA CONTROL
42	2SA844	CHROMA CONTROL
43	2SC403SP	CHROMA CONTROL


Q44	2SA844	CHROMA CONTROL
45	2SC403SP	CHROMA CONTROL
49	2SC403SP	G-Y BUFF
50	2SC403SP	G-Y BUFF
51	DTA124ES	GAIN CHANGE SW
52	DTA124ES	GAIN CHANGE SW
53	DTA124ES	GAIN CHANGE SW
54	2SC403SP	R-Y BUFF
55	2SK381	R-Y CLAMP
56	DTA124ES	GAIN CHANGE SW
57	DTA124ES	GAIN CHANGE SW
58	DTA124ES	GAIN CHANGE SW
59	2SC403SP	B-Y BUFF
60	2SK381	B-Y CLAMP
71	2SA844	R-Y AMP
72	2SC403SP	R-Y AMP
73	2SC403SP	R-Y AMP
74	2SA844	R-Y DELAY
75	2SC3068	R-Y BUFF
76	DTA124ES	COMPONENT SW
77	DTA124ES	COMPONENT SW
78	DTC144ES	COMPONENT SW
81	2SA844	B-Y AMP
82	2SC403SP	B-Y AMP
83	2SC403SP	B-Y AMP
84	2SA844	B-Y DELAY
85	2SC3068	B-Y BUFF
D1	1SS119	COMPONENT SW
2	1SS119	DC SHIFT SW
3	MC932	PROTECT
4	MC932	PROTECT
5	1SS119	PROTECT
6	RD6.2EB2	DC SHIFT
7	1SS119	FILTER SW
8	RD6.2E-B	+6V REG
11	1SS119	GAIN CHANGE SW
12	1SS119	GAIN CHANGE SW
13	1SS119	GAIN CHANGE SW
14	1SS119	GAIN CHANGE SW
16	1SS119	R.G.B. SW
17	1SS119	KILLER




1.0Vp-p (H)




1.7Vp-p (H)



4.8Vp-p (H)



1.4Vp-p (H)



0.9Vp-p (H)




12Vp-p (H)

BH BOARD


IC1(1/3)	TC4053BP	COMPOSITE/R.G.B. CHANGE SW
(2/3)		SET UP & CROSS HATCH SW
(3/3)		SCREENING SW
2(1/3)	TC4053BP	COMPOSITE/R.G.B. CHANGE SW
(2/3)		SET UP SW
(3/3)		SCREENING SW
3(1/3)	TC4053BP	COMPOSITE/R.G.B. CHANGE SW
(2/3)		SET UP SW
(3/3)		SCREENING SW
4(1/3)	TC4053BP	COMPOSITE/R.G.B. CHANGE SW
(2/3)		SET UP SW
(3/3)		SCREENING SW
5	RC4558S	SAMPLE HOLD
6	RC4558S	SAMPLE HOLD
7	LA7016	BLUE ONLY SW
8	LA7016	BLUE ONLY SW
9	MC14053BCP	AGC PULSE, SET UP, WHITE, VITC INSERT GEN
10(1/2)	MC14053BCP	AGC PULSE, SET UP, WHITE, VITC INSERT GEN
(2/2)		COLOR DIFFERENCE & R.G.B. SCREENING PULSE GEN
11(1/4)	MC14081BCP	AGC PULSE, SET UP, WHITE, VITC INSERT GEN
(3/4)		COLOR DIFFERENCE & R.G.B. SCREENING PULSE GEN
(2/4)		Y SCREENING PULSE GEN
(4/4)		
12	MC14081BCP	AGC PULSE, SET UP, WHITE, VITC INSERT GEN
13	MC14001BCP	AGC PULSE, SET UP, WHITE, VITC INSERT GEN
14	TC4030BP	AGC PULSE, SET UP, WHITE, VITC INSERT GEN
101	TX-429M	R CONTRAST CONTROL
102	TL082CP	R CONTRAST & BRIGHT CONTROL
201	TX-429M	G CONTRAST CONTROL
202	TL082CP	G CONTRAST & BRIGHT CONTROL
301	TX-429M	B CONTRAST CONTROL
302	TL082CP	B CONTRAST & BRIGHT CONTROL
Q1	2SC403SP	Y BUFF
2	2SK523	Y SAMPLE HOLD
3	2SA844	Y BUFF
4	2SC403SP	R-Y/R BUFF

Q5	2SK523	R-Y/Y SAMPLE HOLD
6	2SA844	R-Y/R BUFF
7	2SC403SP	G-Y/R BUFF
8	2SK523	G-Y/Y SAMPLE HOLD
9	2SA844	G-Y/G BUFF
10	2SC403SP	B-Y/B BUFF
11	2SK523	B-Y/B SAMPLE HOLD
12	2SA844	B-Y/B BUFF
13	2SA844	R BUFF
14	2SA844	G BUFF
15	2SA844	B BUFF
16	2SC3068	AGC PULSE BUFF
101	2SK381	R CONTRAST CONTROL
102	2SA844	R AMP
103	2SC403SP	R AMP
104	2SC403SP	R LIMITER
105	2SC403SP	R LIMITER
106	2SK381	R BRIGHT CONTROL
107	2SK381	R CONTRAST CONTROL
108	2SK381	R CONTRAST CONTROL
201	2SK381	G CONTRAST CONTROL
202	2SA844	G AMP
203	2SC403SP	G AMP
204	2SC403SP	G LIMITER
205	2SC403SP	G LIMITER
206	2SK381	G BRIGHT CONTROL
207	2SK381	G CONTRAST CONTROL
208	2SK381	G CONTRAST CONTROL
301	2SK381	B CONTRAST CONTROL
302	2SA844	B AMP
303	2SC403SP	B AMP
304	2SC403SP	B LIMITER
305	2SC403SP	B LIMITER
306	2SK381	B BRIGHT CONTROL
307	2SK381	B CONTRAST CONTROL
308	2SK381	B CONTRAST CONTROL
D1	1SS119	
101	1SS119	R LIMITER
102	1SS119	R PROTECT
201	1SS119	G LIMITER
202	1SS119	G PROTECT
301	1SS119	B LIMITER
302	1SS119	B PROTECT

BH board (Y/COLOR DIFFERENCE/RGB SIGNAL SWITCHING, Y-C MATRIX, CONTRAST/BRIGHTNESS CONTROL)

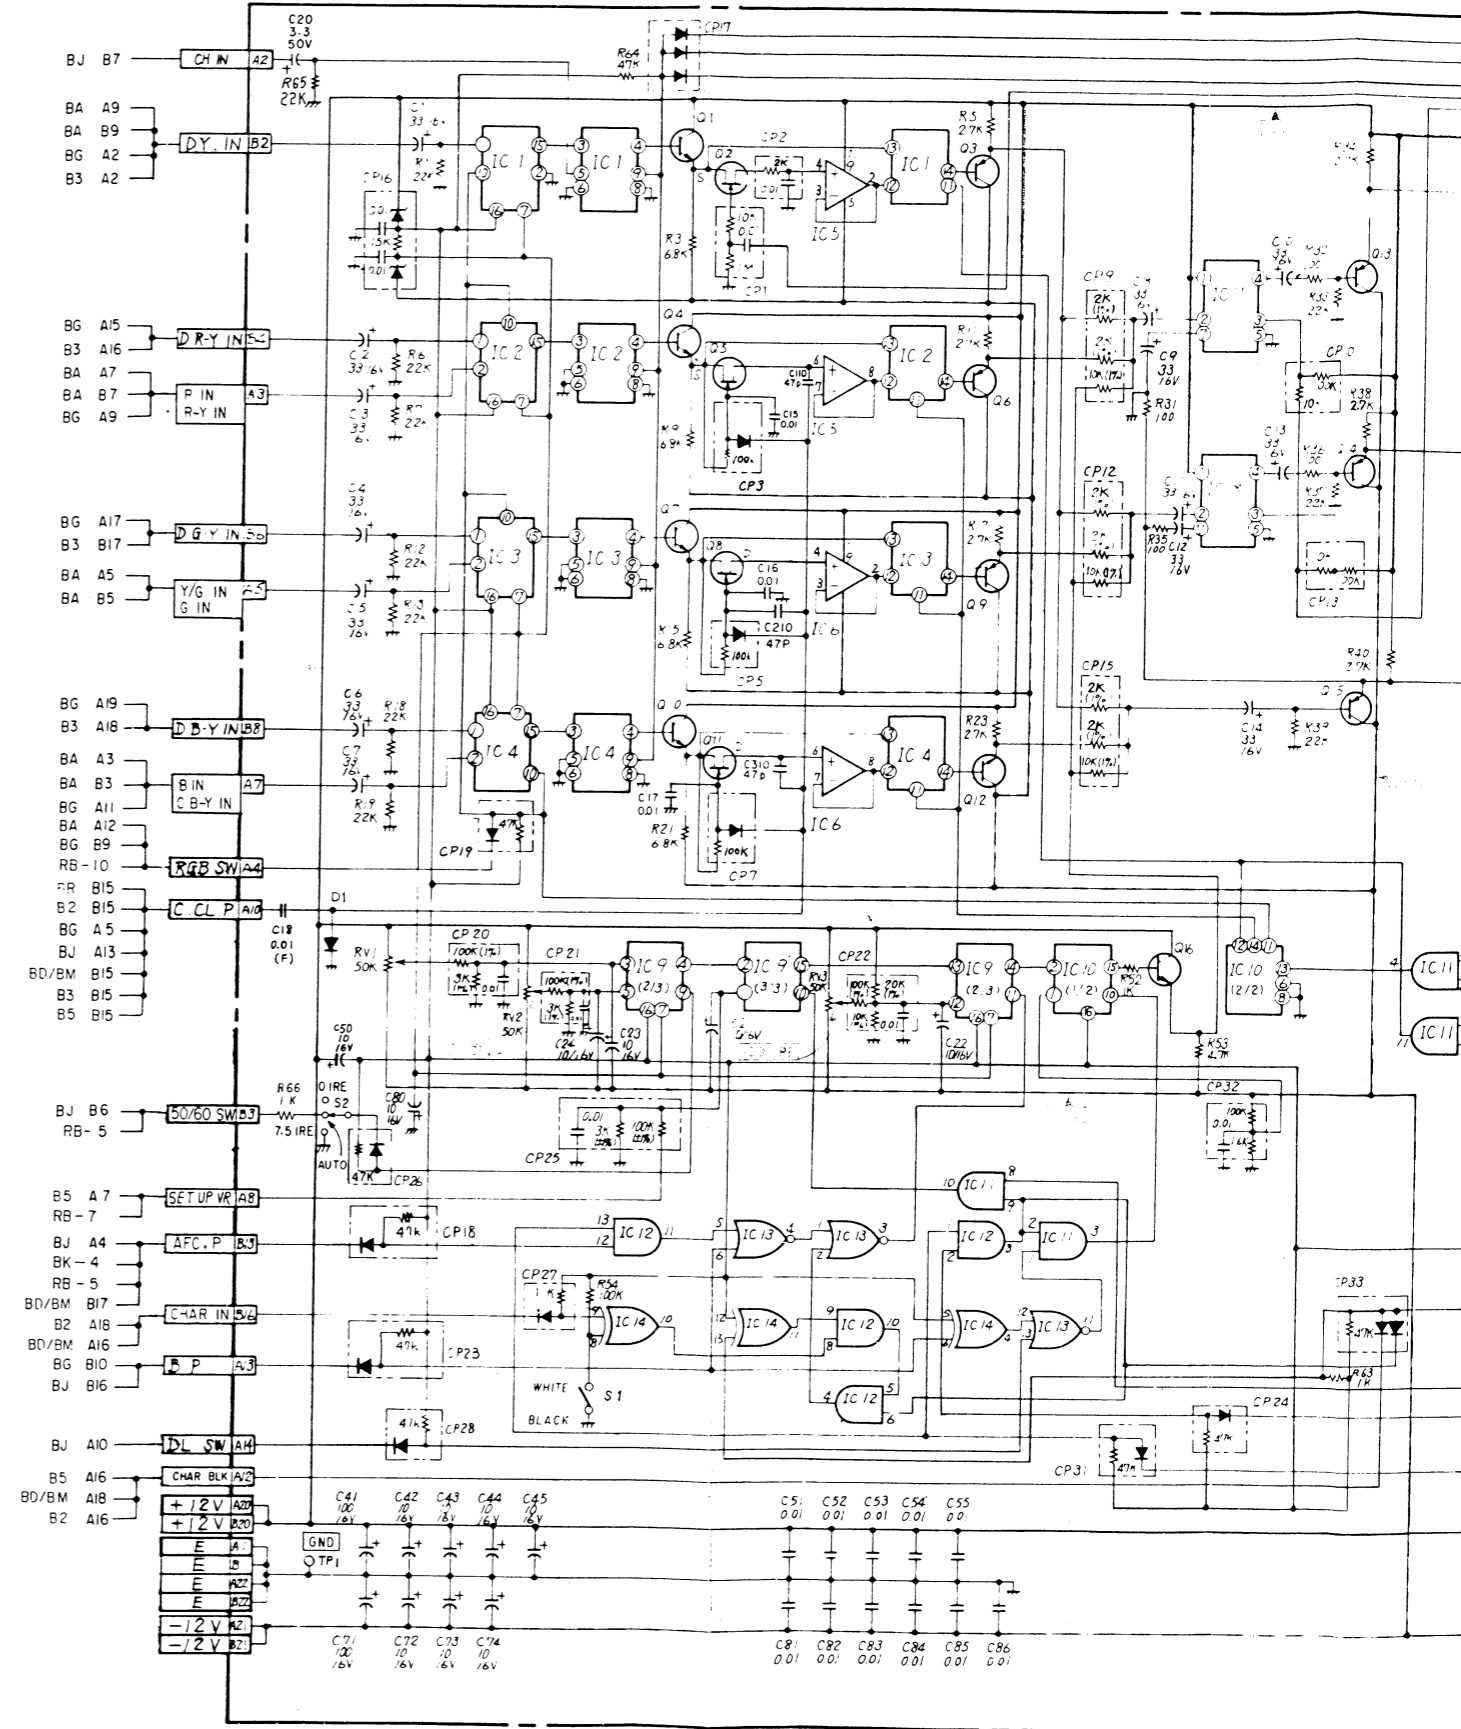


5. DIAGRAMS



0.8Vp-p (H)



0.7Vp-p (H)




0.8Vp-p (H)

BH BH

BH board (Y/COLOR DIFFERENCE/RGB SIGNAL SWITCHING, Y-C MATRIX, CONTRAST/BRIGHTNESS CONTROL)

IC	9 4 3 2 1	10 6 5	11 8 7	12 301 201 101	13	14	202	
Q	10 7 4 1	12 11 8 9 6 5 2 3	16	15 14 13	301 201 101	302 303 202 203 102 103	304 305 204 205 104 105	306 307 308 206 207 208 106 107 108
D			1		302 202 102	301 201 101		
TP ADJ	RV1 RV2 RV3			TP1			TP201 TP101 TP301	

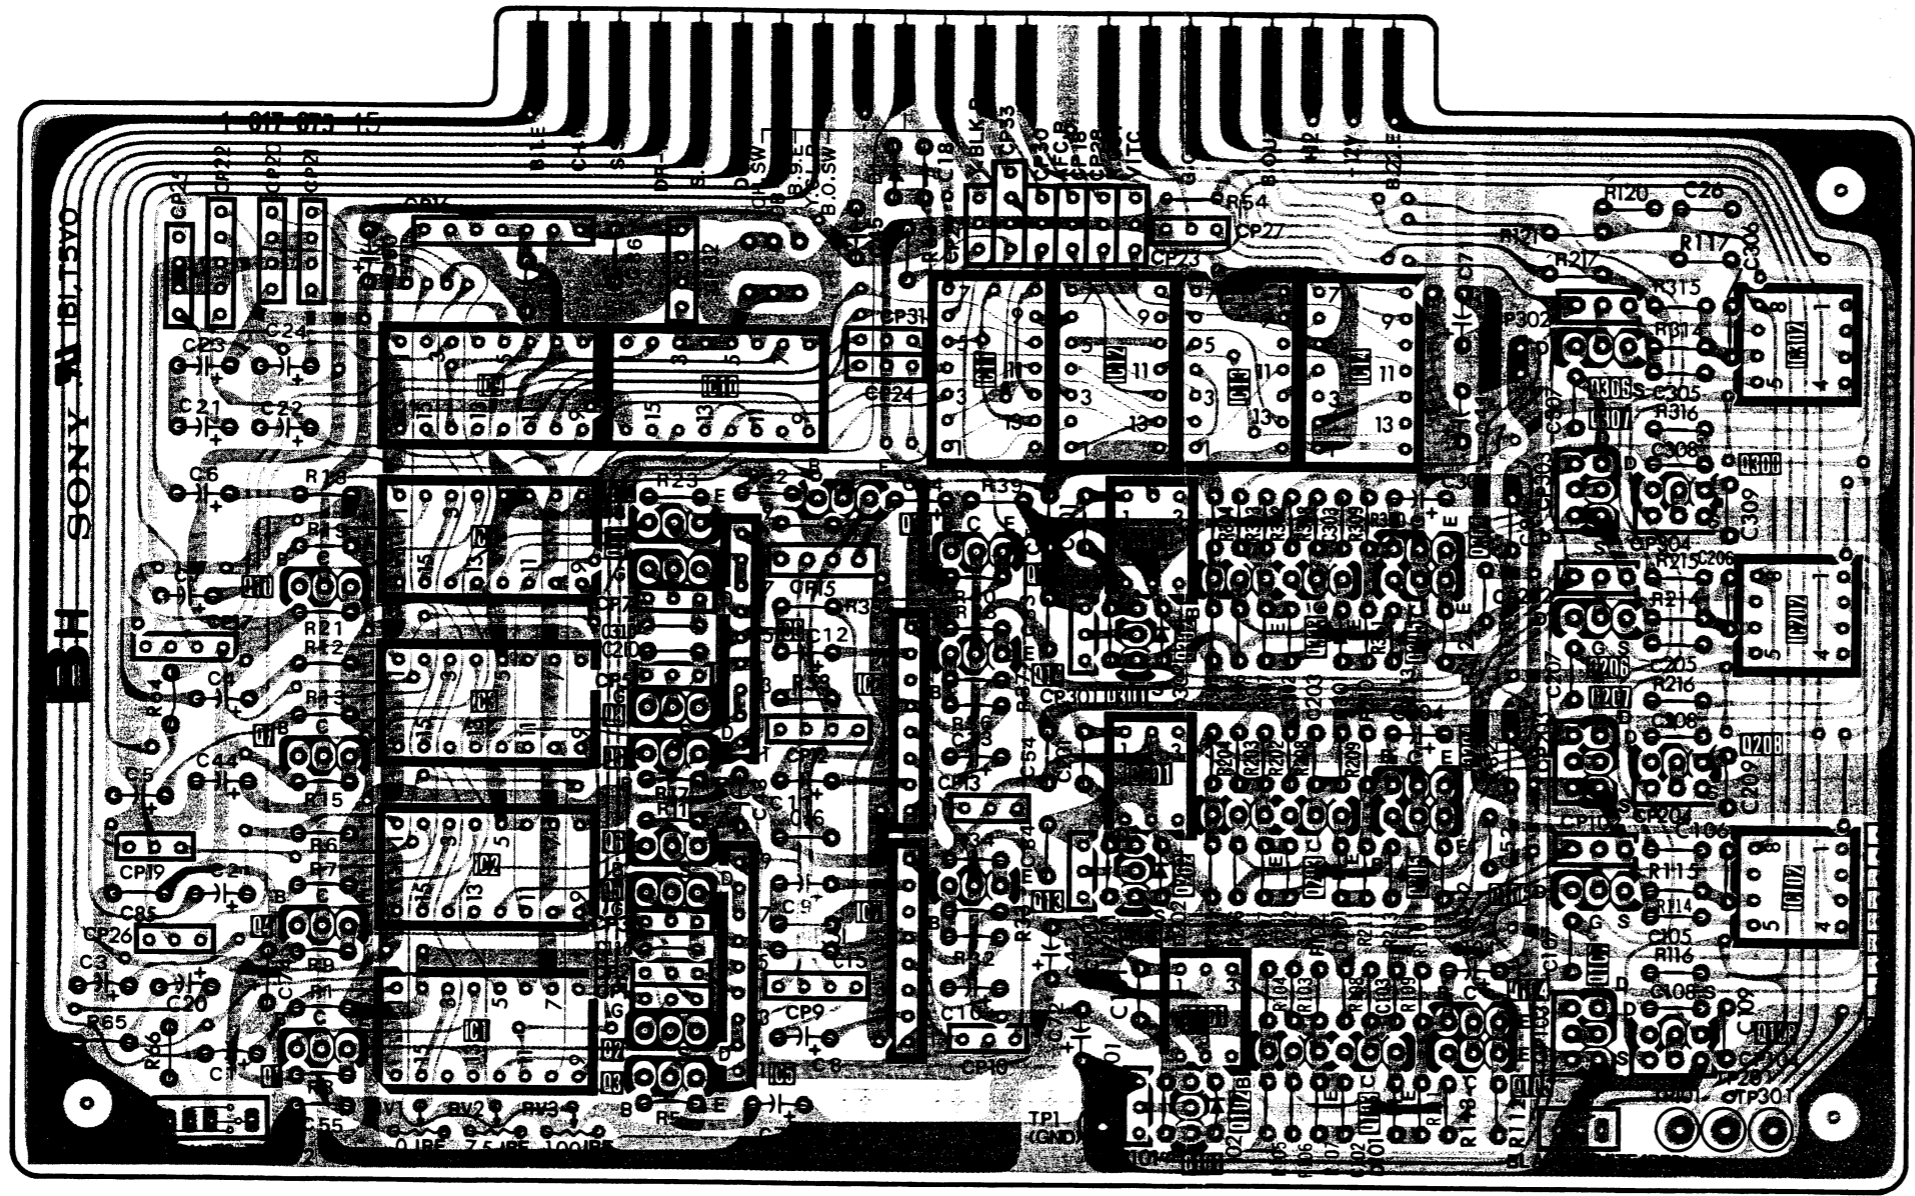


- [Pattern] : Conductor side pattern
- [Pattern] : Component side pattern

BI BI

BI board (DRIVE CONTROL, BEAM CURRENT CONTROL)


IC	101		105		201		205		301		305
	102	103	104		202	203	204		302	303	304
Q		108	114			214	13	12	11		314
	102	103	106		202	203	206		209	302	303
	101	105	110		201	205	210		301	306	305
D	5		7				204	202			
		4	1	2			203			304	302
		104	102	6						303	
		101	103								
TP					105	201	205		301	303	305
						TP 1					8

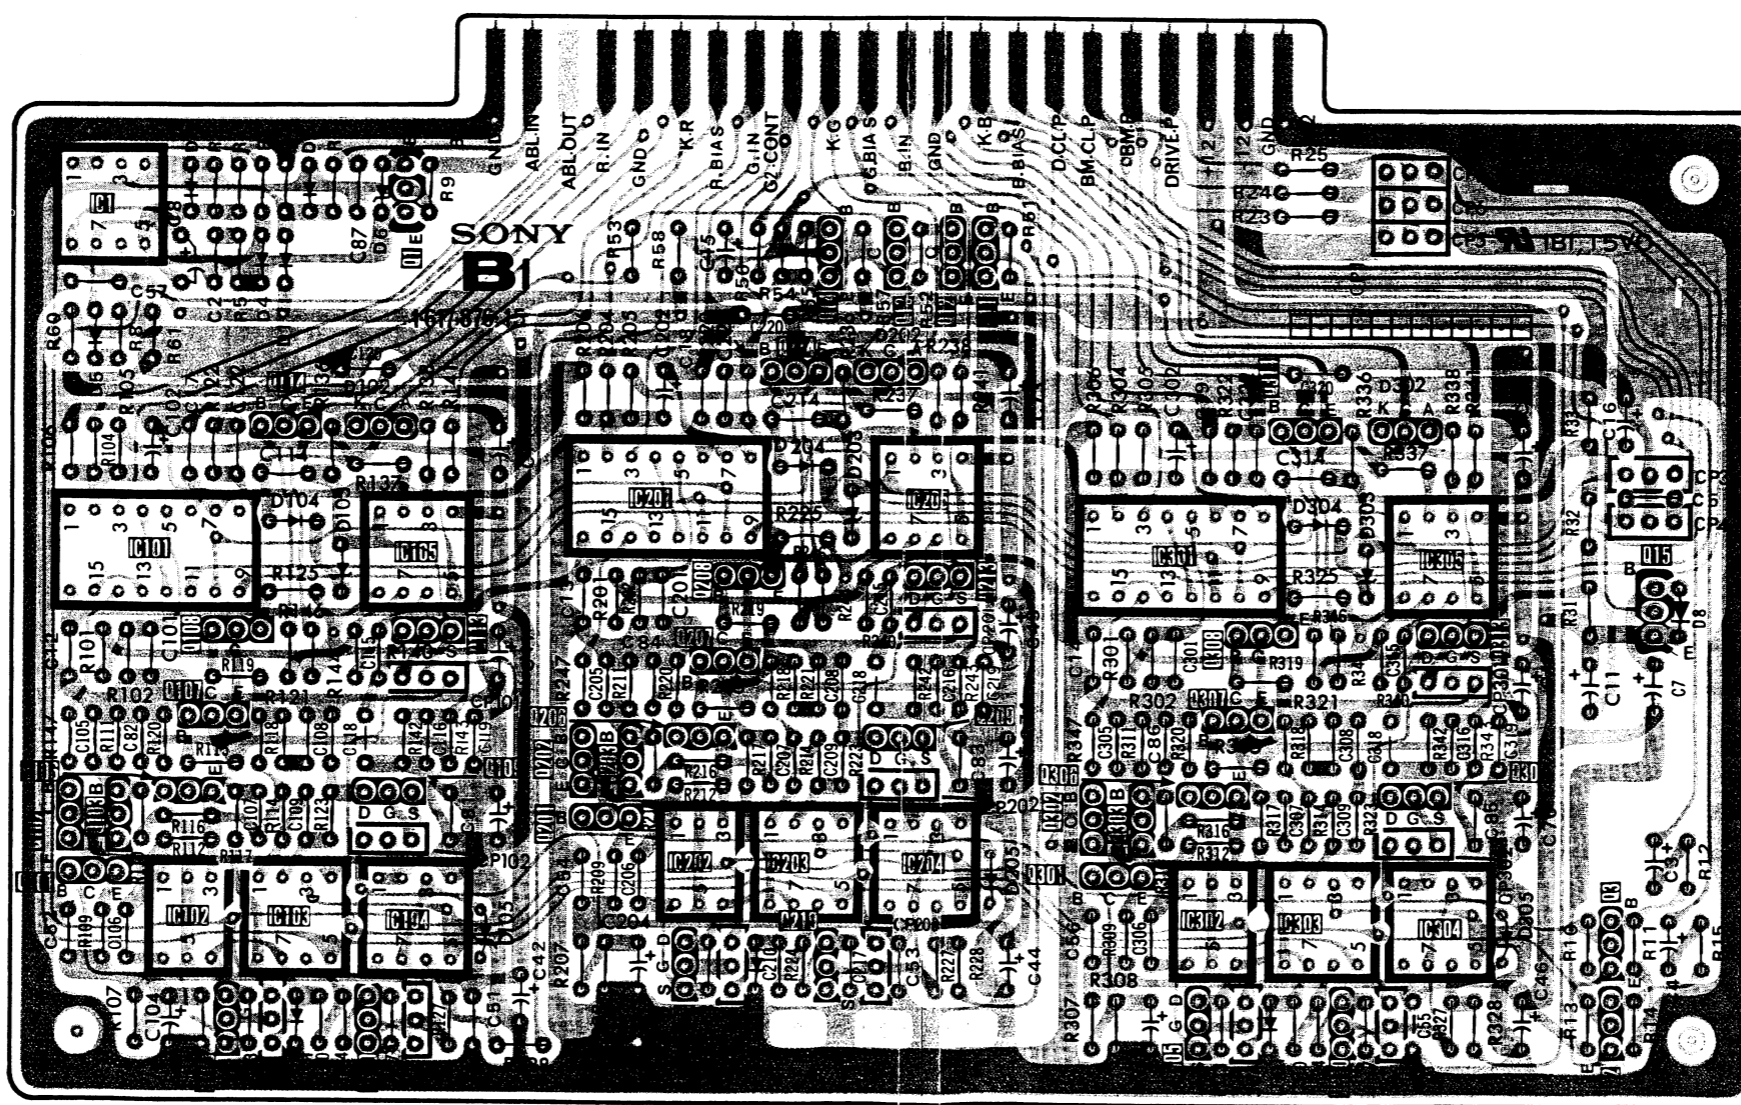

- [Pattern] : Conductor side pattern
- [Pattern] : Component side pattern


BI BI

BI board (DRIVE CONTROL, BEAM CURRENT CONTROL)

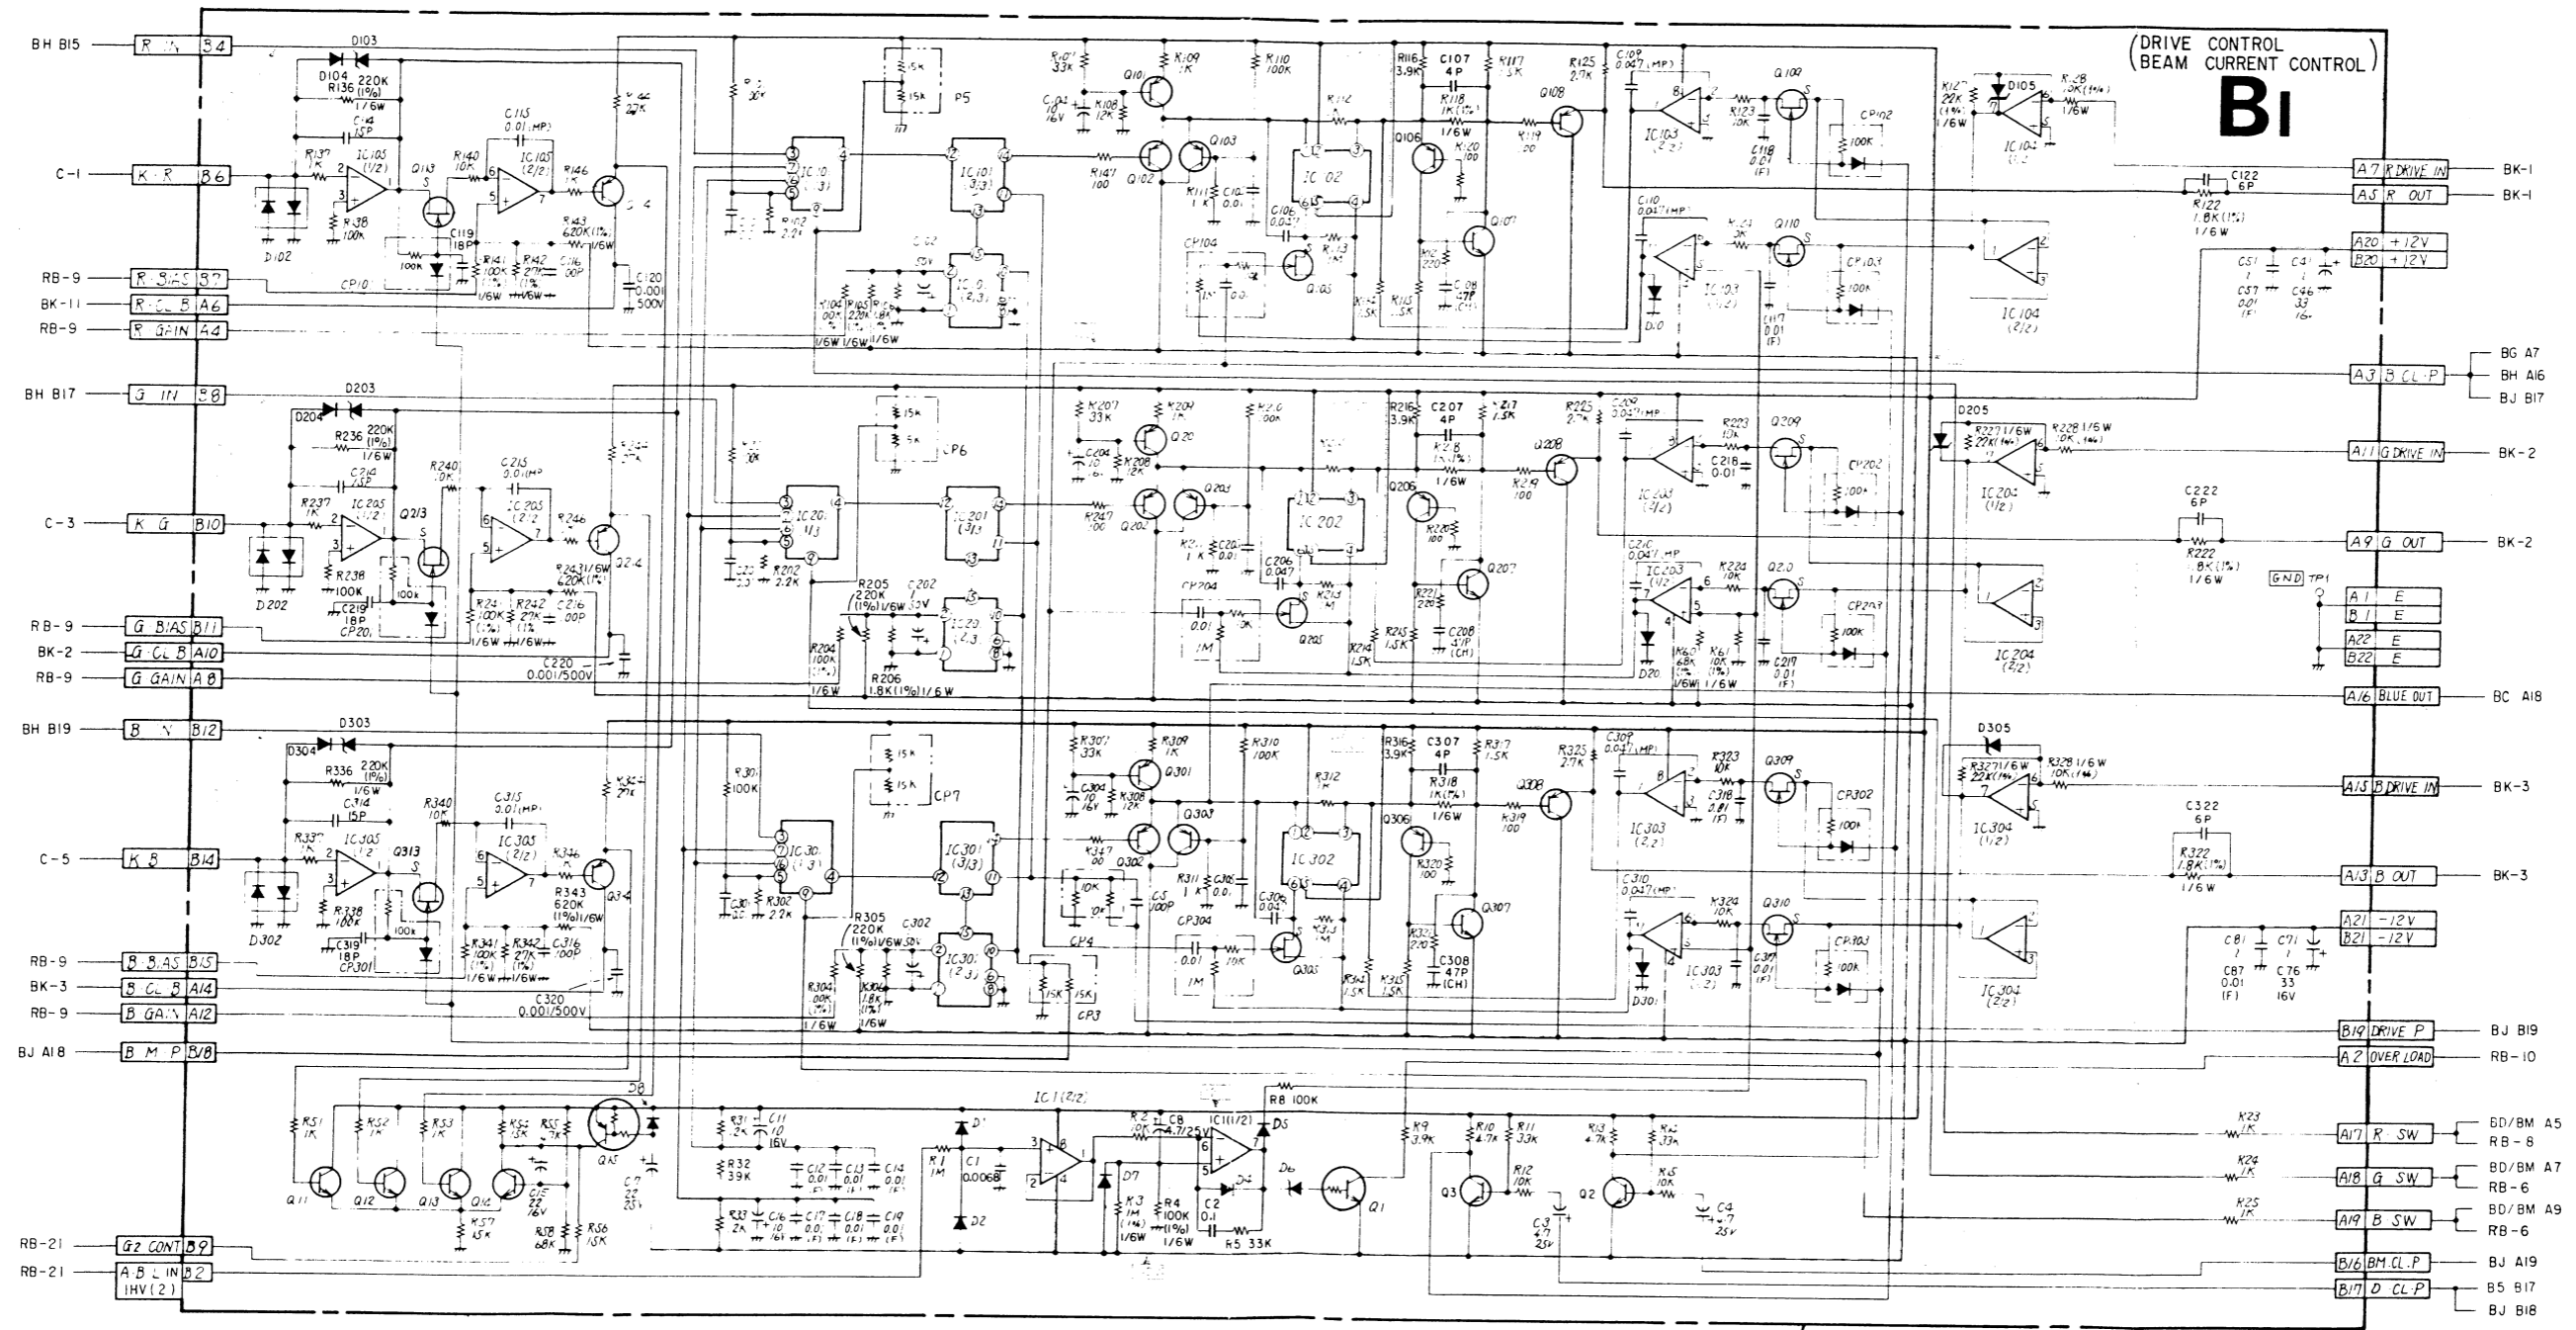

IC1	IC2	IC3	IC4	IC5	IC6	IC7	IC8	IC9	IC10	IC11
101 (1/3)										
	273									
		373								
			102							
				103 (1/2)						
					272					
						104				
							105 (1/2)			
								272		
									201 (1/3)	
										273
										202
										203 (1/2)
										301 (1/3)
										273
										302
										303 (1/2)
										304
										305 (1/2)
										Q1
										2
										3
										11
										12
										13
										14
										15
										101
										102
										103
										105
										106
										107
										108
										109

BI BOARD

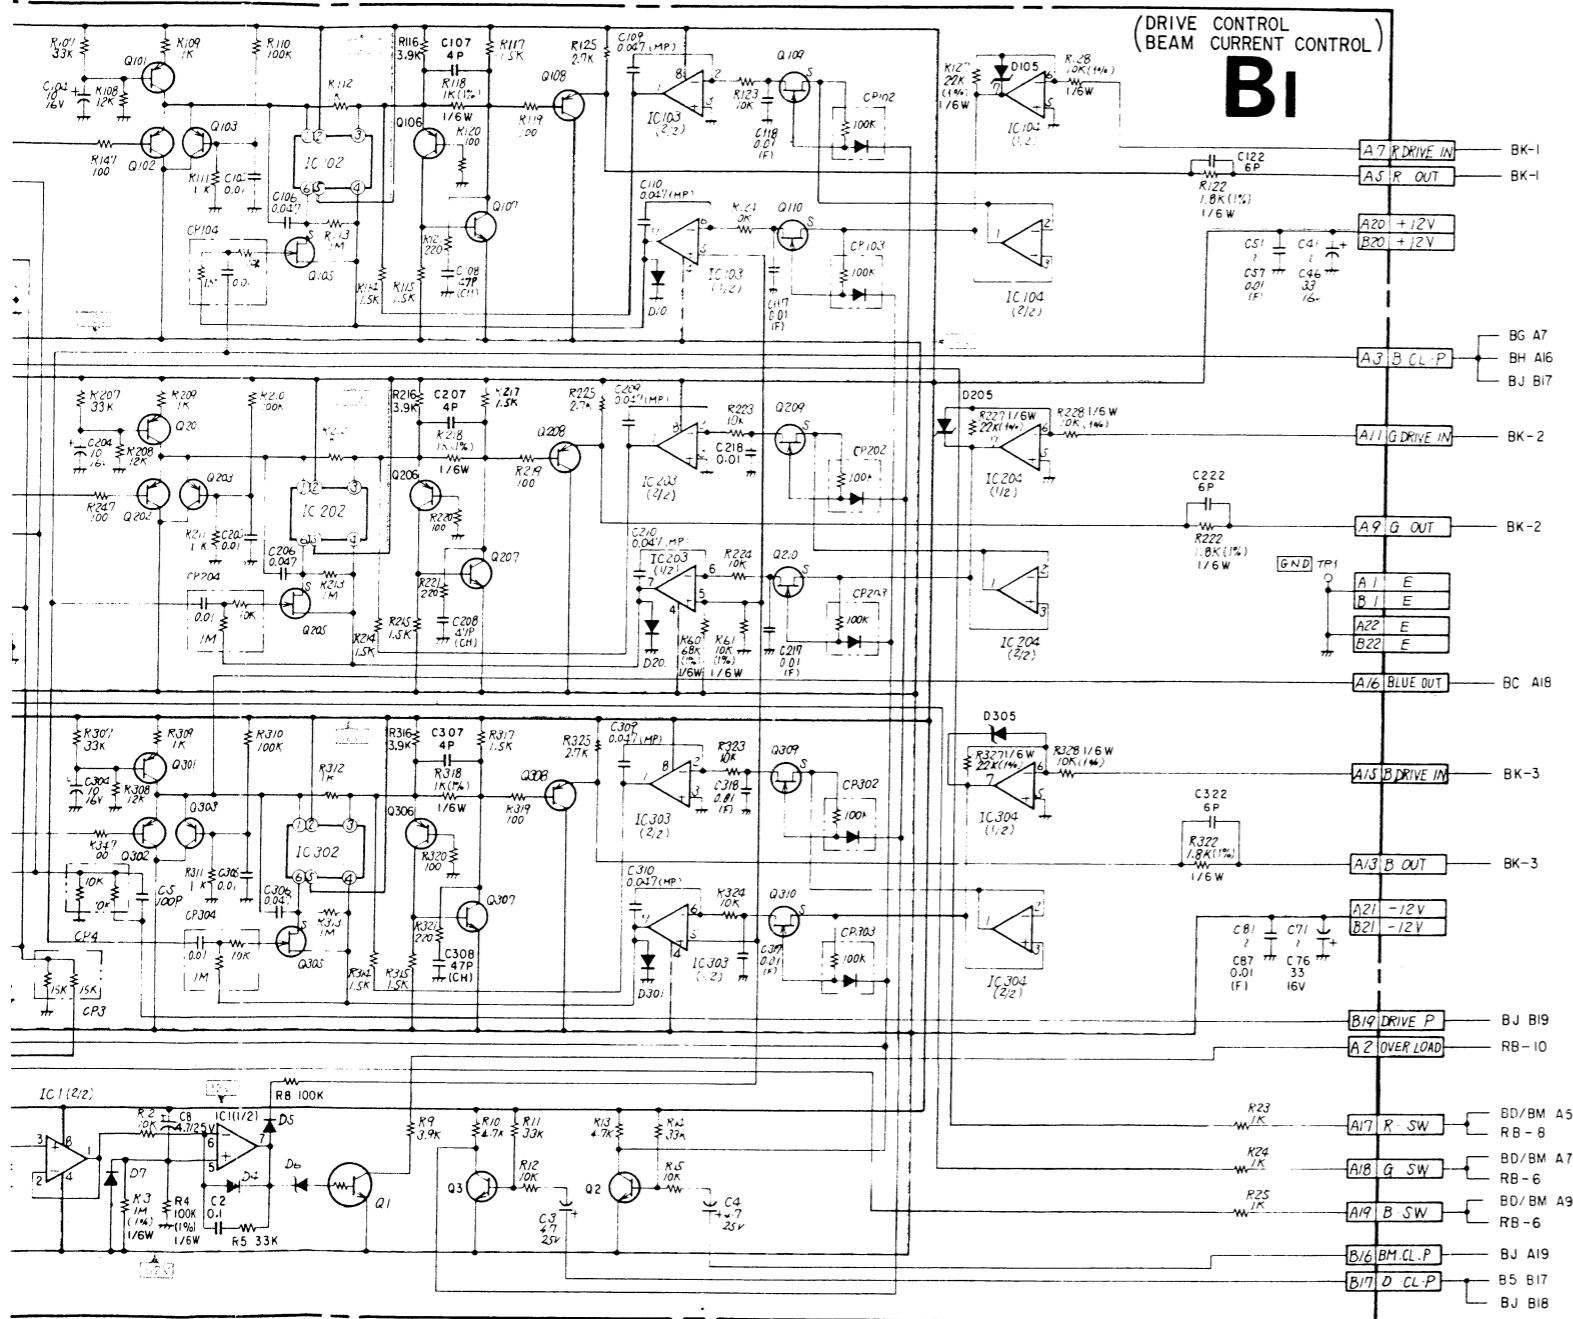


IC1	RC4558DQ	ABL
101(1/3)	TC4053BP	SCREEN OFF SW
(2/3)	TC4053BP	AGC PULSE GEN
(3/3)	TC4053BP	AGC PULSE INSERT
102	TX-429M	GAIN CONTROL
103(1/2)	TL082CP	GAIN CONTROL
(2/2)	TL082CP	BIAS CONTROL
104	TL082CP	AMP
105(1/2)	TL082CP	I-V CONVERTER
(2/2)	TL082CP	CURRENT FEEDBACK CONTROL
201(1/3)	TC4053BP	SCREEN OFF SW
(2/3)	TC4053BP	AGC PULSE GEN
(3/3)	TC4053BP	AGC PULSE INSERT
202	TX-429M	GAIN CONTROL
203(1/2)	TL082CP	GAIN CONTROL
(2/2)	TL082CP	BIAS CONTROL
204	TL082CP	AMP
205(1/2)	TL082CP	I-V CONVERTER
(2/2)	TL082CP	CURRENT FEEDBACK CONTROL
301(1/3)	TC4053BP	SCREEN OFF SW
(2/3)	TC4053BP	AGC PULSE GEN
(3/3)	TC4053BP	AGC PULSE INSERT
302	TX-429M	GAIN CONTROL
303(1/2)	TL082CP	GAIN CONTROL
(2/2)	TL082CP	BIAS CONTROL
304	TL082CP	AMP
305(1/2)	TL082CP	I-V CONVERTER
(2/2)	TL082CP	CURRENT FEEDBACK CONTROL


Q1	DTC143TS	OVER LOAD LED DRIVE
2	2SC403SP	PULSE SHAPING
3	2SC403SP	PULSE SHAPING
11	2SC2878	G2 CONTROL
12	2SC2878	G2 CONTROL
13	2SC2878	G2 CONTROL
14	2SC2878	G2 CONTROL
15	DTA144ES	G2 CONTROL
101	2SA844	LIMITER
102	2SA844	LIMITER
103	2SA844	LIMITER
105	2SK381	GAIN CONTROL
106	2SA844	AMP
107	2SC2668	AMP
108	2SA844	AMP
109	2SK381	SAMPLE-HOLD

Q110	2SK381	SAMPLE-HOLD
113	2SK381	SAMPLING
114	2SA1091	CLAMP BIAS CONTROL
201	2SA844	LIMITER
202	2SA844	LIMITER
203	2SA844	LIMITER
205	2SK381	GAIN CONTROL
206	2SA844	AMP
207	2SC2668	AMP
208	2SA844	AMP
209	2SK381	SAMPLE-HOLD
210	2SK381	SAMPLE-HOLD
213	2SK381	SAMPLING
214	2SA1091	CLAMP BIAS CONTROL
301	2SA844	LIMITER
302	2SA844	LIMITER
303	2SA844	LIMITER
305	2SK381	GAIN CONTROL
306	2SA844	AMP
307	2SC2668	AMP
308	2SA844	AMP
309	2SK381	SAMPLE-HOLD
310	2SK381	SAMPLE-HOLD
313	2SK381	SAMPLING
314	2SA1091	CLAMP BIAS CONTROL


D1	1SS119	PROTECTOR
2	1SS119	PROTECTOR
4	1SS119	ABL
5	1SS119	ABL
6	RD12ESB1	OVER LOAD LED DRIVE
7	1SS119	ABL
8	1SS119	G2 CONTROL
101	1SS119	PROTECTOR
102	MC932	PROTECTOR
103	RD4.3ES-T1B	LIMITER
104	1SS119	LIMITER
201	1SS119	PROTECTOR
202	MC932	PROTECTOR
203	RD4.3ES-T1B	LIMITER
204	1SS119	LIMITER
301	1SS119	PROTECTOR
302	MC932	PROTECTOR
303	RD4.3ES-T1B	LIMITER
304	1SS119	LIMITER
D105	RD6.2ESB	
D205	RD6.2ESB	
D305	RD6.2ESB	



1.0Vp-p(H)



1.0Vp-p(H)




1.0Vp-p(H)

BJ BOARD


IC1	HD14538BP	PIC.SET.PULSE GEN
2	MC14001BCP	CROSS HATCH GEN
3	TC4040BP	V SYNC & DELAY
4	TC4040BP	V COUNT
5	TC504027BP	V SYNC & DELAY
6(1/2)	TC504027BP	CHROMA CLAMP PULSE GEN
(2/2)		2FH MULTI
7	TC504027BP	V COUNT
8	TC504027BP	1H PULSE PROCESS
9(1/2)	TC4027BP	V SYNC & DELAY
(2/2)		1H PULSE PROCESS
10(1/2)	HD14538BP	B.G.P GEN 2
(2/2)		H CYCLE
11(1/2)	HD14538BP	CROSS HATCH GEN
(2/2)		SPLIT Y BLK, C BLK PULSE GEN
12	HD14538BP	Y CYCLE AGC & CLAMP PULSE GEN
13(1/4)	MC14001BCP	CHROMA CLAMP PULSE GEN
(2/4)		Y.CL.P GEN
(3/4)		B.G.P GEN 2
(4/4)		RESIDUAL PULSE GEN
14(1/4)	MC14001BCP	SPLIT Y BLK: C BLK PULSE GEN
(2/4)		V CYCLY AGC & CLAMP PULSE GEN
15	MC14071BCP	V CYCLE AGC & CLAMP PULSE GEN
16(1/4)	MC14011BCP	CROSS HATCH GEN
(2/4)		Y CYCLE AGC & CLAMP PULSE GEN
(3/4)		H OR V BLK, P
(4/4)		SPLIT Y BLK, C BLK PULSE GEN
17	MC14011BCP	CROSS HATCH GEN
18	TC4023BP	CROSS HATCH GEN
19(1/4)	MC14081BCP	V COUNT
(2/4)		V SYNC & DELAY
(3/4)		2FH MULTI
(4/4)		1H PULSE PROCESS
20	MC14081BCP	V COUNT
21(1/4)	MC14071BCP	V CYCLE AGC & CLAMP PULSE GEN
(2/4)		V SYNC & DELAY
(3/4)		V COUNT
(4/4)		V COUNT
22(1/4)	MC14071BCP	2FH MULTI
(2/4)		V COUNT
(3/4)		V SYNC & DELAY
(4/4)		V SYNC & DELAY

IC23(1/3)	TC4073BP	V SYNC & DELAY
(2/3)		V COUNT
(3/3)		V COUNT
24(1/5)	MC14069UBCP	V SYNC & DELAY
(4/5)		CROSS HATCH GEN
(5/5)		V COUNT
25(1/6)	MC14069UBCP	1H PULSE PROCESS
(2/6)		INV
(3/6)		H OR V BLK.P
(4/6)		Y CYCLE AGC & CLAMP PULSE GEN
(5/6)		CROSS HATCH GEN
(6/6)		CROSS HATCH GEN
26	HC14175BCP	1H PULSE PROCESS
27(1/3)	MC14053BCP	CLAMP PULSE CHANGE SW
(2/3)		CROSS HATCH GEN
(3/3)		H OR V DL SW
28	TC4520BP	CROSS HATCH GEN
29(1/2)	HD14538BP	B.G.P GEN 1
(2/2)		Y.CL.P GEN
Q14	2SC2785	CROSS HATCH GEN
15	2SC2785	Y.CL.P GEN
16	2SC2785	Y.CL.P GEN
17	2SC2785	CHROMA CLAMP PULSE GEN
18	2SC2785	CHROMA CLAMP PULSE GEN
19	2SA1115	H CYCLE
20	2SC2785	H CYCLE
21	2SC2785	H CYCLE
22	2SC2785	H CYCLE
23	2SA1048	H CYCLE
24	2SC2785	H CYCLE
25	2SC2785	CHROMA CLAMP PULSE GEN
26	2SC2785	Y.CL.P GEN
D1	1SS119	CROSS HATCH GEN
2	1SS119	H CYCLE
3	1SS119	H CYCLE
7	1SS119	1H PULSE PROCESS
8	1SS119	V SYNC & DELAY
9	1SS119	2FH MULTI
11	HC932	PROT


BJ board (SYNC PROCESSING & PULSE GEN)

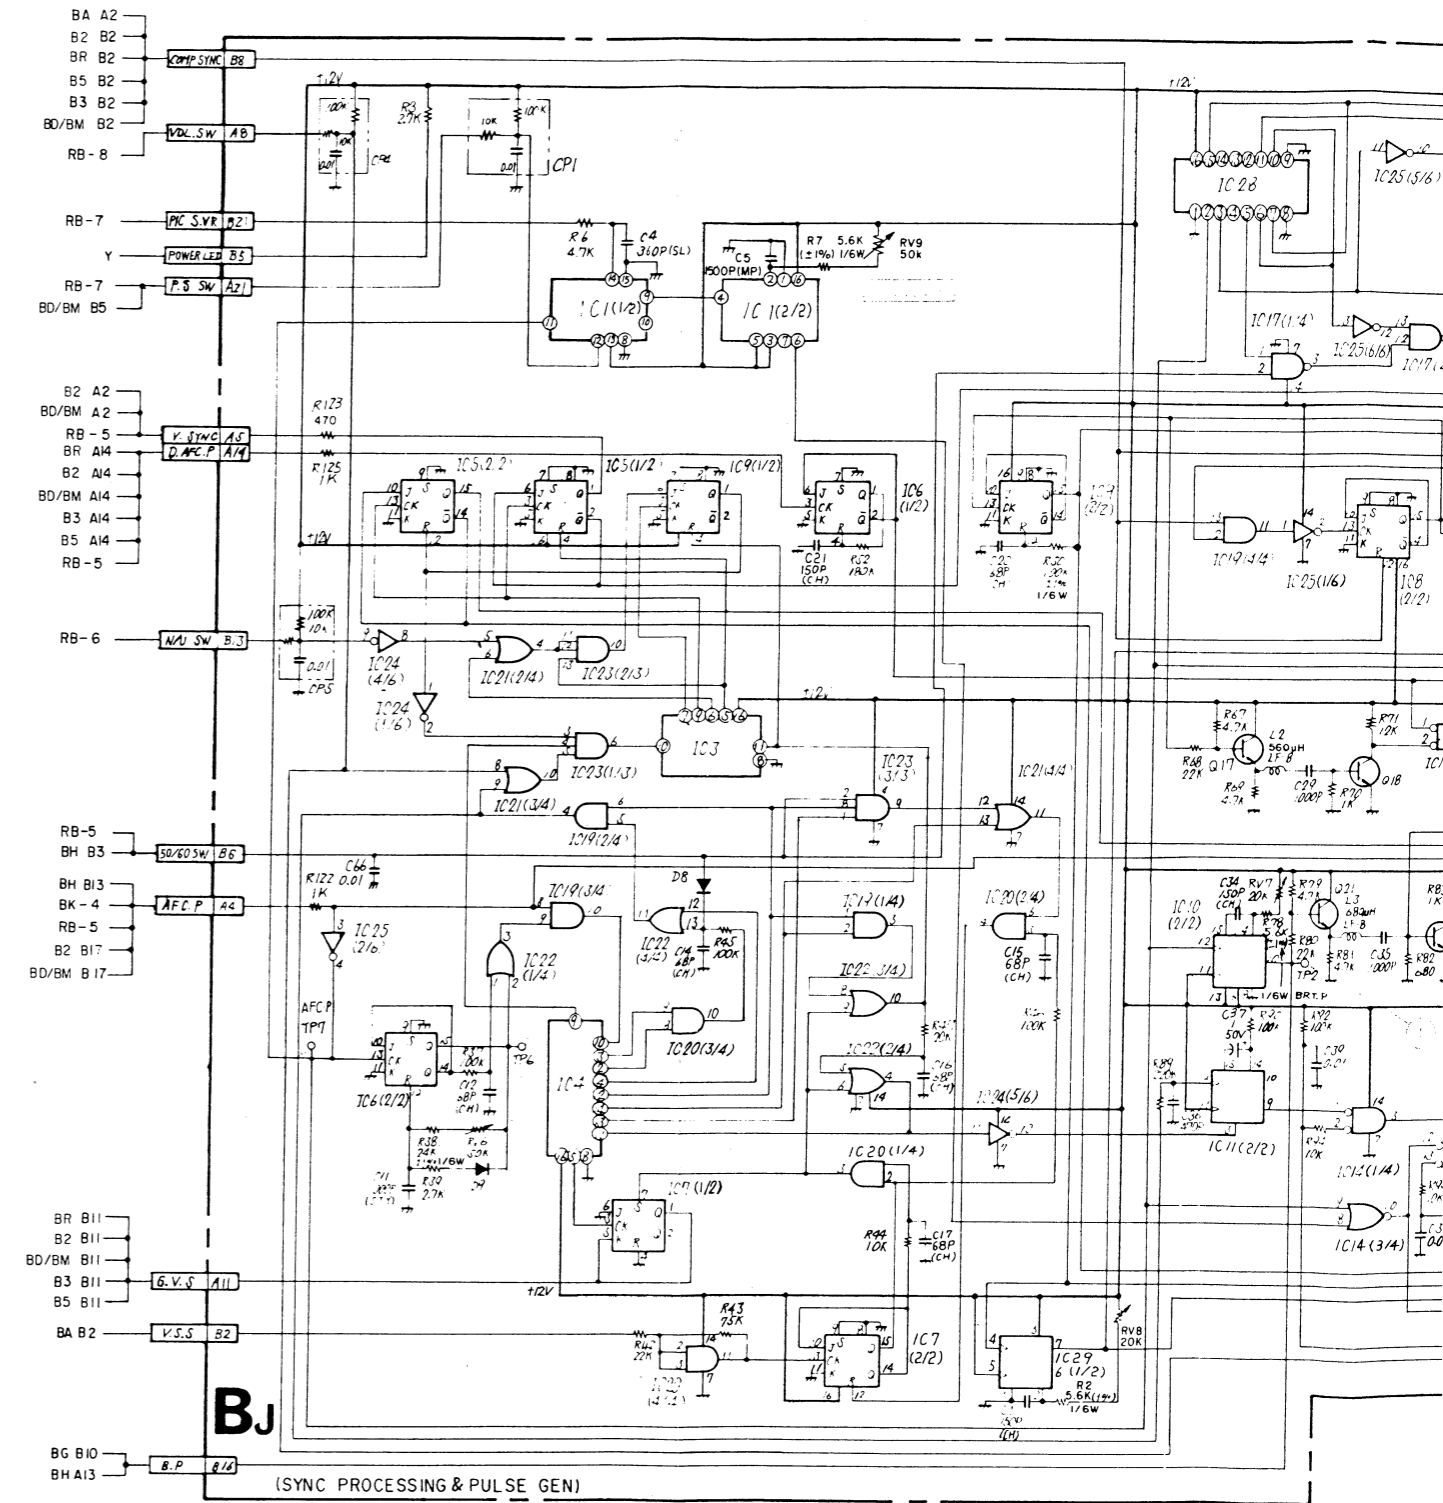


5. DIAGRAMS




12Vp-p (H)
12Vp-p (H)



12Vp-p (H)
12Vp-p (H)




12Vp-p (V)



12Vp-p (H)

BJ board (SYNC PROCESSING & PULSE GEN)


& DELAY
& DELAY
ATCH GEN
B5 B2
E PROCESS
BLK.P
AGC & CLAMP PULSE GEN
ATCH GEN
E PROCESS
ULSE CHANGE SW
ATCH GEN
DL SW
ATCH GEN
EN 1
GEN
ATCH GEN
GEN
CLAMP PULSE GEN
CLAMP PULSE GEN
ATCH GEN
GEN
CLAMP PULSE GEN
GEN
ATCH GEN
E PROCESS
& DELAY
I

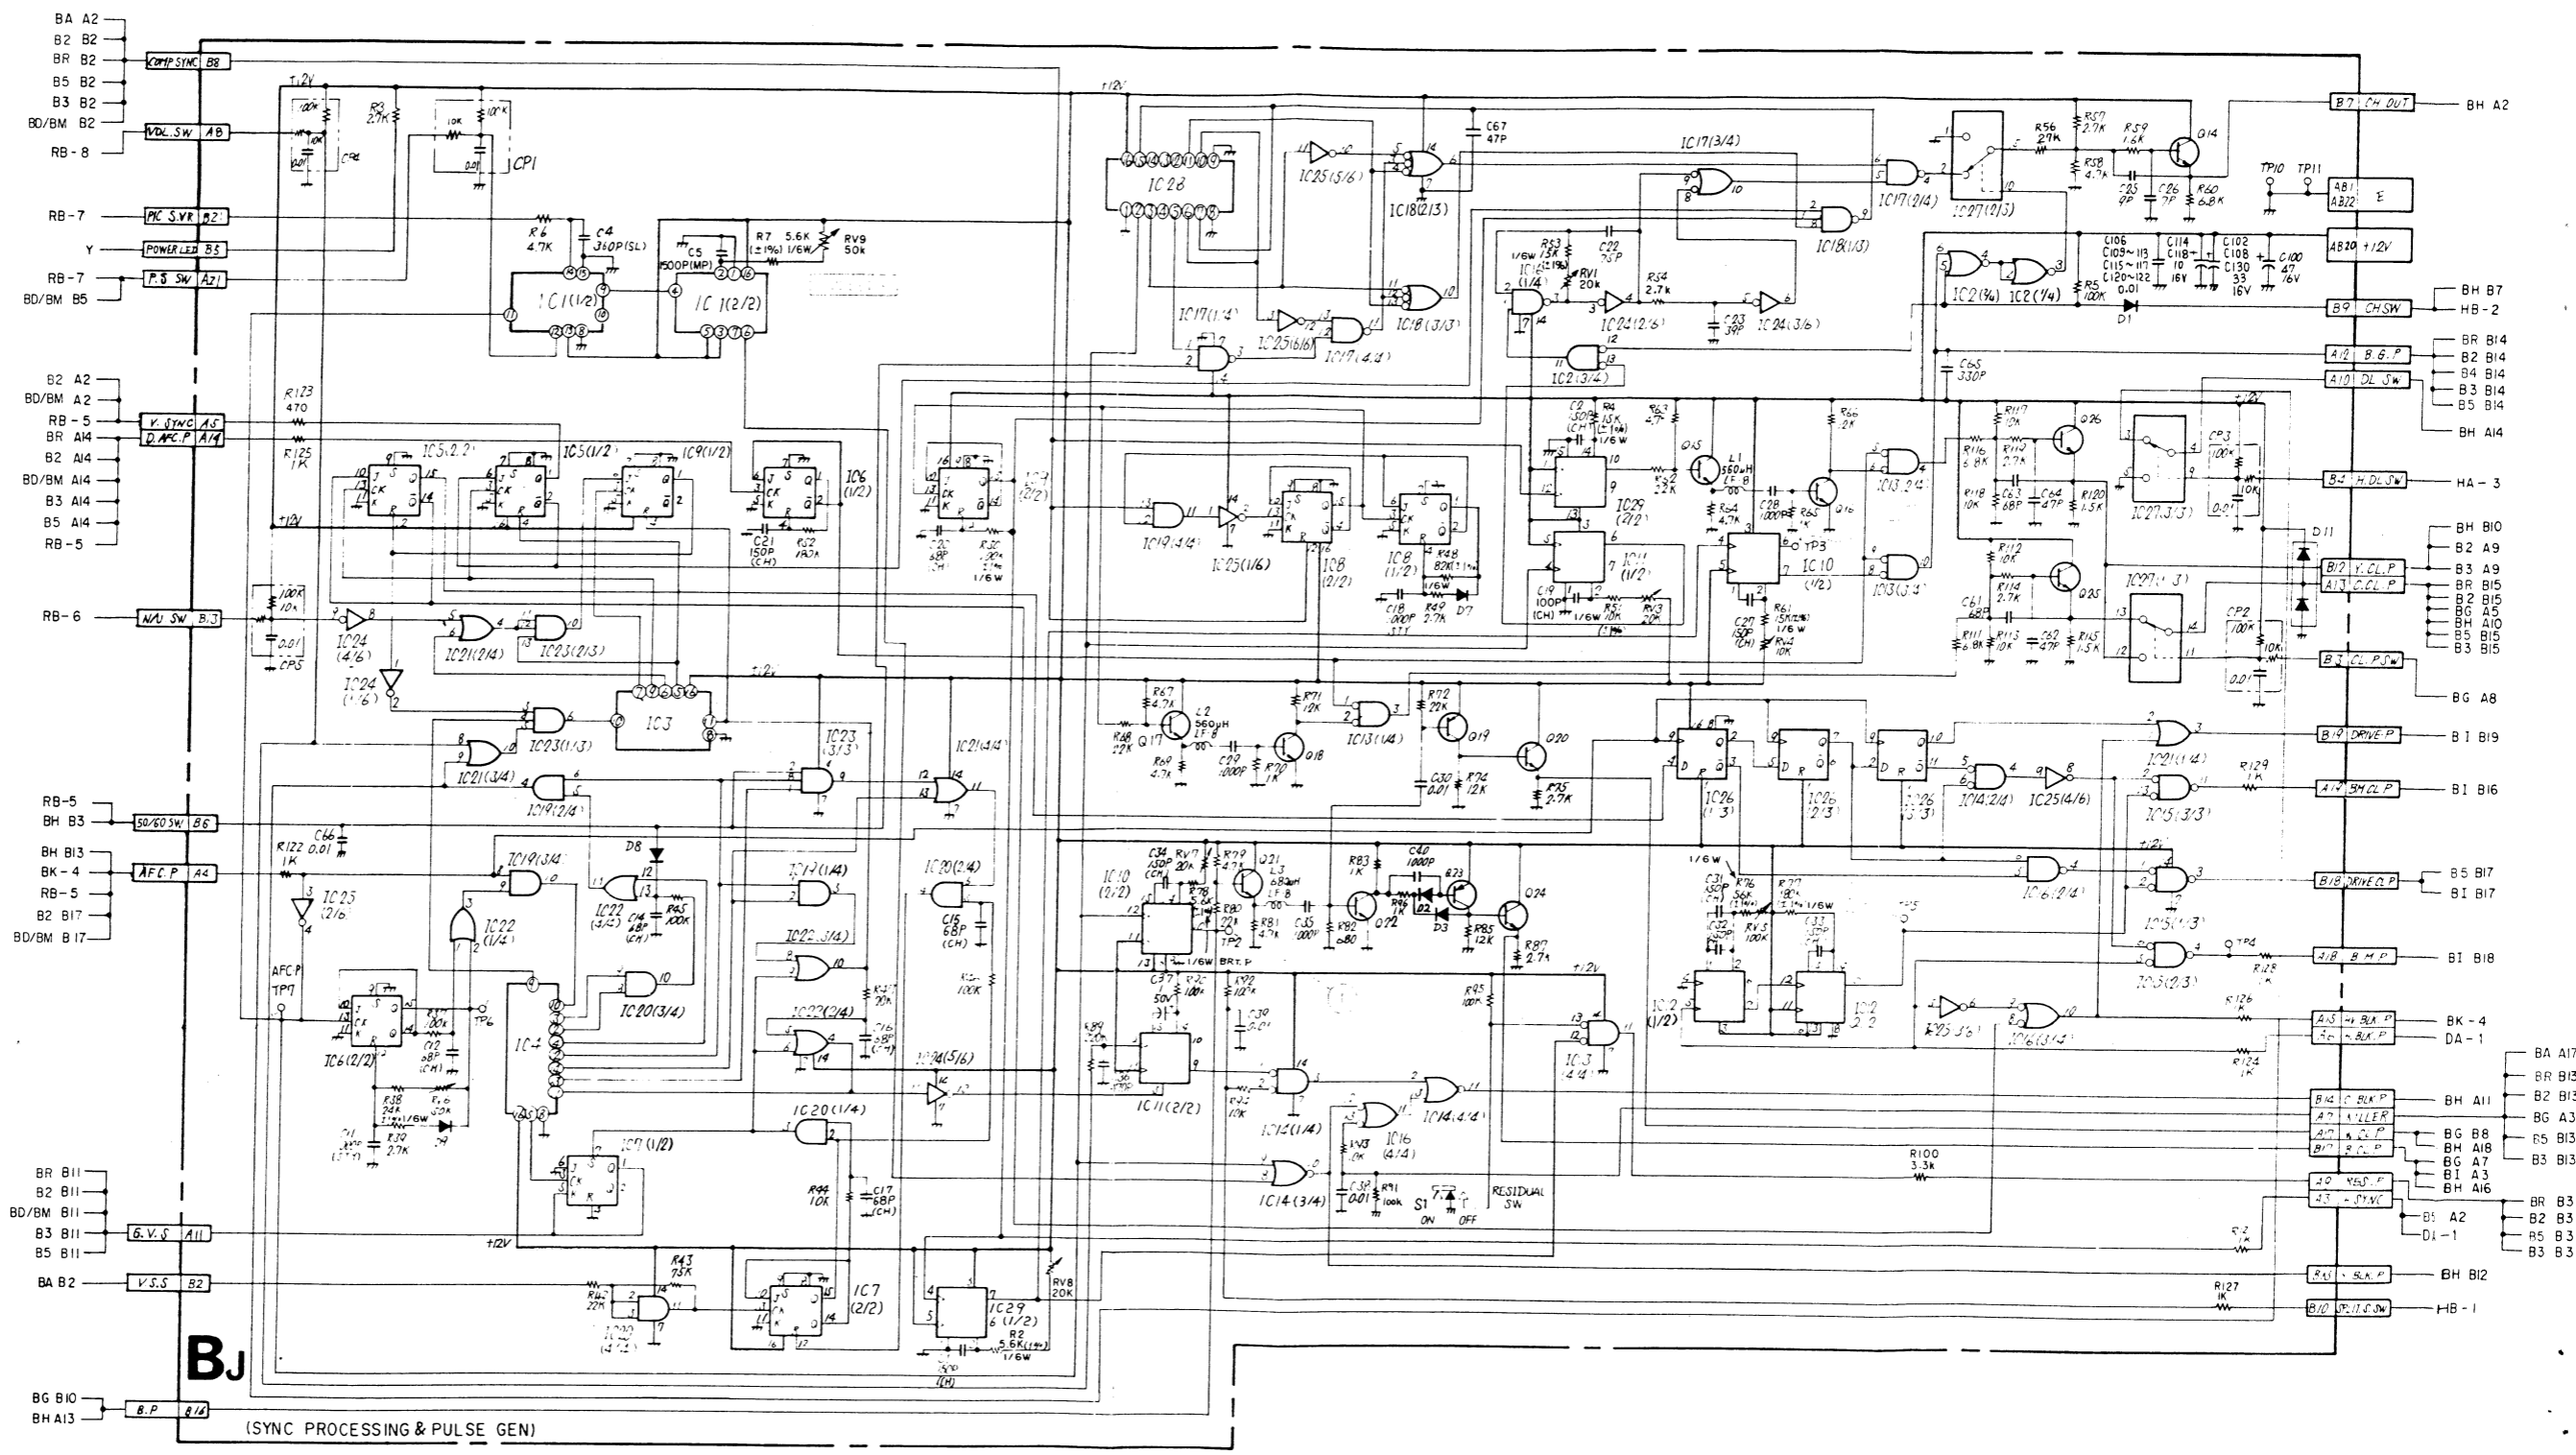

BJ BJ

BJ board (SYNC PROCESSING & PULSE GEN)

IC	6 19 1	24 21 7	20 23 4	22 26 3	12 18 15	9 25 14	8 17 27	11 16 28	10 13 5	29 2
Q									20 19	24 23 22 18 25 26 16 14
D	9		8					7		
TP ADJ	RV6 TP7		TP6		RV5 TP11	TP5 TP4		TP10		RV3 RV4 RV1 RV7 RV8 TP2 TP3

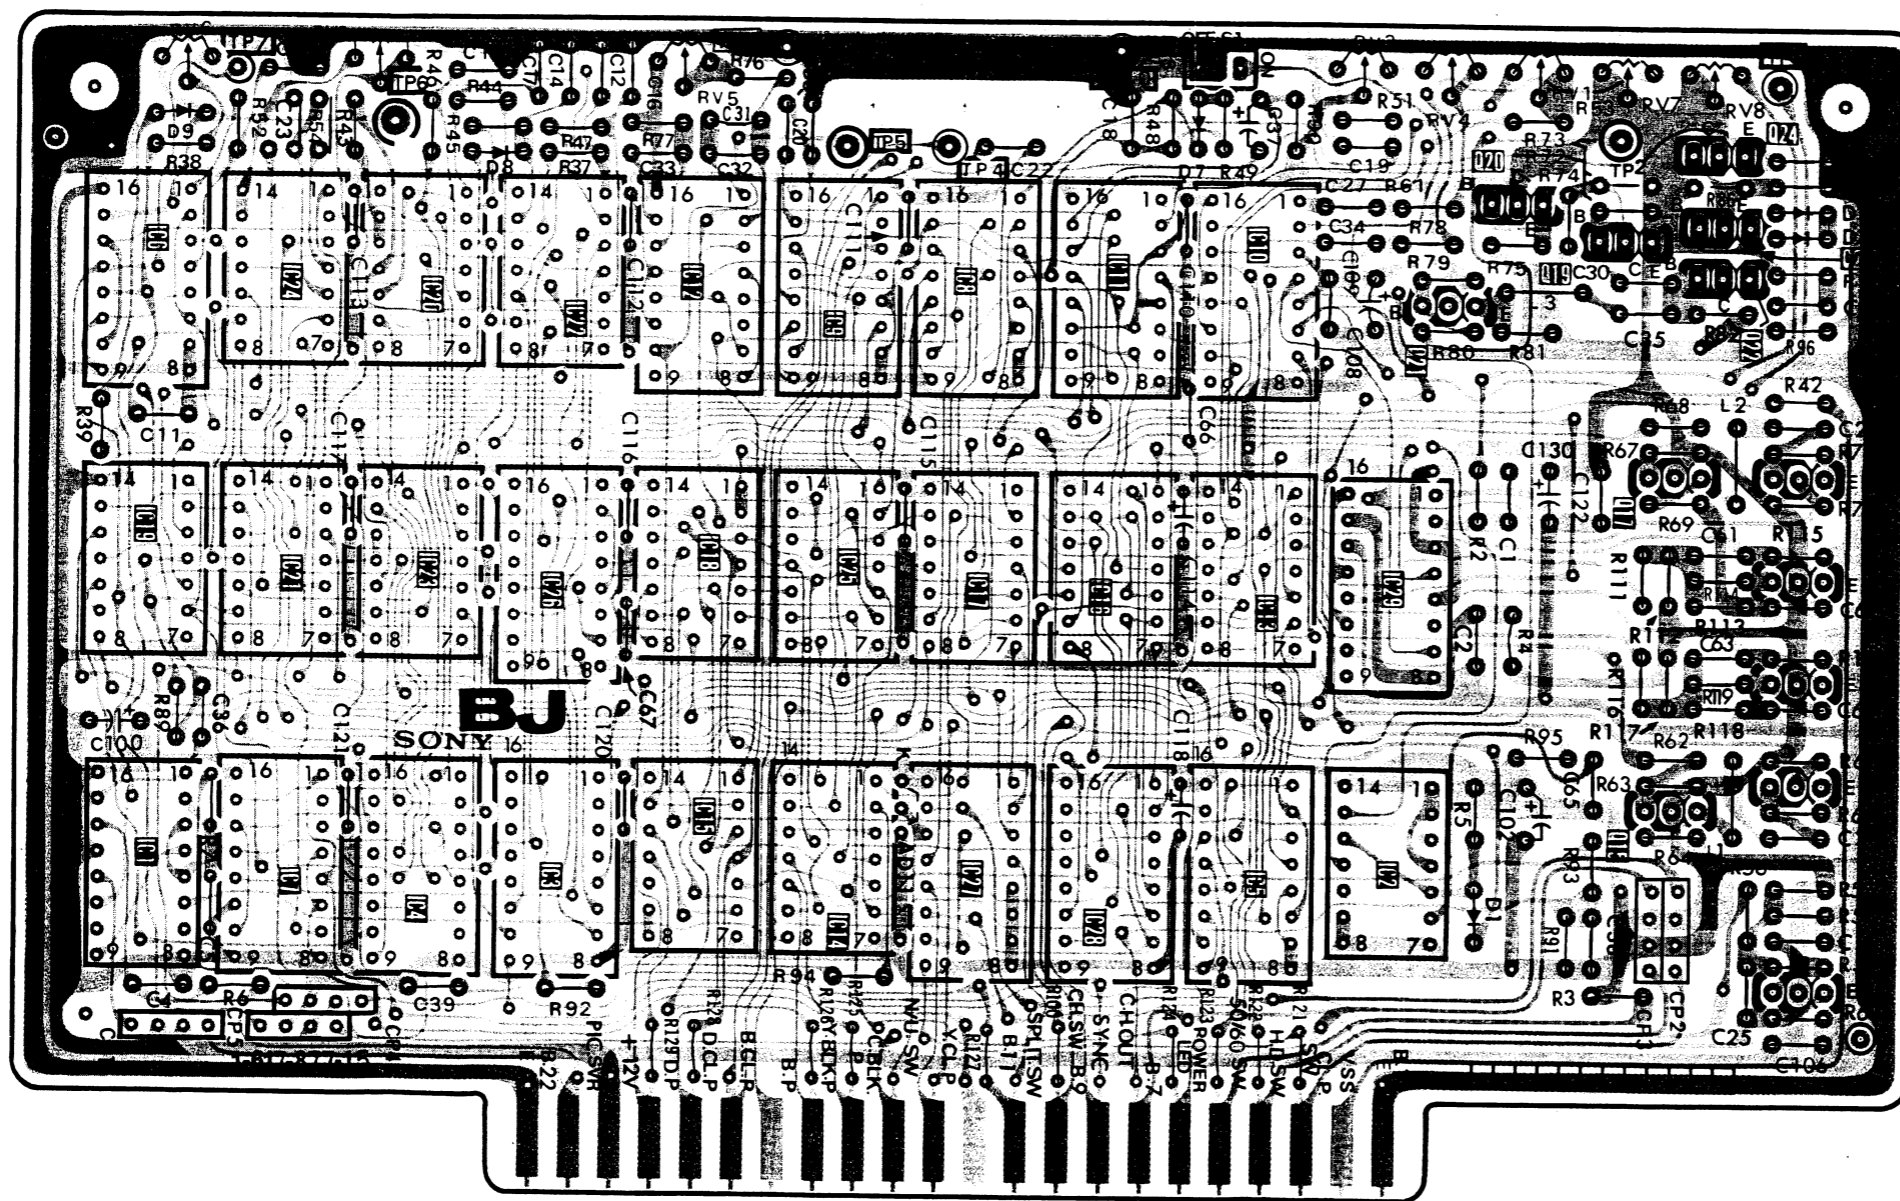


- : Conductor side pattern
- : Component side pattern

BK BK

BK board (VIDEO OUT AMP)

IC															
Q	113		110		108		106		104	103	102	101		13	12
	112		111		109		107		105	115	114				
	213		210		208		206		204	203	202	201			
	212		211		209		207		205	215	214				
	313		310		308		306		304	303	302	301			1
D	111		112		107	114	115	104	103		101				
	109	110		113	108	116		106	105		102				
	211		212		207	214	215	204	203		201				
	209	210		213	208	216		206	205		202				
	311		312		307	314	315	304	303		301				1 2
309	310		313	308	316		306	305		302					
TP		TPI01							CV102				CV101		
ADJ	TPI	TPI02							C V202				CV201		
		TPI03							C V302				CV301		

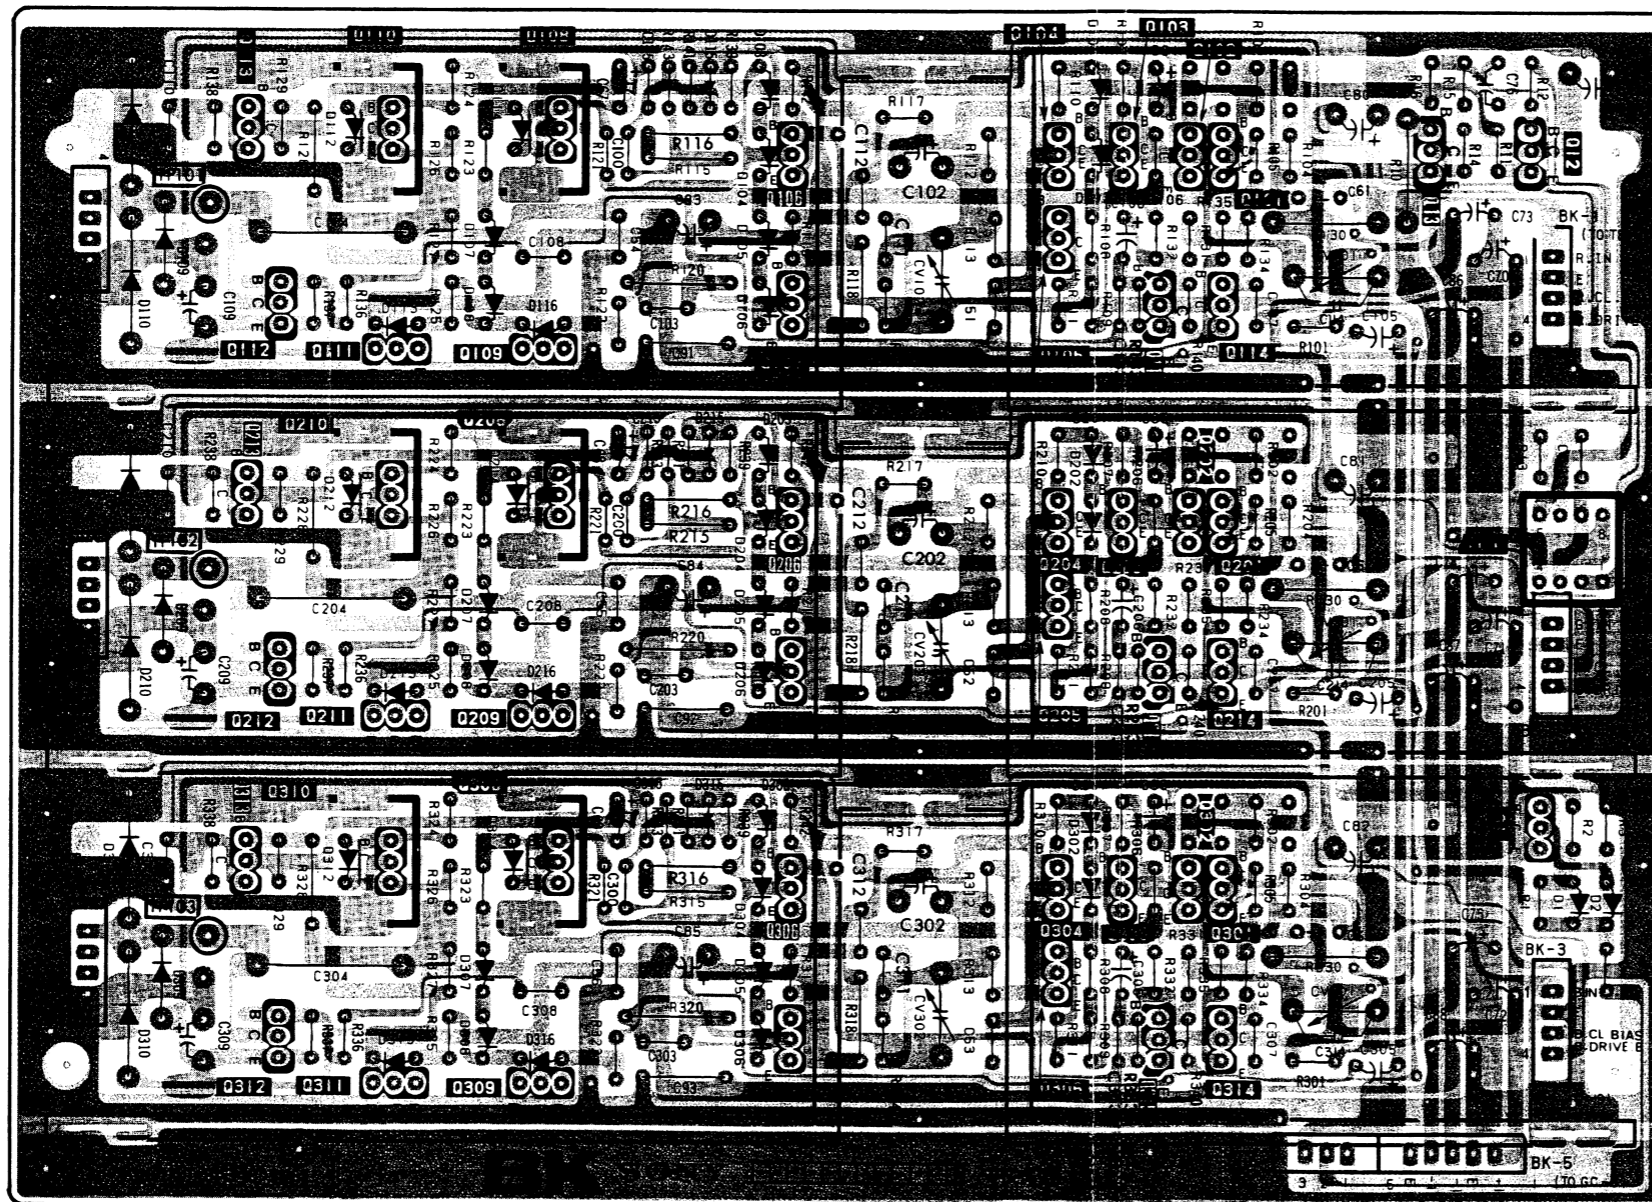


- : Conductor side pattern
- : Component side pattern

BK BK


BK board (VIDEO OUT AMP)

BK BOARD

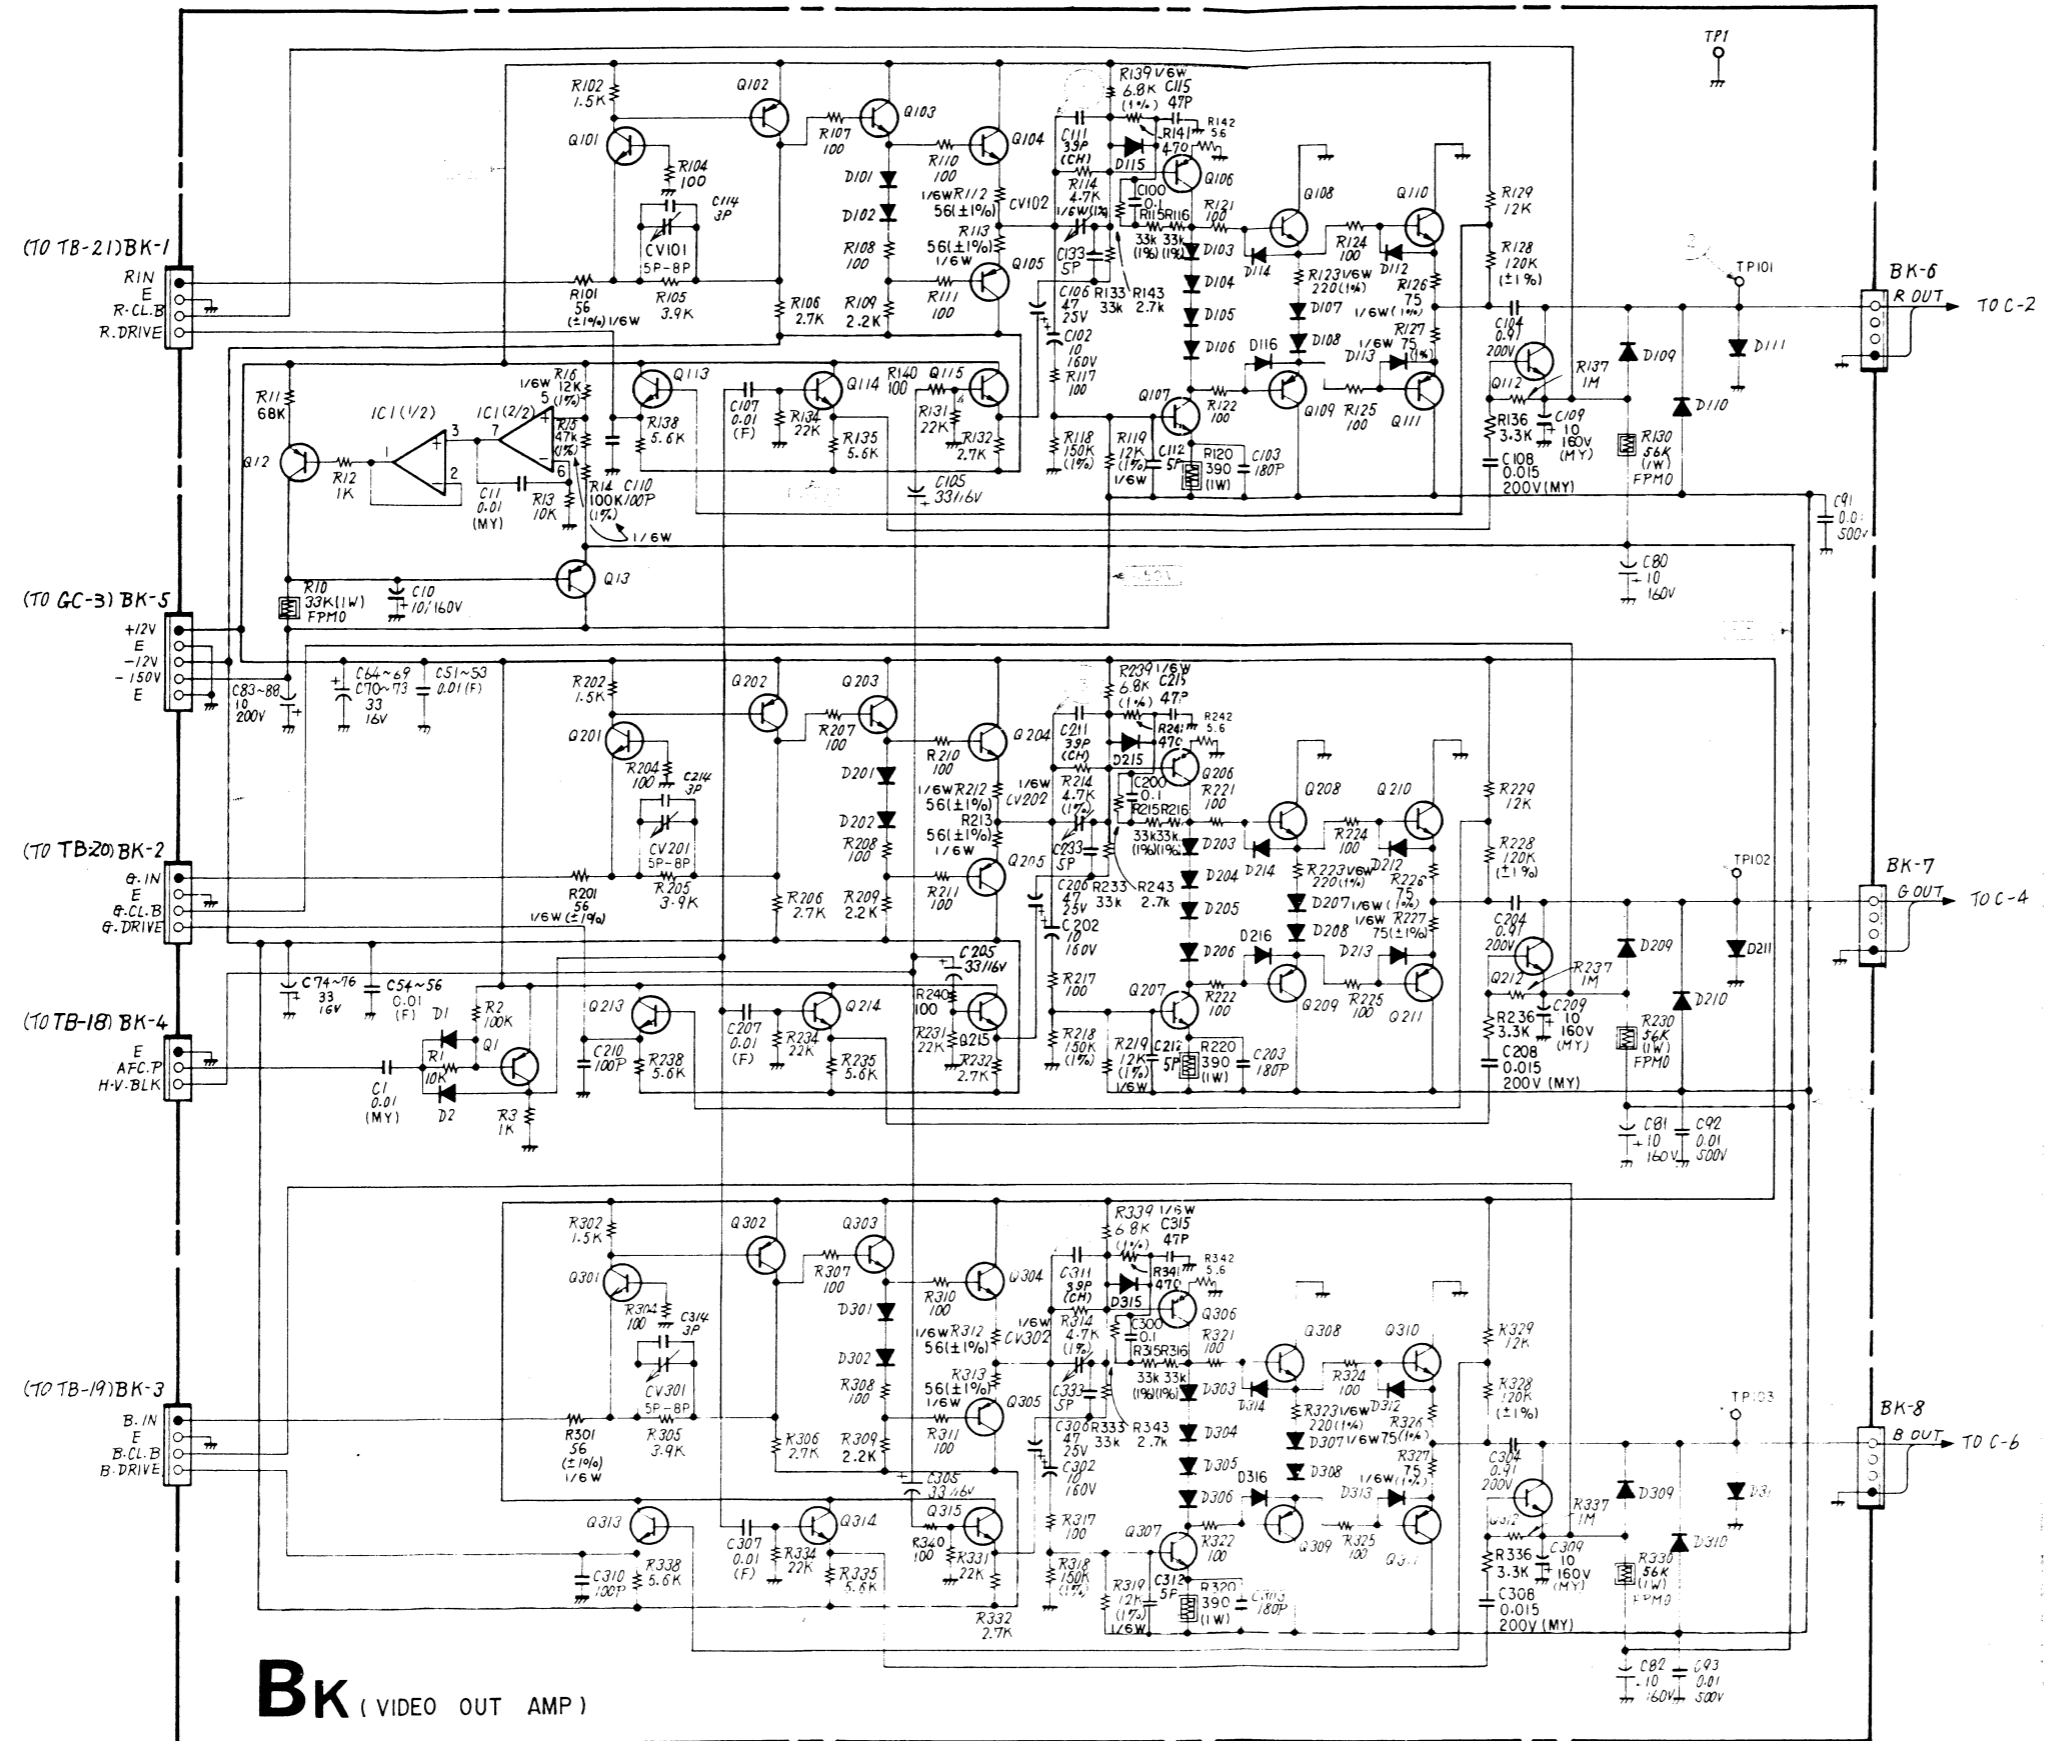

Bk (VIDEO OUT AMP)

IC1
Q1
12
13
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315

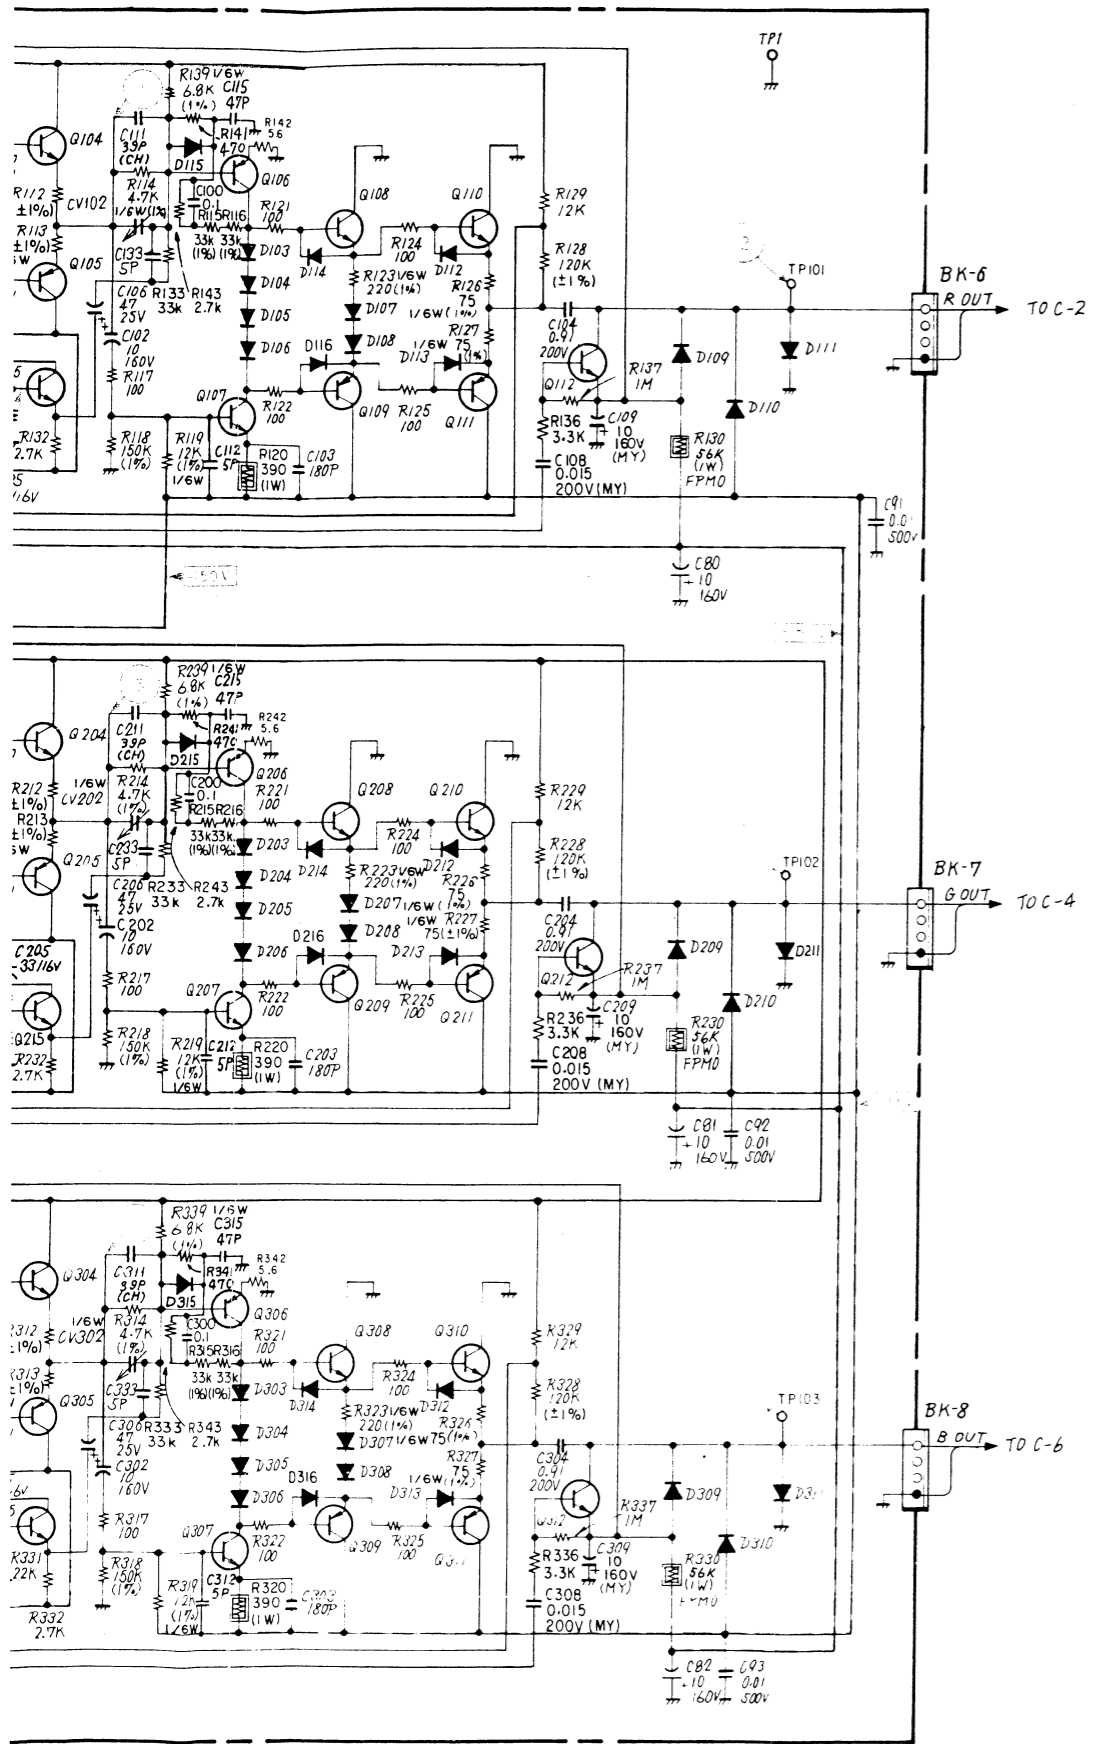

BK BOARD


IC1	RC455800	LIPPLE FILTER
Q1	2SA844	INVERTER
12		

DA BOARD


IC1	M884027B	H. BLK. WIDTH
2	HD14011BP	H. DELAY. POSITION
3	TC4093BP	BUFFER
4	CX-158	H. OSC AFC
5	TLO82CP	H. LIN. GEN.
6	TLO82CP	H. LIN. GEN.
7	MC1496P	H. LIN. MOD.
8	LM2903DQ	1/2H, 1/2V. GEN.
9	TLO82CP	H. BLK. PHASE
10	LM2903DQ	T & B. H. PHASE
11	TLO82CP	T & B PIN. GEN.
12	MC1496P	T & B. PIN MOD.
13	uPD4066BC	50/60 SW.
14	uPD4066BC	DEF. LEVEL. SW
15	uPD4066BC	DEF. LEVEL. SW
16	uPD4066BC	DEF. LEVEL. SW
17	RC4558DQ	BUFFER
18	CX23025	50/60 SELECTOR
19	RC4558DQ	V. SAWTOOTH. GEN.
20	RC4558DQ	SIDE. PIN. GEN.
21	RC4558DQ	SIDE. PIN. GEN.
22	RC4558DQ	V. SAWTOOTH GEN.
23	RC4558DQ	BUFFER
24	uPC78M12H	+12V REG.
25	uPC79M12H	-15V REG.
	TLO82CP	BUFFER
Q1	DTC144ES	H. OSC. SW
2	2SC2785	H. LIN. GEN
3	2SC2785	H. LIN. GEN
4	2SC2785	1/2H. P. GEN.
5	2SC2785	H. BLK. GEN.
6	2SC2785	H. BLK. GEN.
7	2SC2785	T & B PIN. PHASE

8	2SC2785	T & B PIN. GEN.
9	2SC2785	T & B PIN. GEN.
10	2SC3068	T & B PIN. MOD.
12	DTC144ES	50/60 SW
13	DTC144ES	SCAN. SW
14	DTC144ES	SCAN. SW
15	DTC144ES	SCAN. SW
16	DTC144ES	SCAN. SW
17	DTC144ES	50/60 SW
18	2SC2785	BUFFER
19	2SC2785	V. SAW. GEN
20	2SC2785	V. SAW. CLIP
21	2SC2785	SIDE PIN GEN
22	2SC2785	SIDE PIN GEN
23	2SC2785	SIDE PIN GEN
24	2SC2785	V. SAW GEN.
D1	1S5148	H. DELAY SW
2	1S5148	H. DELAY SW
3	RD6.8EB	CLIPPER
4	RD6.8EB	CLIPPER
5	RD12E-B	50/60 SW
6	RD12E-B	SCAN SW
7	1S5148	SCAN SW
8	1S5148	SCAN SW
9	RD7.5E-B	+7.5V REG.
10	RD7.5E-B	-7.5V REG.
11	RD15E-B	50/60 SW.
12	RD5.6E-B	V. SAW. CLIP
13	1S5148	V. SAW. CLIP
14	1S5148	V. SAW. CLIP
15	1S5148	AFC.CLIP
18	1S5148	PROT
19	1S5148	


DA board (DEFLECTION WAVEFORM)

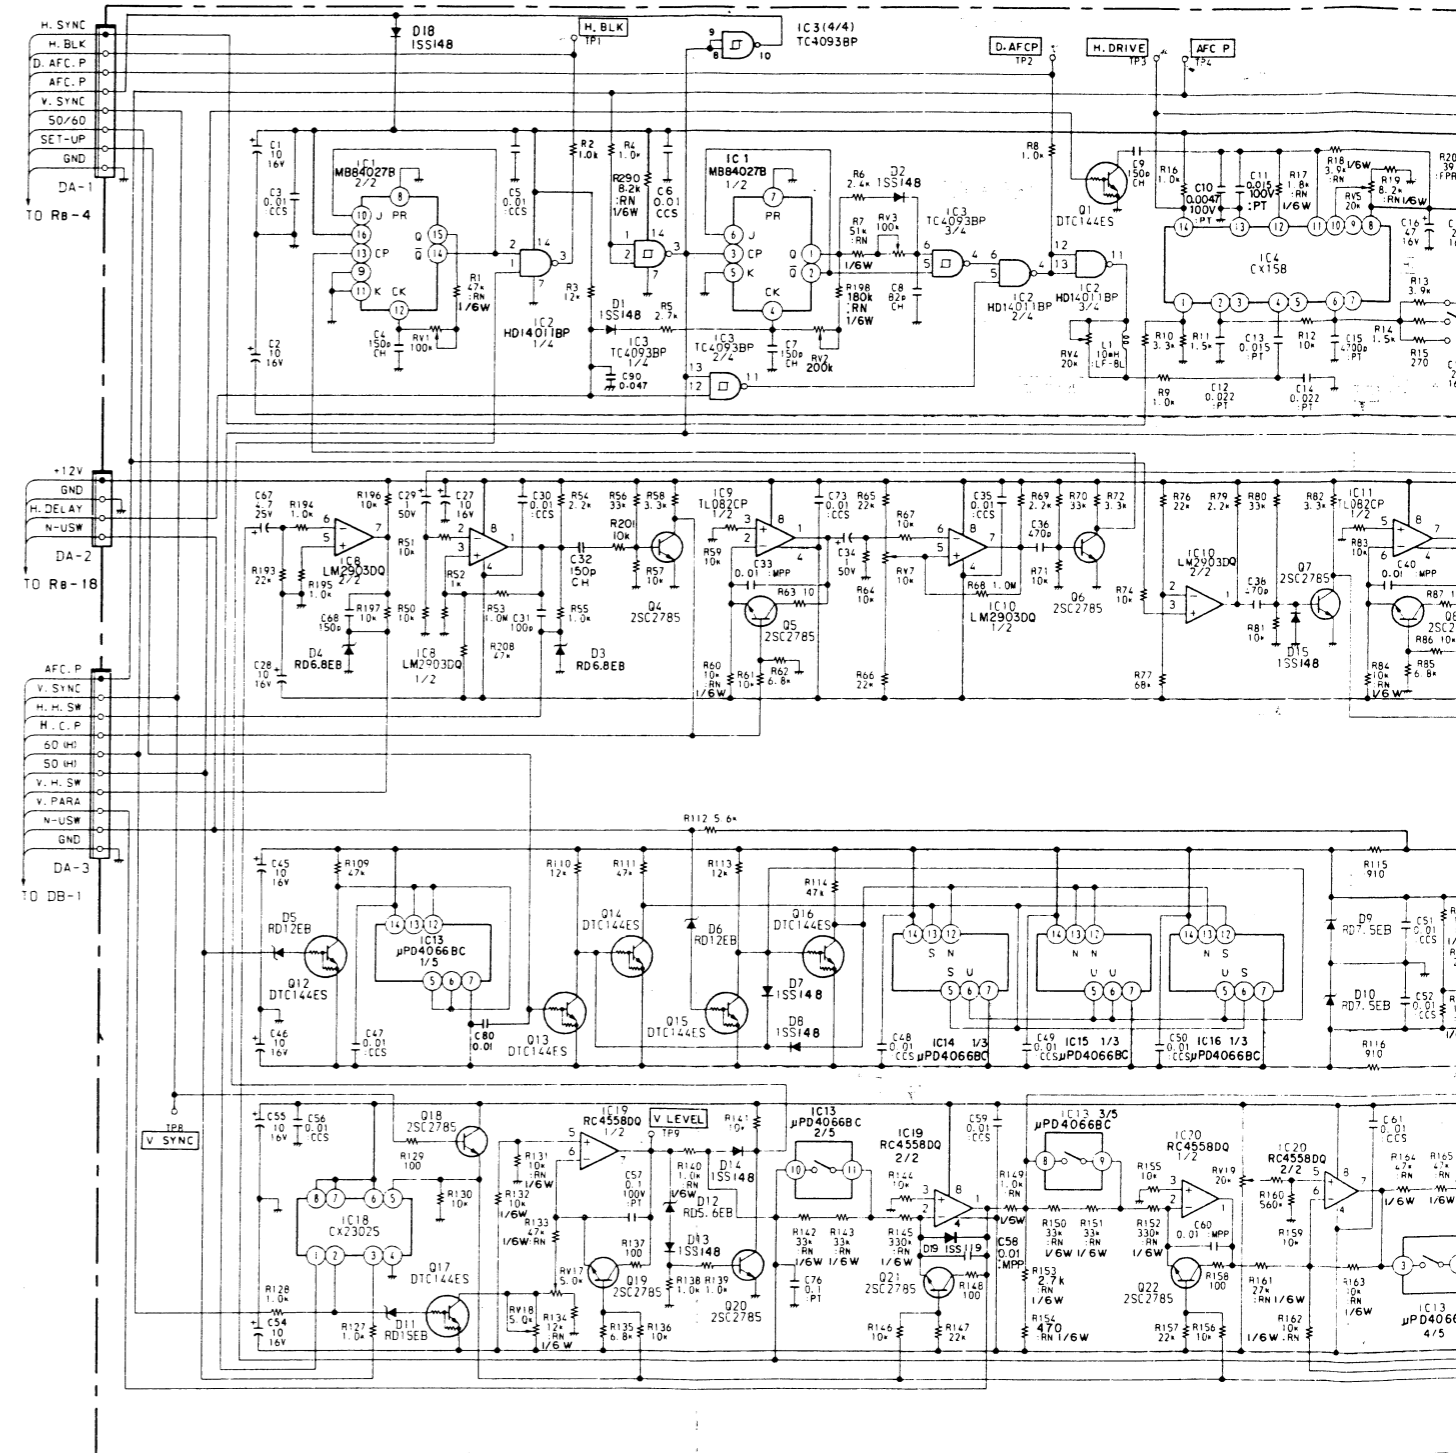


5. DIAGRAMS




14Vp-p (H)




10Vp-p (H)




2.5Vp-p (V)



14Vp-p (H)




4.5Vp-p (H)



12Vp-p (V)



9Vp-p (H)



1.8Vp-p (V)



12Vp-p (V)




8Vp-p (V)

DA DA

DA board (DEFLECTION WAVEFORM)


& B PIN. GEN.
& B PIN. GEN.
& B PIN. MOD.
760 SW
AN. SW
AN. SW
AN. SW
AN. SW
50/60
760 SW
SET-UP
GND
FFER
SAW. GEN
SAW. CLIP
DE PIN GEN
DE PIN GEN
DE PIN GEN
SAW GEN.
DELAY SW
DELAY SW
IPPER
IPPER
760 SW
AN SW
AN SW
AN SW
.5V REG.
.5V REG.
760 SW.
SAW. CLIP
SAW. CLIP
SAW. CLIP
.CLIP
DT

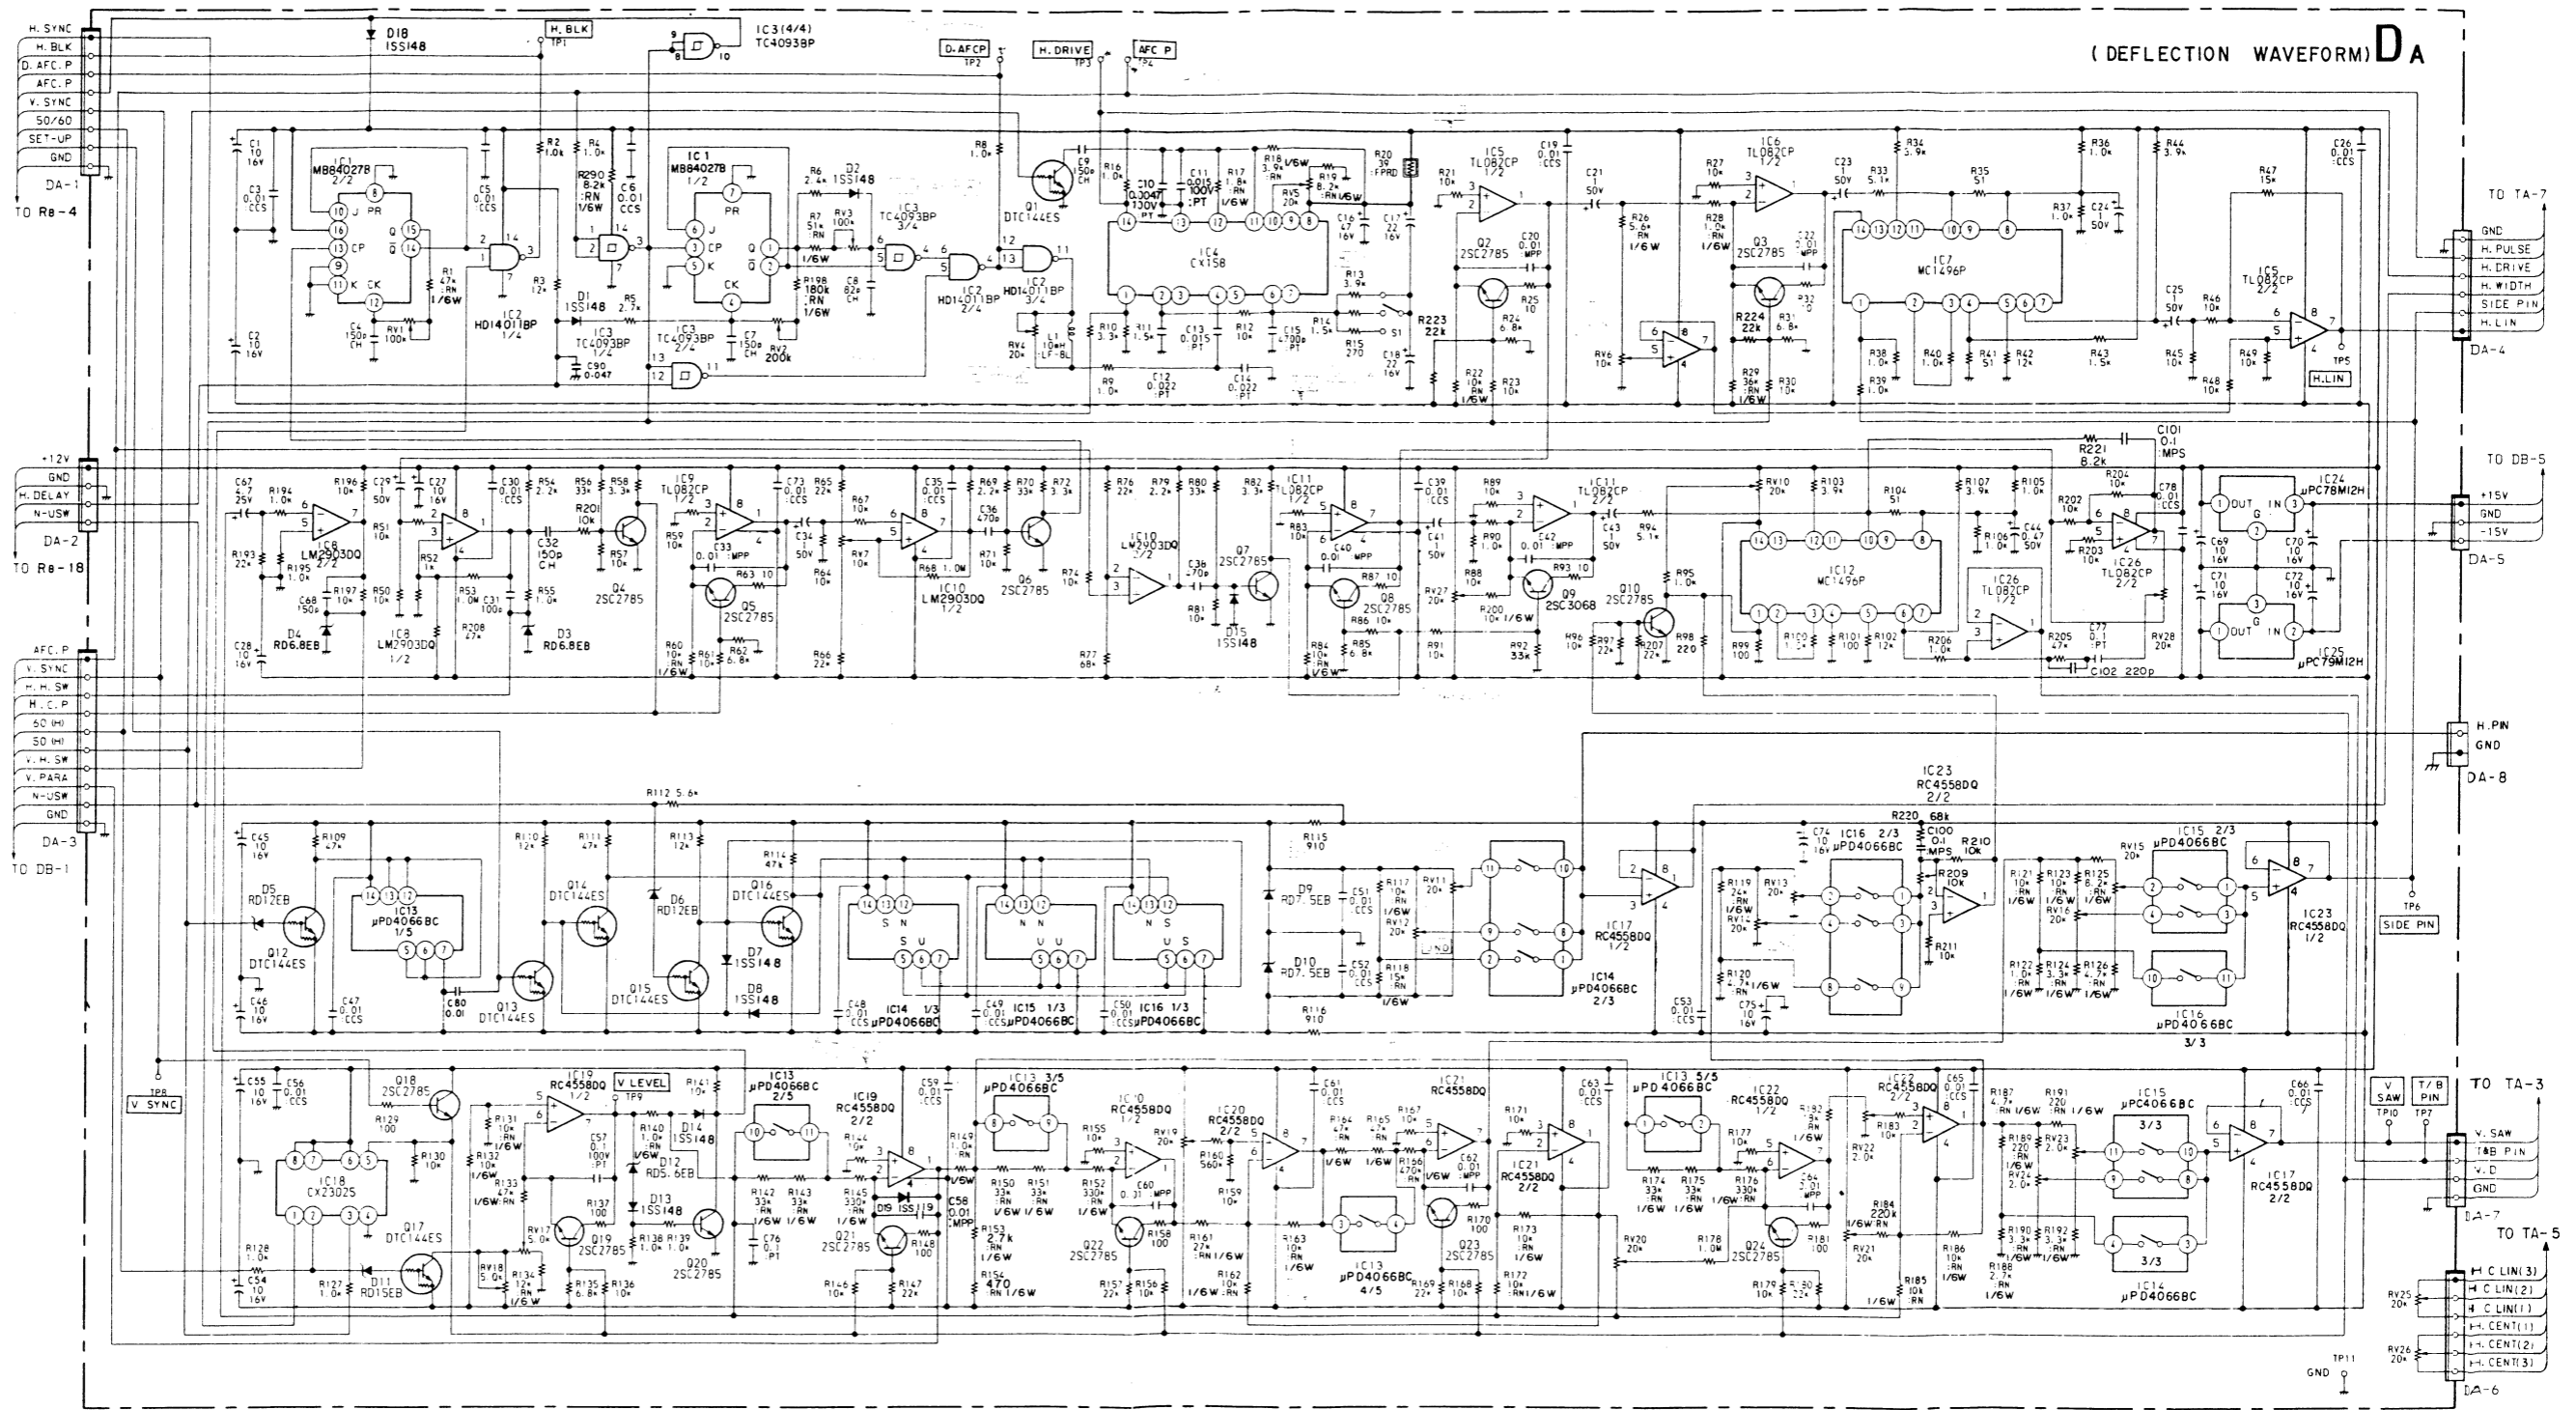

8Vp-p (V)

DA board (DEFLECTION WAVEFORM)

IC	Q	D	TP	ADJ
7	18	4		
8 18 17	17	11		
		3	TP6	RV18
		13		RV12 RV11
		14	TP8	RV6 RV17
5, 6, 9	4, 20	14	TP5	
		12		
	5 21	19	TP9	RV24 RV23
19	2 3		TP3	RV7
25	15			RV5
				RV19
10				RV16 RV15
4	20	1		
	6			
	7	15		
16		5		RV4
	8			
24	12			RV14 RV13
2	23		TP2	RV28
11, 26		9	TP1	
3	21	10	TP4	
	9	18	TP7	RV27 RV21
		8		RV1 RV20
	13, 14	6		
	15, 16	7	TP10	
1 12 22	24	2	TP11	
				RV2 RV10 RV26
	10			RV3 RV22 RV25

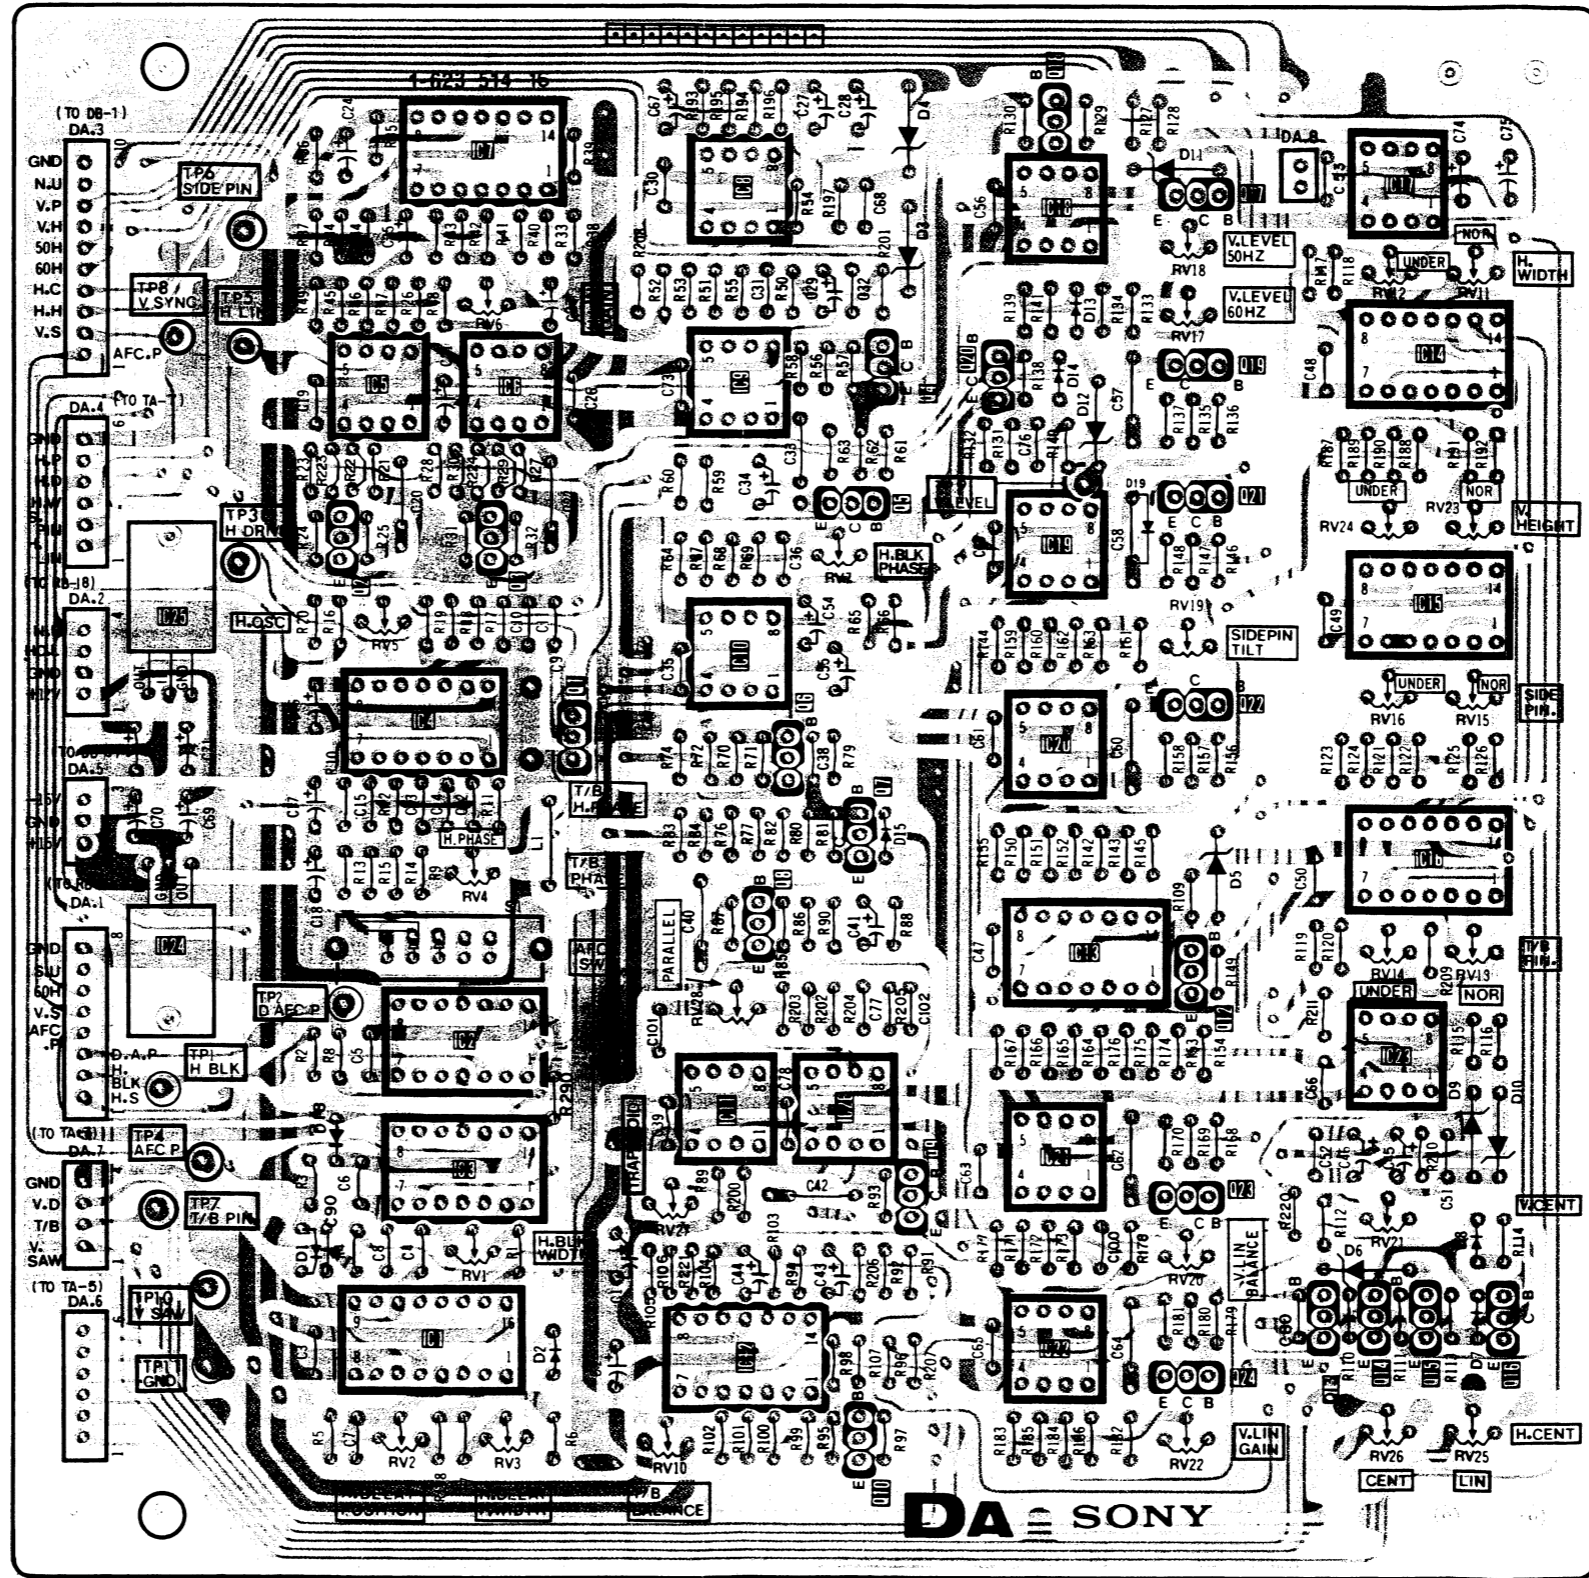


- : Conductor side pattern
- : Component side pattern

DB DB

DB board (CONVERGENCE WAVEFORM)

IC	Q	D	TP
			11
16	38 33 34		
15	40 41	4 3	9
8	35 36 37	5	10 2
3			1
12	10,12 11		3 4
	15 17 14,16 13 19 18 20	8	
4			
5 6	21 25 4 5 2	2	
1	23 27 22 24,26 28		6 7
	7 29 3,44	6	
2 7 11	43 31 8 9,30,32		12 8
		7	
13,14		6	5

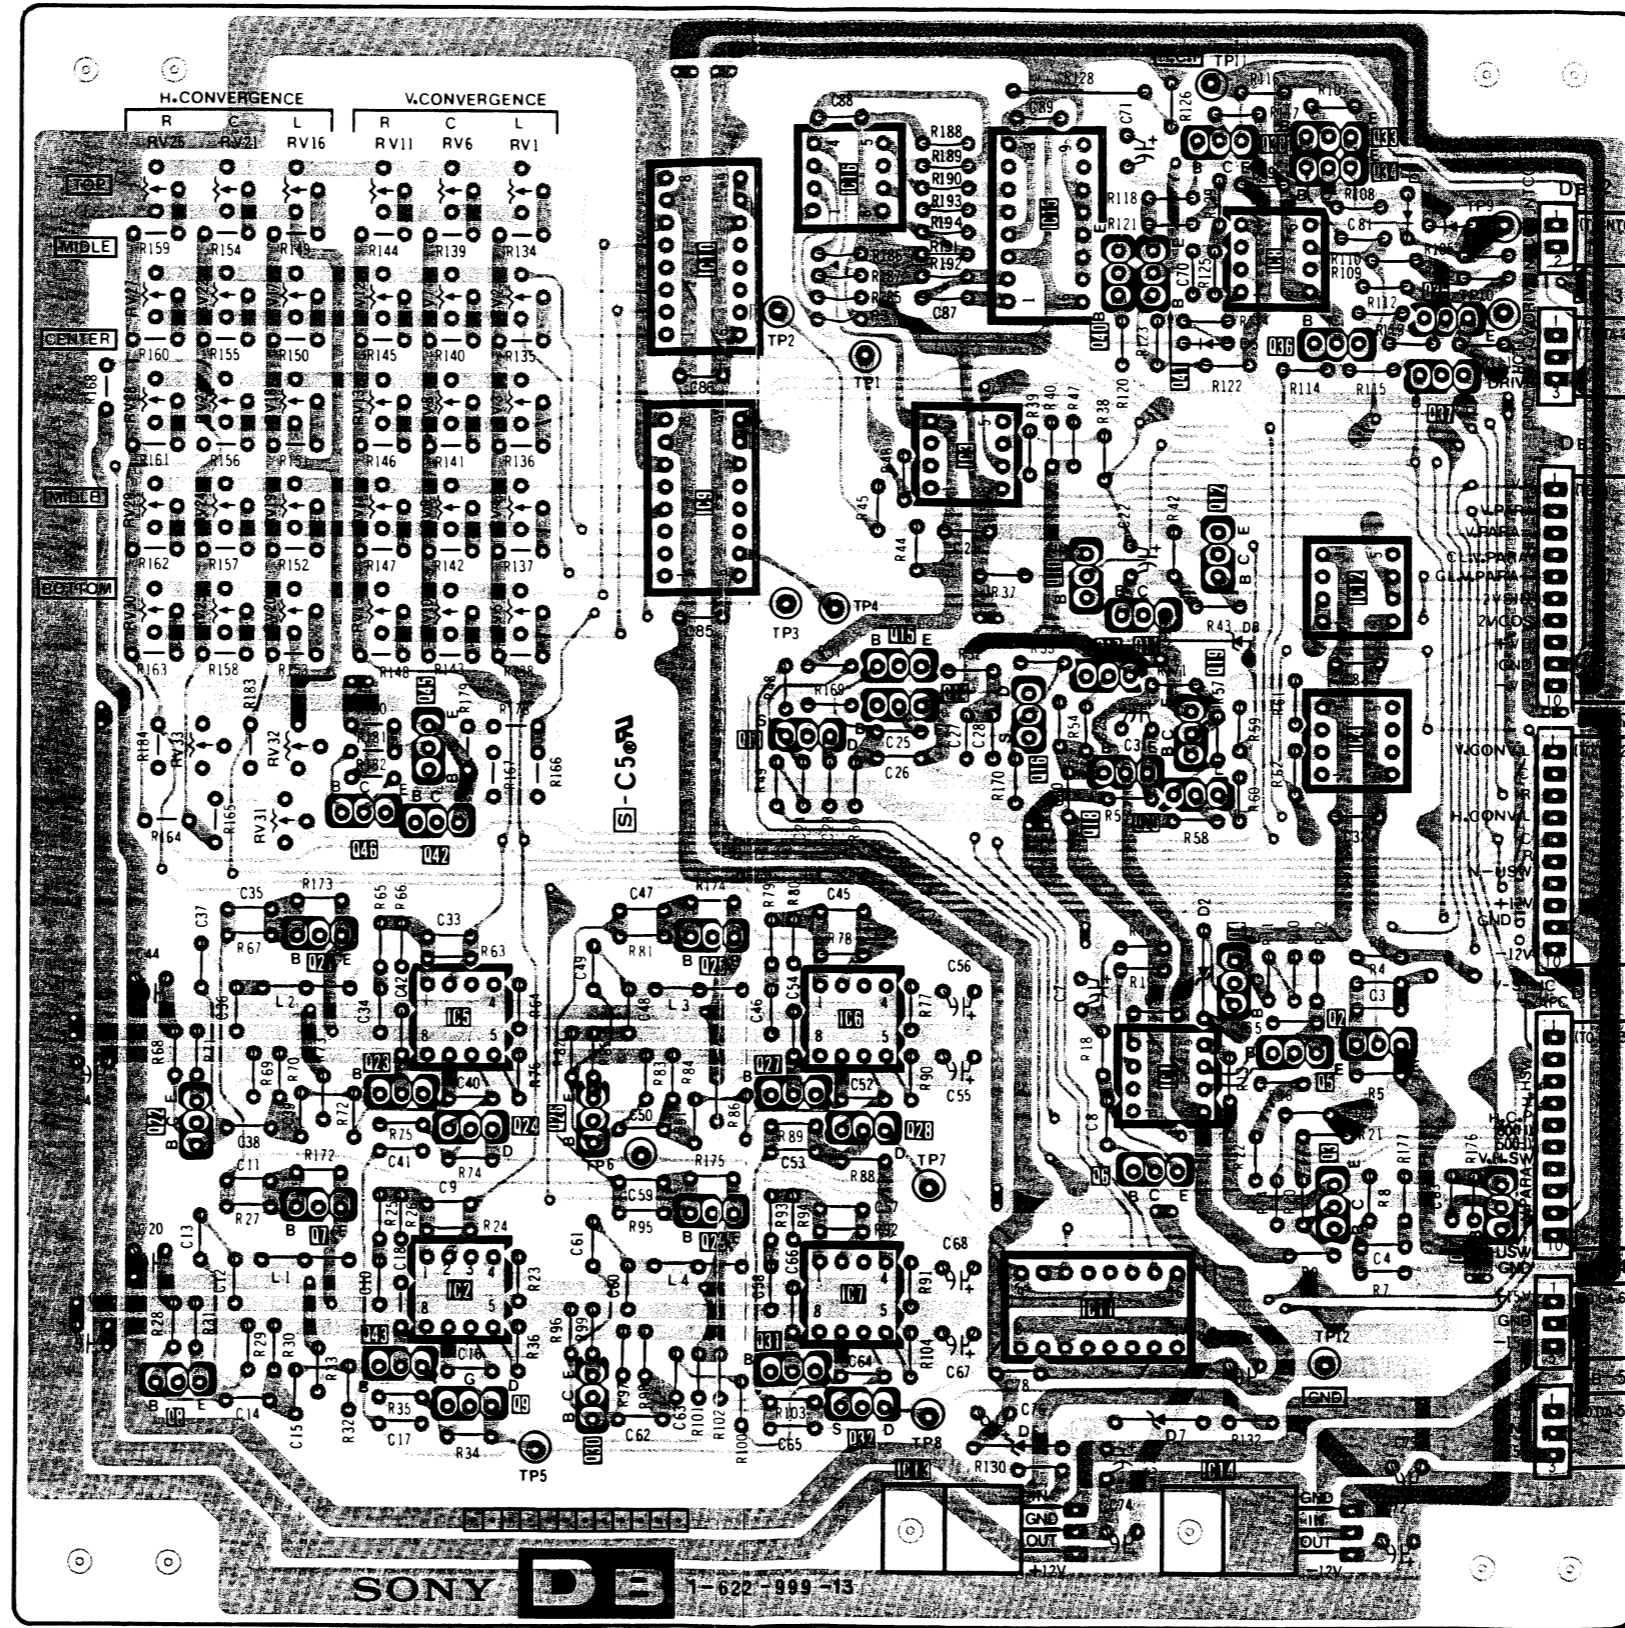


- : Conductor side pattern
- : Component side pattern

DB DB

DB board (CONVERGENCE WAVEFORM)

DB BOARD

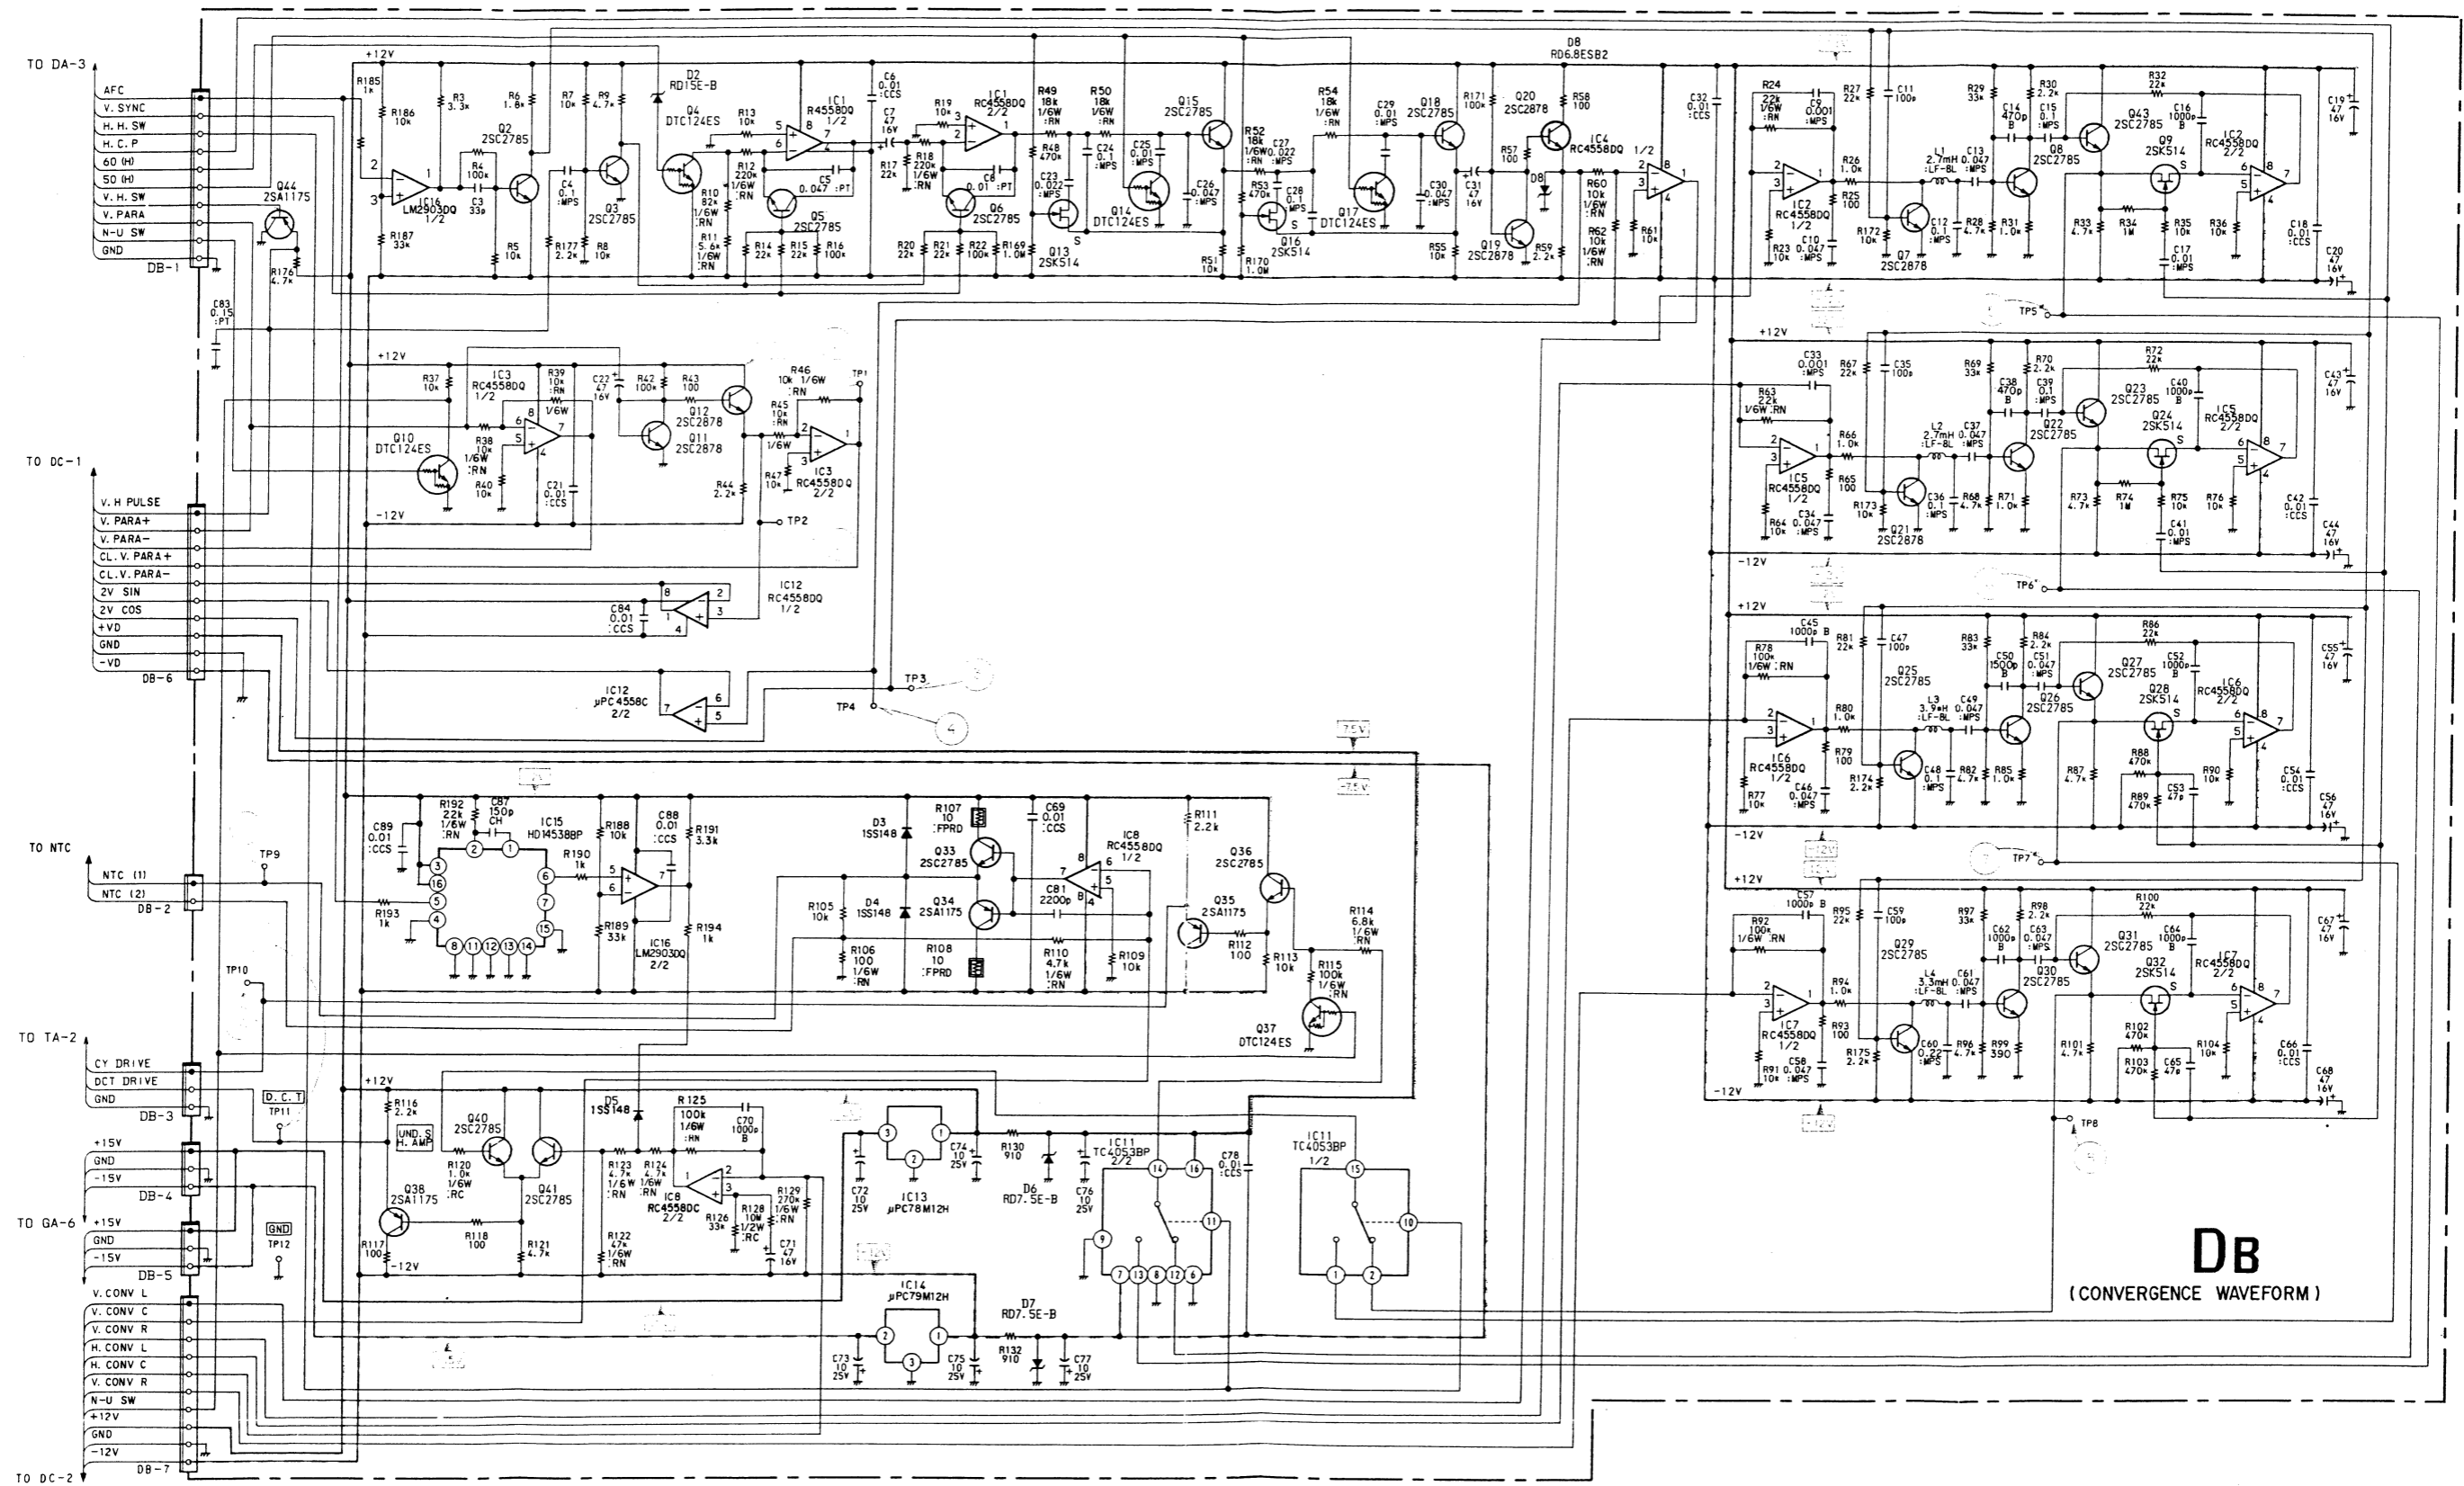

IC 1
2
3
4
5
6
7
8
11
12
13
14
15
16
Q 2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19



1 5.8Vp




2 5.8Vp



3 2.0Vp


4 2.0Vp

DB BOARD

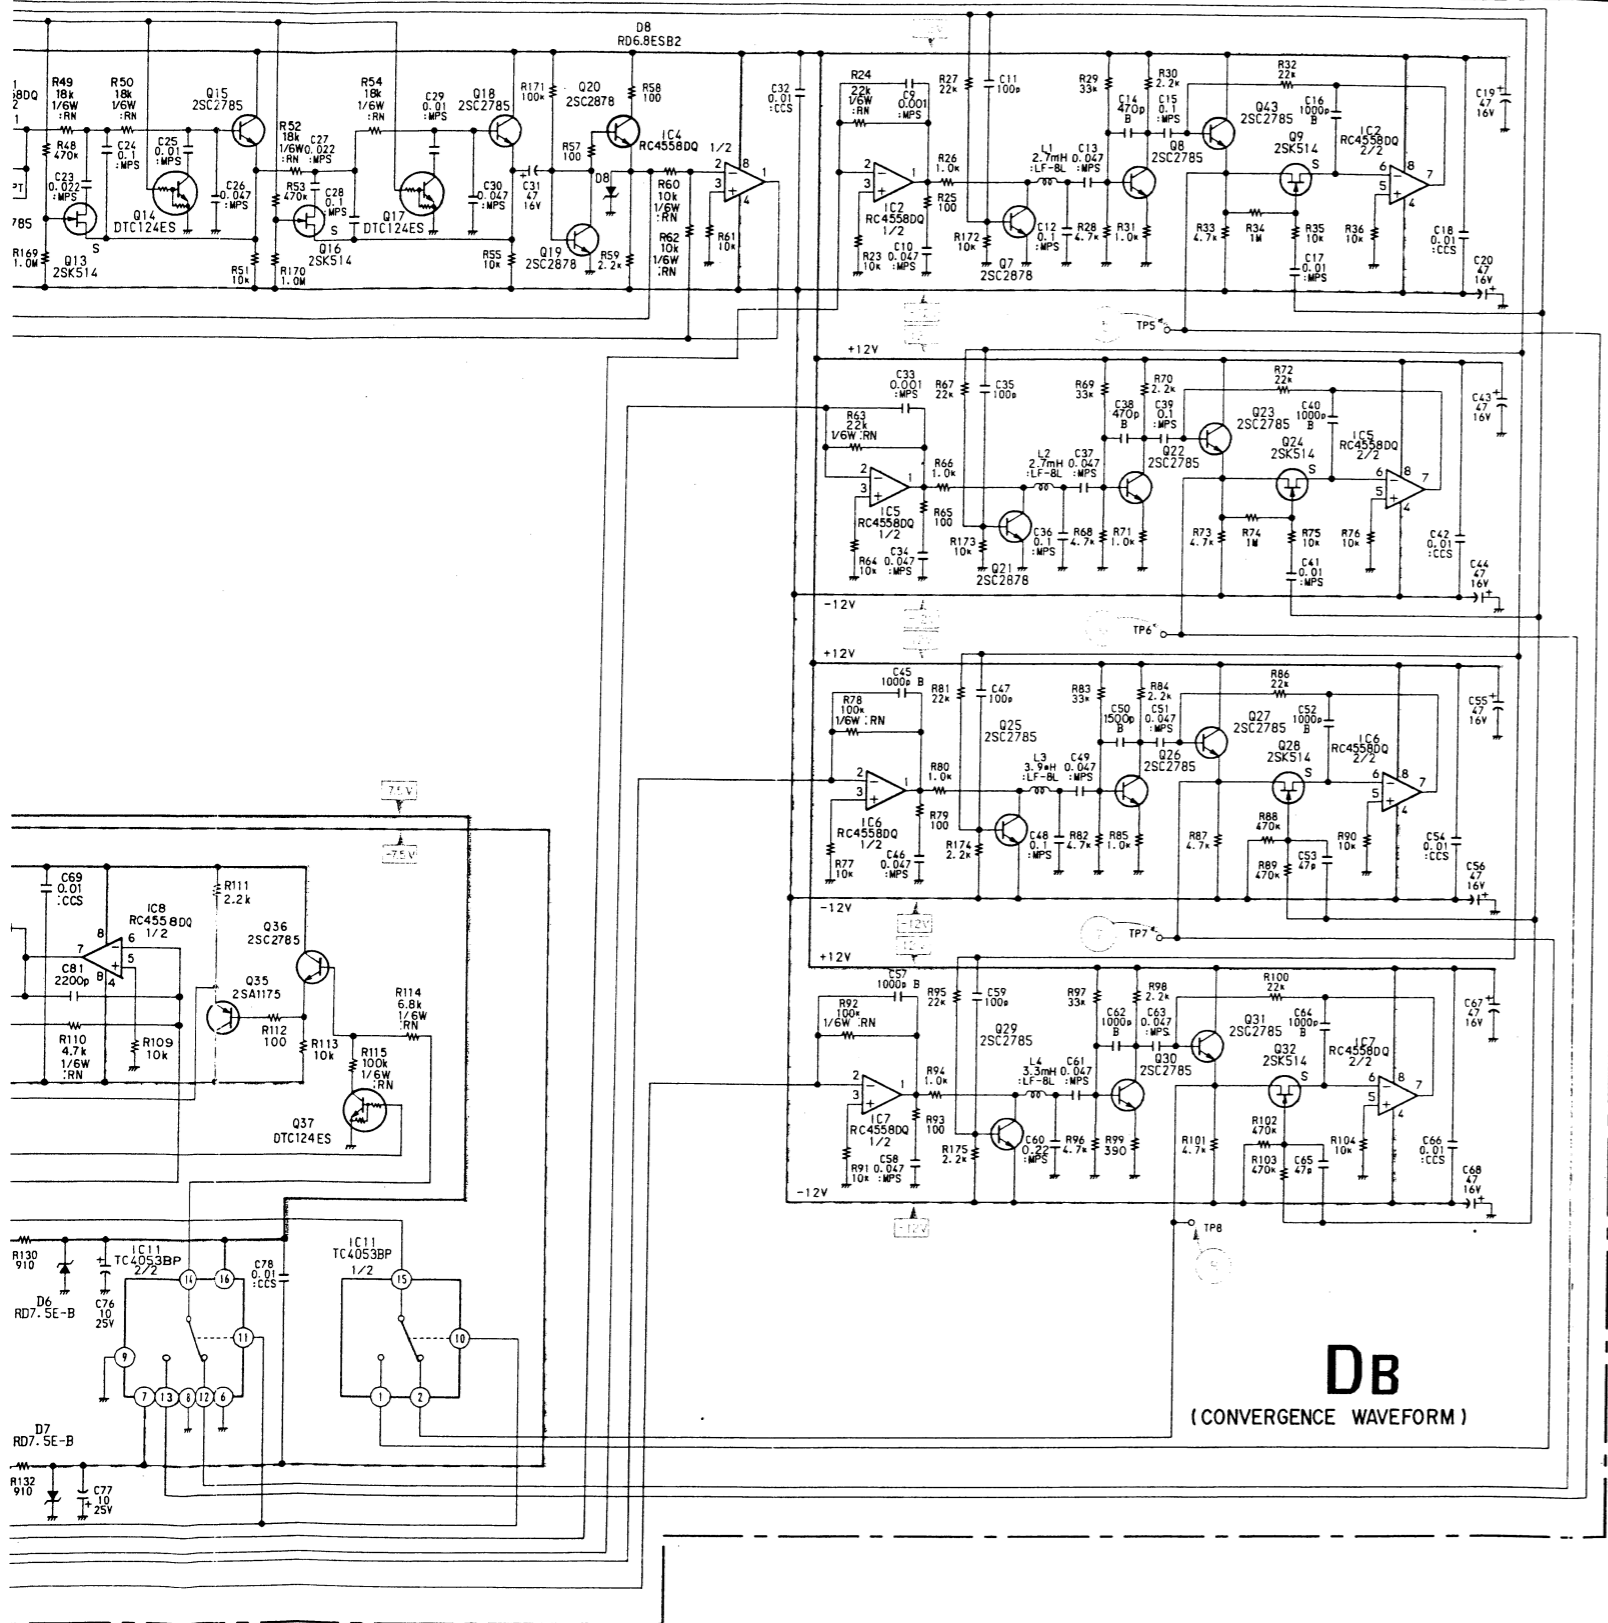

IC 1	RC4558DQ	2XV GEN
2	RC4558DQ	AMP & CLAMP
3	RC4558DQ	INVERTER
4	RC4558DQ	INVERTER
5	RC4558DQ	AMP & CLAMP
6	RC4558DQ	AMP & CLAMP
7	RC4558DQ	AMP & CLAMP
8	RC4558DQ	AMP
11	TC4053BP	1/2HV. SW
12	RC4558DQ	BUFFER
13	uPC78M12H	+12V REG.
14	uPC79M12H	-12V REG.
15	HD14538BP	H.CONV CLAMP
16	LM2903DQ	INVERTER
Q 20	2SC2878	BUFFER
21	2SC2878	H. SW
22	2SC2785	AMP
23	2SC2785	H. CLAMP
24	2SK514	H. CLAMP
25	2SC2785	H. SW
26	2SC2785	AMP
27	2SC2785	H. CLAMP
28	2SK514	H. CLAMP
29	2SC2785	H. SW
30	2SC2785	AMP
31	2SC2785	H. CLAMP
32	2SK514	H. CLAMP
33	2SC2785	N.T.C AMP
34	2SA1175	N.T.C AMP
35	2SA1175	BUFFER
36	2SC2785	BUFFER
37	DTC124ES	N/U SW
38	2SC2785	BUFFER
40	2SC2785	ADDER
41	2SC2785	ADDER
43	2SC2785	H. CLAMP
44	2SA1175	BUFFER
D 2	RD15E-B3TN	LEVEL SHIFT
3	1SS148	PROTECTOR
4	1SS148	PROTECTOR
5	1SS148	DC STOPPER
6	RD7.5E-B3TN	+7.5V REG.
7	RD7.5E-B3TN	-7.5V REG.
18	2SC2785	BUFFER
19	2SC2878	CLAMP


Q 2	2SC2785	H. SW
3	2SC2785	2XV. PULSE GEN
4	DTC124ES	50/60 SW
5	2SC2785	2XV SW
6	2SC2785	2XV SW
7	2SC2878	H. SW
8	2SC2785	AMP
9	2SK514	H. CLAMP
10	DTC124ES	N/U SW
11	2SC2878	CLAMP
12	2SC2878	BUFFER
13	2SK514	50/60 SW
14	DTC124ES	50/60 SW
15	2SC2785	50/60 SW
16	2SK514	50/60 SW
17	DTC124ES	50/60 SW
18	2SC2785	BUFFER
19	2SC2878	CLAMP

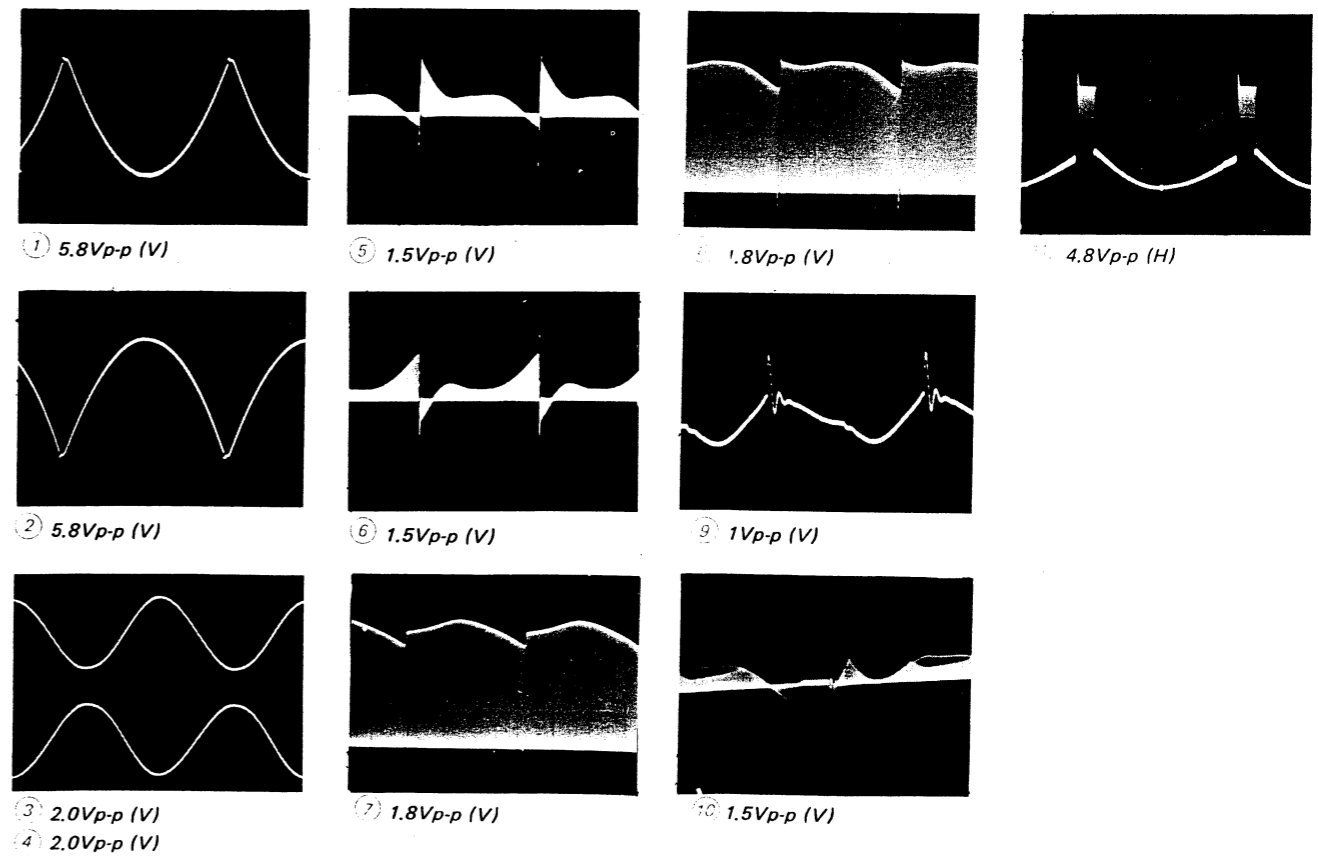


DC board (CONVERGENCE CONTROL)

IC	1	TC4053BP	1/2 HV.SW
	2	TC4053BP	1/2 HV.SW
Q	1	2SC3327	UND.Y.BOW
	2	2SC2785	UND.H.AMP
	3	2SC2785	UND.H.AMP

5. DIAGRAMS

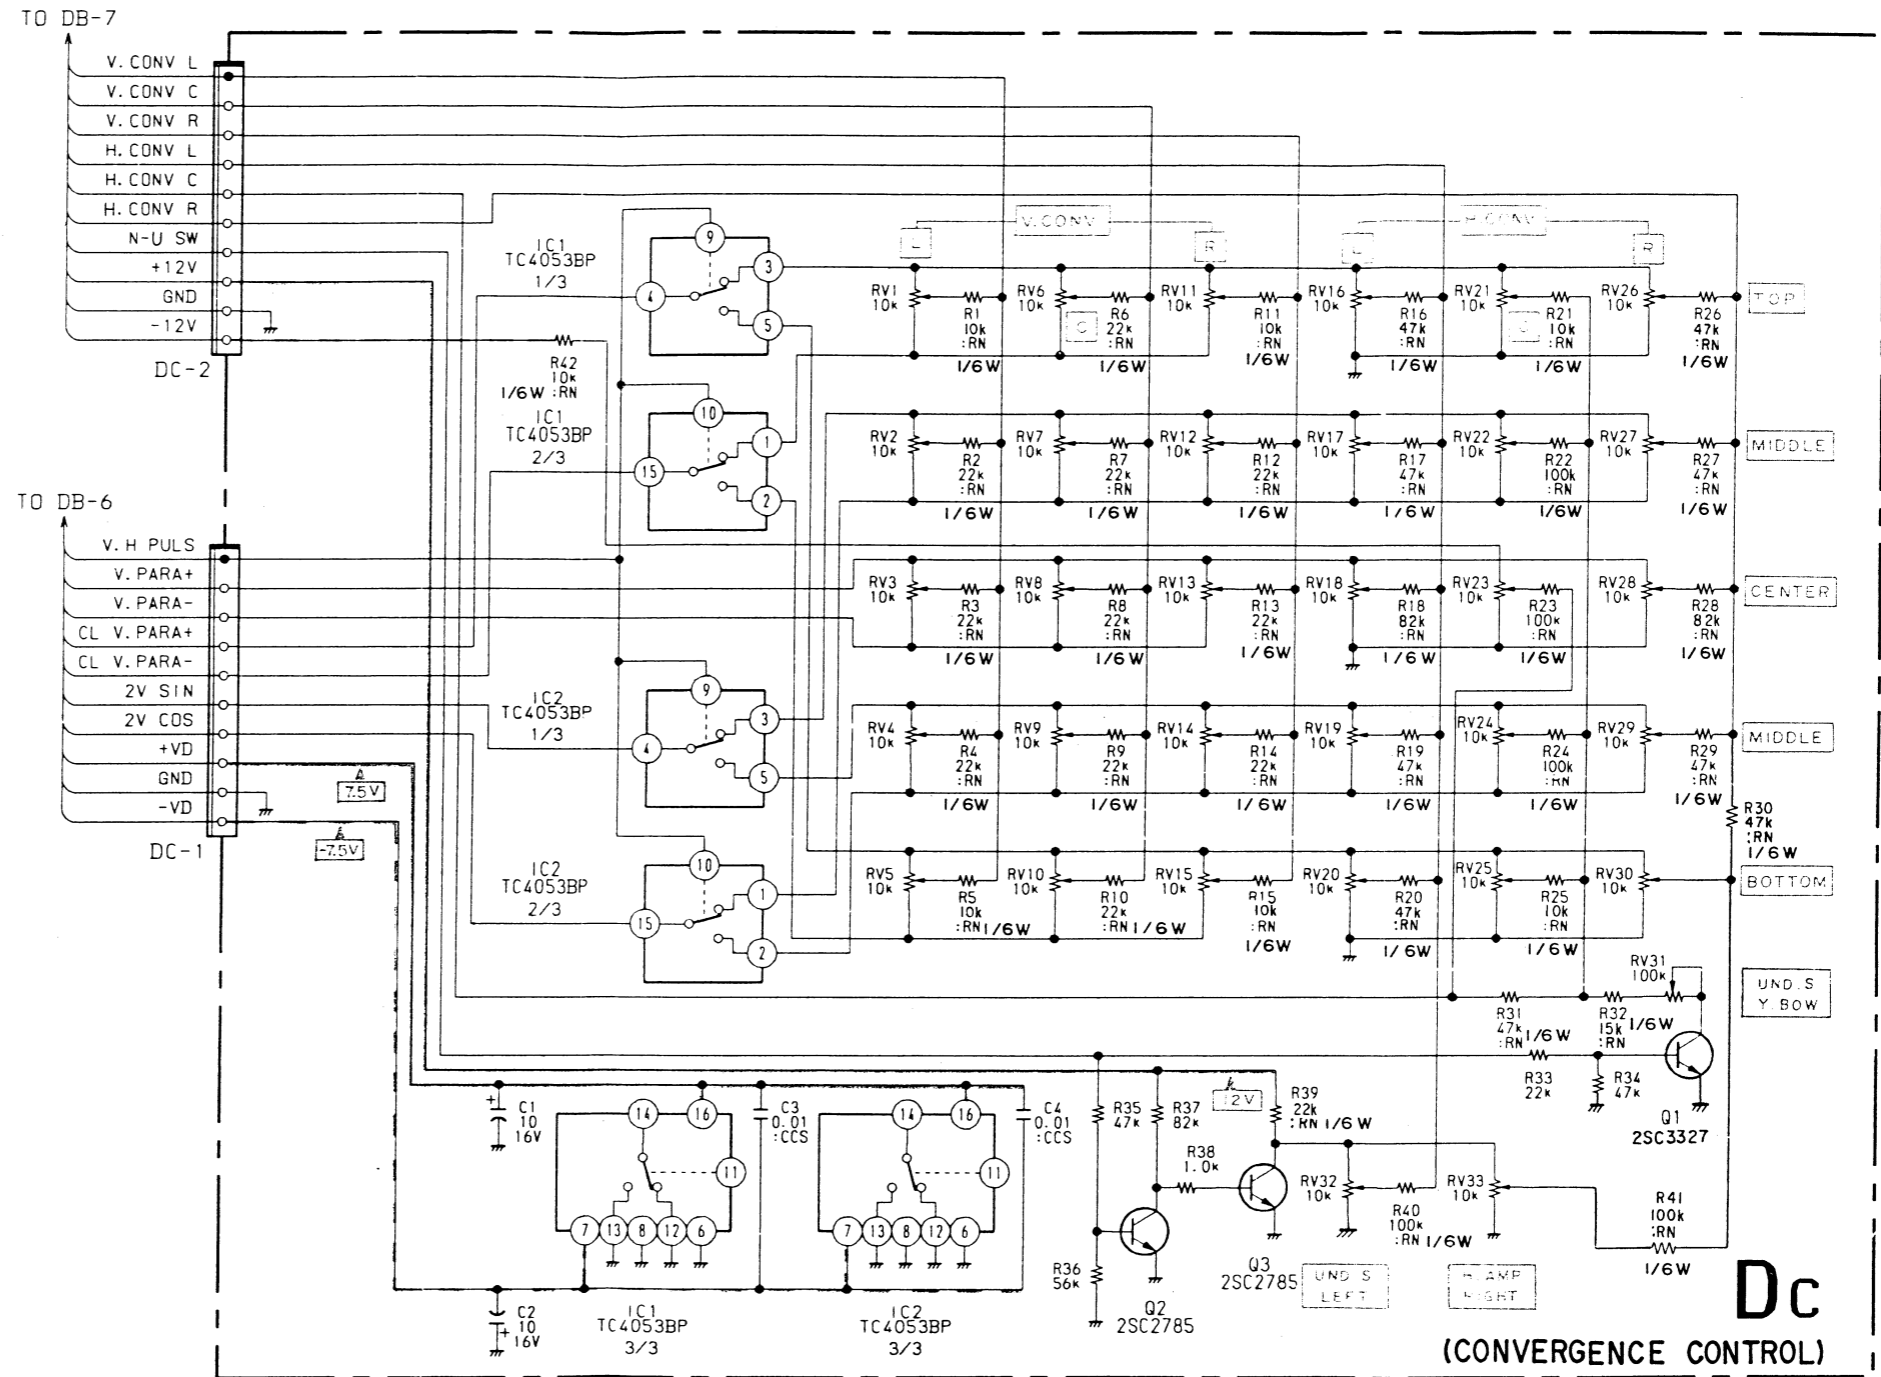

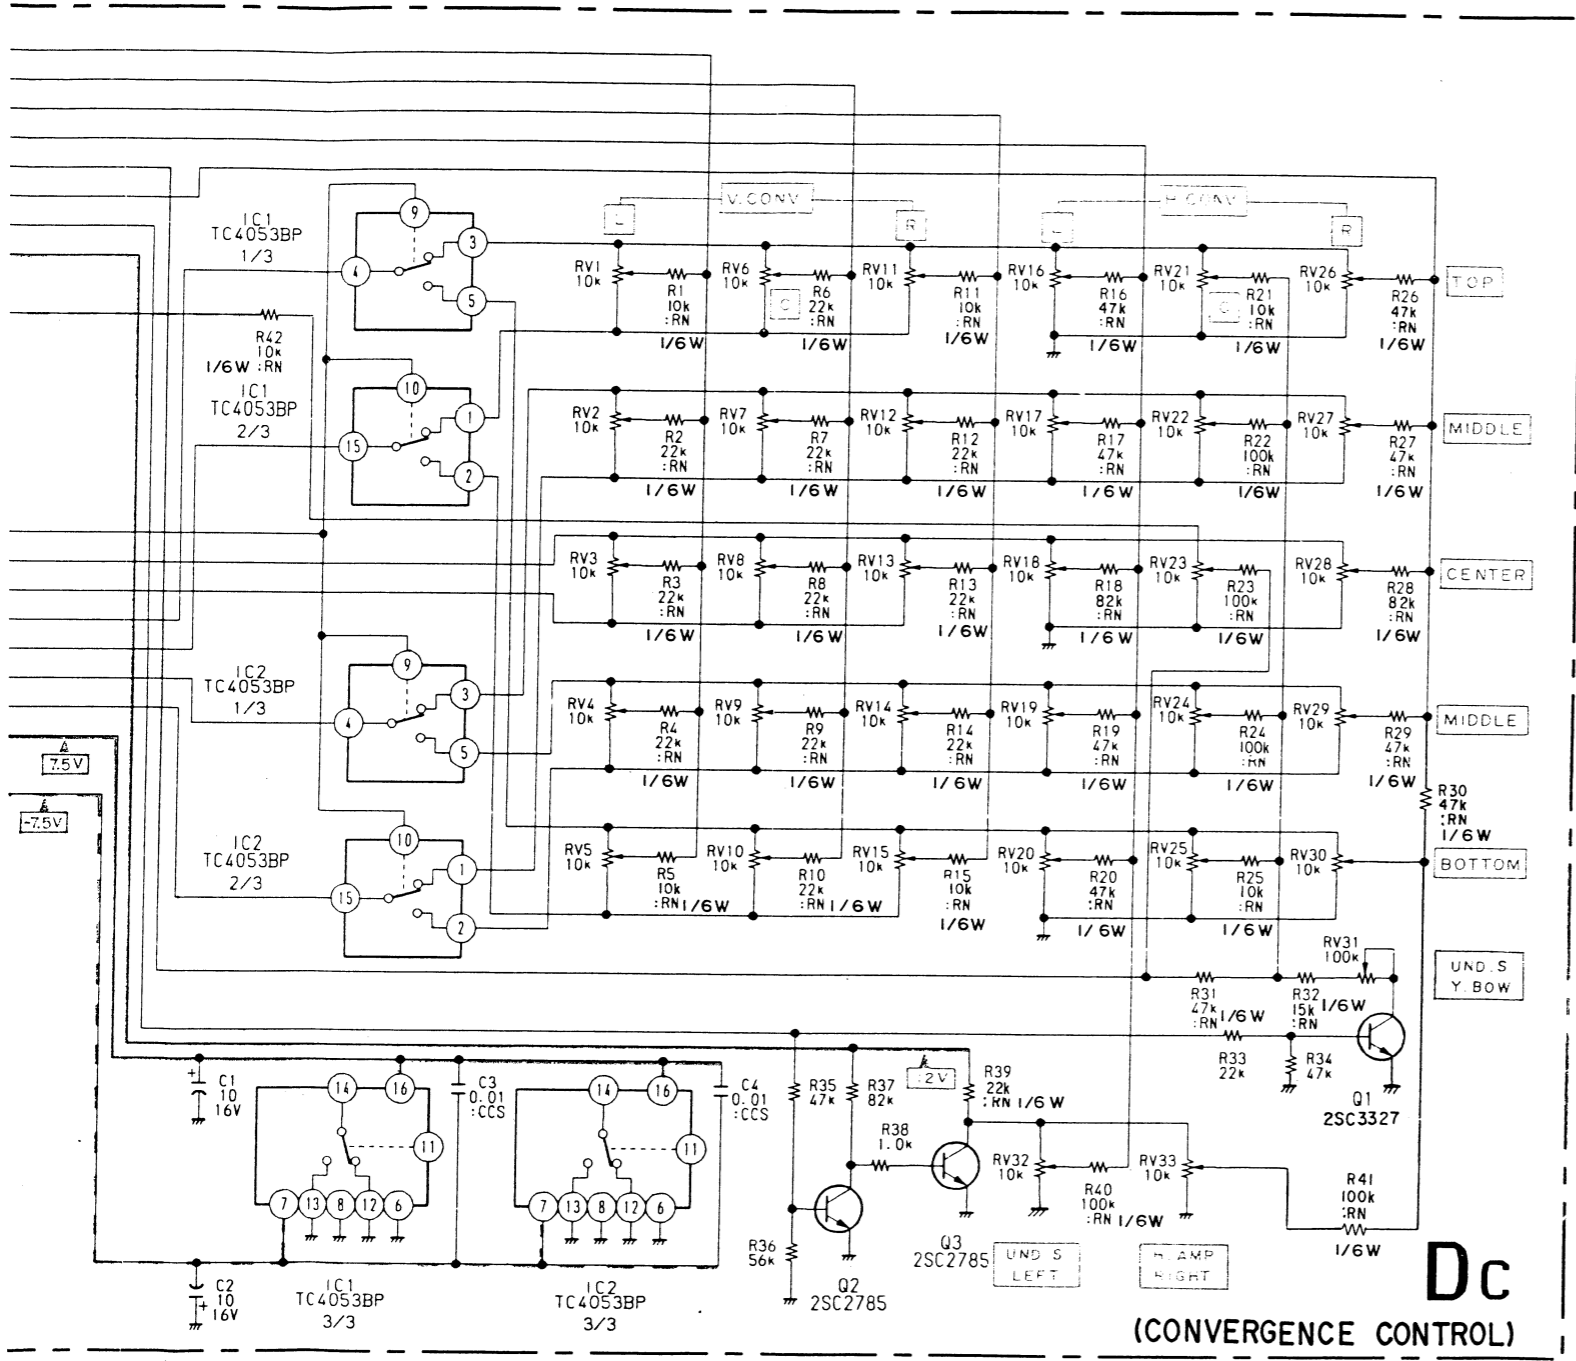


Dc


(CONVERGENCE CONTROL)

DC DC

DC board (CONVERGENCE CONTROL)

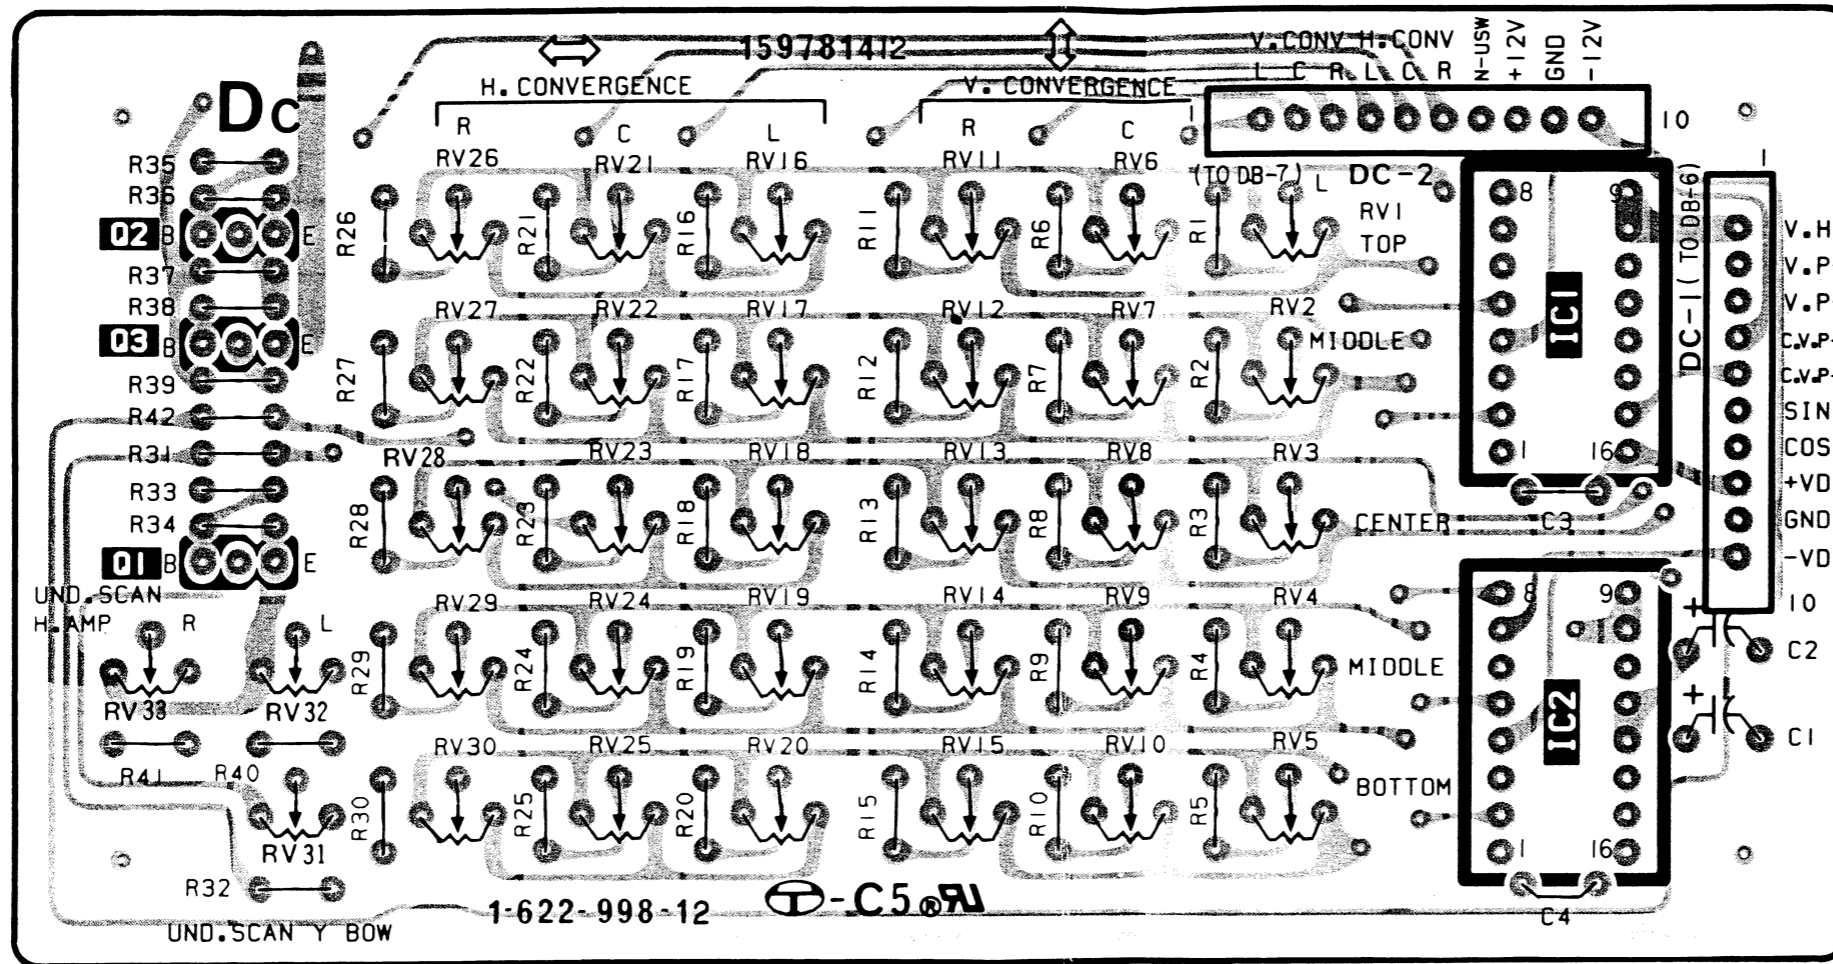

- [Pattern]: Conductor side pattern
- [Pattern]: Component side pattern

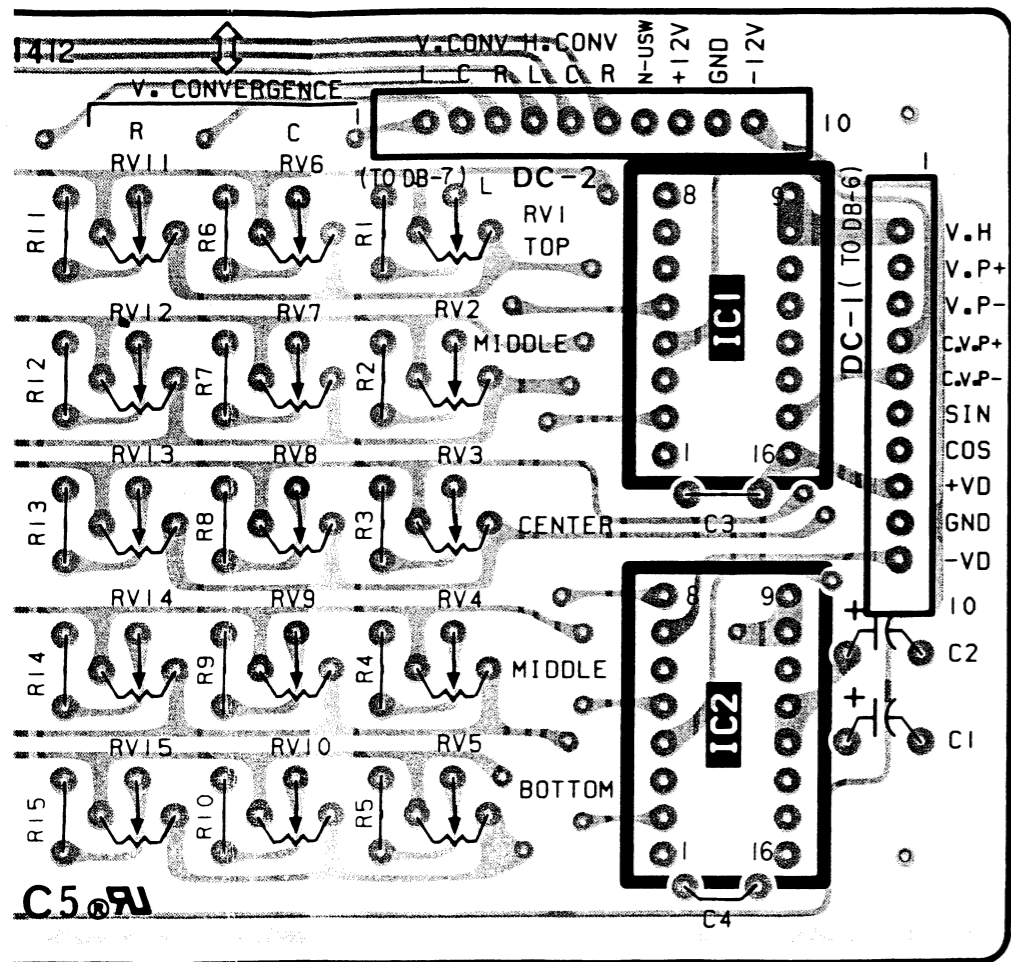



- [shaded circle] : Conductor side pattern
- [white circle] : Component side pattern

EA, EB EA, EB

EB board (V OUT)

2			
	14		
			13
			10
	12 11	14 13	
	TP2		

Q	5	3	6	18	19	12	13	
	7	8	4	16	17		11	
			1		15		10	
			2		14		9	
D	5	4	1	2	3	9	10	
	6					7	8	
TP	TP1			TP5		TP4	TP3	TP2

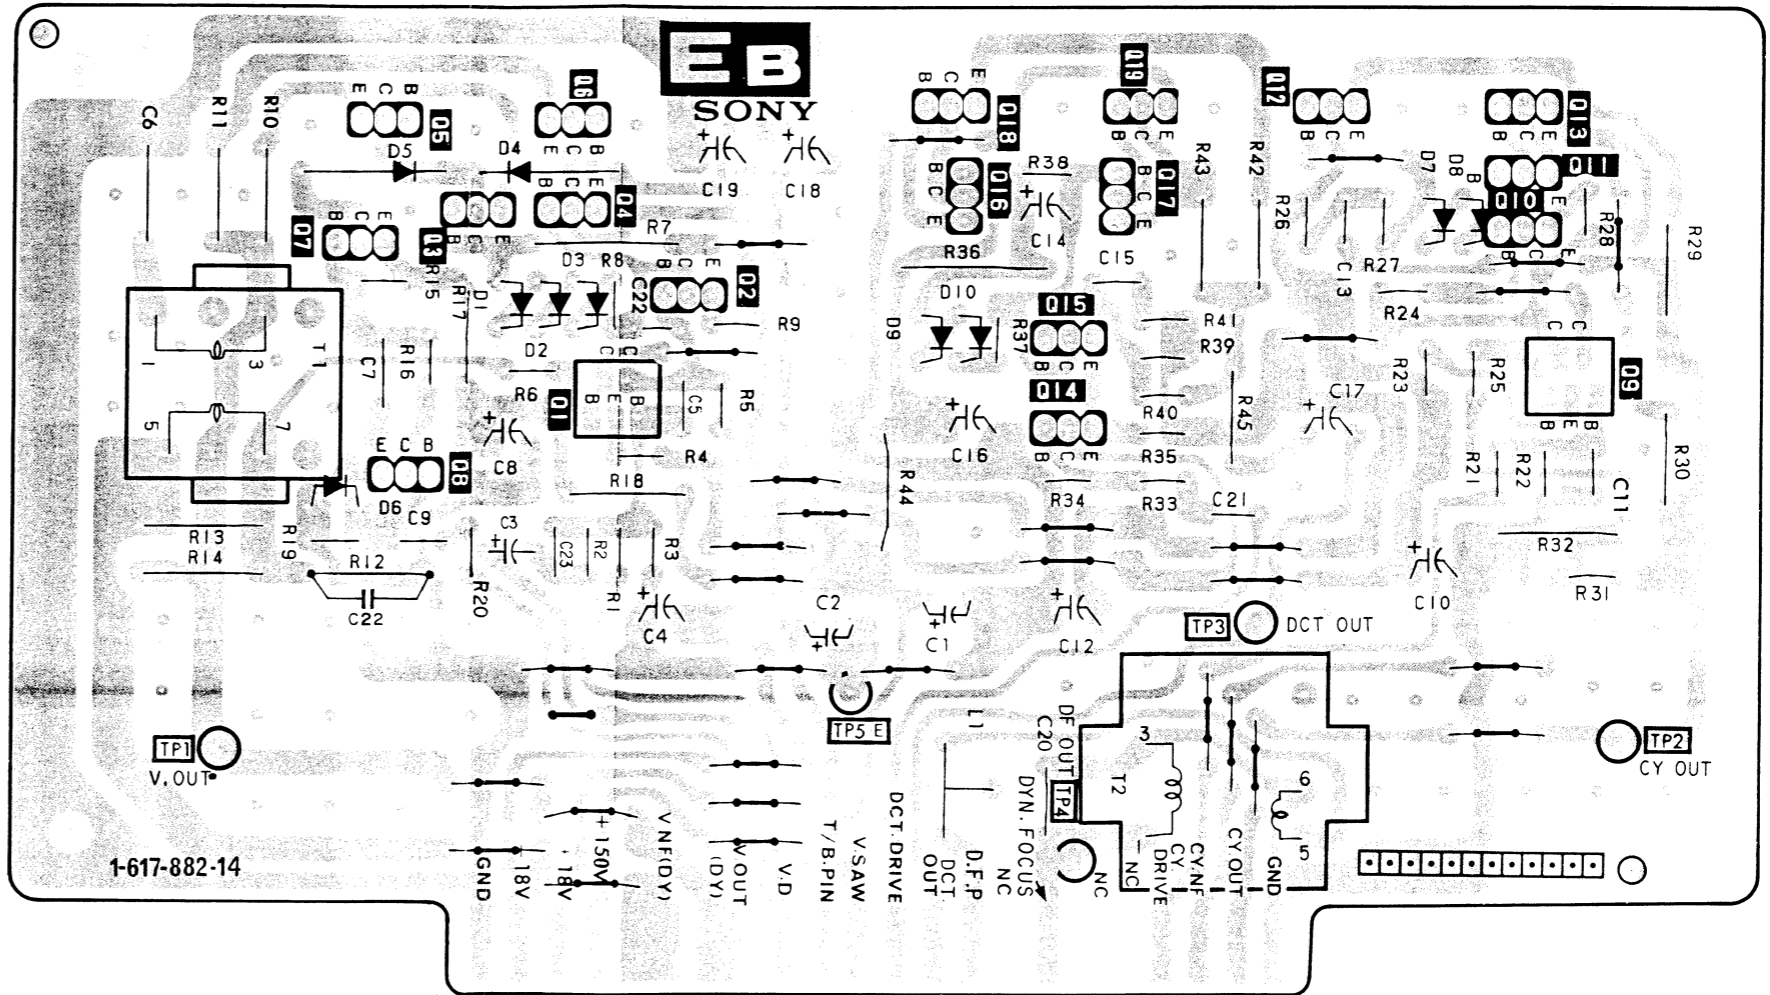
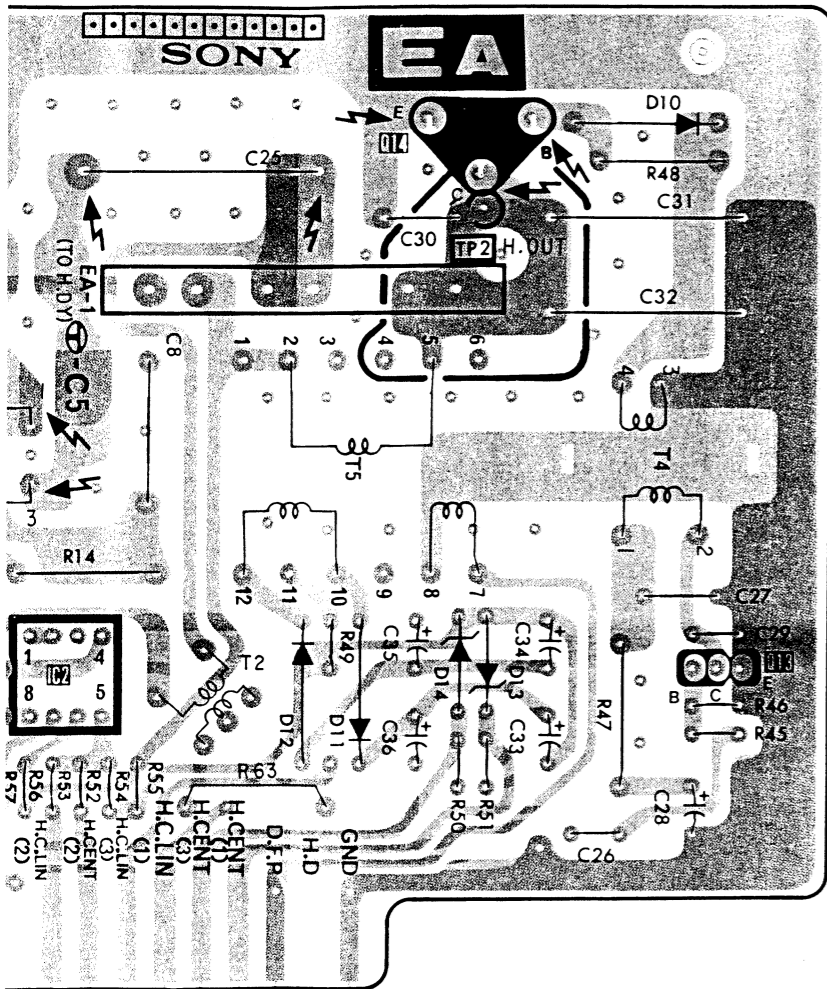


- : Conductor side pattern
- : Component side pattern

EA, EB EA, EB

EA board (H OUT)
EB board (V OUT)

EA B

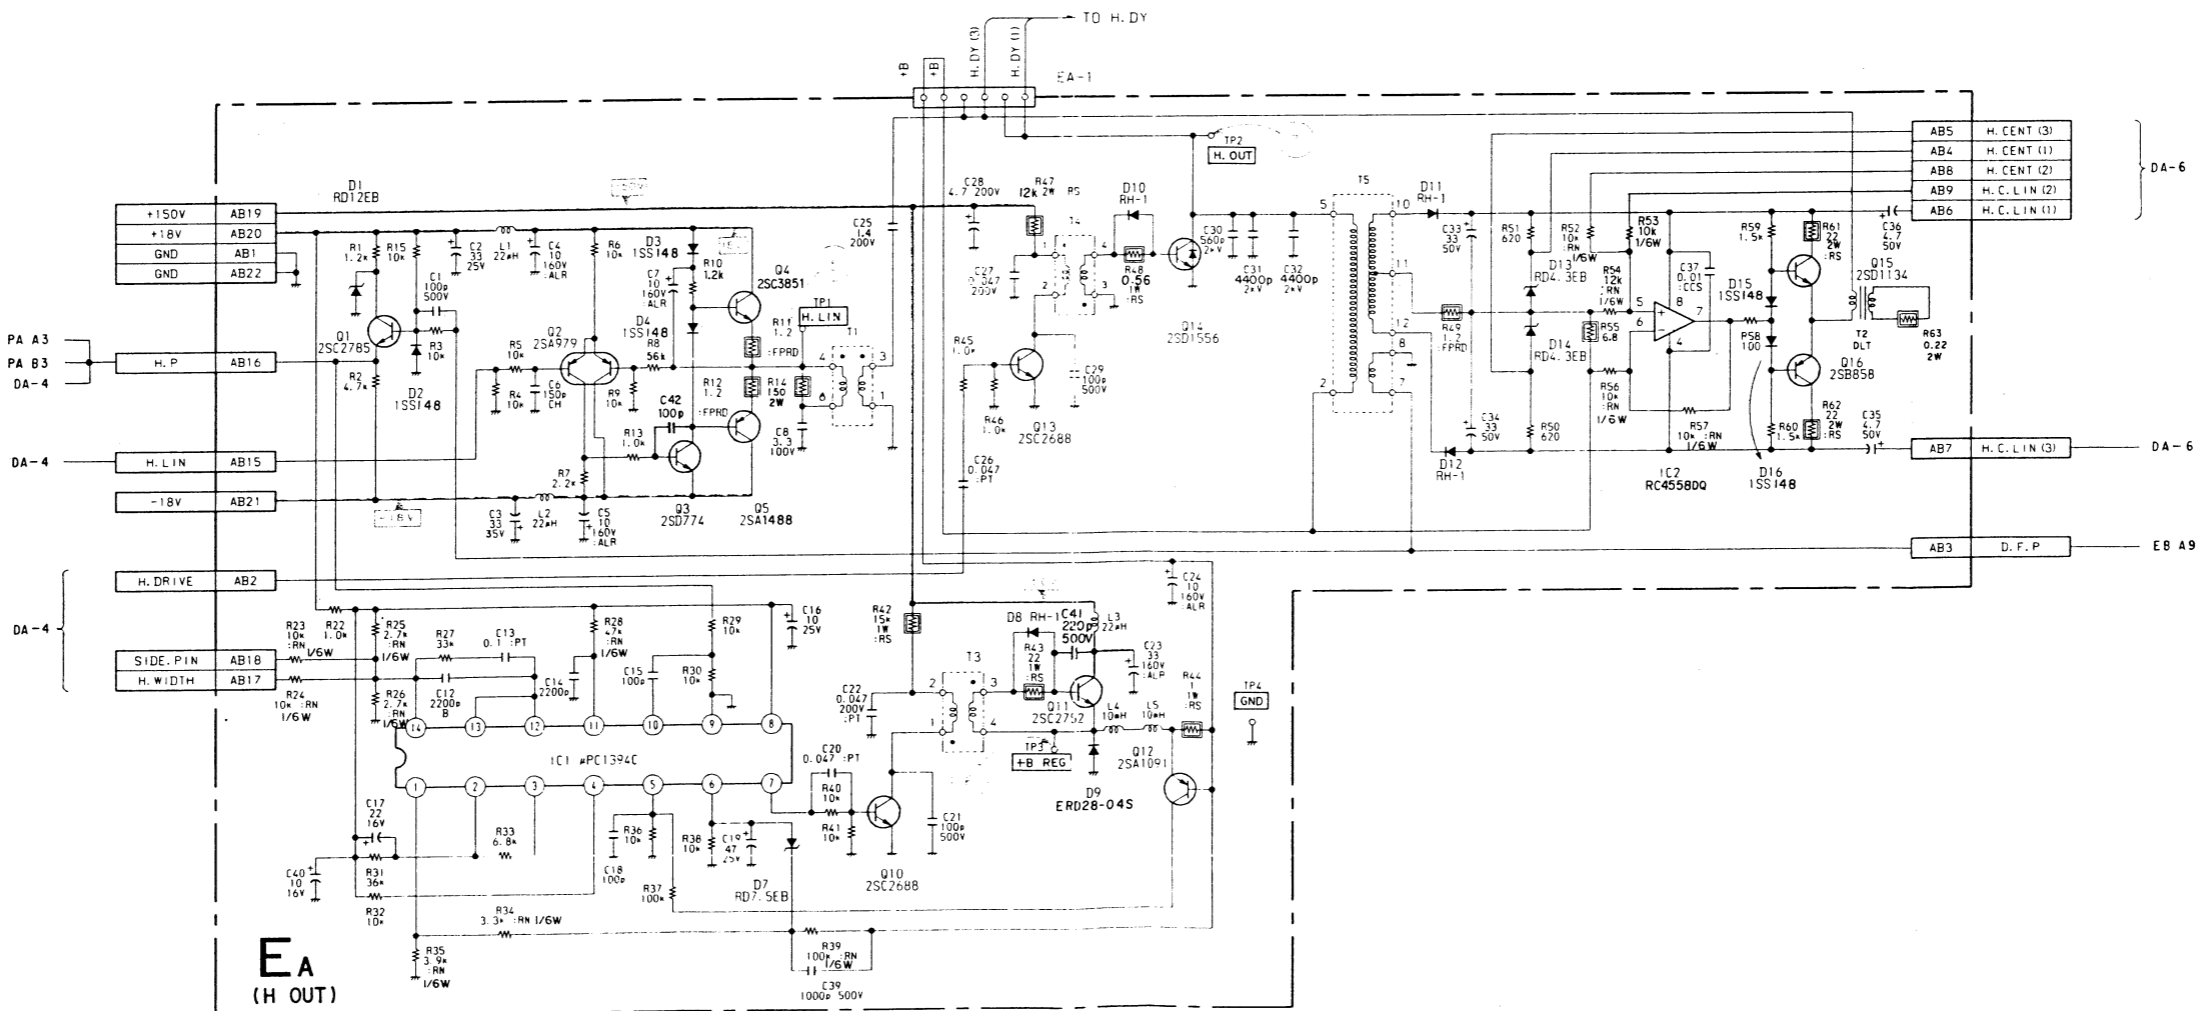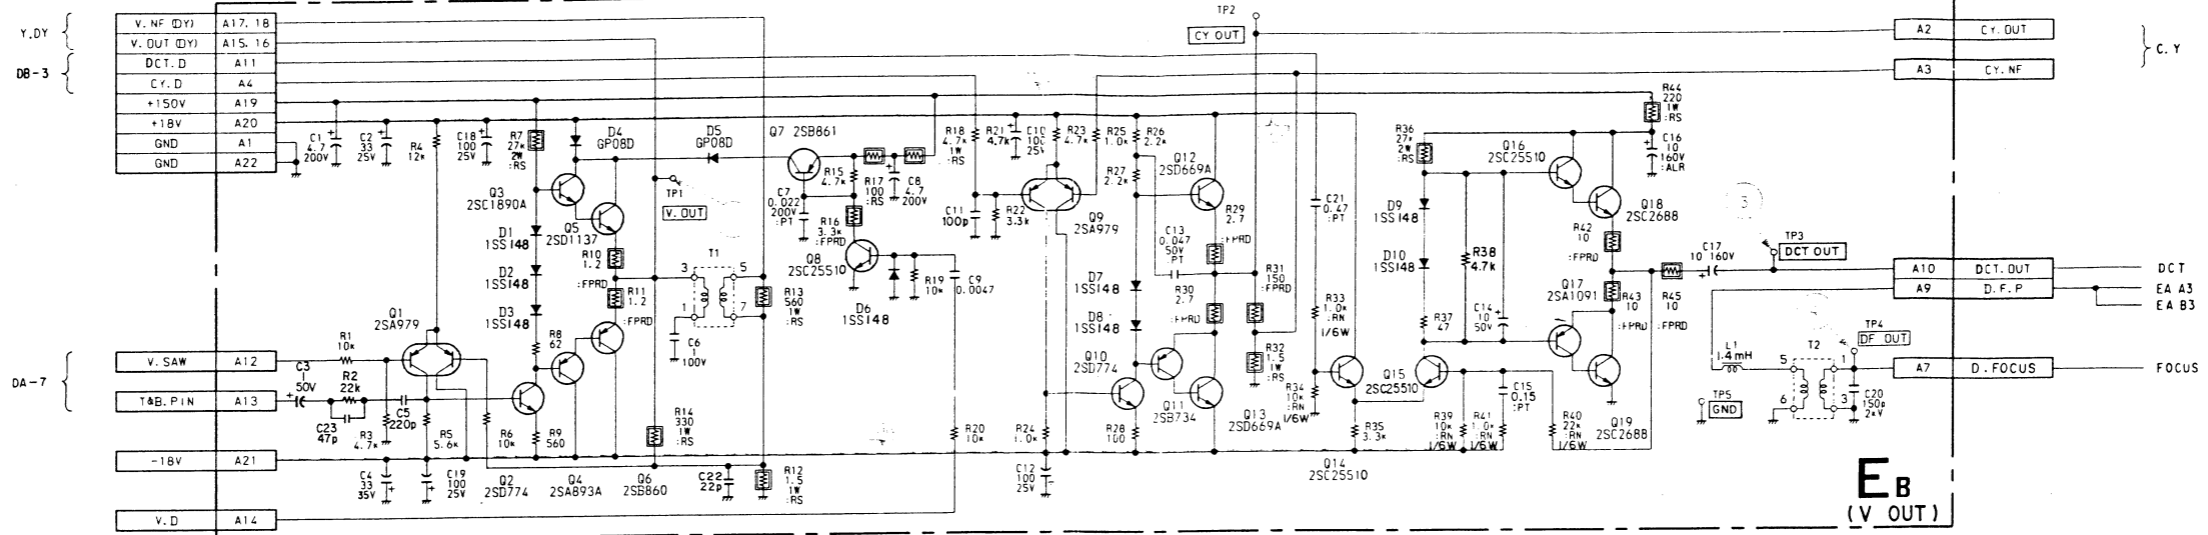

IC
1
2
3
4
5
10
11
12
13
14
15
16
D1
2
3
4
7
8
9
10
11
12
13
14
15
16




(1) 9



(2) 0.



(3) 10


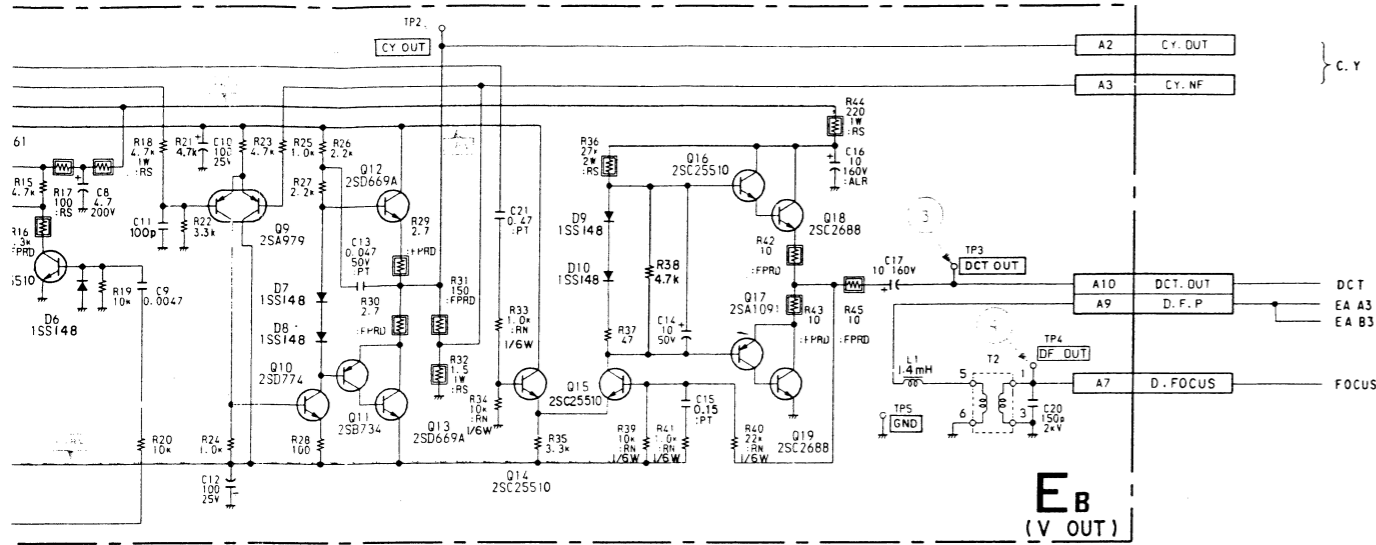


EA BOARD


IC1	uPC1394C	P.W.M CONTROL
2	RC4558DQ	H.CENT
Q1	2SC2785	H.PULSE BUFFER
2	2SA979	H.LIN AMP
3	2SD774	H.LIN AMP
4	2SC3851	H.LIN AMP OUT
5	2SA1488	H.LIN AMP OUT
10	2SC2688	P.W.M DRIVE
11	2SC2752	P.W.M OUT
12	2SA1091	O.C.P
13	2SC2688	H.DRIVE
14	2SD1556	H.OUT
15	2SD1134	H.CENT
16	2SB858	H.CENT
D1	RD12E-B	CLIPPER
2	1SS148	PROTECTOR
3	1SS148	BIAS
4	1SS148	BIAS
7	RD7.5E-B	PROTECTOR
8	RH-1	P.W.M DRIVE
9	ERD28-04S	P.W.M SW
10	RH-1	H.DRIVE
11	RH-1	H.P.RECT.
12	RH-1	H.P.RECT.
13	RD4.3E-B	+4.3V REG
14	RD4.3E-B	-4.3V REG
15	1SS148	BIAS
16	1SS148	BIAS

EB BOARD


Q1	2SA979	V.AMP
2	2SD774	V.AMP
3	2SC1890A	V.AMP
4	2SA893A	V.AMP
5	2SD1137	V.AMP OUT
6	2SB860	V.AMP OUT
7	2SB861	V.RETRACE SW
8	2SC25510	V.RETRACE SW
9	2SA979	CY.AMP
10	2SD774	CY.AMP
11	2SB734	CY.AMP
12	2SD669A	CY.AMP OUT
13	2SD669A	CY.AMP OUT
14	2SC25510	D.C.T AMP
15	2SC25510	D.C.T AMP
16	2SC25510	D.C.T AMP
17	2SA1091	D.C.T AMP
18	2SC2688	D.C.T AMP OUT
19	2SC2688	D.C.T AMP OUT
D1	1SS148	BIAS
2	1SS148	BIAS
3	1SS148	BIAS
4	GP08D	DC.STOPPER
5	GP08D	DC.STOPPER
6	1SS148	PROTECTOR
7	1SS148	BIAS
8	1SS148	BIAS
9	1SS148	BIAS
10	1SS148	BIAS

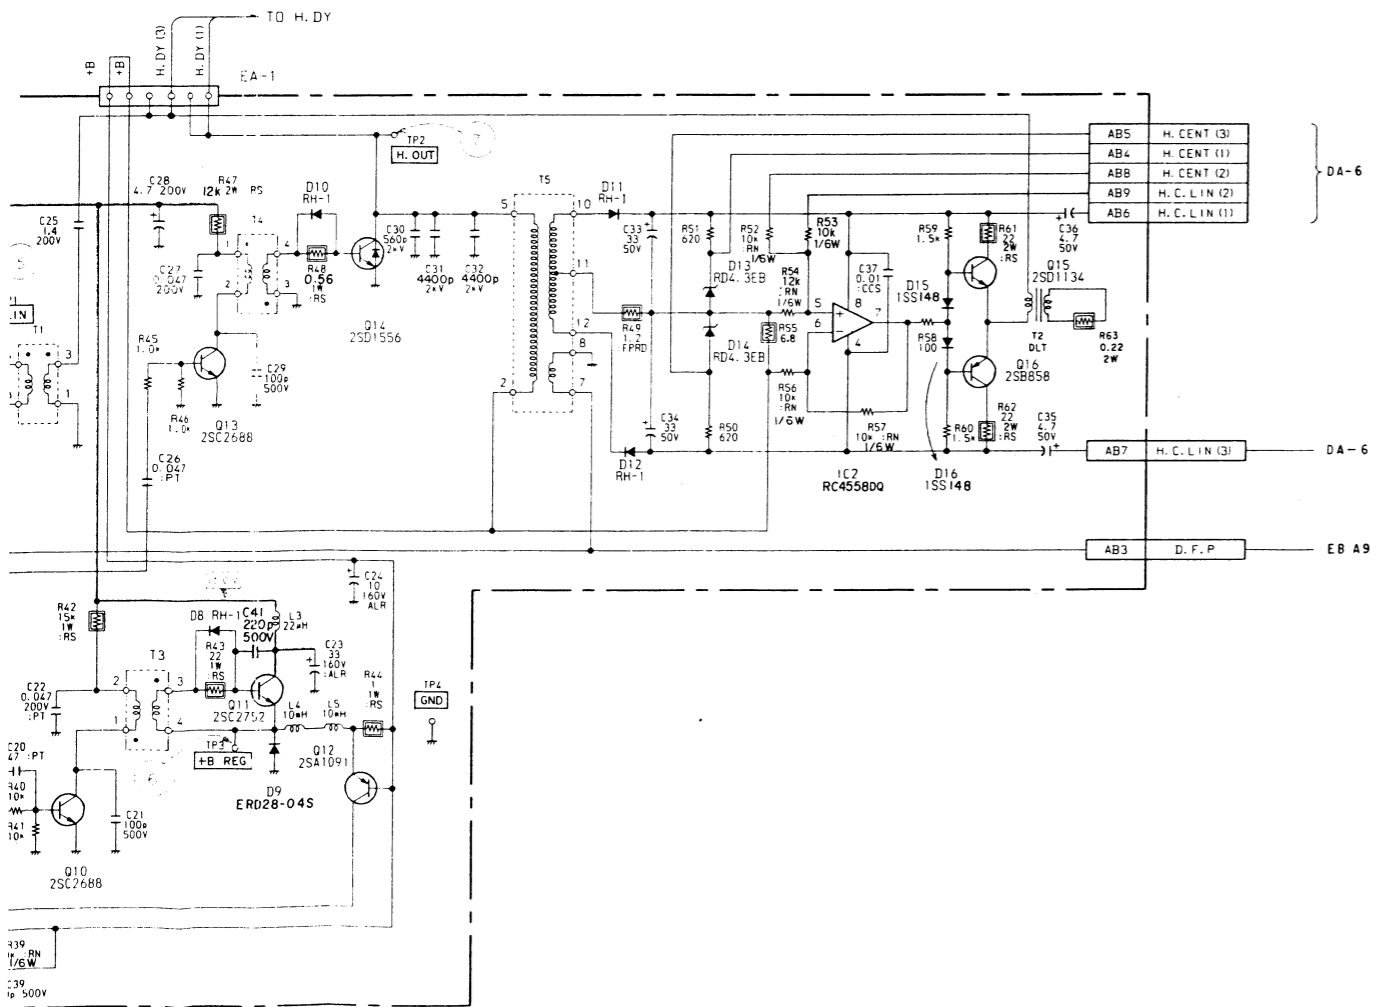


① 90Vp-p (V)




② 840Vp-p (H)




③ 920Vp-p (H)




④ 0.3Ap-p (V)



⑤ 30Vp-p (H)




⑥ 100Vp-p (H)




⑦ 150Vp-p (H)

GB board (OVER VOLTAGE PROTECTOR)

GA board (AC RECT, DC REG)

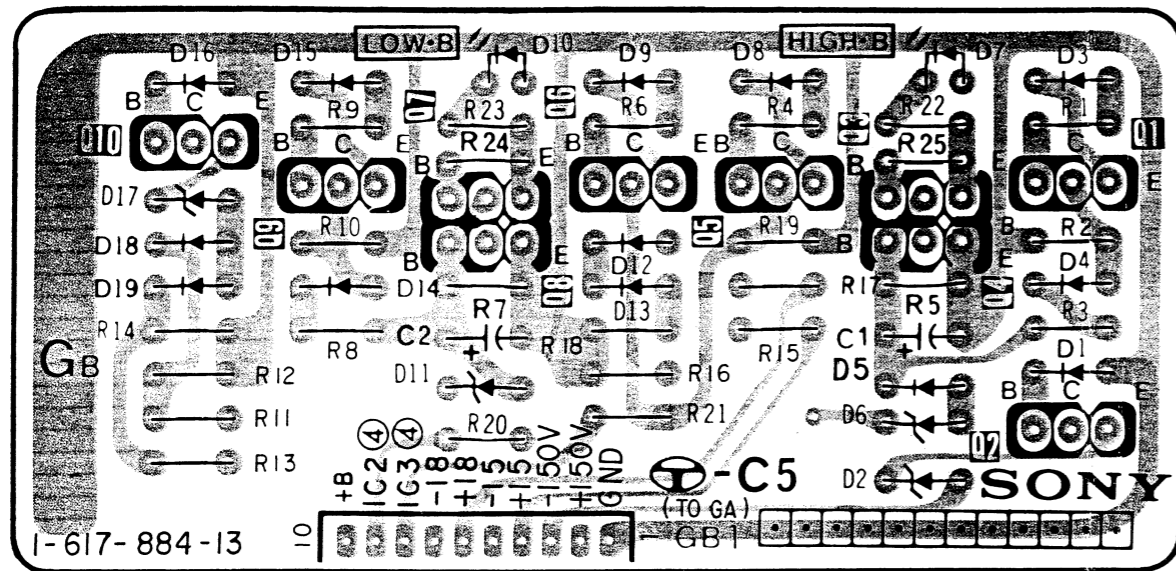


IC	Q	D	ADJ. TP
		23 25	TP2
	11		TP3
	12	18	
	10		
			RV1
		21	
	13	11	RV2 TP4
	5	6	
	2		
2	14		
3			TP1
		20 13	
	7	5	12
	9	6	15
	8	3	10
		14	16
		17	1
		7	
		31,32	
		29	27
		30	
			26
			22
		28	
		3	4
		9	8

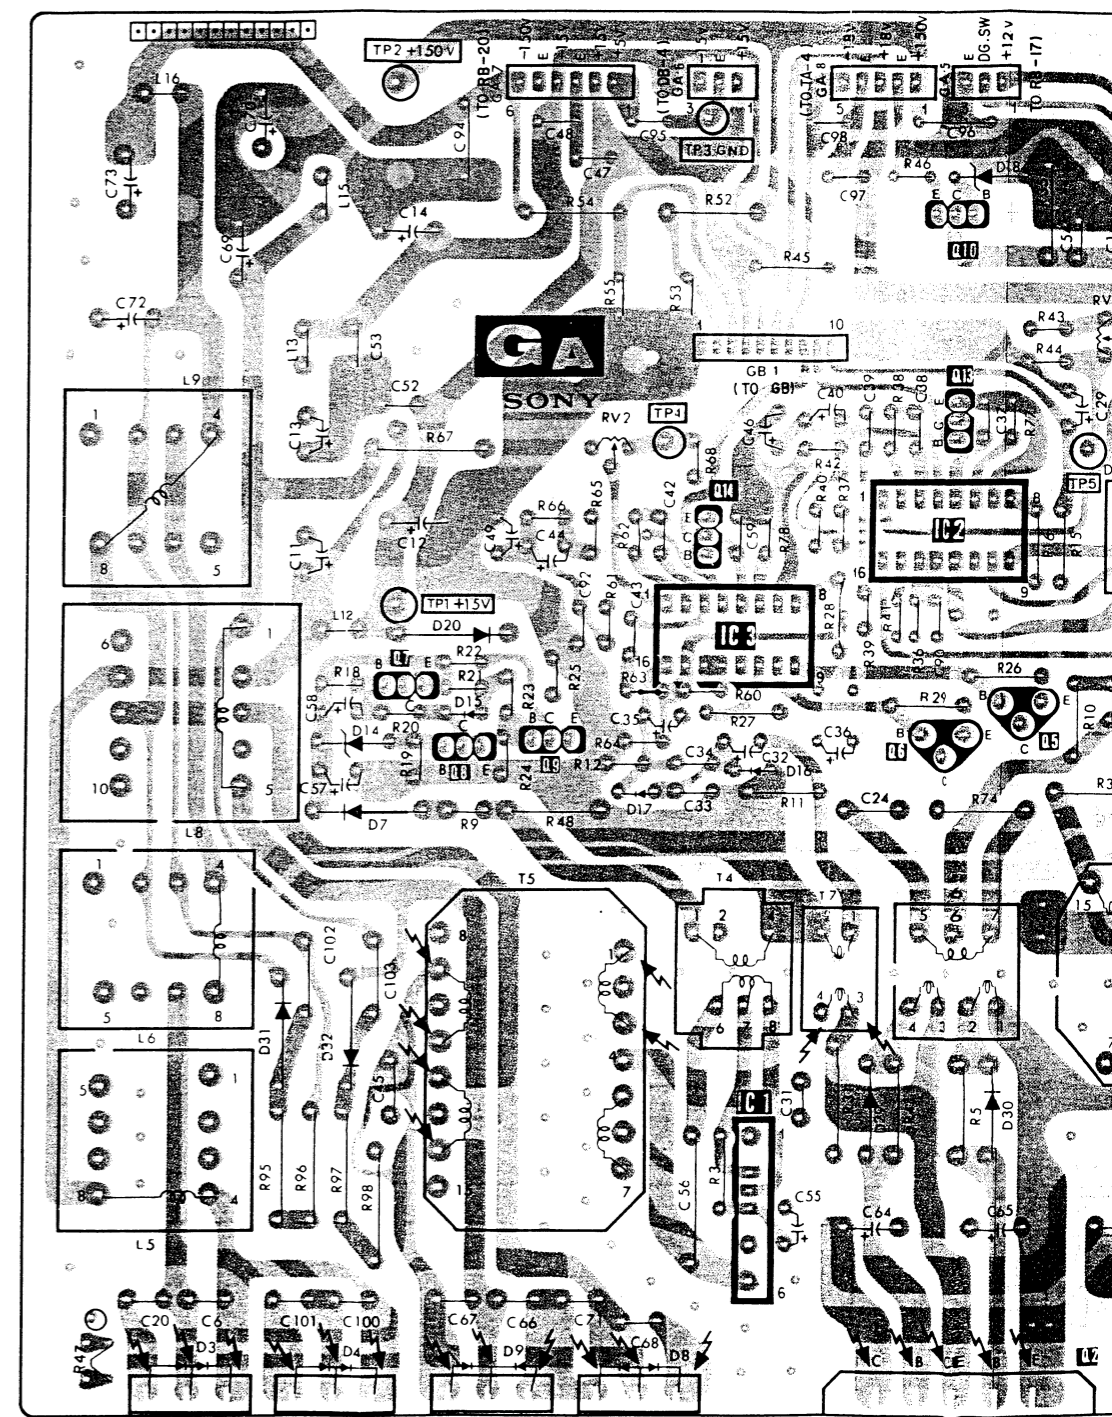


5. DIAGRAMS

GA board (AC RECT, DC REG)

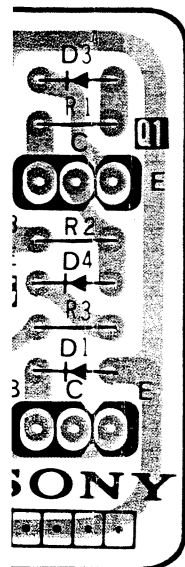

IC	Q	D	ADJ. TP
		23 25	TP2
	11		TP3
	12	24	
	10	18	
			RV1
		21	
	13	11	RV2 TP4
	5	6	
	2	2	
2	14		
3			TP1
		20	
7	5	12	
9	6	15	
8	3	10	
		14	
		16	
		17	
		7	
		31,32	
		29	
		30	
		26	
1			
		22	
		28	
	3	4	
	9	8	
	2	1	

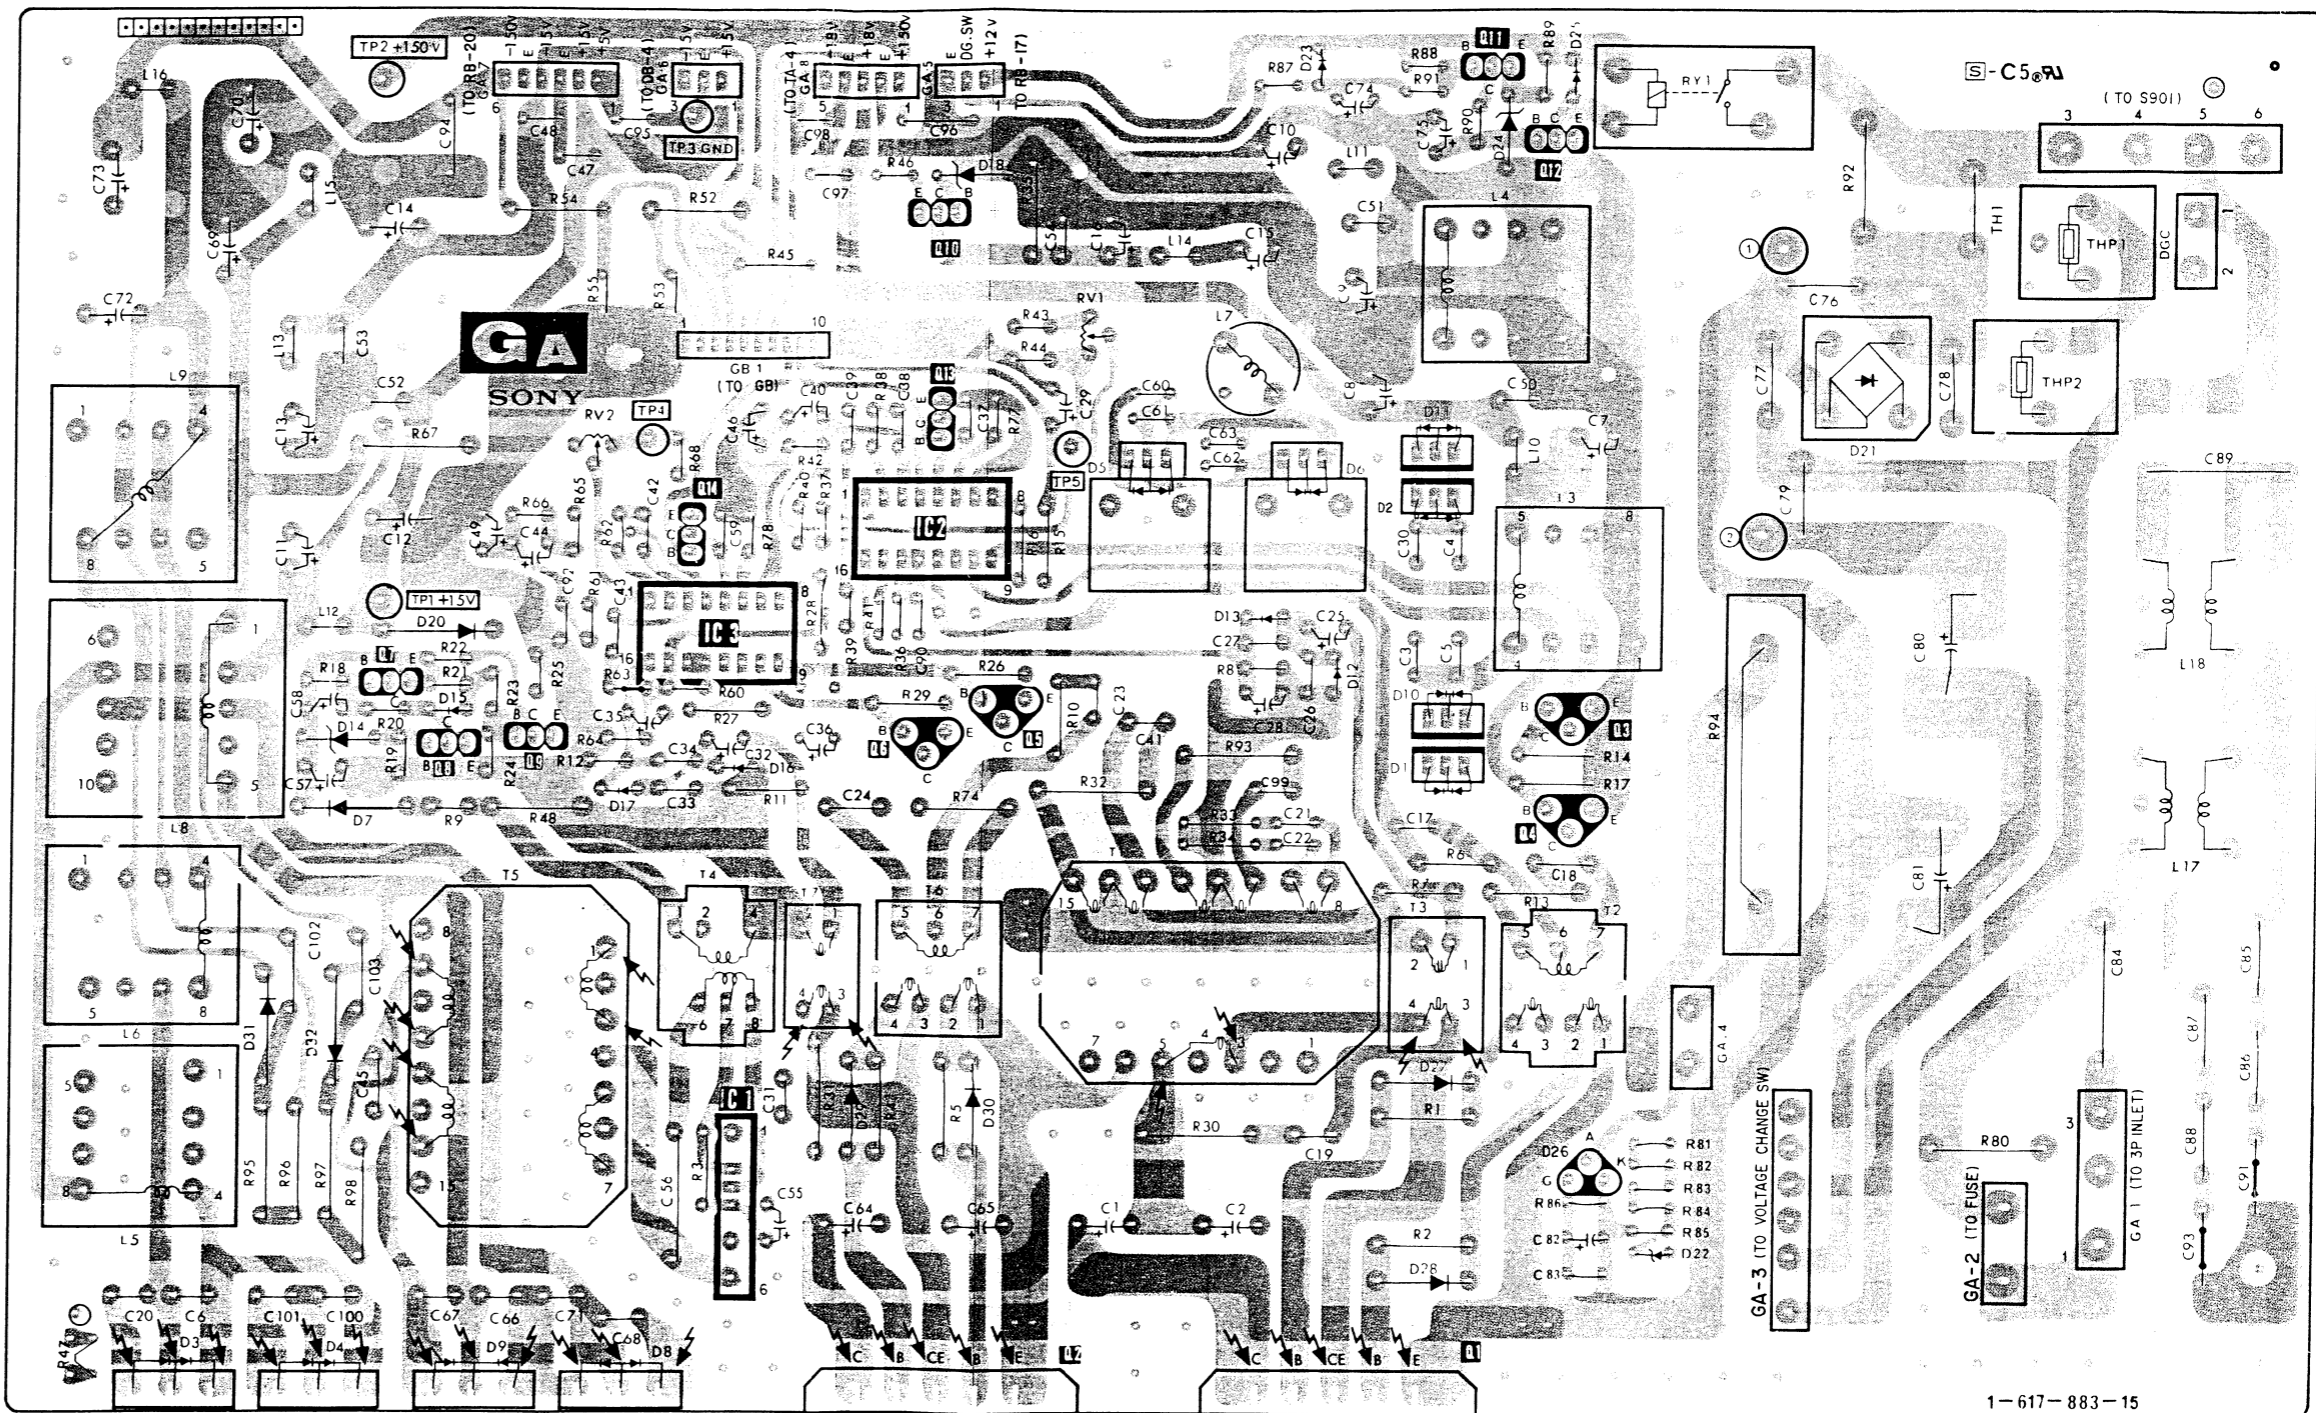


1-617-883-15

- : Conductor side pattern
- : Component side pattern

GA, GB GA, GB

GA board (AC RECT, DC REG)
GB board (OVER VOLTAGE PROTECTOR)

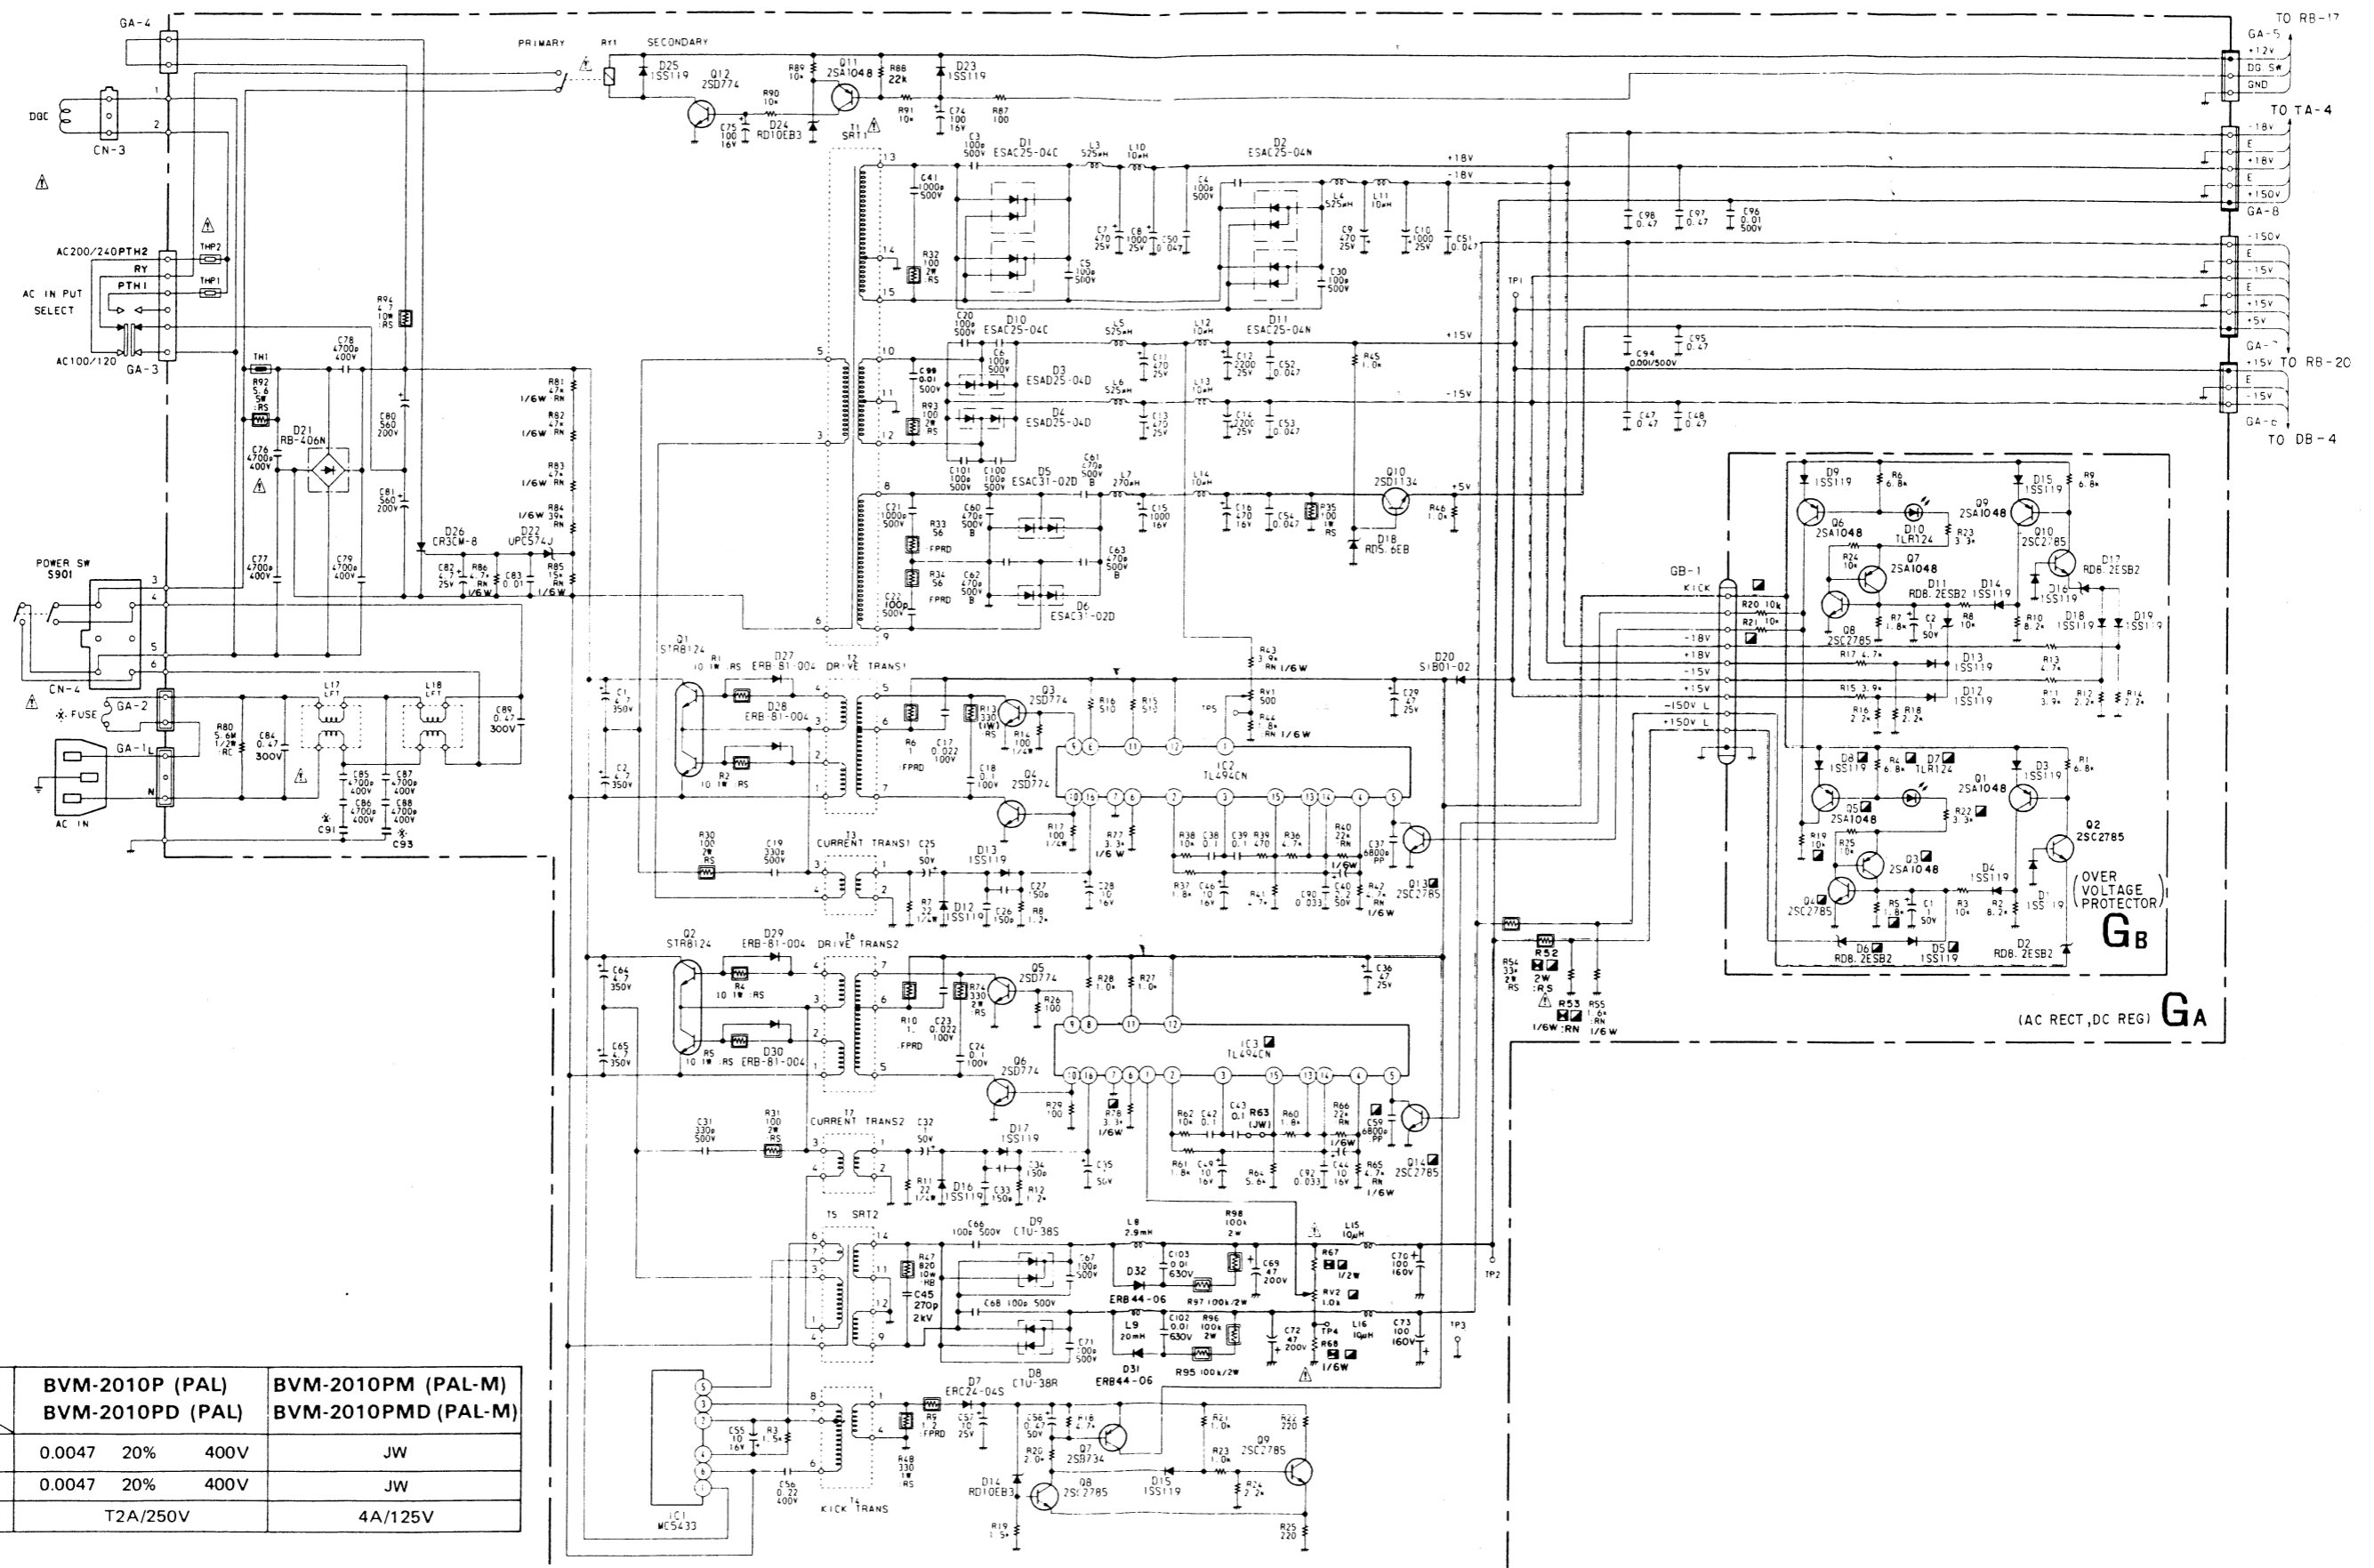


NOTE

Model	BVM-2010P (PAL)	BVM-2010PM (PAL-M)
Ref	BVM-2010PD (PAL)	BVM-2010PMD (PAL-M)
C91	0.0047 20% 400V	JW
C93	0.0047 20% 400V	JW
FUSE	T2A/250V	4A/125V

GA BOAF

IC1
2
3
Q1
2
3
4
5
6
7
8
9
10
11
12
13
14
D1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
20
21
22
23
24
25
26
27
28
29
30
31
32

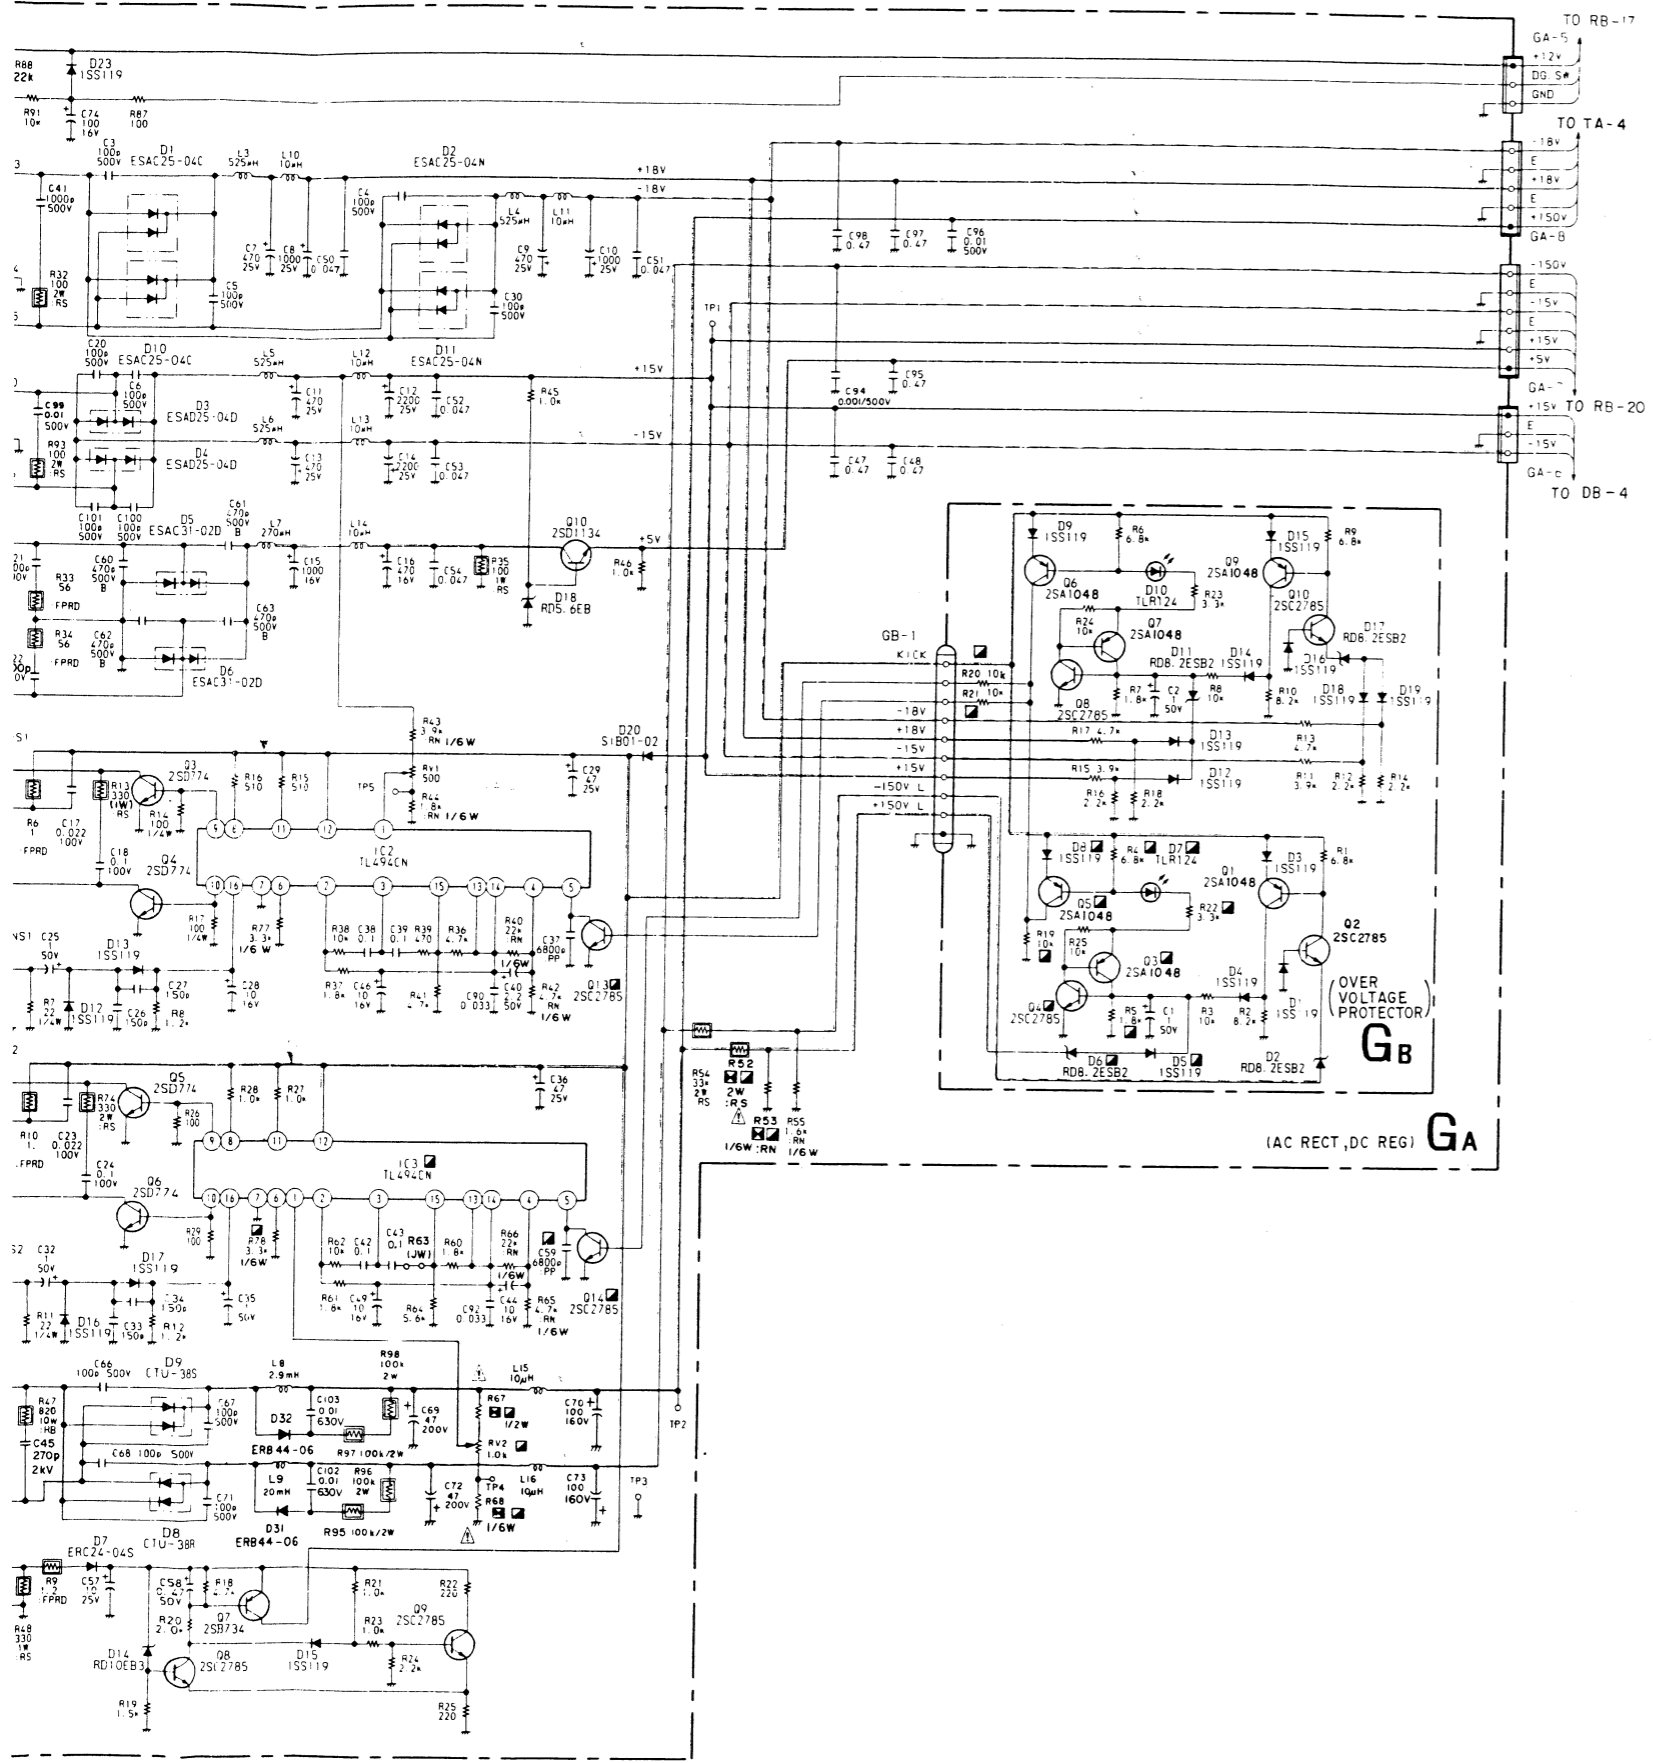


GA BOARD

IC1	MC5433	STARTER
2	TL494CN	DC REG
3	TL494CN	DC REG
Q1	STR8124	DC-DC CONV.
2	STR8124	DC-DC CONV.
3	2SD774	CONV. DRIVE
4	2SD774	CONV. DRIVE
5	2SD774	CONV. DRIVE
6	2SD774	CONV. DRIVE
7	2SB734	SOFT. START
8	2SC2785	SOFT. START
9	2SC2785	SOFT. START
10	2SD1134	+5V REG.
11	2SA1048	D.G. CONTROL
12	2SD774	D.G. CONTROL
13	2SC2785	O.V.P SW
14	2SC2785	O.V.P SW
D1	ESAC25-04C	+18V RECT
2	ESAC25-04N	-18V RECT
3	ESAD25-04D	+15V RECT
4	ESAD25-04D	-15V RECT
5	ESAC31-02D	+5V RECT
6	ESAC31-02D	-5V RECT
7	ERC24-04S	START. RECT
8	CTU-38R	-150V RECT
9	CTU-38S	+150V RECT
10	ESAC25-04C	+18V RECT
11	ESAC25-04N	-18V RECT
12	1SS119	O.C.P RECT
13	1SS119	O.C.P RECT
14	RD10EB3T	STARTER
15	1SS119	STARTER
16	1SS119	O.C.P RECT
17	1SS119	O.C.P RECT
18	RD5.6E-B2TN	+5V REG
20	SIB01-02	DC. STOPPER
21	RB406N	AC RECT
22	uPC574J	O.V.P
23	1SS119	DISCHARGE
24	RD10EB3T	+10V REG
25	1SS119	SW PROTECT
26	CR3CM-8	O.V.P
27	ERB81-004	CONV. DRIVE
28	ERB81-004	CONV. DRIVE
29	ERB81-004	CONV. DRIVE
30	ERB81-004	CONV. DRIVE
31	ERB44-06	
32	ERB44-06	

GB BOARD

Q1	2SA1048	O.V.P (-150V)
2	2SC2785	O.V.P (-150V)
3	2SA1048	O.V.P (+150V)
4	2SC2785	O.V.P (+150V)
5	2SA1048	O.V.P (+150V)
6	2SA1048	O.V.P (+15V)
7	2SA1048	O.V.P (+15V)
8	2SC2785	O.V.P (+15V)
9	2SA1048	O.V.P (-15V)
10	2SC2785	O.V.P (-15V)
D1	1SS119	PROTECTOR
2	RD8.2ES-T1B2	REFERENCE
3	1SS119	PROTECTOR
4	1SS119	MIX.
5	1SS119	MIX.
6	RD8.2ES-T1B2	REFERENCE
7	TLR124	O.V.P INDICATE
8	1SS119	PROTECTOR
9	1SS119	PROTECTOR
10	TLR124	O.V.P INDICATE
11	RD8.2ES-T1B2	REFERENCE
12	1SS119	MIX.
13	1SS119	MIX.
14	1SS119	MIX.
15	1SS119	PROTECTOR
16	1SS119	PROTECTOR
17	RD8.2ES-T1B2	REFERENCE
18	1SS119	MIX.
19	1SS119	MIX.



C board (CRT SOCKET)

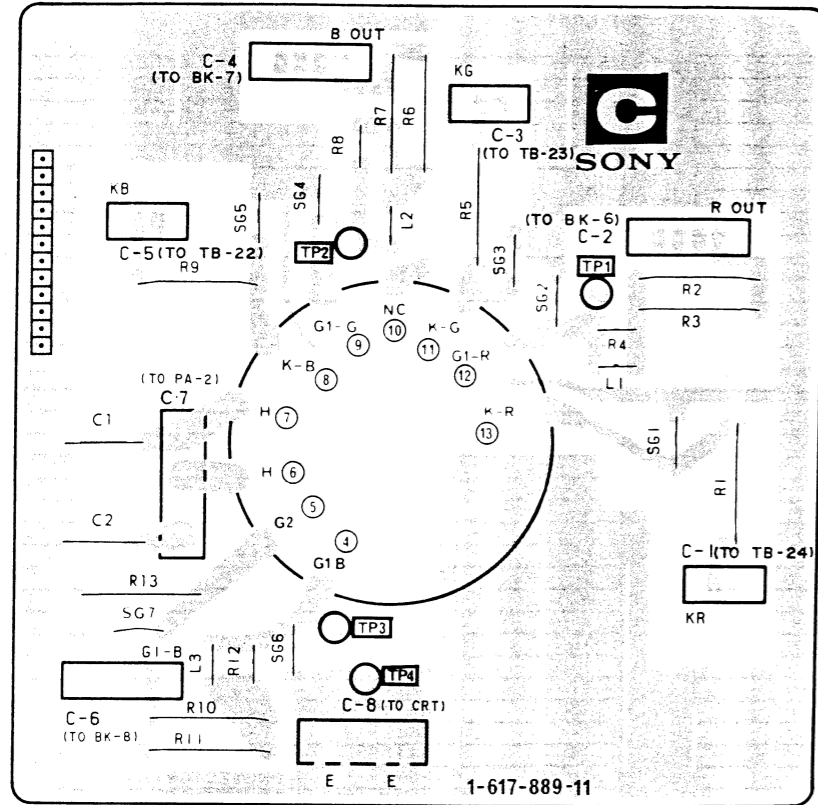

PA board (HIGH VOLTAGE PROTECTOR)

IC	3	2											4																									
Q											104	105											103											102				
D											207	204	202											106											108			
TP	4	1											215											216	218	217											201	105
RV																																						

PB board (FBT)

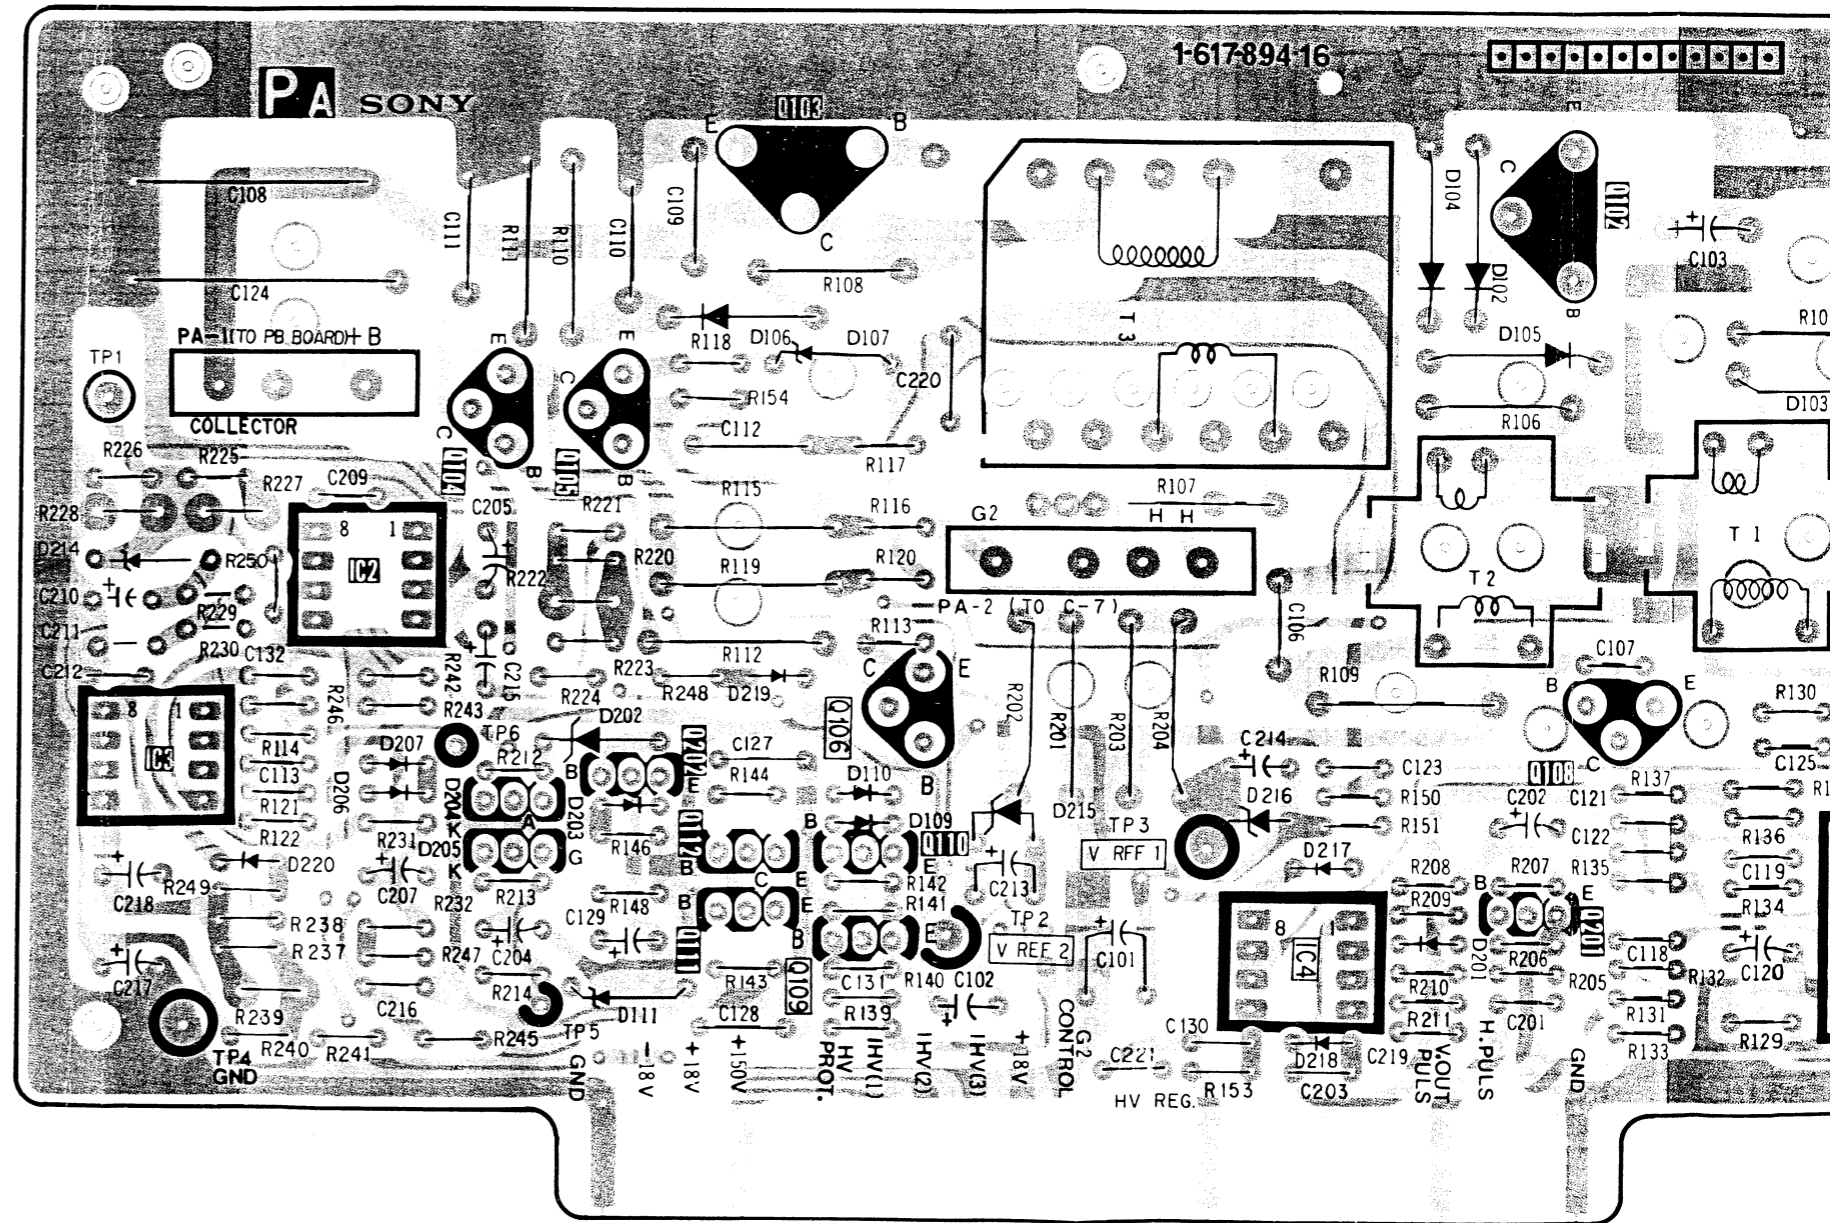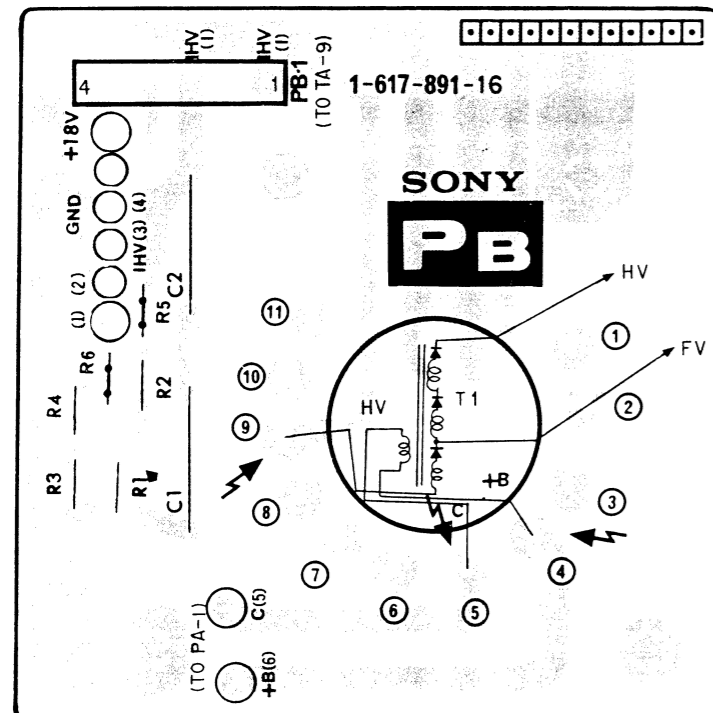


C, PA, PB C, PA, PB

(HIGH VOLTAGE PROTECTOR)

IC	3	2											4											1	101																								
Q											104	105	103												102											107													
D											207	204	202	106	107											104	102											105											103
TP	4	1											2											3																									
RV											220	206	205	203	219	110	109	215	216	218	217	201																											



PA BOARD

IC1	uPC1394C	P.W.M CONTROL
2	LM2903bq	COMPARATOR
3	LM2903bq	COMPARATOR
4	TLO82CP	BUFFER & COMPARATOR
Q101	2SA1142	O.V.P
102	2SC2555	DC-DC CONV.
103	2SD1556	HV CONV.
104	2SC3675	G2 REGULATOR
105	2SC3675	G2 REGULATOR
106	2SC3675	G2 REGULATOR
107	2SC2688	DC-DC CONV. DRIVE
108	2SC2688	HV CONV. DRIVE
109	2SA1048	HV CONV. DRIVE
110	2SC2785	HV CONV. DRIVE
111	2SC2785	HV CONV. DRIVE
112	2SC2785	HV CONV. DRIVE
201	2SC2785	CRT PROTECTOR
202	2SC2785	CRT PROTECTOR
D102	RU-1A	DC-DC CONV.
103	RU-1A	DC-DC CONV.
104	RU-1A	DC-DC CONV.
105	RU-1A	HV CONV. DRIVE
106	V11N	RECTIFIER
107	RD6.2EB2	G2 CONTROL
109	1SS148	HV CONV. DRIVE
110	1SS148	HV CONV. DRIVE
111	RD3.0ESB2	HV CONV. DRIVE
201	1SS148	PROTECTOR
202	RD3.9EB2	CRT PROTECTOR
203	1SS148	CRT PROTECTOR
204	CRO2AM	PROTECTOR
205	CRO2AM	PROTECTOR
206	1SS148	MIX
207	1SS148	MIX
215	uPC574J	HV PROT. REF.
216	uPC574J	HV PROT. REF.
217	1SS148	PROT
218	1SS148	PROT
219	1SS148	PROT
220	1SS148	PROT

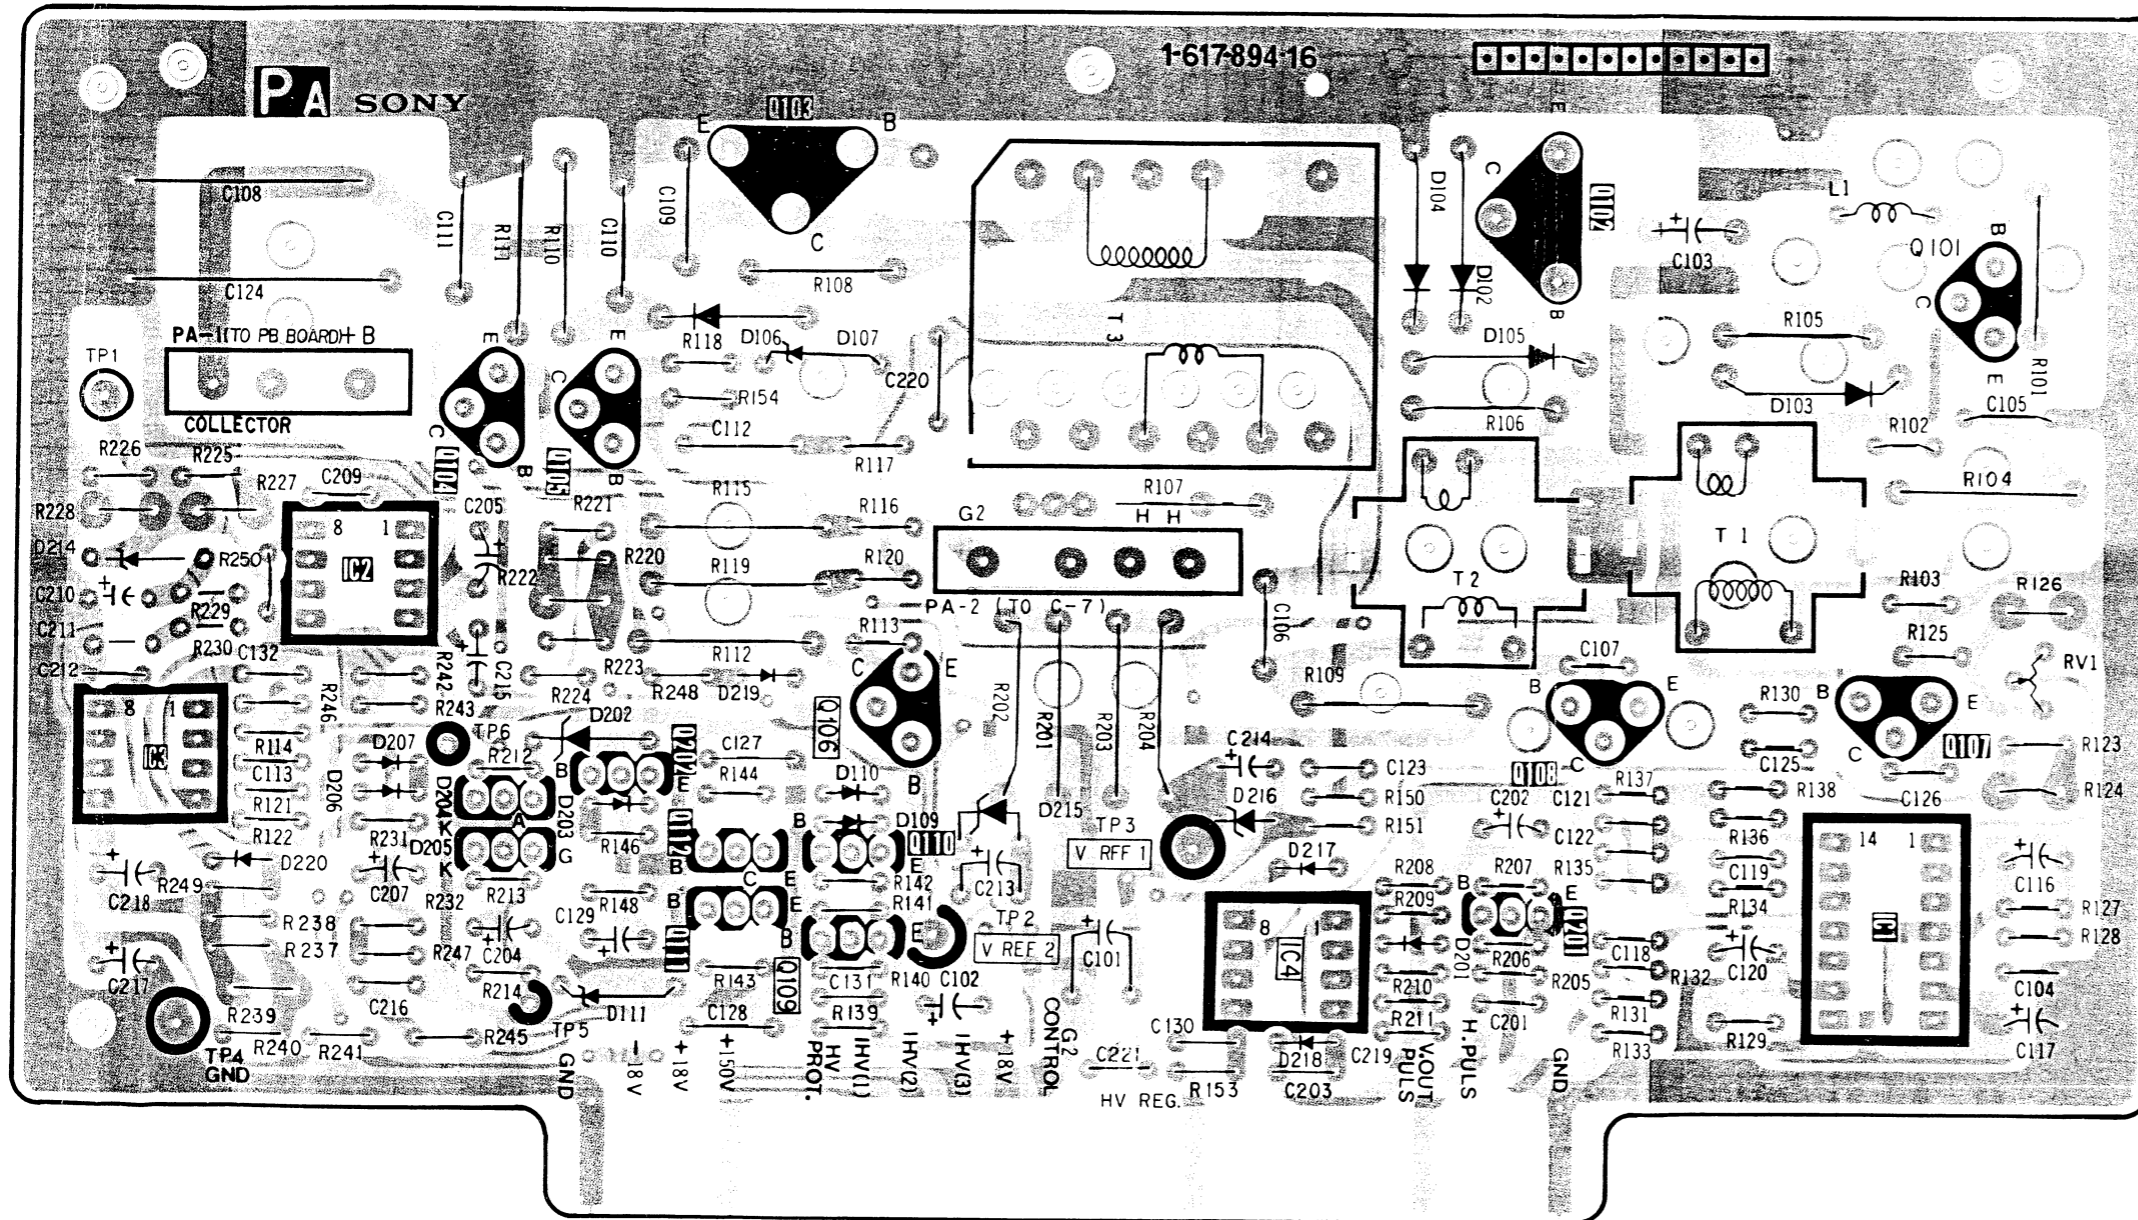


- : Conductor side pattern
- : Component side pattern


C, PA, PB C, PA, PB

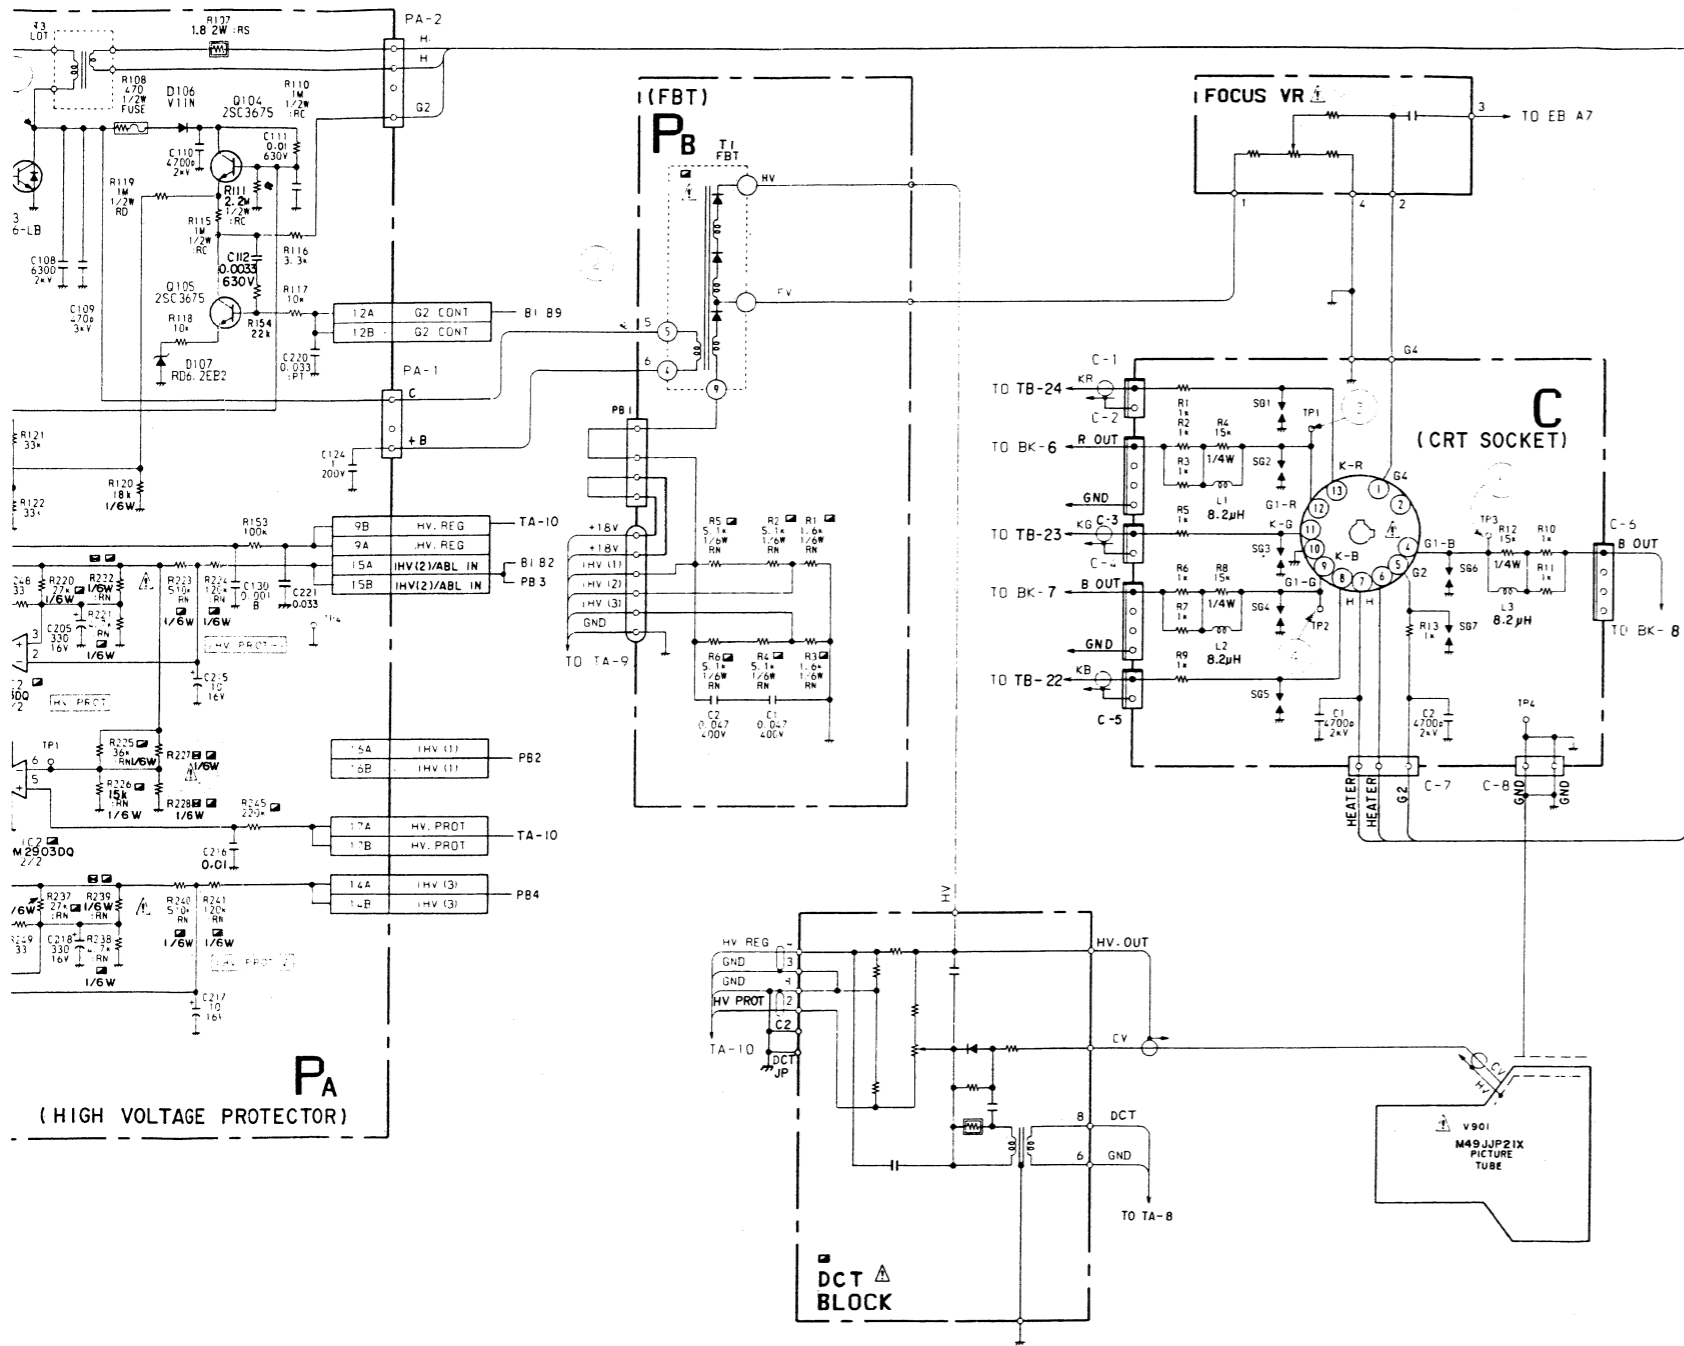

1Vp-p (H)




4 68Vp-p (H)



5 61Vp-p (H)

HG board (CONTROL PANEL 2)

(Serial No. 2,001,081 and Higher (BVM-2010P only))
 (Serial No. 2,000,004 and Higher (BVM-2010PM only))
 (Serial No. 2,000,042 and Higher (BVM-2010PD only))
 (Serial No. 2,000,001 and Higher (BVM-2010PMD only))

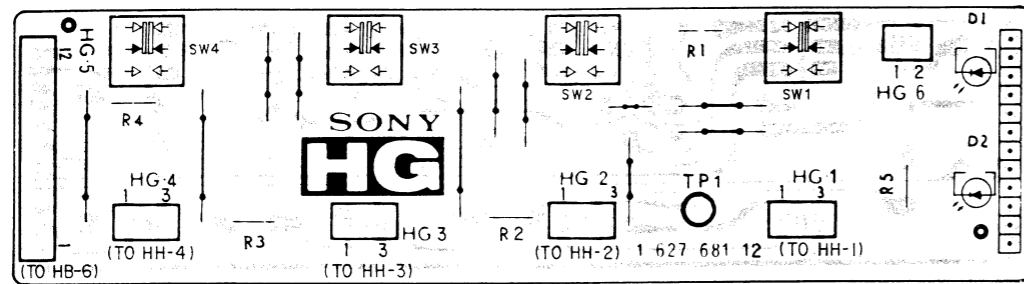


HH board (CONTROL PANEL 1)

(Serial No. 2,001,081 and Higher (BVM-2010P only))
 (Serial No. 2,000,004 and Higher (BVM-2010PM only))
 (Serial No. 2,000,042 and Higher (BVM-2010PD only))
 (Serial No. 2,000,001 and Higher (BVM-2010PMD only))




5. DIAGRAMS


HC board (INPUT SELECT)

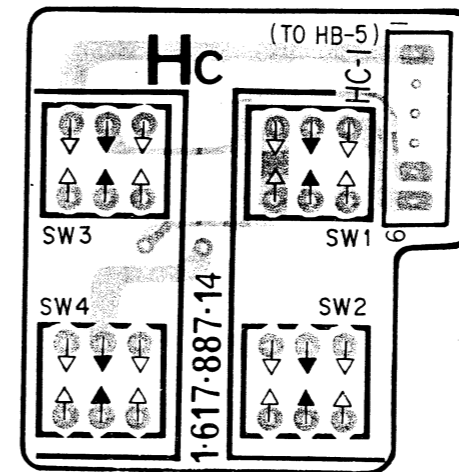

XB board (TALLY)

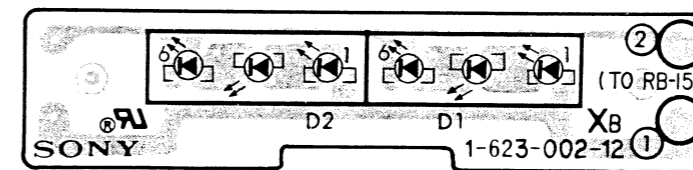


Y board (POWER LED)

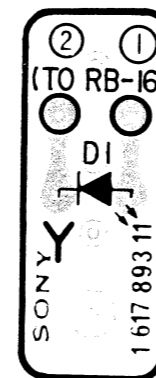


HD board (MANUAL CONTROL)

(Serial No. Up to 2,001,080 (BVM-2010P only))
 (Serial No. Up to 2,000,041 (BVM-2010PD only))
 (Serial No. Up to 2,000,003 (BVM-2010PM only))

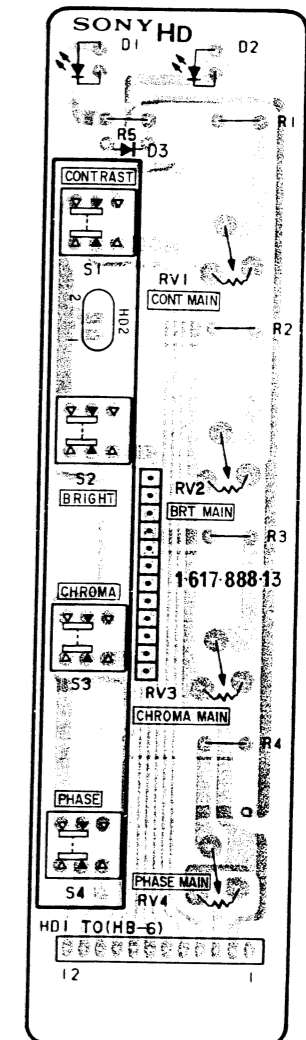


HA board (LEFT CONTROL PANEL)

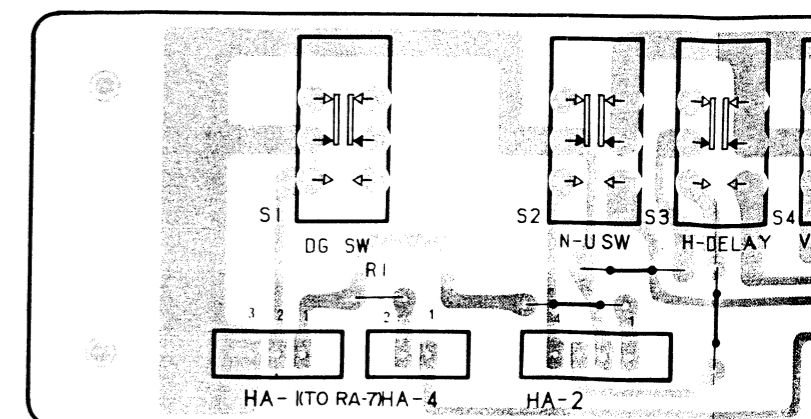


HA, HB, HC, HD, HH, HG, XB, Y HA, HB, HC, HD, HH, HG, XB, Y


HC board (INPUT SELECT)

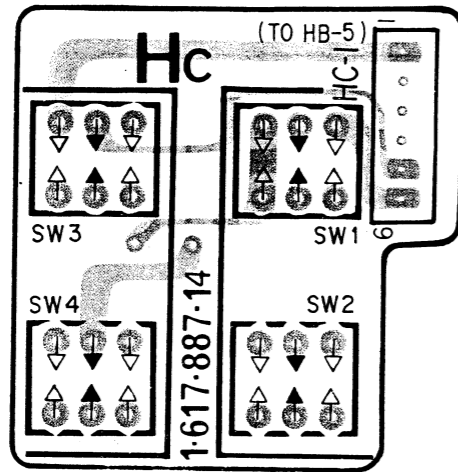

XB board (TALLY)

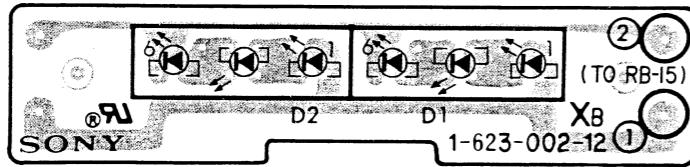


Y board (POWER LED)

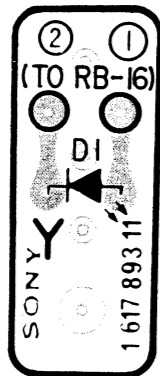


HD board (MANUAL CONTROL)


(Serial No. Up to 2,001,080 (BVM-2010P only))
 (Serial No. Up to 2,000,041 (BVM-2010PD only))
 (Serial No. Up to 2,000,003 (BVM-2010PM only))

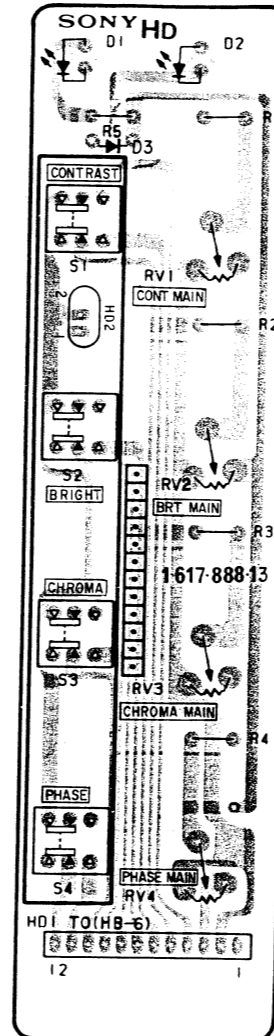

HB board (SYSTEM SWITCH)

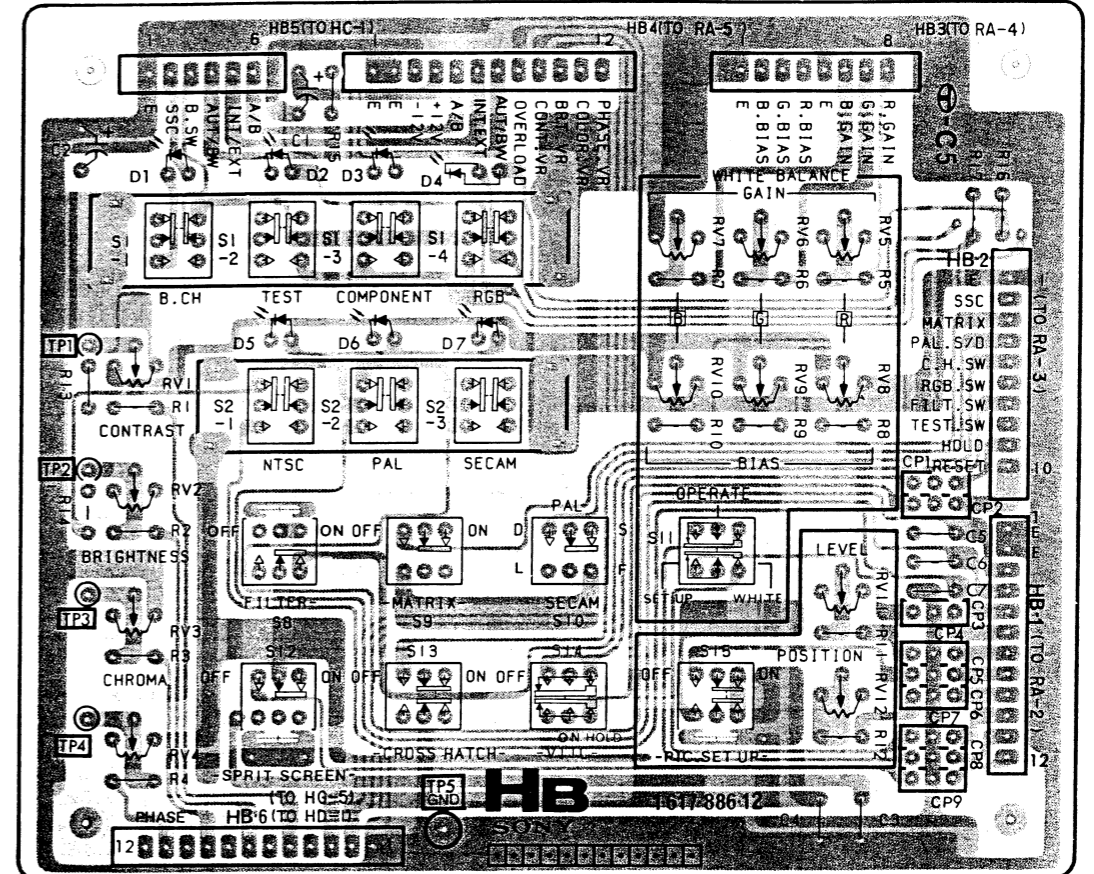

HA board (LEFT CONTROL PANEL)

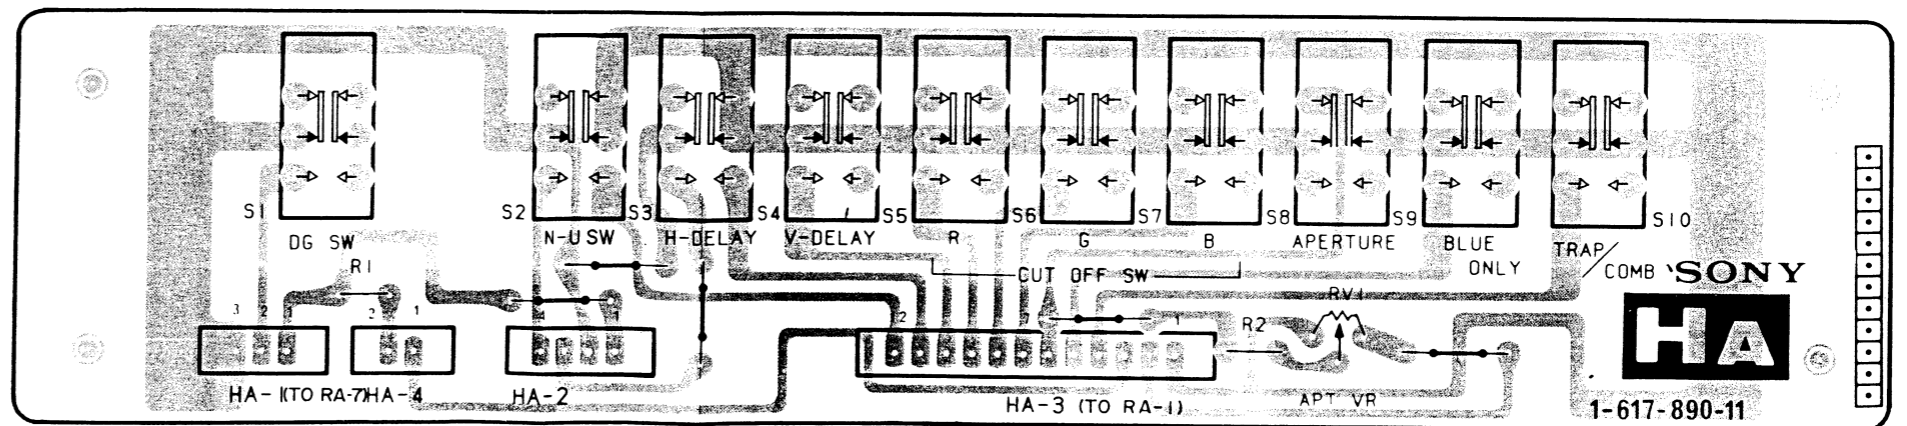



• : Conductor side pattern
 • : Component side pattern

HA, HB, HC, HD, HH, HG, XB, Y HA, HB, HC, HD, HH, HG, XB, Y



HA board (LEFT CONTROL PANEL), HB board (SYSTEM SWITCH), HC board (INPUT SELECT), HG board (CONTROL PANEL 2)
 HD board (MANUAL CONTROL), XB board (TALLY), Y board (POWER LED), HH board (CONTROL PANEL 1)

HB BOARD

D1	TLY124	INPUT MODE INDICATOR
2	TLY124	INPUT MODE INDICATOR
3	TLY124	INPUT MODE INDICATOR
4	TLY124	INPUT MODE INDICATOR
5	TLG124A	SYSTEM INDICATOR
6	TLG124A	SYSTEM INDICATOR
7	TLG124A	SYSTEM INDICATOR

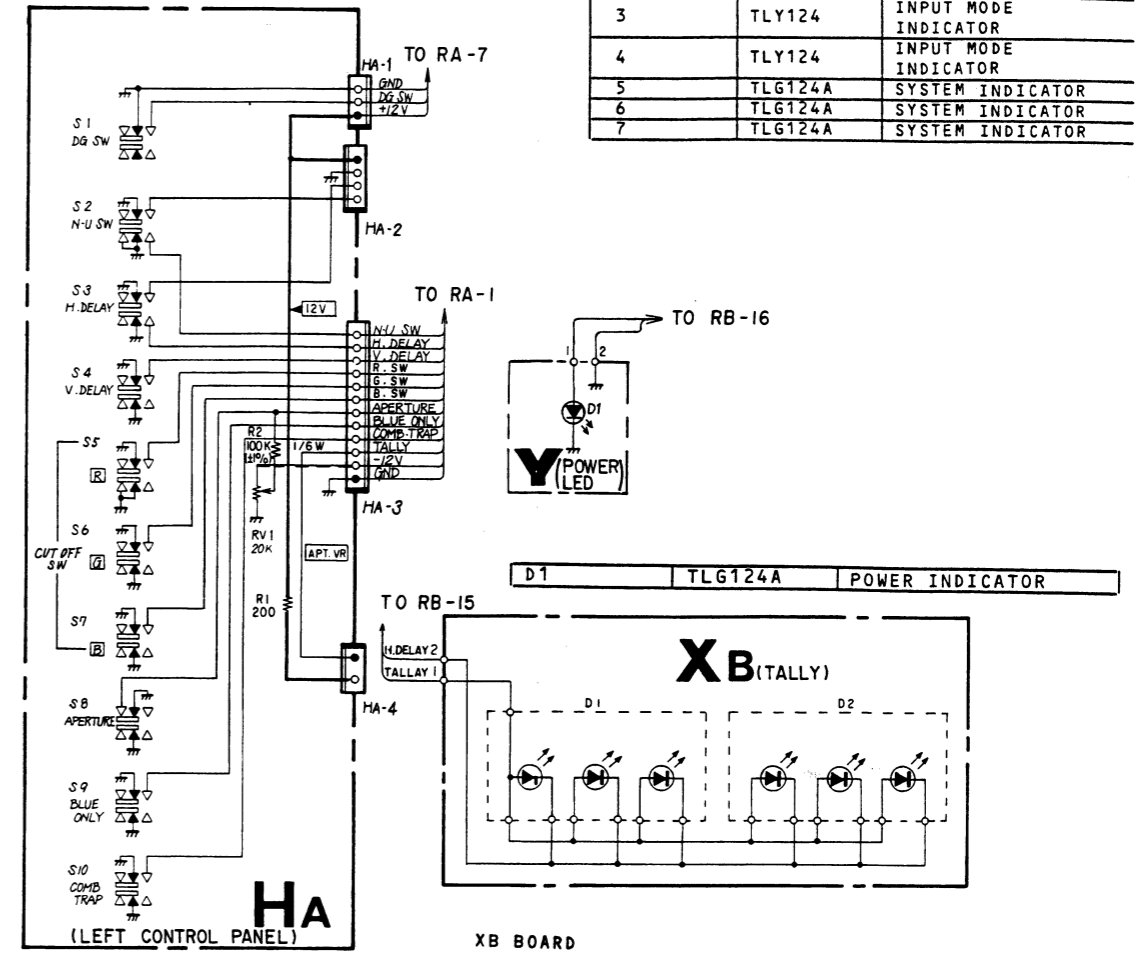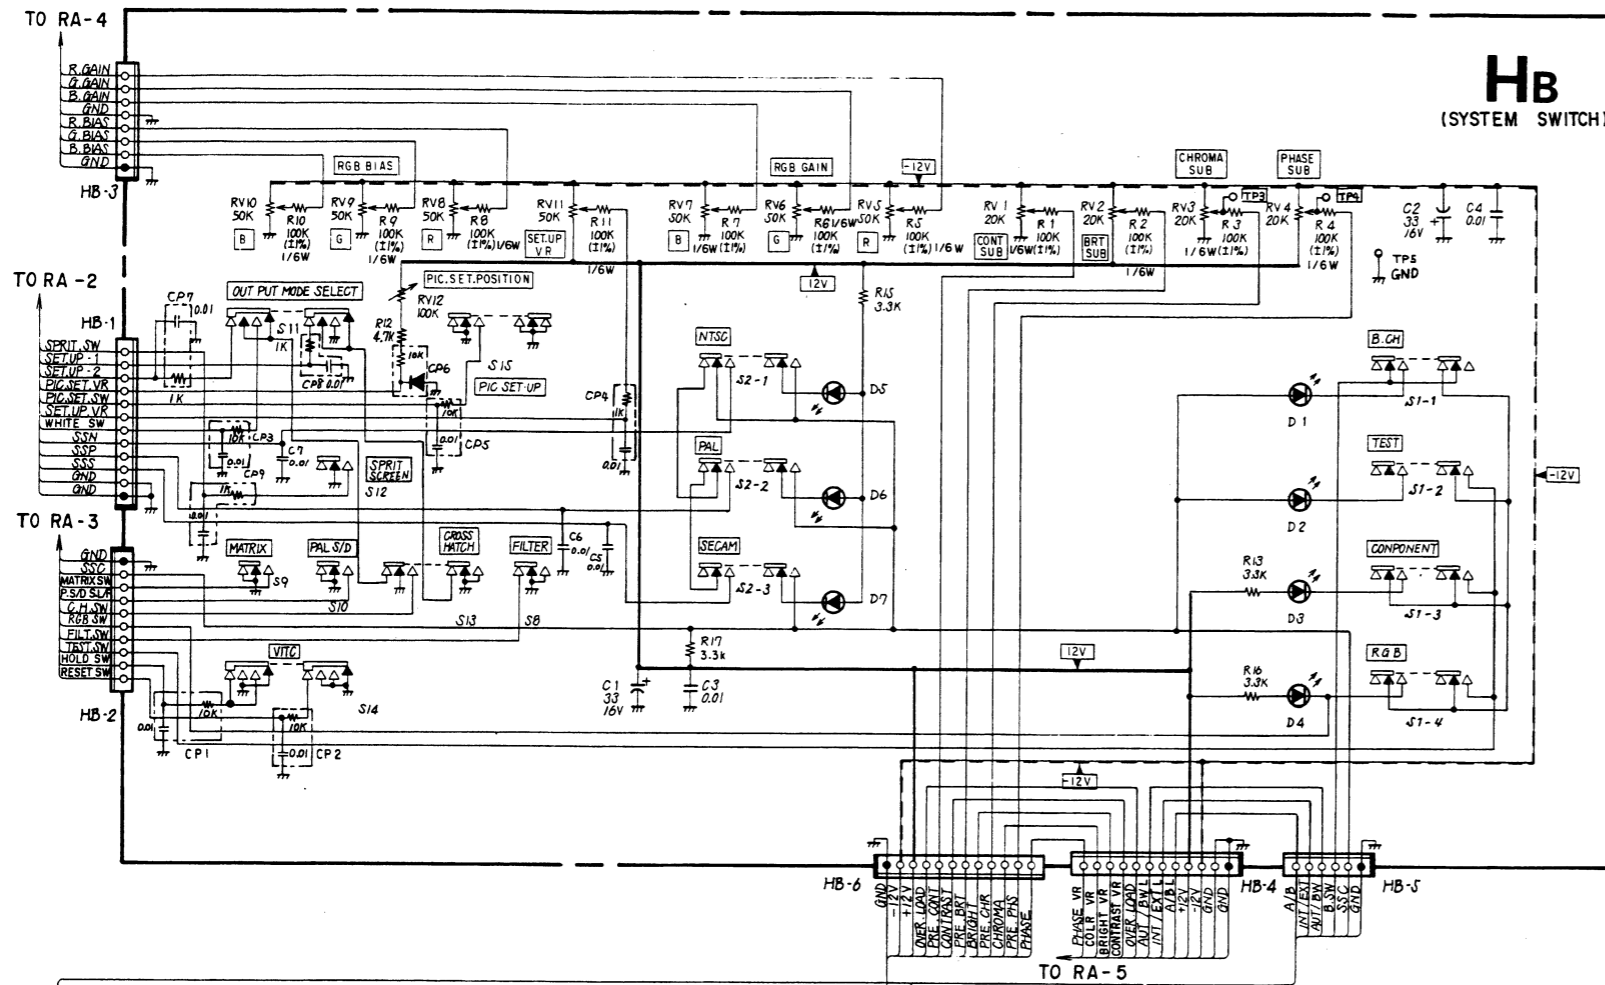


D1	TLG124A	POWER INDICATOR
D2	LT-9010H	TALLY LAMP
D2	LT-9010H	TALLY LAMP

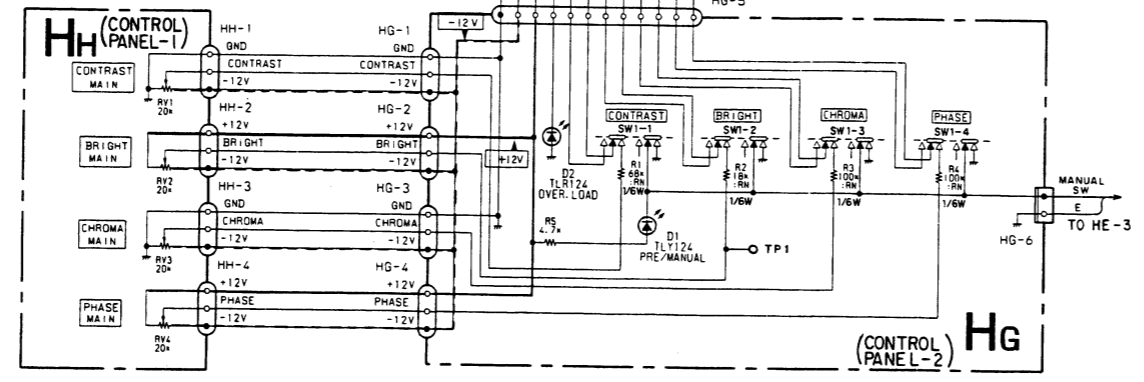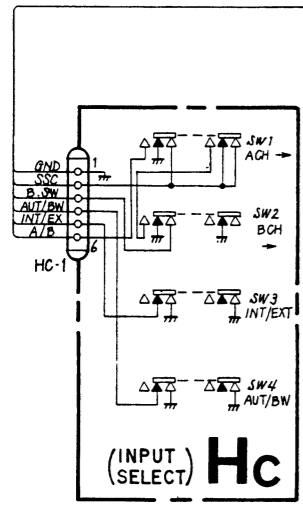

HD/HG BOARD

D1	TLY124	PRE/MANUAL INDICATOR
2	TLR124	OVER LOAD INDICATOR

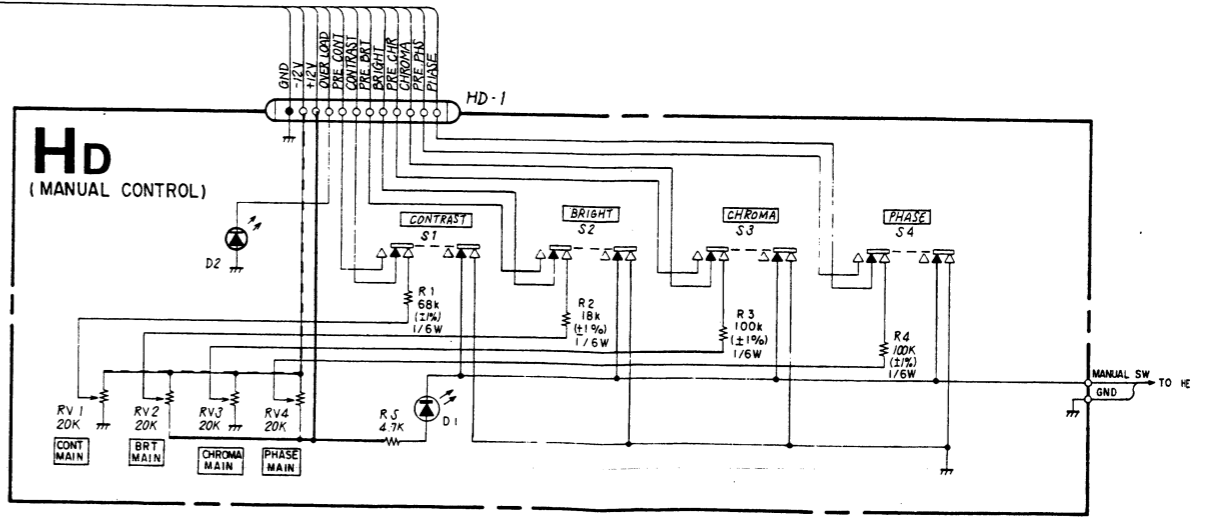


***HD board**
 (Serial No. Up to 2,001,080 (BVM-2010P only))
 (Serial No. Up to 2,000,041 (BVM-2010PD only))
 (Serial No. Up to 2,000,003 (BVM-2010PM only))


***HH & HG board**
 (Serial No. 2,001,081 and Higher (BVM-2010P only))
 (Serial No. 2,000,004 and Higher (BVM-2010PM only))
 (Serial No. 2,000,042 and Higher (BVM-2010PD only))
 (Serial No. 2,000,001 and Higher (BVM-2010PMD only))

HE, HF HE, HF

HE board (AUTO-SET-UP CONTROL)

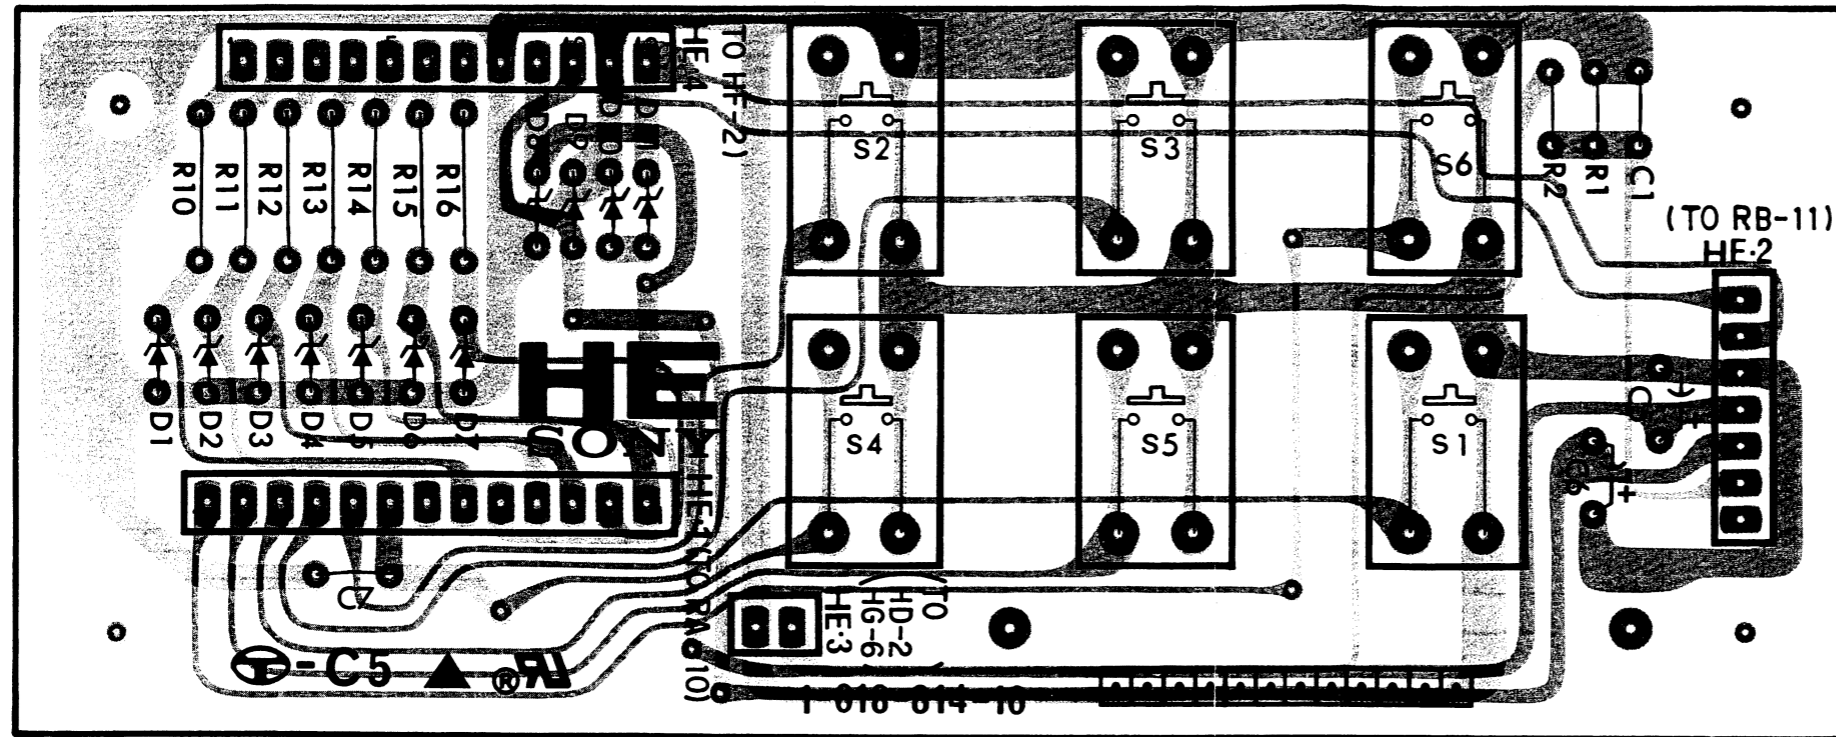


HF board (AUTO-SET-UP PROBE)

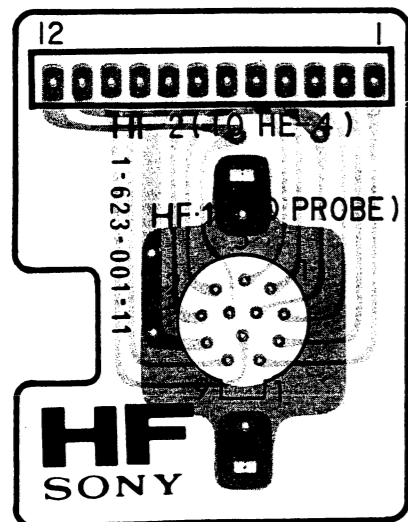

● [Solid black] : Conductor side pattern
 ● [Stippled] : Component side pattern

HE, HF HE, HF

HE board (AUTO-SET-UP CONTROL)
 HF board (AUTO-SET-UP PROBE)

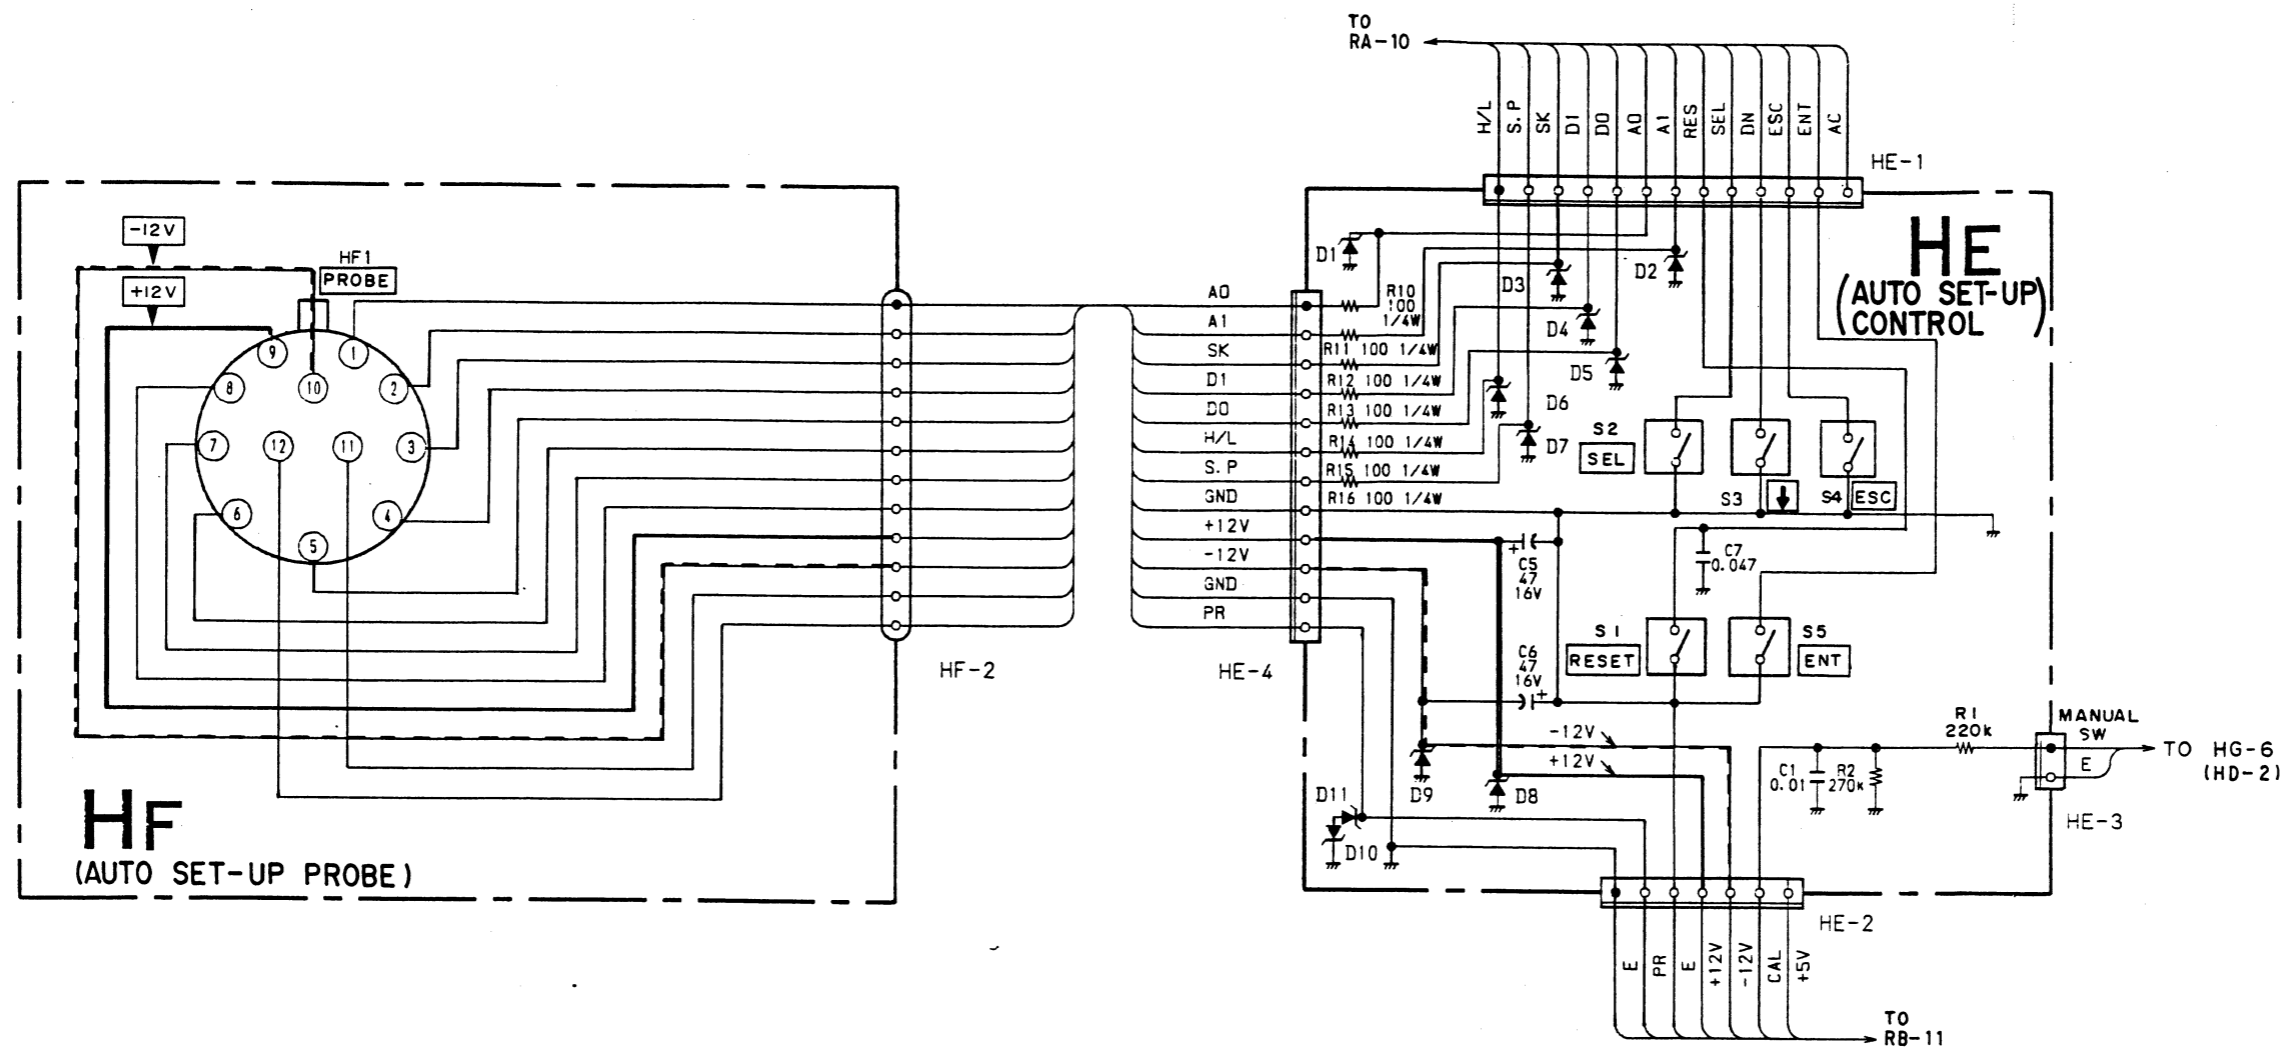

HE board





D	1	RD5.6ES-B2	PROTECTOR
	2	RD5.6ES-B2	PROTECTOR
	3	RD5.6ES-B2	PROTECTOR
	4	RD5.6ES-B2	PROTECTOR
	5	RD5.6ES-B2	PROTECTOR
	6	RD5.6ES-B2	PROTECTOR
	7	RD5.6ES-B2	PROTECTOR
	8	RD13ES-B2	PROTECTOR
	9	RD13ES-B2	PROTECTOR
	10	RD13ES-B2	PROTECTOR
	11	RD13ES-B2	PROTECTOR

GC, QA, QB, V, W GC, QA, QB, V, W

GC board (REG) QA board (COMPOSITE VIDEO INPUT) QB board (RGB/COMPONENT INPUT)
 V board (REMOTE) W board (RGB/COMPONENT & VECTOR)

GC BOARD


IC1	uPC7972H	-12V REG
2	uPC7972H	-12V REG
3	uPC7812H	+12V REG
4	uPC7812H	+12V REG

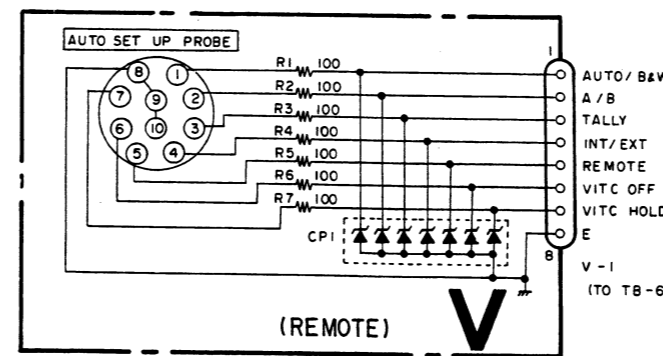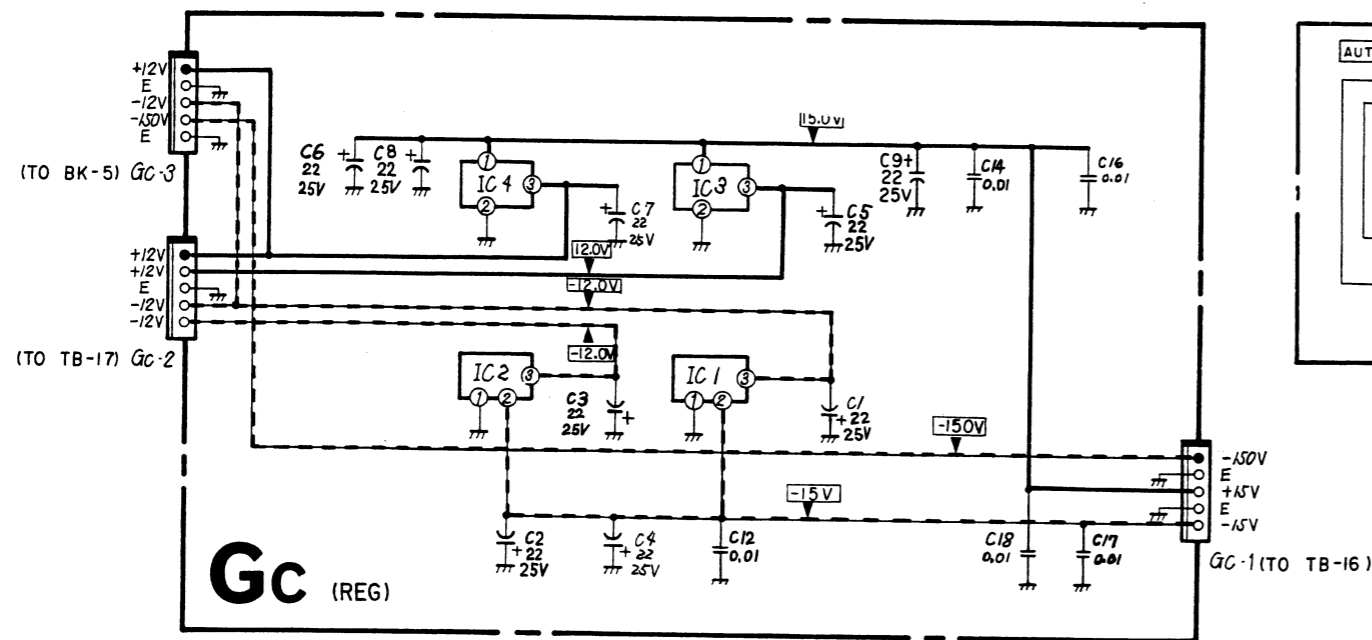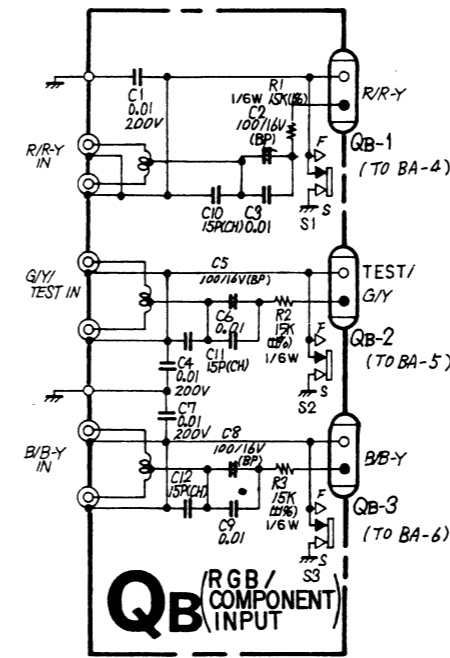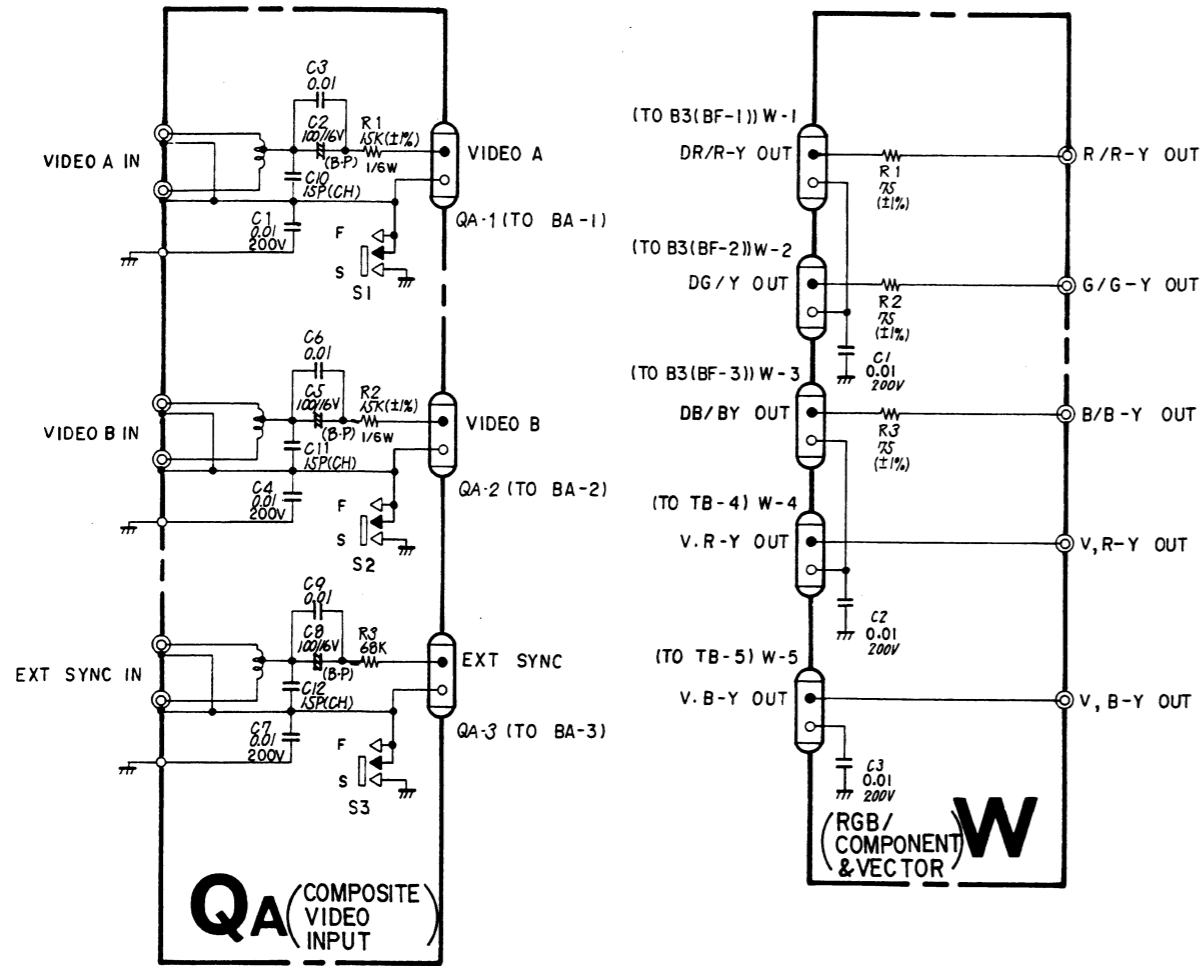

RA RA


RA board (SERIAL TO PARALLEL CONVERT)

IC	9	3	2	5	12	11	4	10	6
	7								
	8								1
D	101 102		4 2	20 17 18 19 21 23 24	22 12 9 10 11 13 15 16 14			28 25 26 27	29 31 32 30
	202 201	34 33	5 1 3 7 8 6	37					

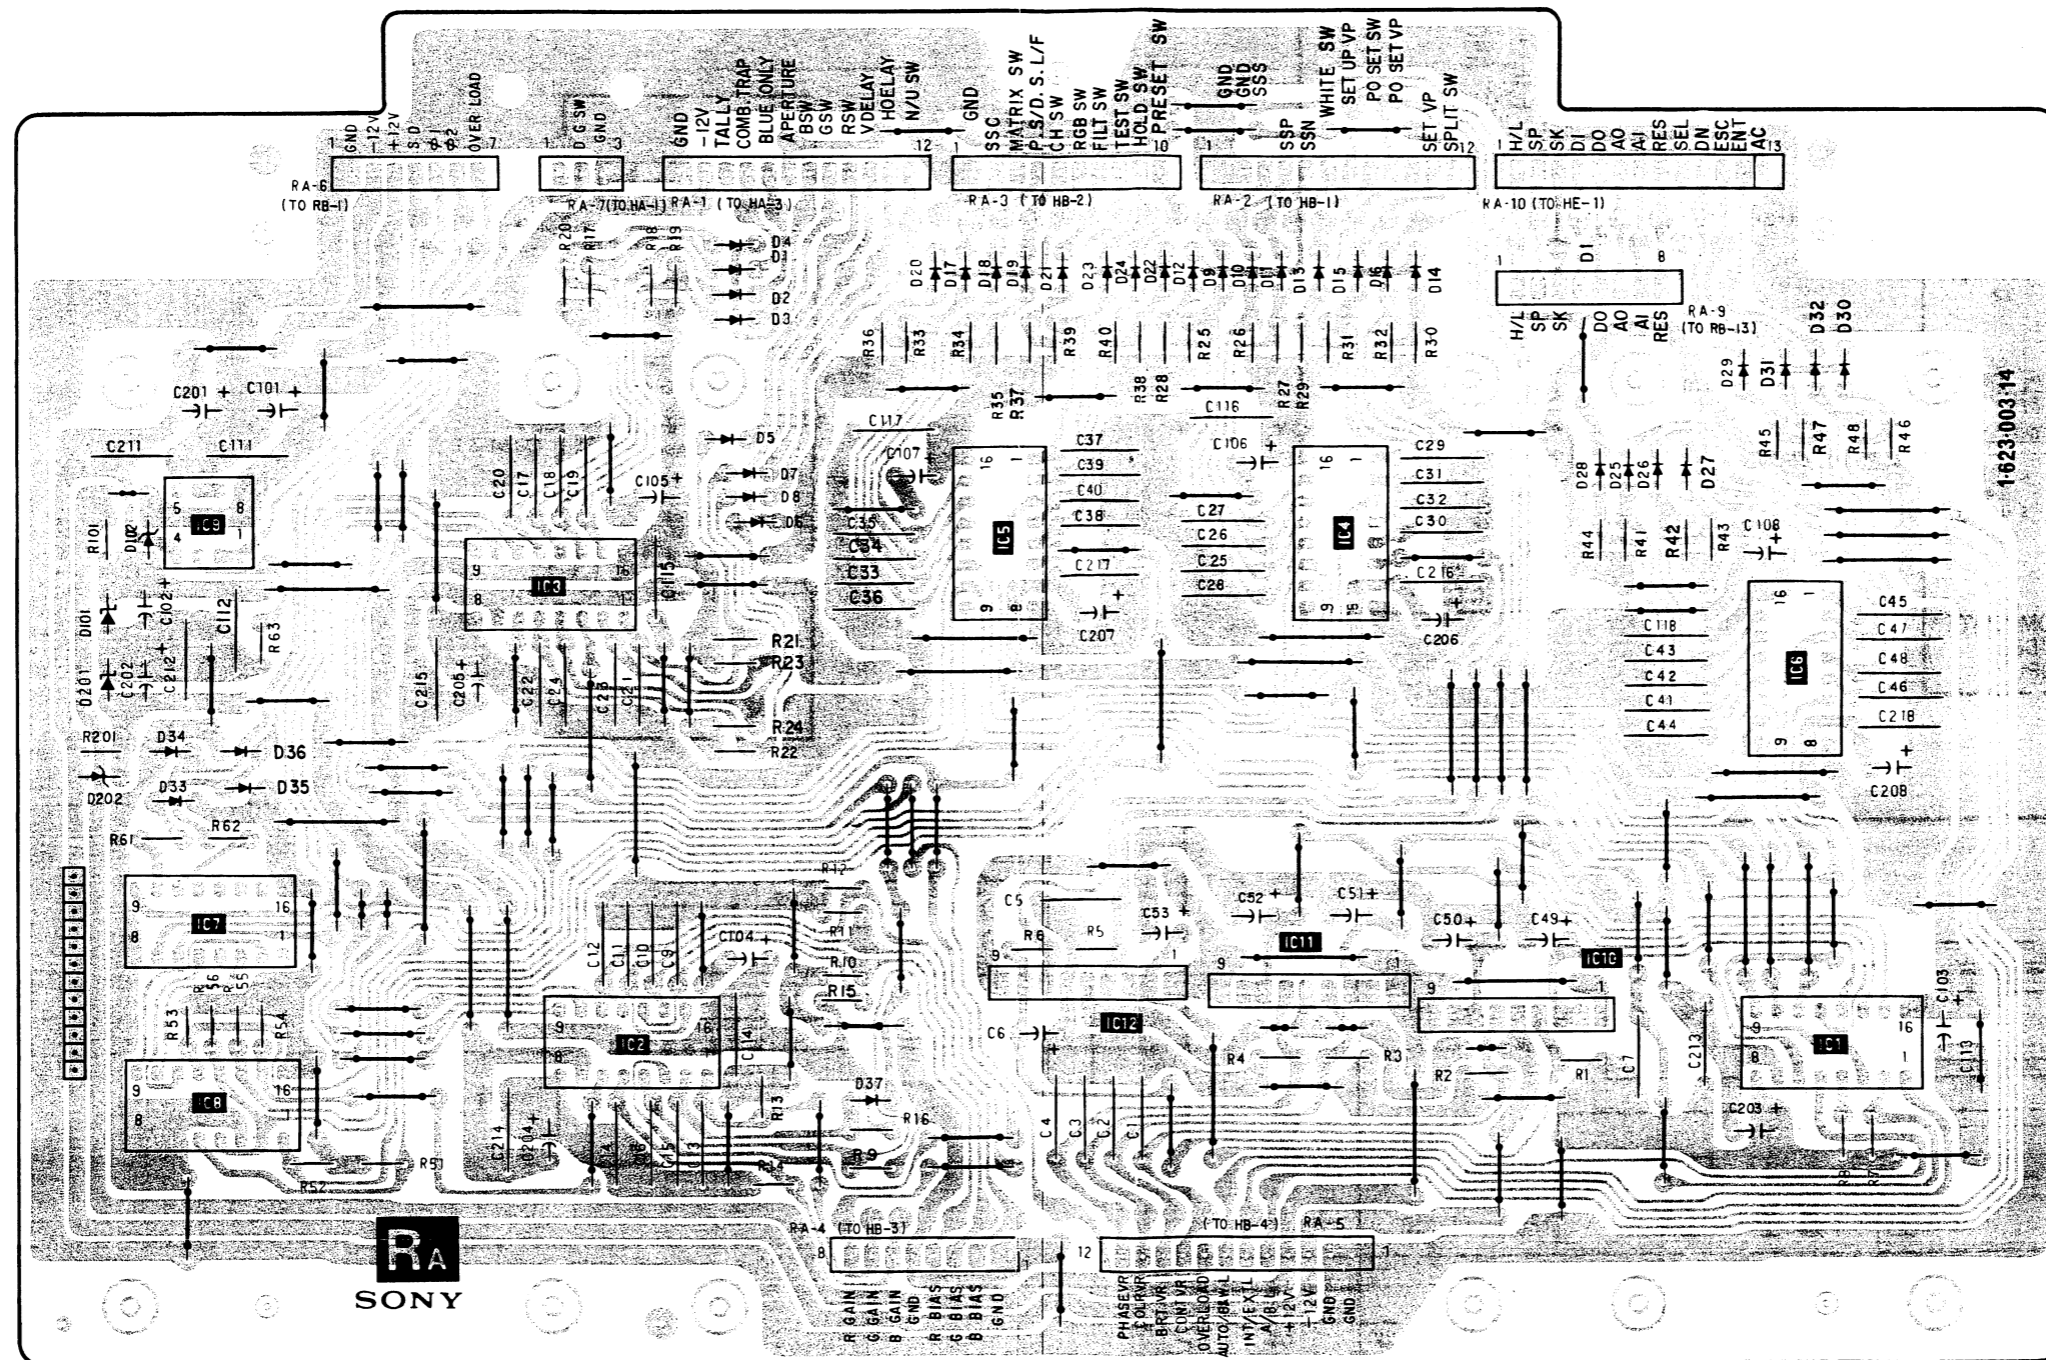


RA RA

RA board (SERIAL TO PARALLEL CONVERT)

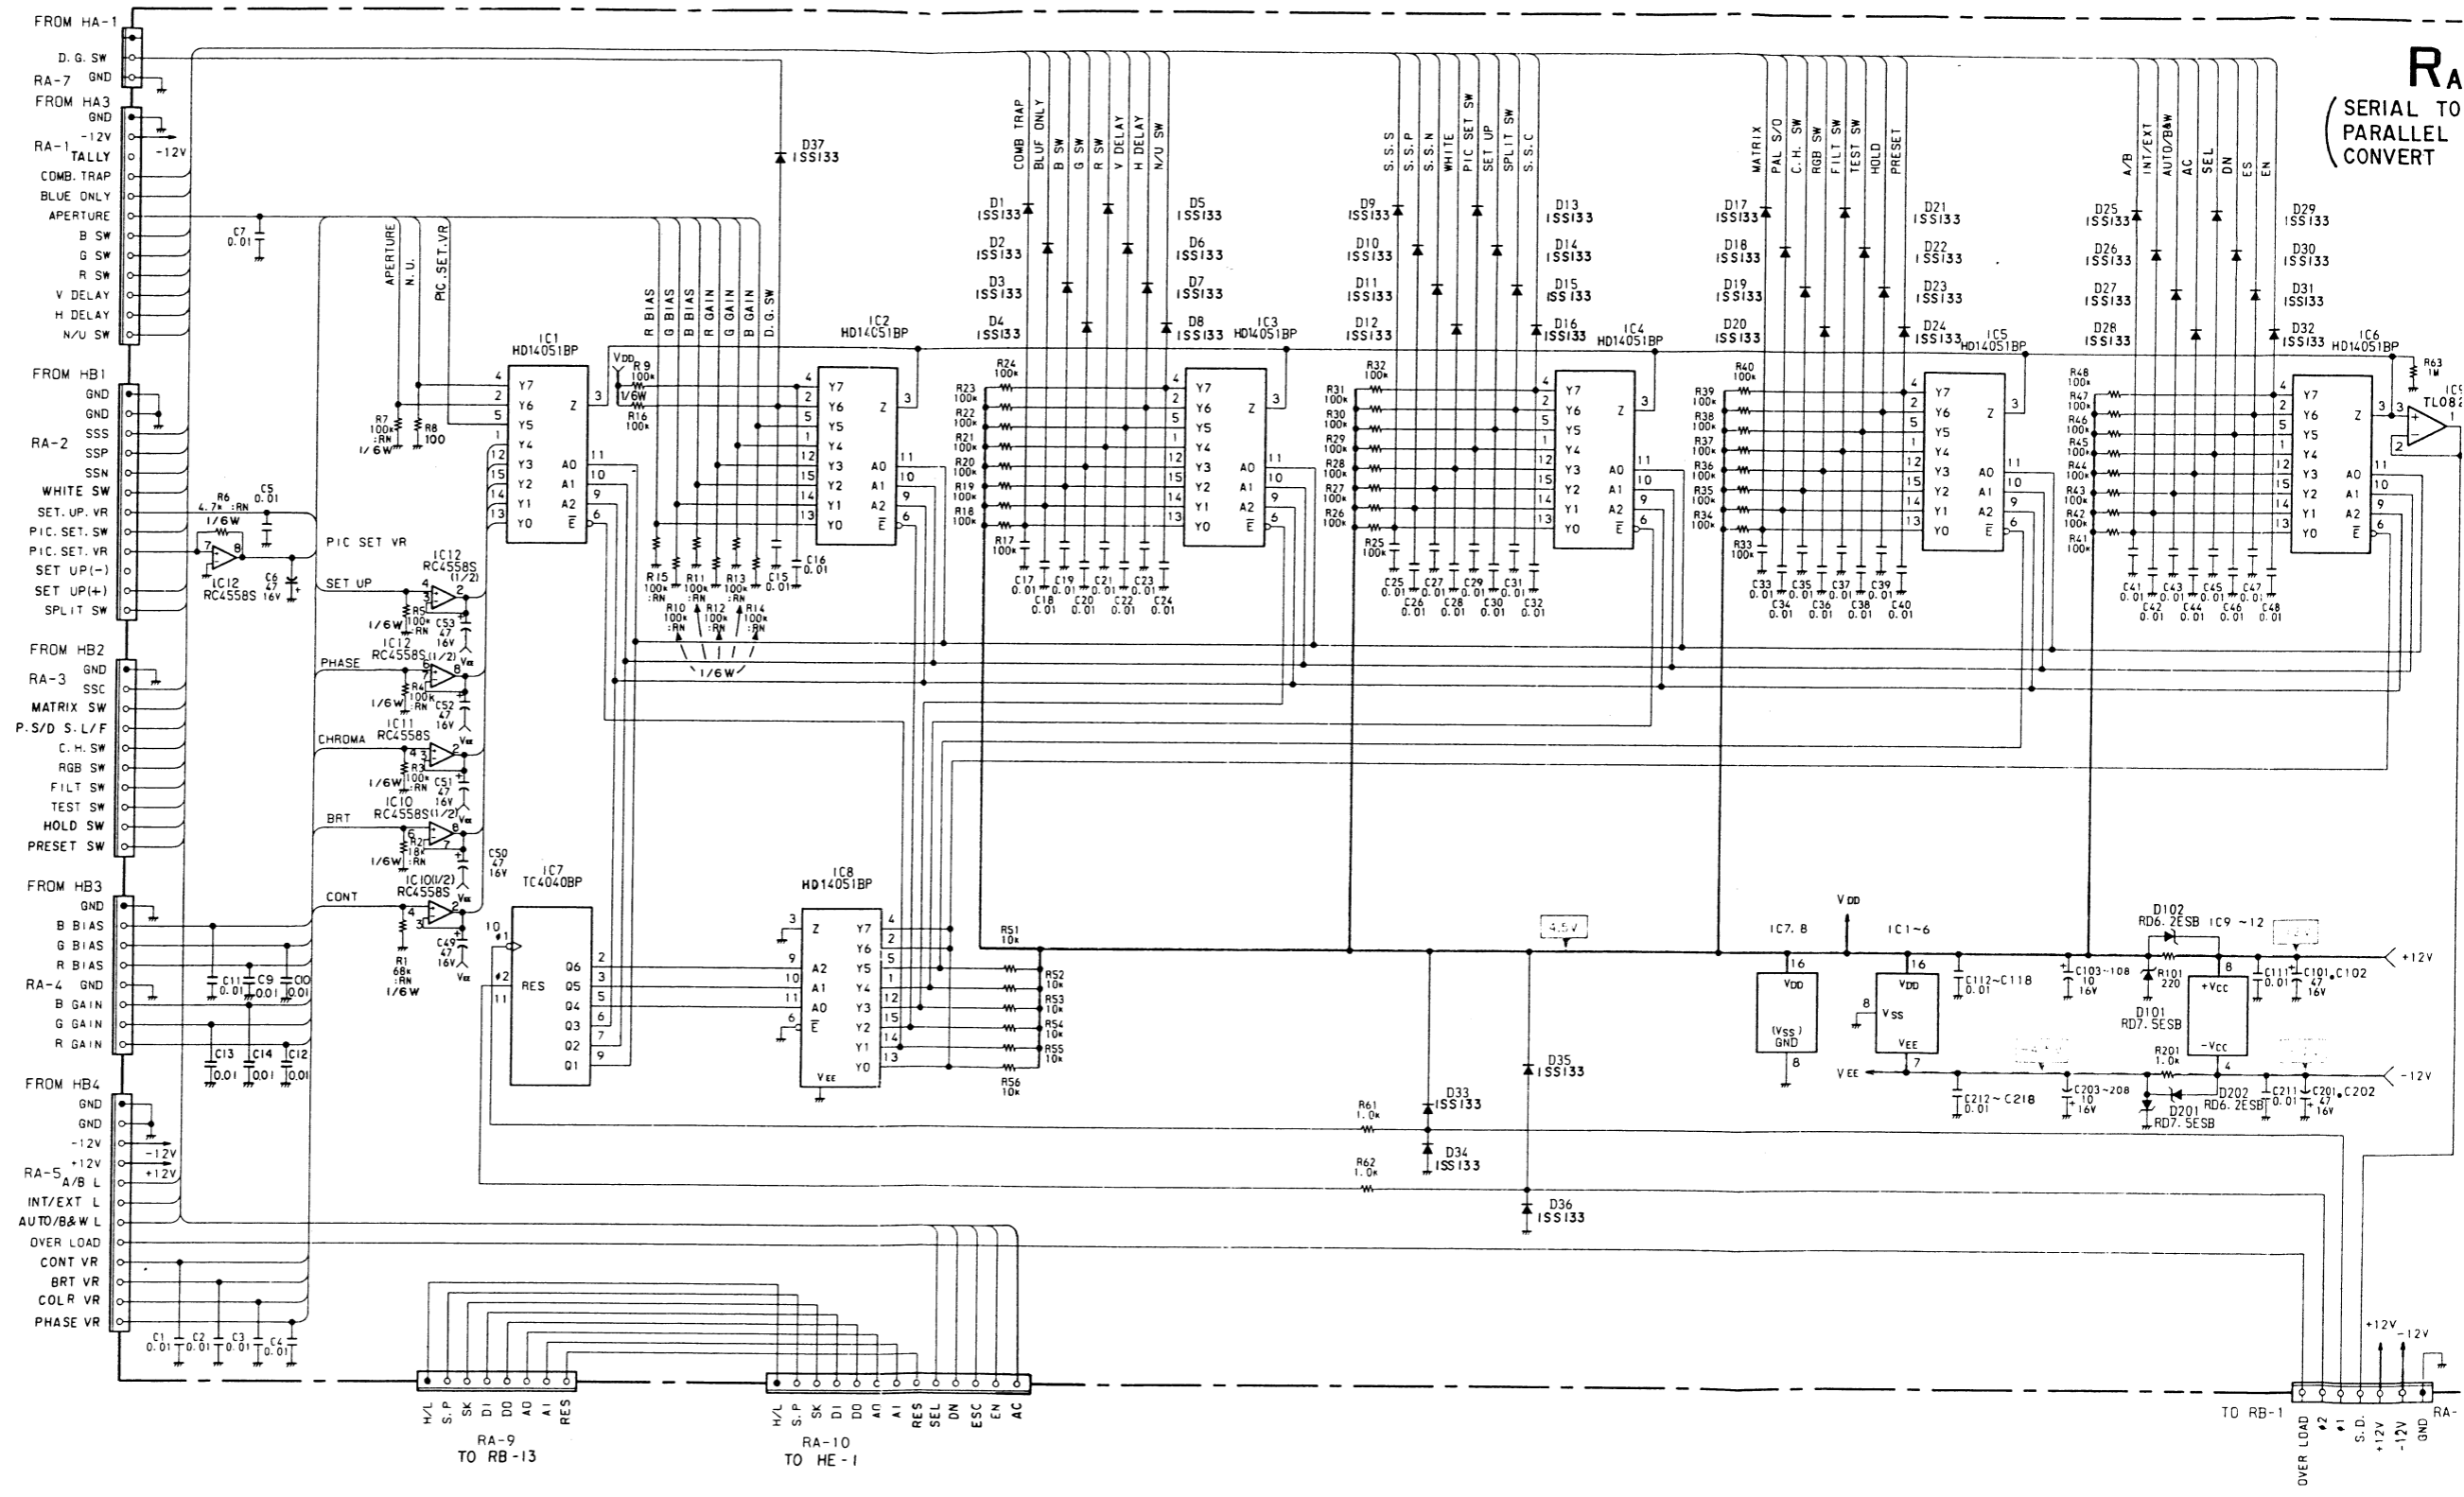

RA
(SERIAL TO
PARALLEL
CONVERT

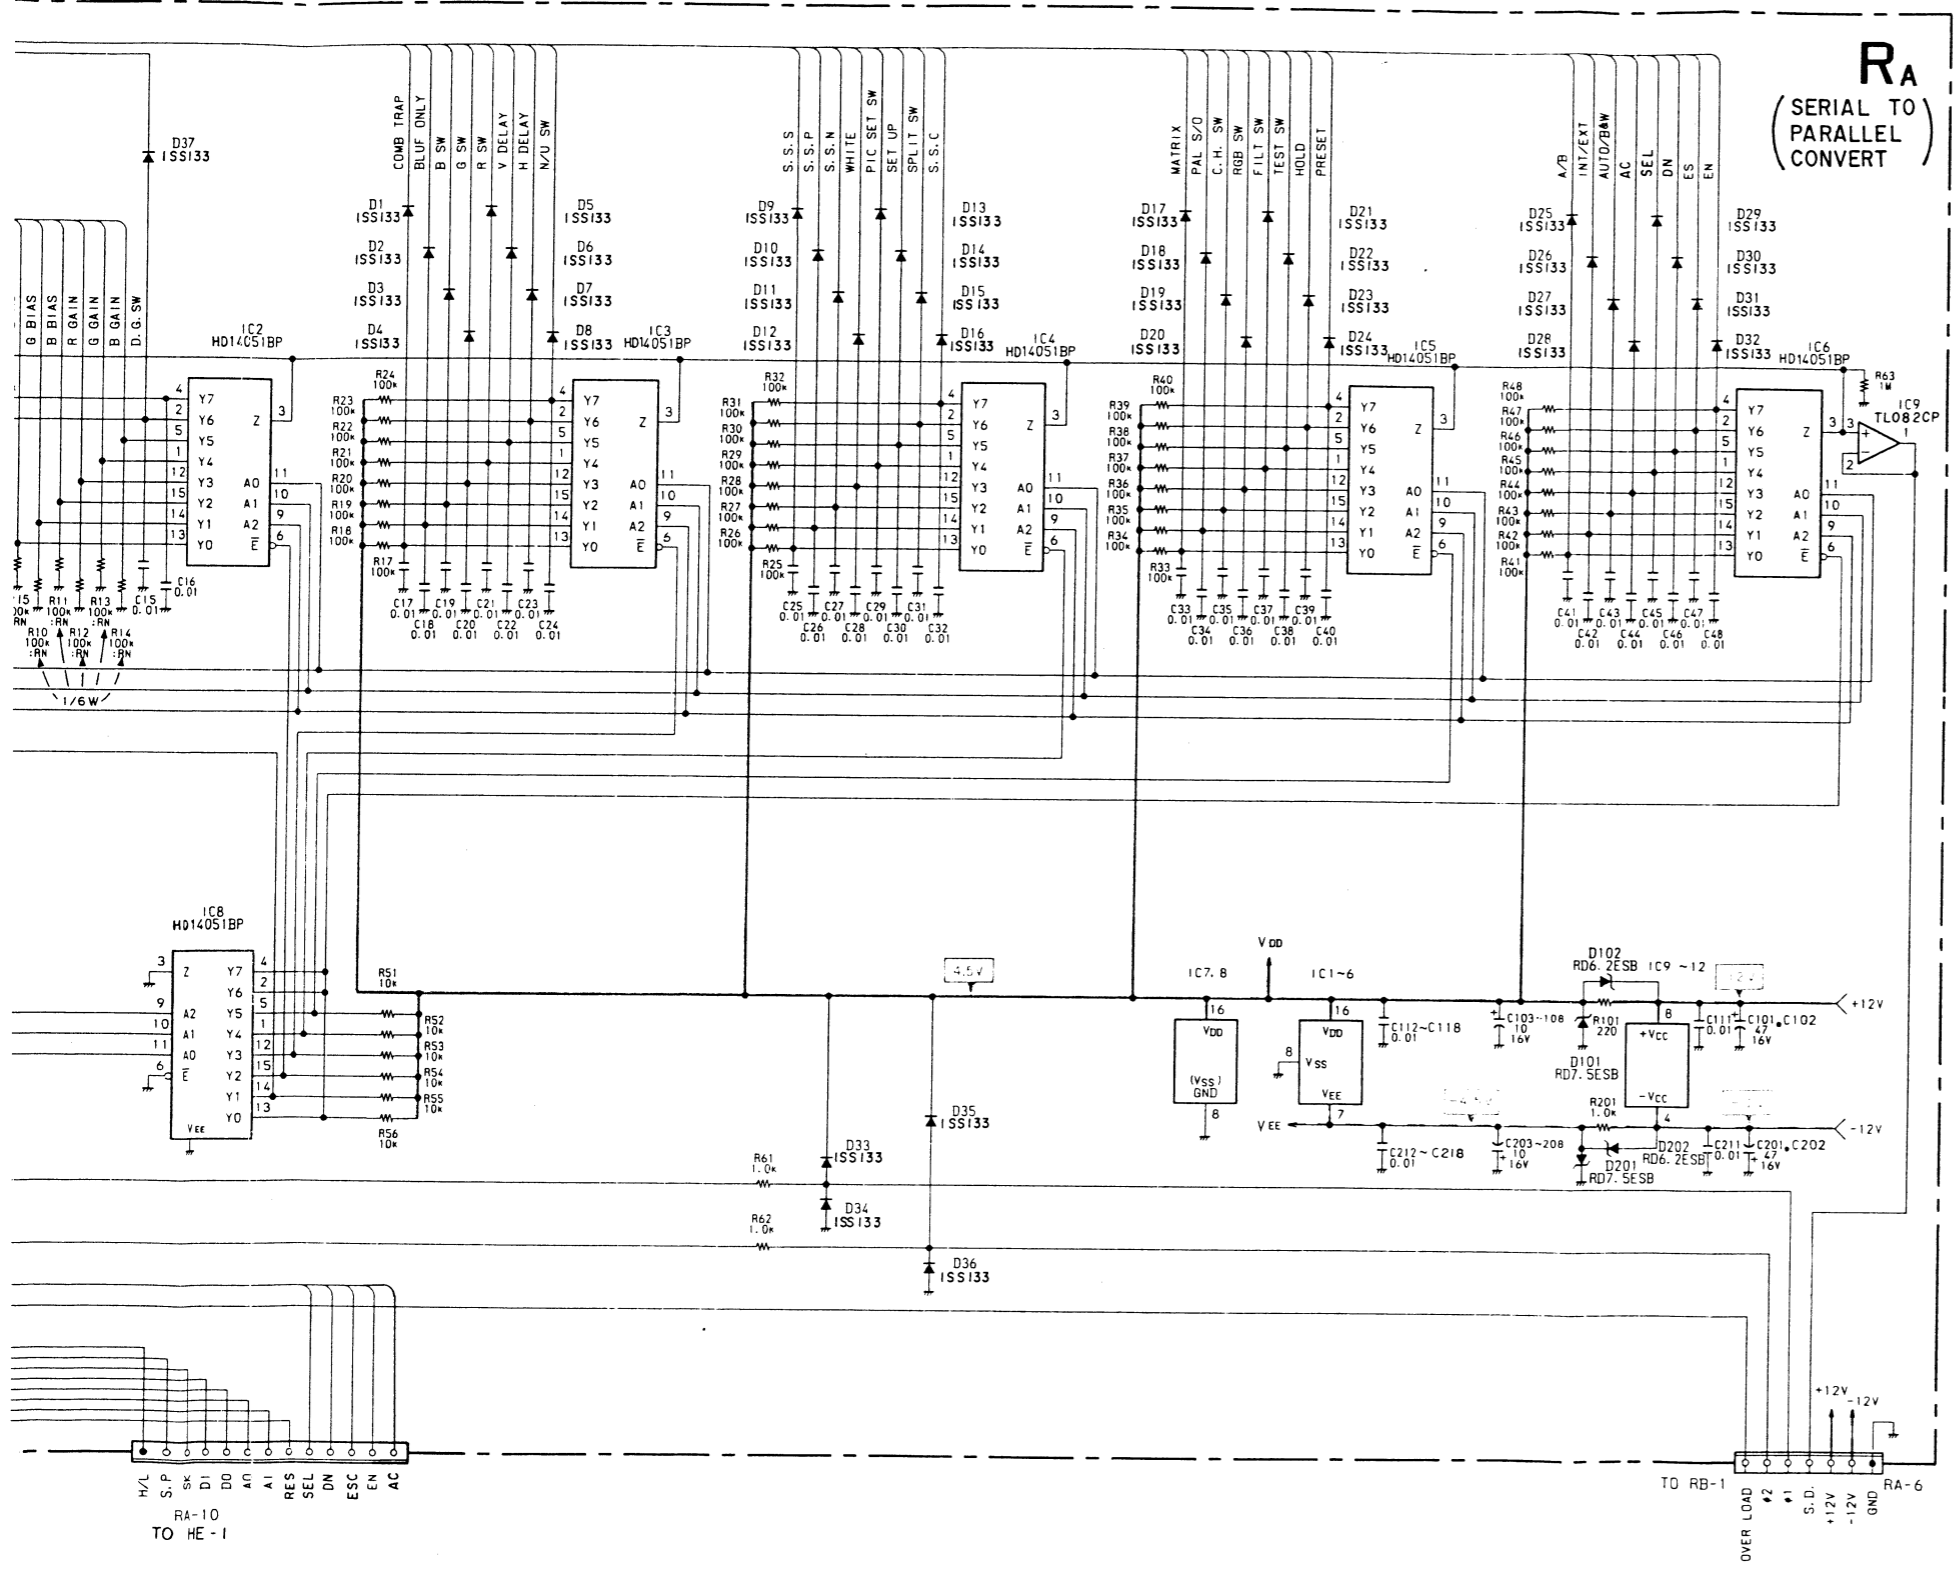

RA BOARD

D 1	1SS133	SWITCH
2	1SS133	SWITCH
3	1SS133	SWITCH
4	1SS133	SWITCH
5	1SS133	SWITCH
6	1SS133	SWITCH
7	1SS133	SWITCH
8	1SS133	SWITCH
9	1SS133	SWITCH
10	1SS133	SWITCH
11	1SS133	SWITCH
12	1SS133	SWITCH
13	1SS133	SWITCH
14	1SS133	SWITCH
15	1SS133	SWITCH
16	1SS133	SWITCH
17	1SS133	SWITCH
18	1SS133	SWITCH
19	1SS133	SWITCH
20	1SS133	SWITCH
D 21	1SS133	SWITCH
22	1SS133	SWITCH
23	1SS133	SWITCH
24	1SS133	SWITCH
25	1SS133	SWITCH
26	1SS133	SWITCH
27	1SS133	SWITCH
28	1SS133	SWITCH
29	1SS133	SWITCH
30	1SS133	SWITCH
31	1SS133	SWITCH
32	1SS133	SWITCH
33	1SS133	SWITCH
34	1SS133	PROTECTOR
35	1SS133	PROTECTOR
36	1SS133	PROTECTOR
37	1SS133	PROTECTOR
D 101	RD7.5ES-T1B	+4.5V REG
102	RD6.2ES-T1B	+4.5V REG
201	RD7.5ES-T1B	-4.5V REG
202	RD6.2ES-T1B	-4.5V REG
IC 1	HD14051BP	MULTIPLEXER
2	HD14051BP	MULTIPLEXER
3	HD14051BP	MULTIPLEXER
4	HD14051BP	MULTIPLEXER
5	HD14051BP	MULTIPLEXER
6	HD14051BP	MULTIPLEXER
7	TC4040BP	COUNTER
8	HD14051BP	DECODER
9	UPC4082C	BUFFER
10	RC4558S	SAMPLE HOLD
11	RC4558S	BUFFER
12	RC4558S	BUFFER

RB board (PARALLEL TO SERIAL CONVERT)


RB BOARD

D	1	1S5148	SWITCH
	2	1S5148	SWITCH
	3	1S5148	SWITCH
	4	1S5148	SWITCH
	5	1S5148	SWITCH
	6	1S5148	SWITCH
	7	1S5148	SWITCH
	8	1S5148	SWITCH
	10	RD13ES-T1B	
	101	RD7.5ESB	+4.5V REG
	201	RD7.5ESB	-4.5V REG
IC	1	TL082CP	DE-MULTIPLEXER
	2	TL082CP	DE-MULTIPLEXER
	3	TL082CP	SAMPLE HOLD
	4	TL082CP	SAMPLE HOLD
	5	TL082CP	SAMPLE HOLD
	6	TL082CP	SAMPLE HOLD
	7	TL082CP	SAMPLE HOLD
	8	TL082CP	SAMPLE HOLD
	9	TL082CP	SAMPLE HOLD
	10	TL082CP	SAMPLE HOLD
	11	TC4053BP	DE-MULTIPLEXER
	13	HD14051BP	COUNTER
	14	HD14051BP	DECODER
	15	HD14051BP	DE-MULTIPLEXER
IC16	HD14051BP	DE-MULTIPLEXER	
	17	HD14051BP	DE-MULTIPLEXER
	18	HD14051BP	DE-MULTIPLEXER
	19	HD14051BP	DE-MULTIPLEXER
	20	HD14051BP	DE-MULTIPLEXER
	21	UPD4069UBC	SAMPLE HOLD
	22	UPD4069UBC	SAMPLE HOLD
	23	UPD4069UBC	SAMPLE HOLD
	24	UPD4069UBC	SAMPLE HOLD
	25	UPD4069UBC	SAMPLE HOLD
	26	UPD4069UBC	SAMPLE HOLD
Q	1	DTC144ES	OUTPUT BUFFER
	2	DTC144ES	OUTPUT BUFFER
	3	DTC144ES	OUTPUT BUFFER
	4	DTC144ES	OUTPUT BUFFER
	5	DTC144ES	OUTPUT BUFFER

Q	6	DTC144ES	OUTPUT BUFFER
	7	DTC144ES	OUTPUT BUFFER
	8	DTC144ES	OUTPUT BUFFER
	9	DTC144ES	OUTPUT BUFFER
	10	DTC144ES	OUTPUT BUFFER
	11	DTC144ES	OUTPUT BUFFER
	12	DTC144ES	OUTPUT BUFFER
	13	DTC144ES	OUTPUT BUFFER
	14	DTC144ES	OUTPUT BUFFER
	15	DTC144ES	OUTPUT BUFFER
	16	DTC144ES	OUTPUT BUFFER
	17	DTC144ES	OUTPUT BUFFER
	18	DTC144ES	OUTPUT BUFFER
	19	DTC144ES	OUTPUT BUFFER
	20	DTC144ES	OUTPUT BUFFER
	21	DTC144ES	OUTPUT BUFFER
	22	DTC144ES	OUTPUT BUFFER
Q	23	DTC144ES	OUTPUT BUFFER
	24	DTC144ES	OUTPUT BUFFER
	25	DTC144ES	OUTPUT BUFFER
	26	DTC144ES	OUTPUT BUFFER
	27	DTC144ES	OUTPUT BUFFER
	28	DTC144ES	OUTPUT BUFFER
	29	DTC144ES	OUTPUT BUFFER
	30	DTC144ES	OUTPUT BUFFER
	31	DTC144ES	OUTPUT BUFFER
	32	DTC144ES	OUTPUT BUFFER
	33	2SA1175	OUTPUT BUFFER
	34	2SA1175	OUTPUT BUFFER
	35	DTC144ES	OUTPUT BUFFER
	36	DTC144ES	OUTPUT BUFFER
	37	2SA1175	OUTPUT BUFFER


IC		21	22	23	24	25	26		4						
		17	18	19	20		14		3 15						
Q		27, 29	1, 2, 3, 4	5	6	7	8	9	10	11	12	13	14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	34	33
		32, 26											37		
		31, 28													
		30, 25													
D		10											6		1
													8		

5. DIAGRAMS

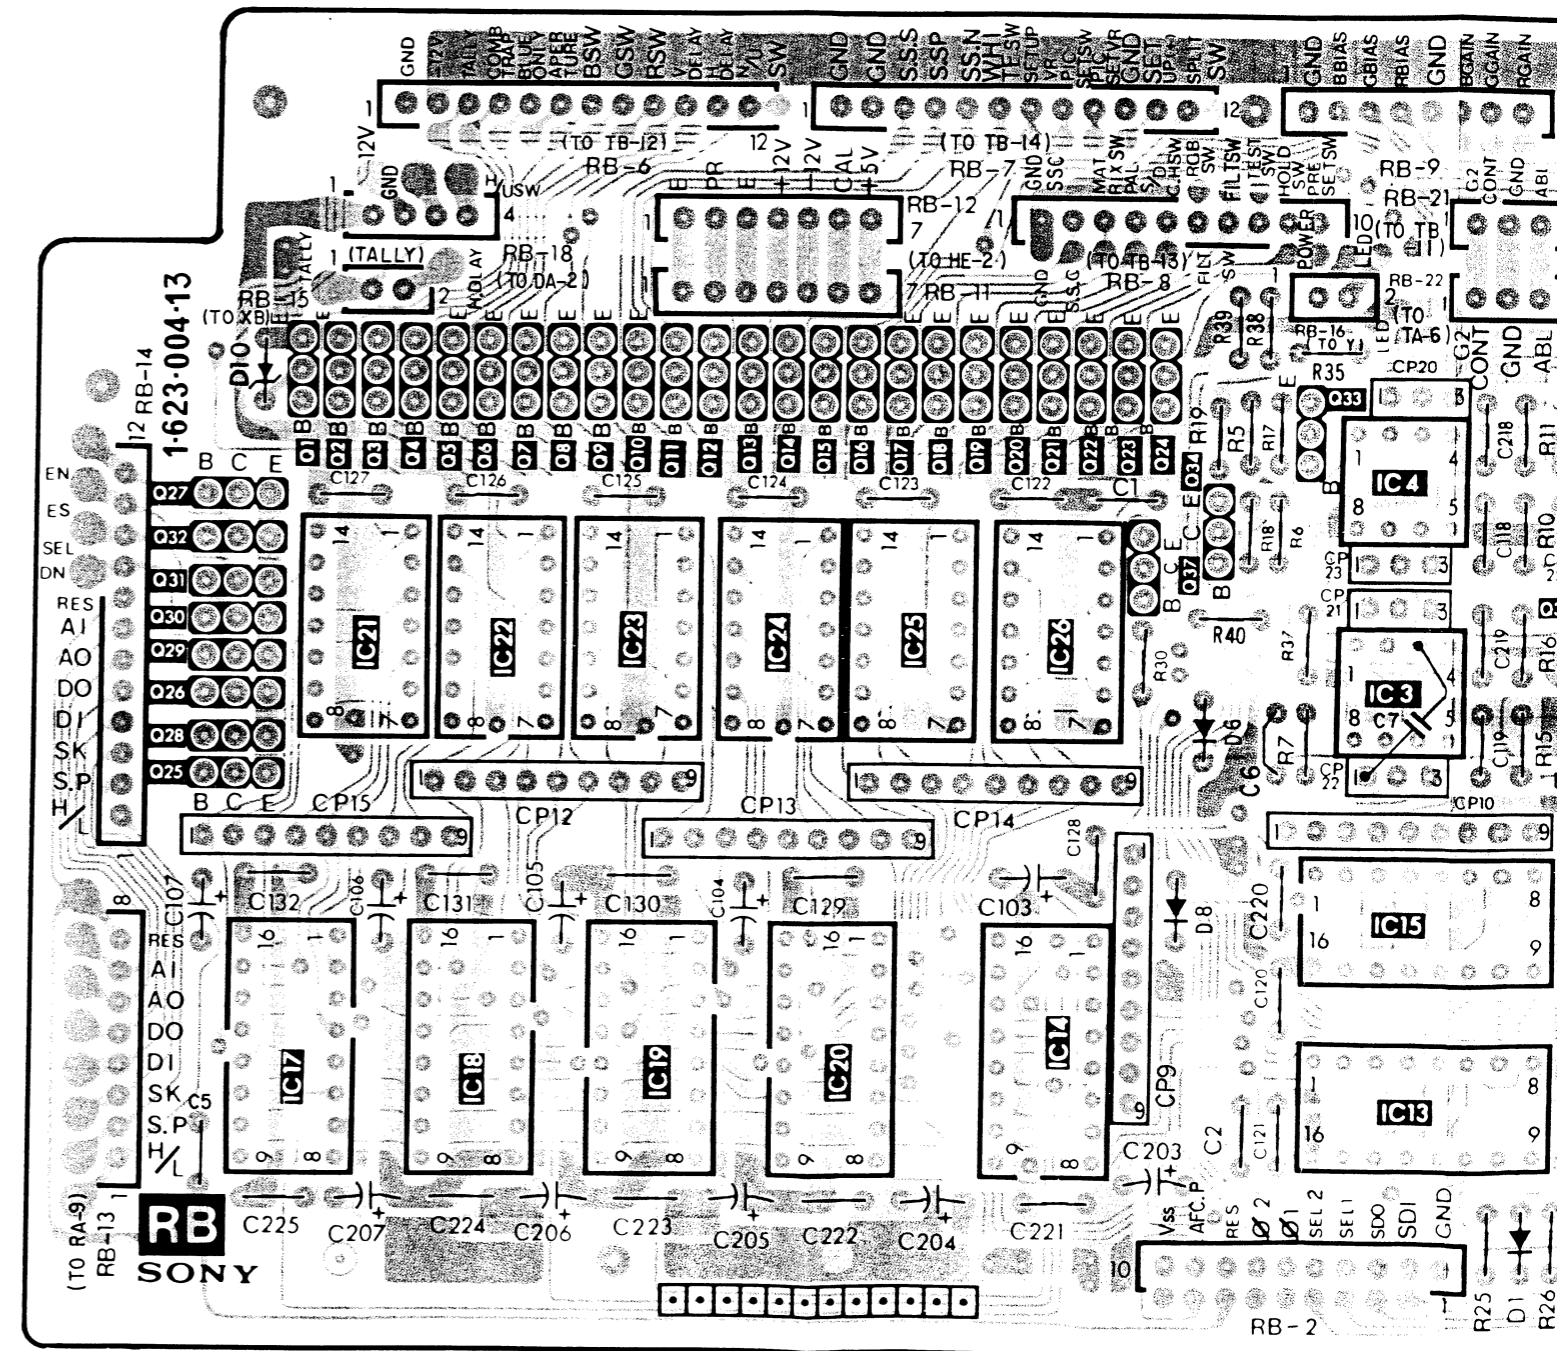

RB RB


IC		21	22	23	24	25	26		4	7	9	6										
		17	18	19	20	14	14		3	10	8	5	2									
Q	27, 29 32, 26 31, 28 30, 25	1, 2, 3, 4	5	6	7	8	9	10	11	12	13	14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	34	33		35	36					
D	10							6						8	1	2	3	4	7	5	202	101

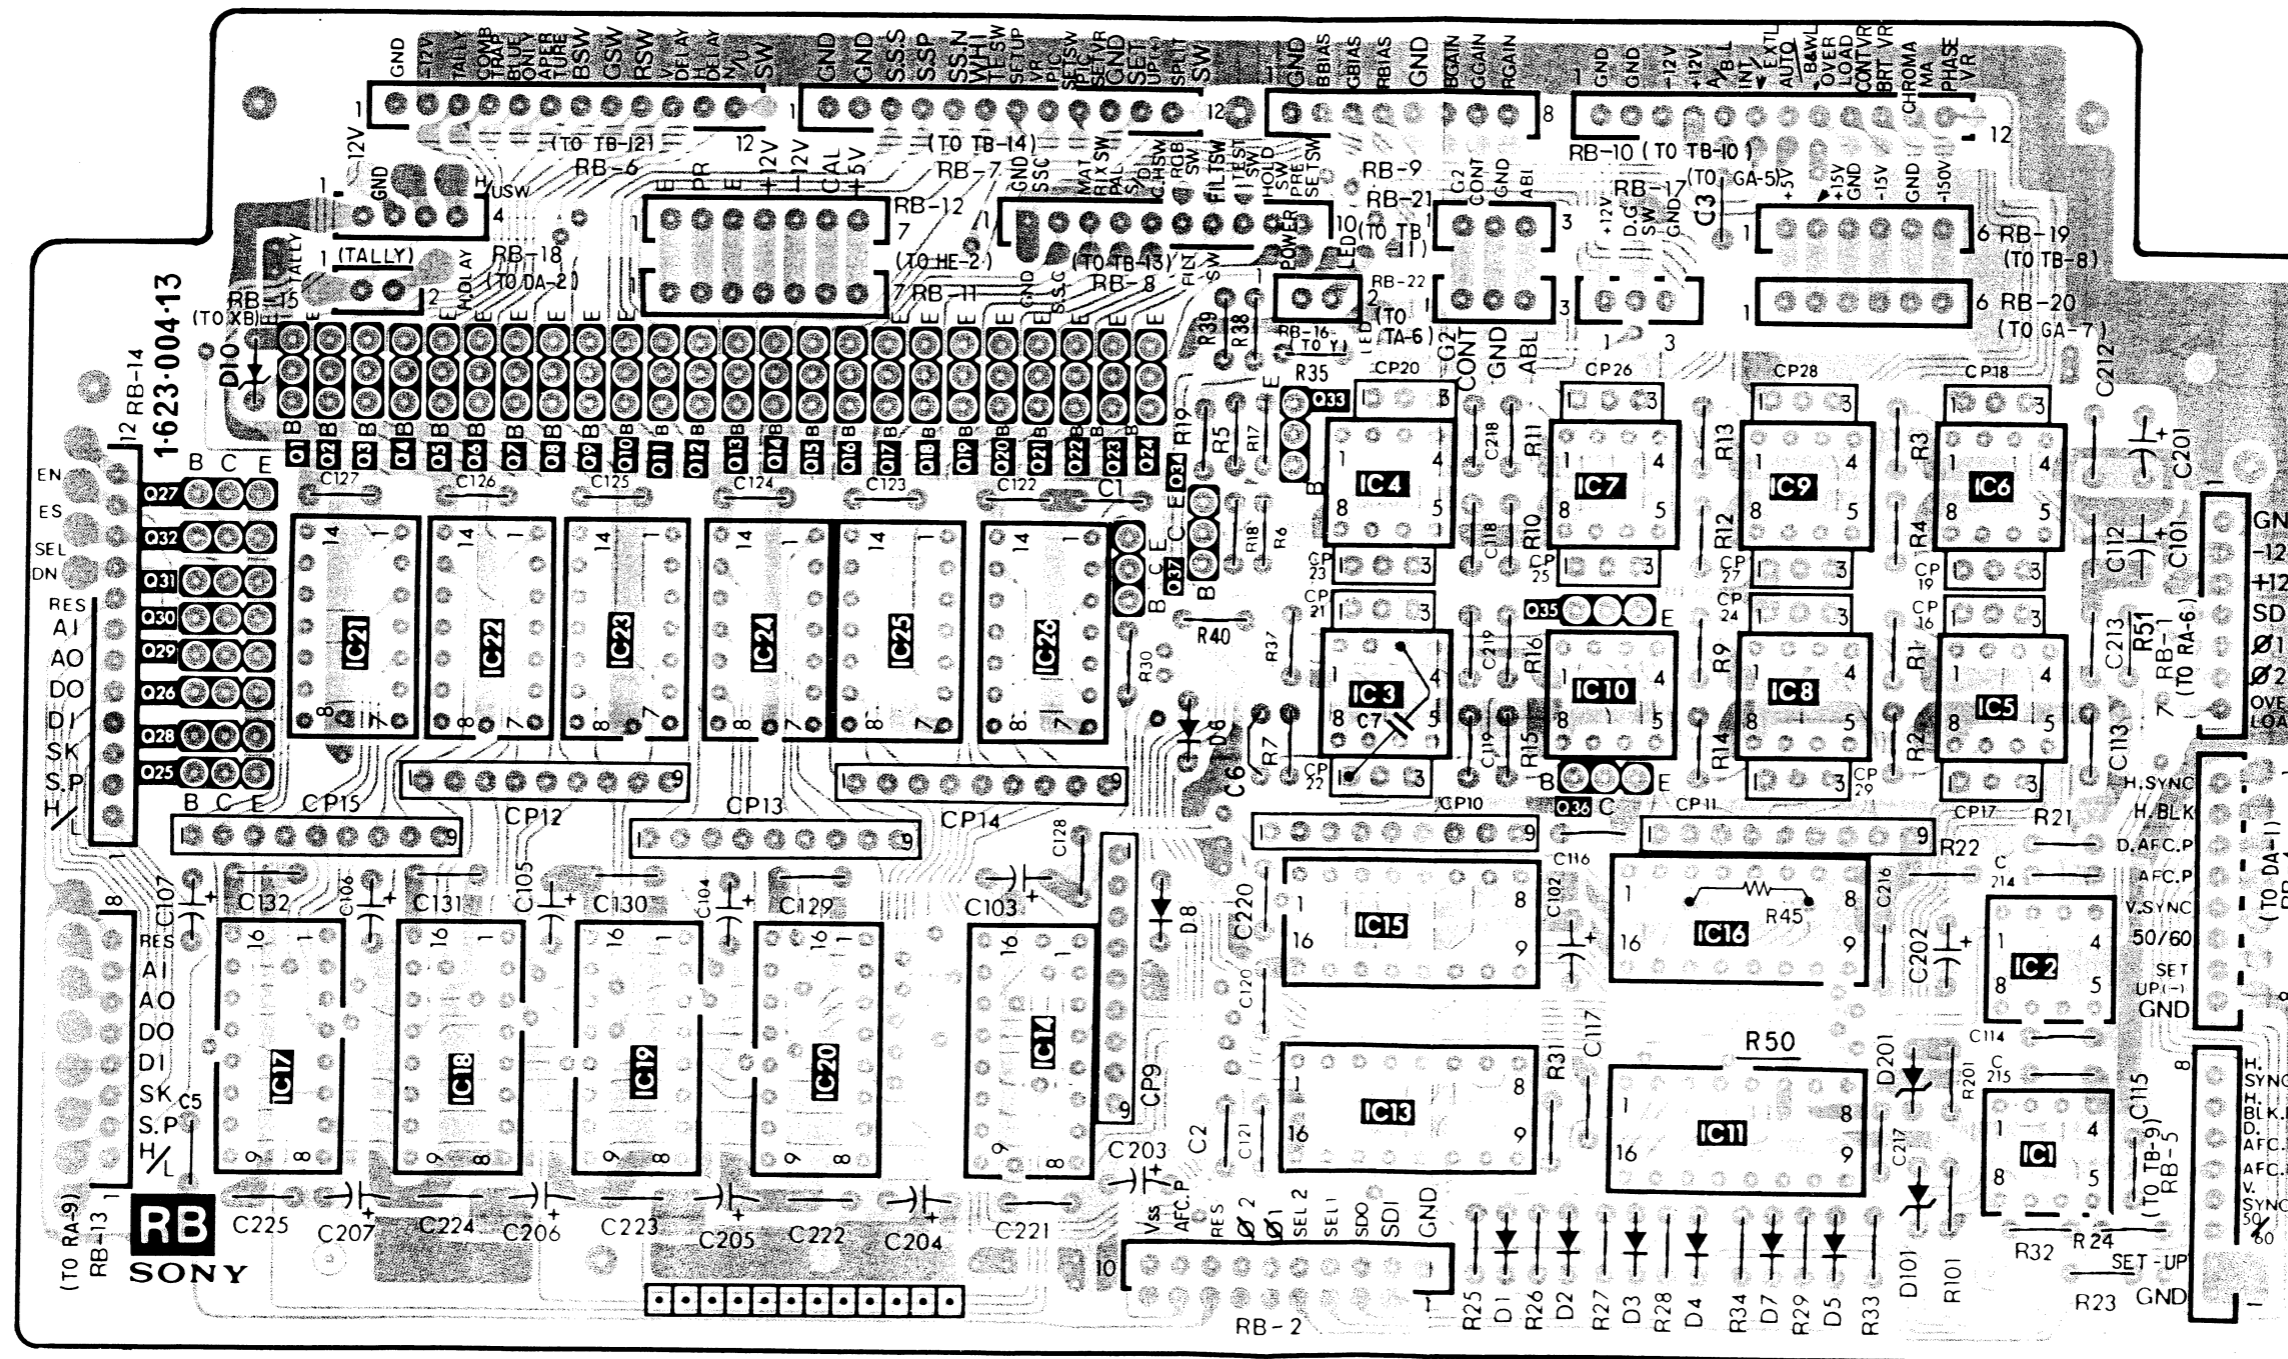

• : Conductor side patter
 - - - : Component side patte

RB RB


RB board (PARALLEL TO SERIAL CONVERT)

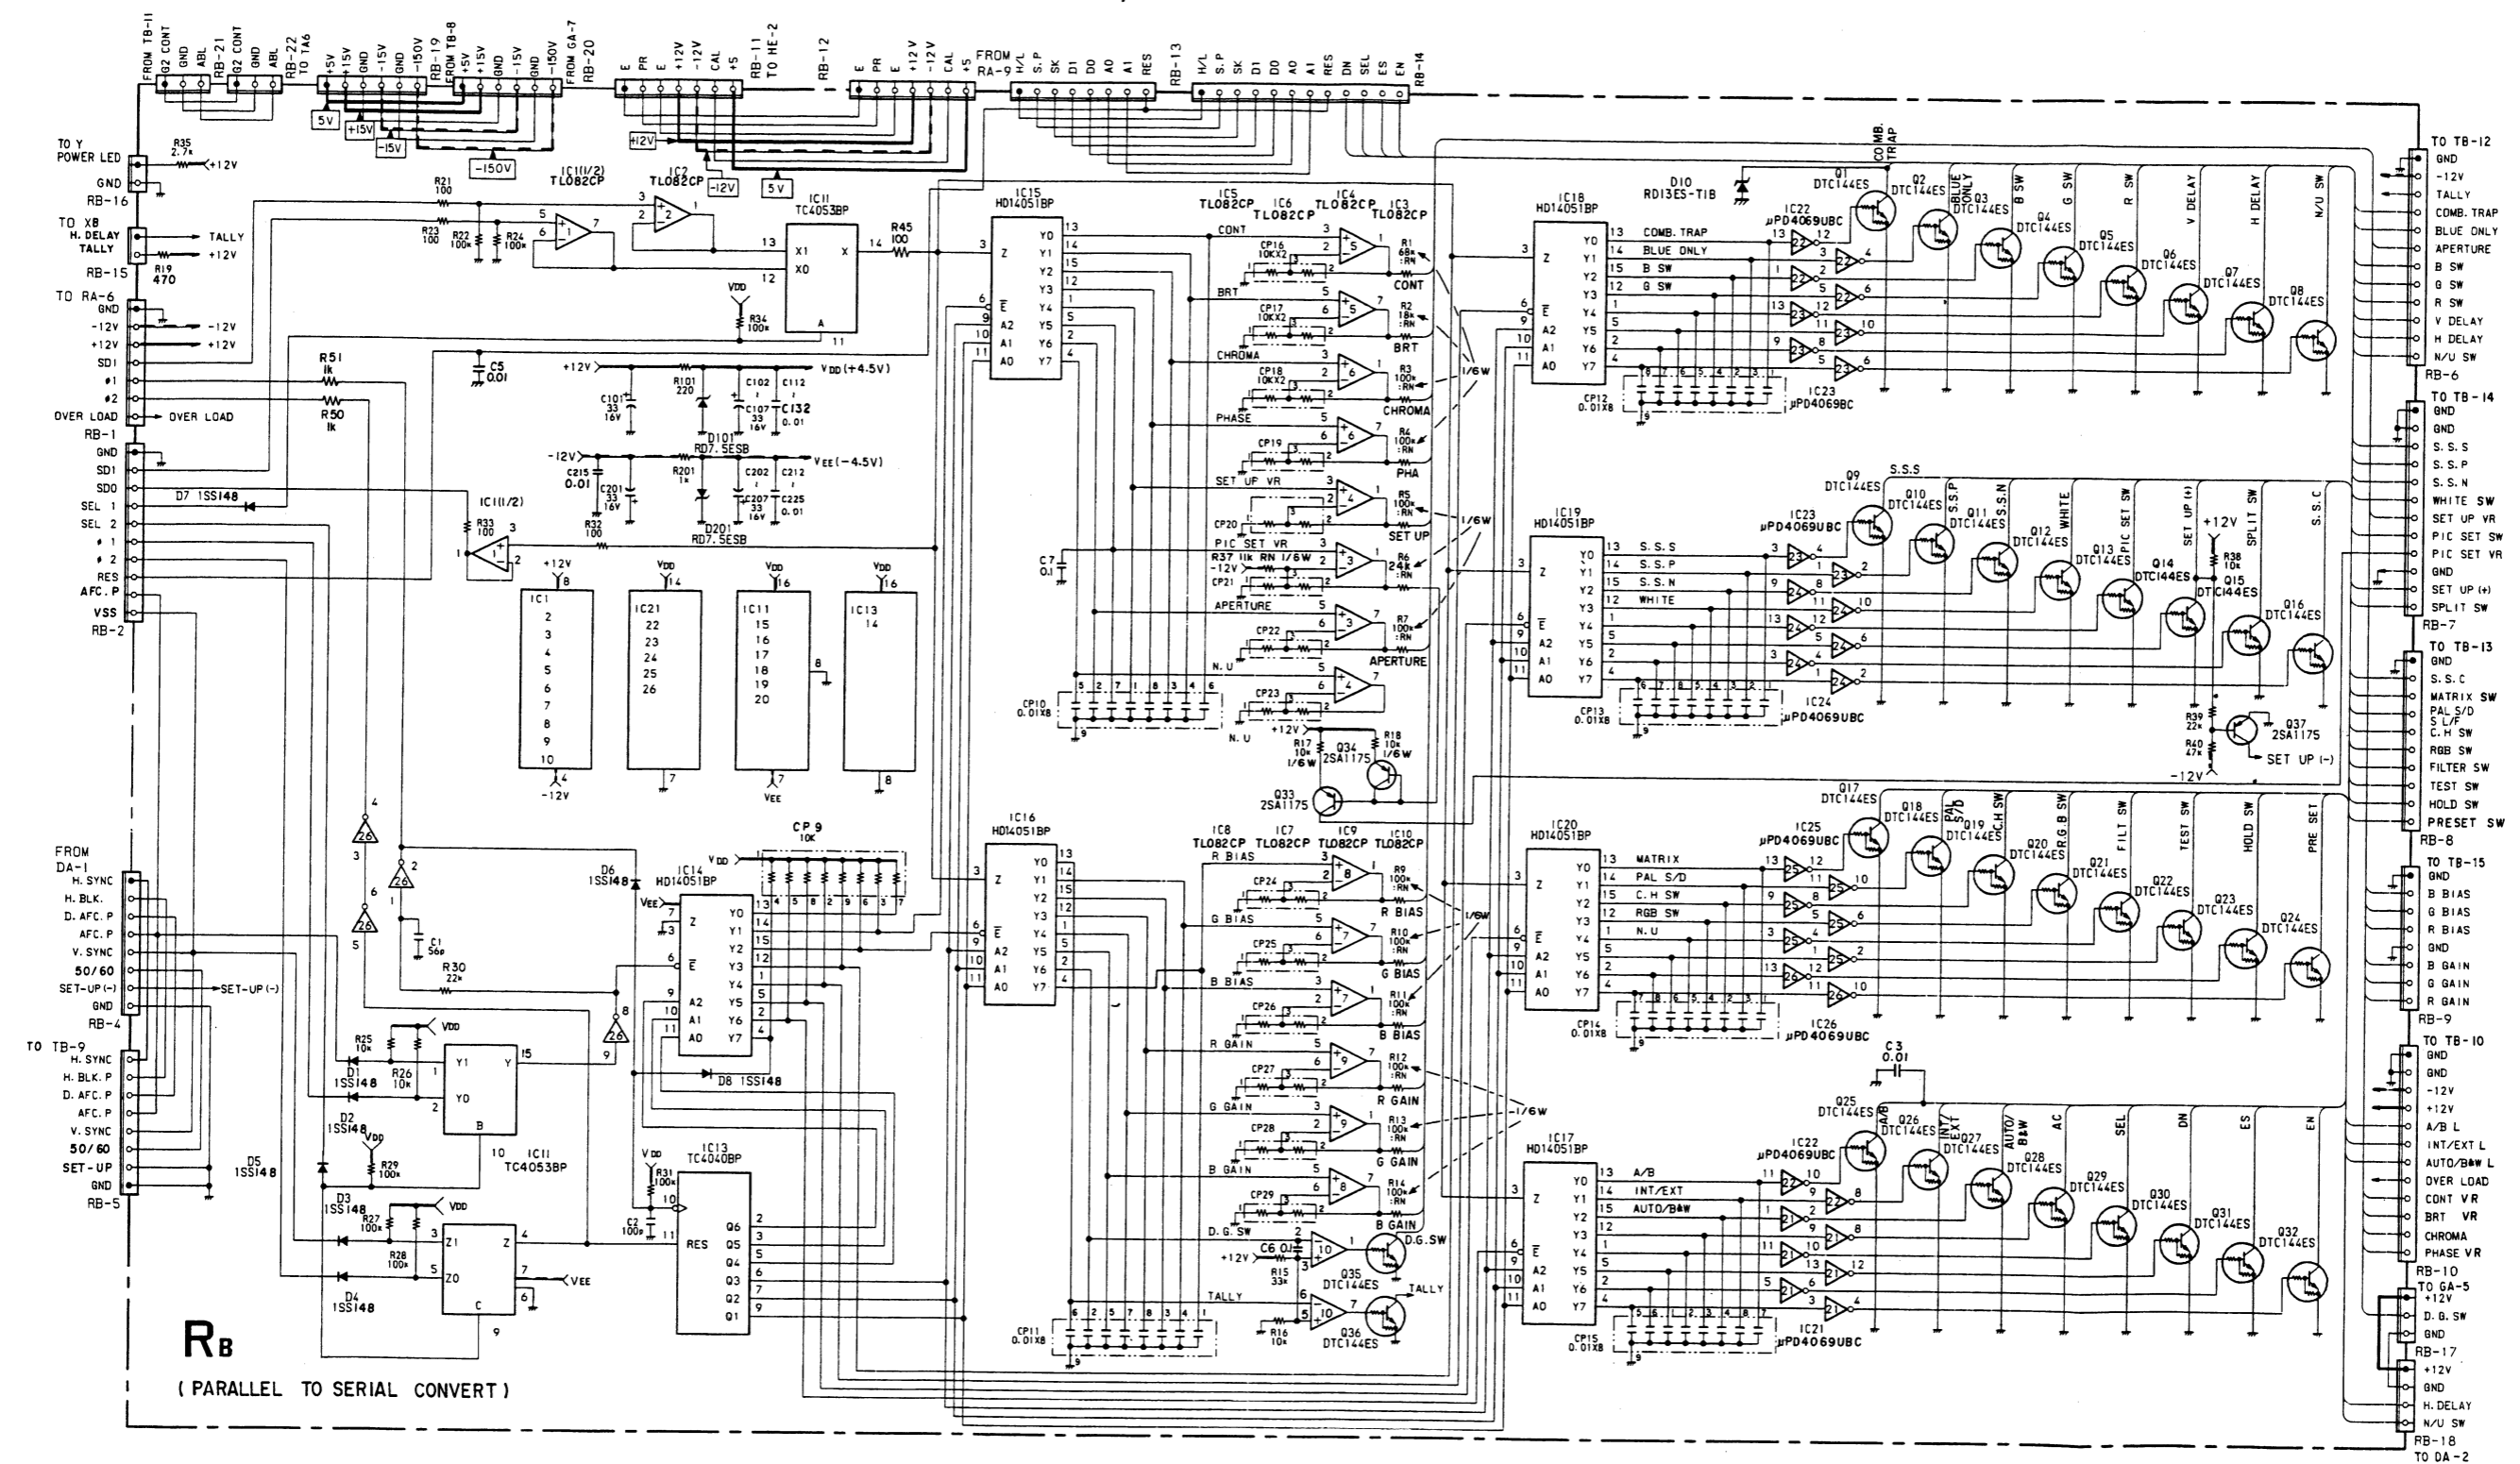

R_B
(PARALLEL TO SERIAL CONVERT)

BR BR

BR board (R-Y AMP & DELAY, Y AMP, R-Y BUFFER) (BVM-2010PD/PMD only)

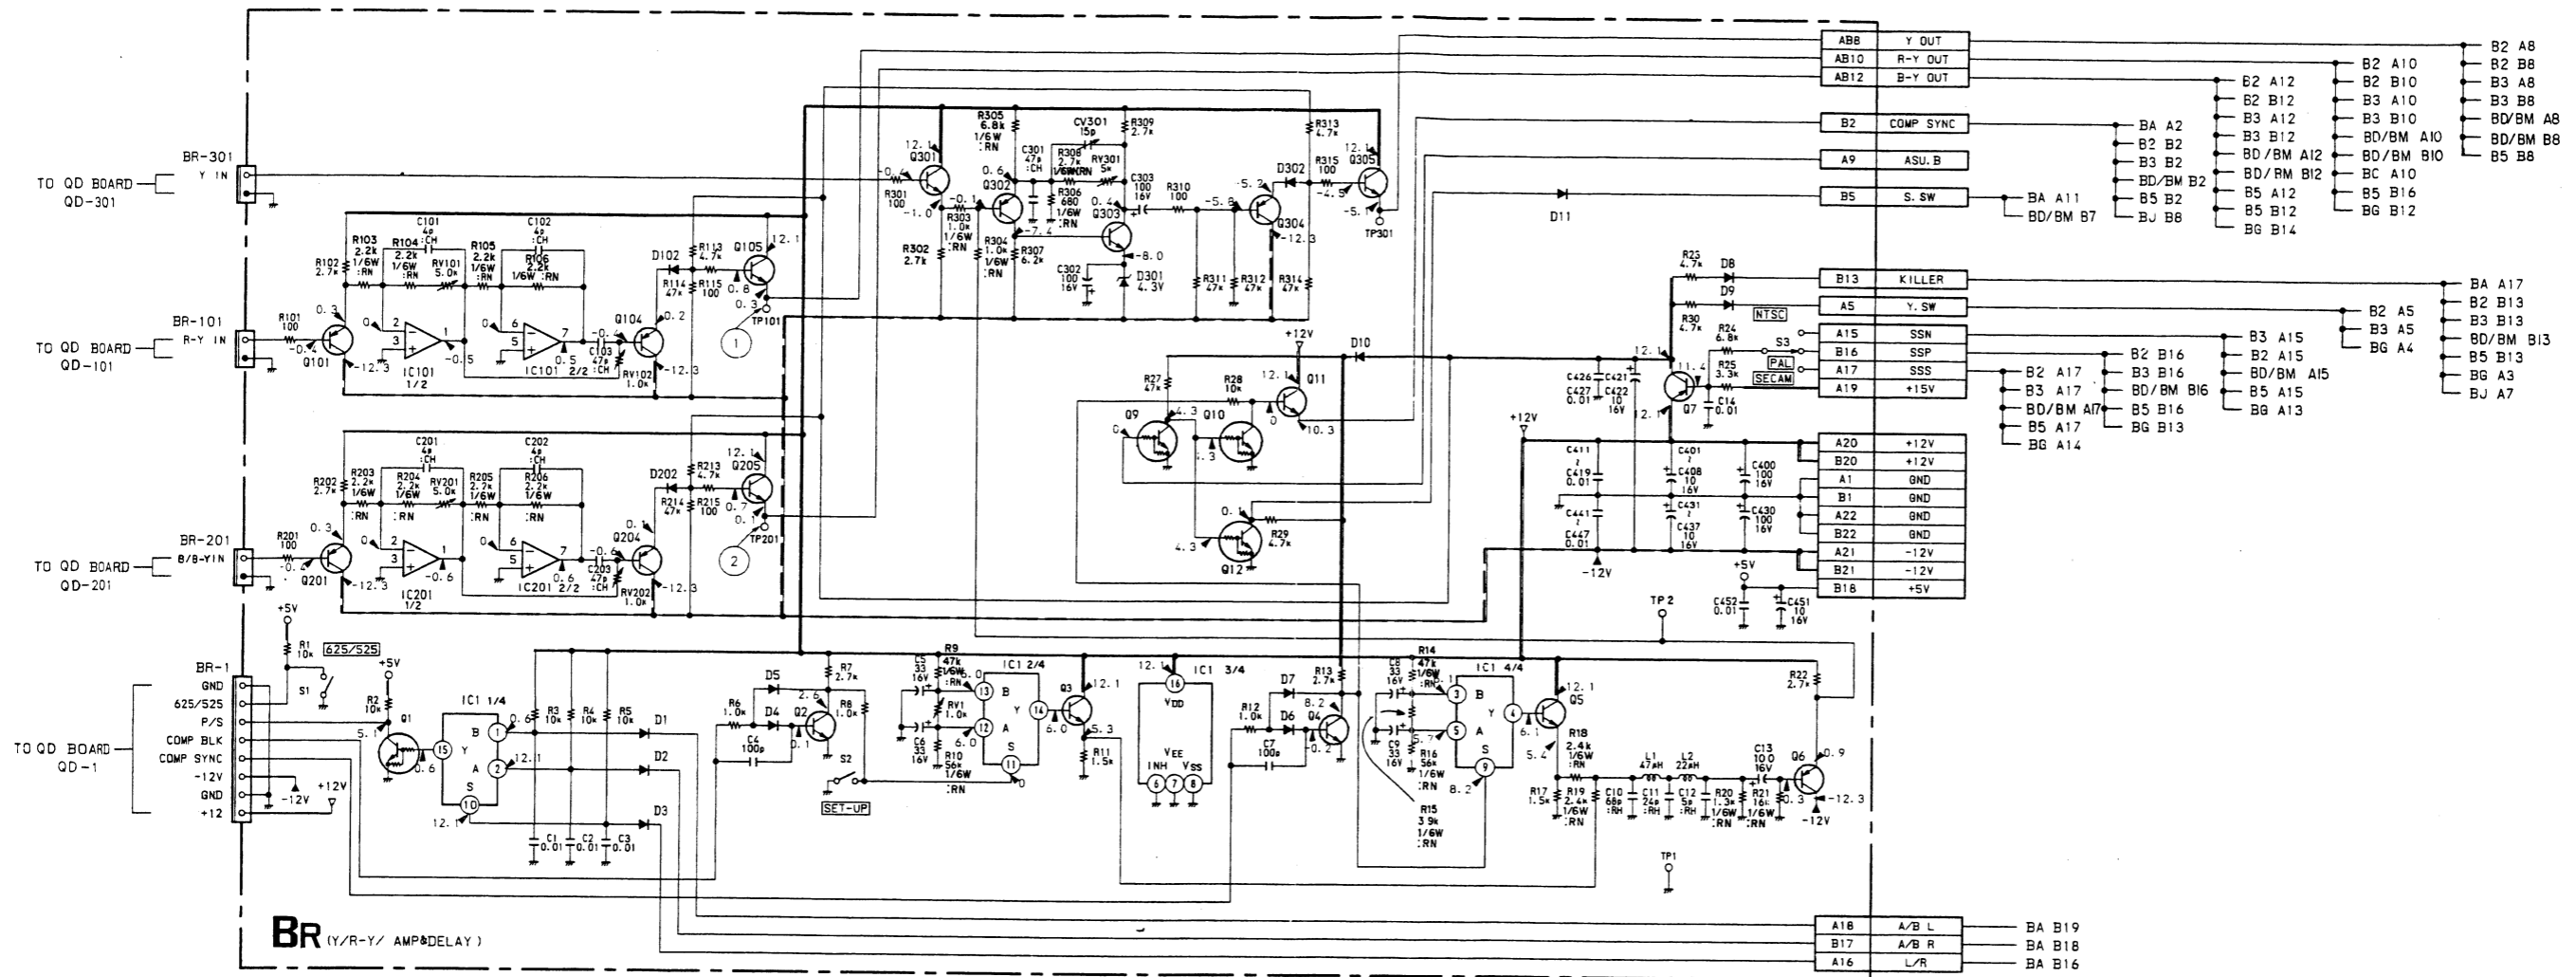


IC	1	TC4053BPHB	MULTIPLEXER	D 102	1SS119	R-Y SW	Q 12	DTC144ES	SYNC INHIBIT	
	101	CX20197	OP-AMPLIFIER	202	1SS119	B-Y SW	101	2SA1175	R-Y BUFFER	
	201	CX20197	OP-AMPLIFIER	301	RD4.3ES-B	OP.AMP. BIAS	104	2SA1175	R-Y BUFFER	
				302	1SS119	Y SW	105	2SC3068	R-Y BUFFER	
D	1	1SS119	A/B LOCAL IN				201	2SA1175	B-Y BUFFER	
	2	1SS119	A/B REMOTE IN	Q	1	DTC144ES	P/S SELECTOR	204	2SA1175	B-Y BUFFER
	3	1SS119	LDC/REW IN	2	2SC2785	BLANKING BUF.	205	2SC3068	B-Y BUFFER	
BR	4	1SS119	BLANKING PRO.	3	2SC2785	BLANKING BUF.	301	2SC2785	Y BUFFER	
	5	1SS119	BLANKING PRO.	4	2SC2785	COMP SYNC BUF.	302	2SA1175	OP. AMPLIFIER	
	6	1SS119	COMP SYNC PRO.	5	2SC2785	COMP SYNC PRO.	303	2SC2785	OP. AMPLIFIER	
	7	1SS119	COMP SYNC PRO.	6	2SA1175	COMP SYNC BUF.	304	2SA1175	Y BUFFER	
	8	1SS119	KILLER OUT	7	2SA1175	BR ENABLE	305	2SC3068	Y BUFFER	
	9	1SS119	Y SW OUT	9	DTC144ES	ASU ENABLE				
	10	1SS119	BR ENABLE	10	DTC144ES	SYNC ENABLE				
	11	1SS119	S. INHIBIT OUT	11	2SC3068	COMP SYNC BUF.				

BR BR

BR board (R-Y AMP & DELAY, Y AMP, R-Y BUFFER) (BVM-2010PD/PMD only)


IC	101	201	1	IC
Q	305 302 303 304 301	105 104 101	205 204 201	7 6 5 3 4 2 1 11 10
D	302 301	102	202 9 8	10 7 6 3,1,2 5 4 11
ADJ	CV301 RV301	RV101 RV102	RV201 RV202 RV1	ADJ
TP	301	101	201 2 1	TP

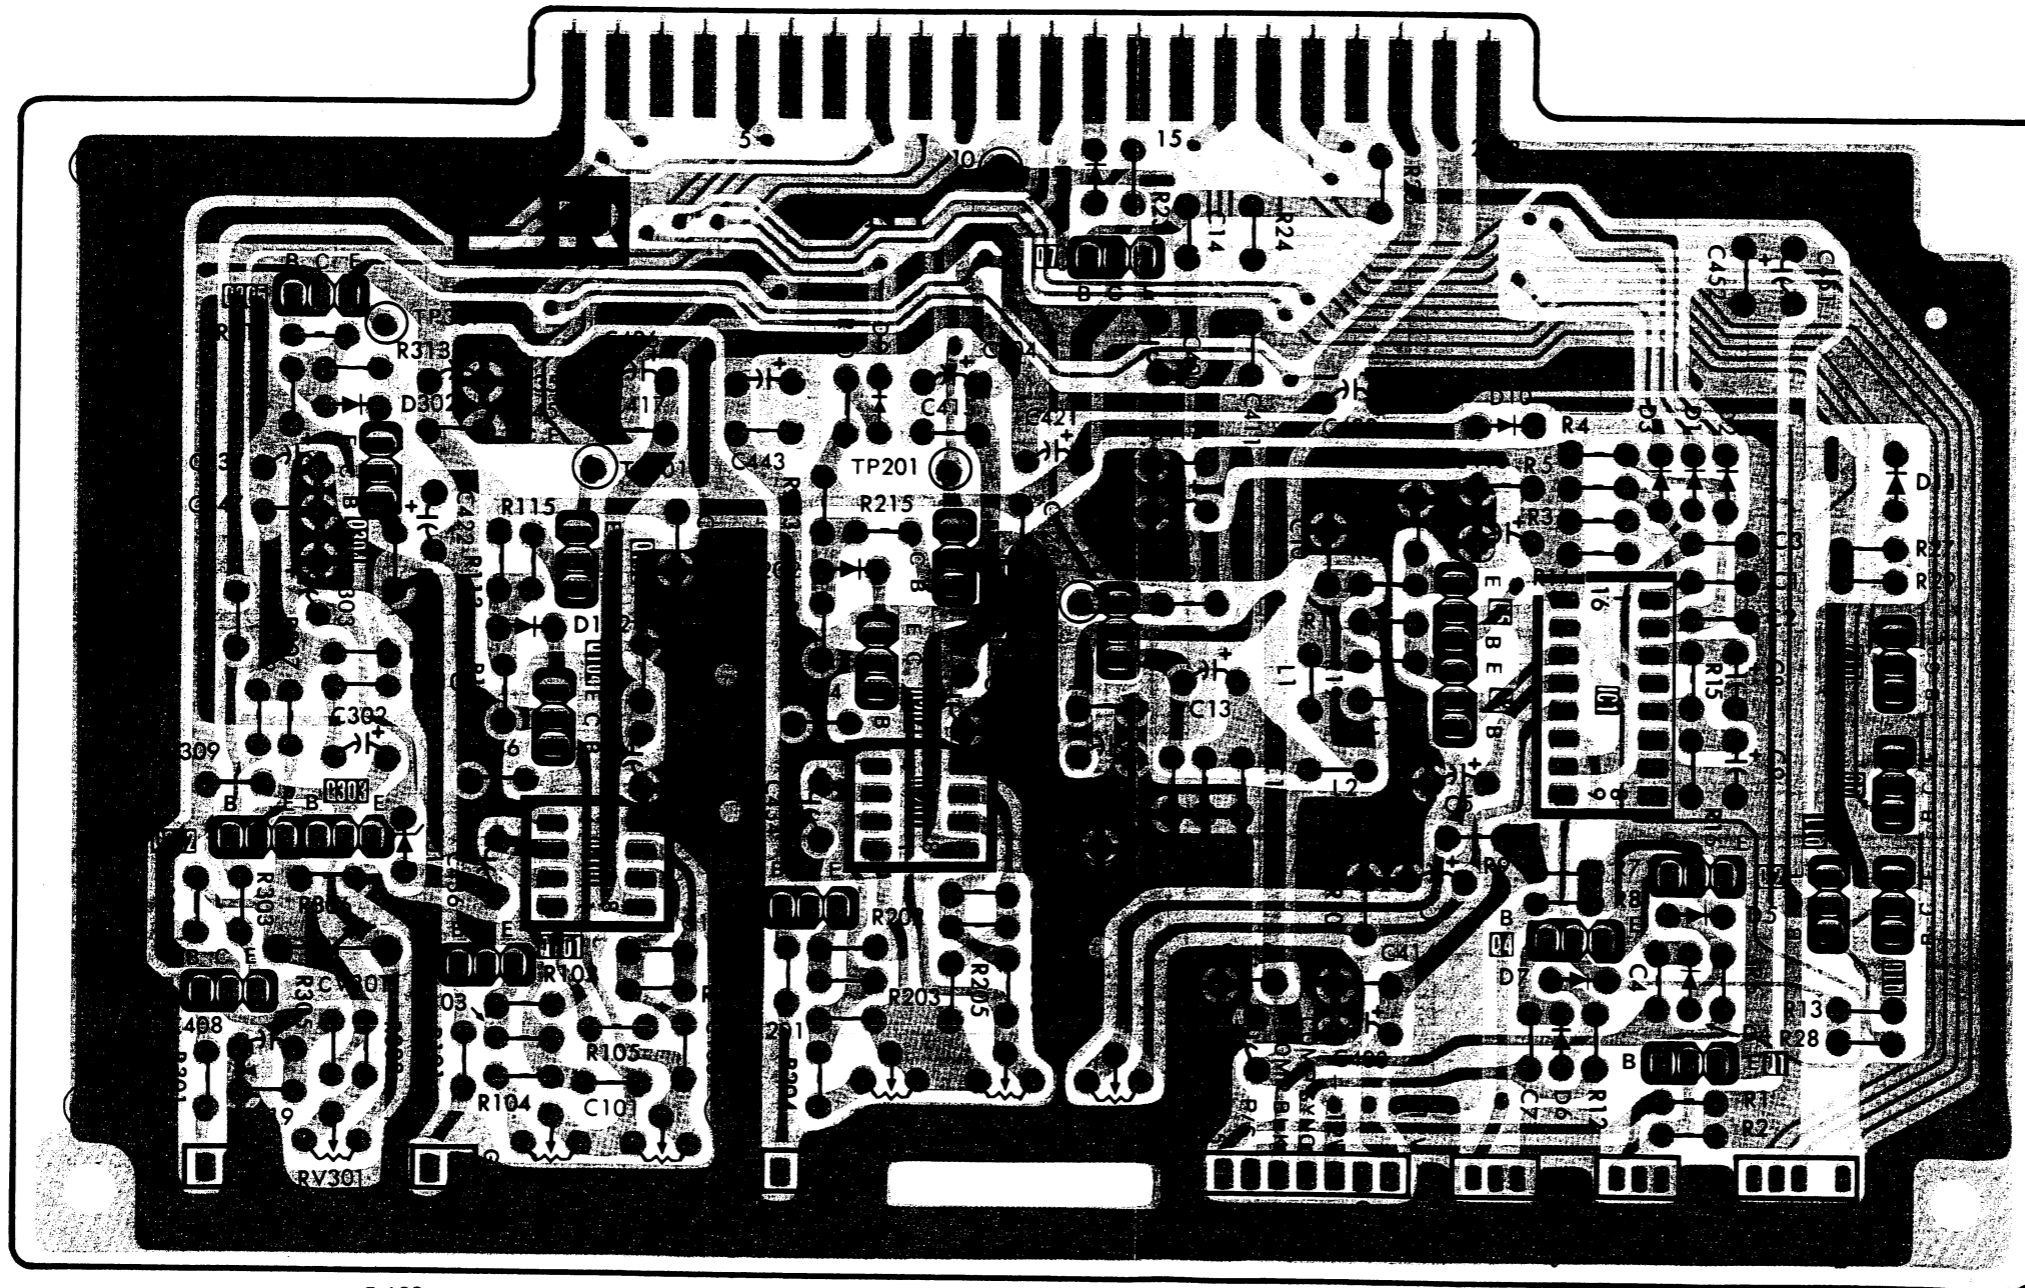

● ———: Conductor side pattern
 ● - - - : Component side pattern



QD QD

QD board (4:2:2 DECODE, D/A CONVERTER) (BVM-2010PD/PMD only)

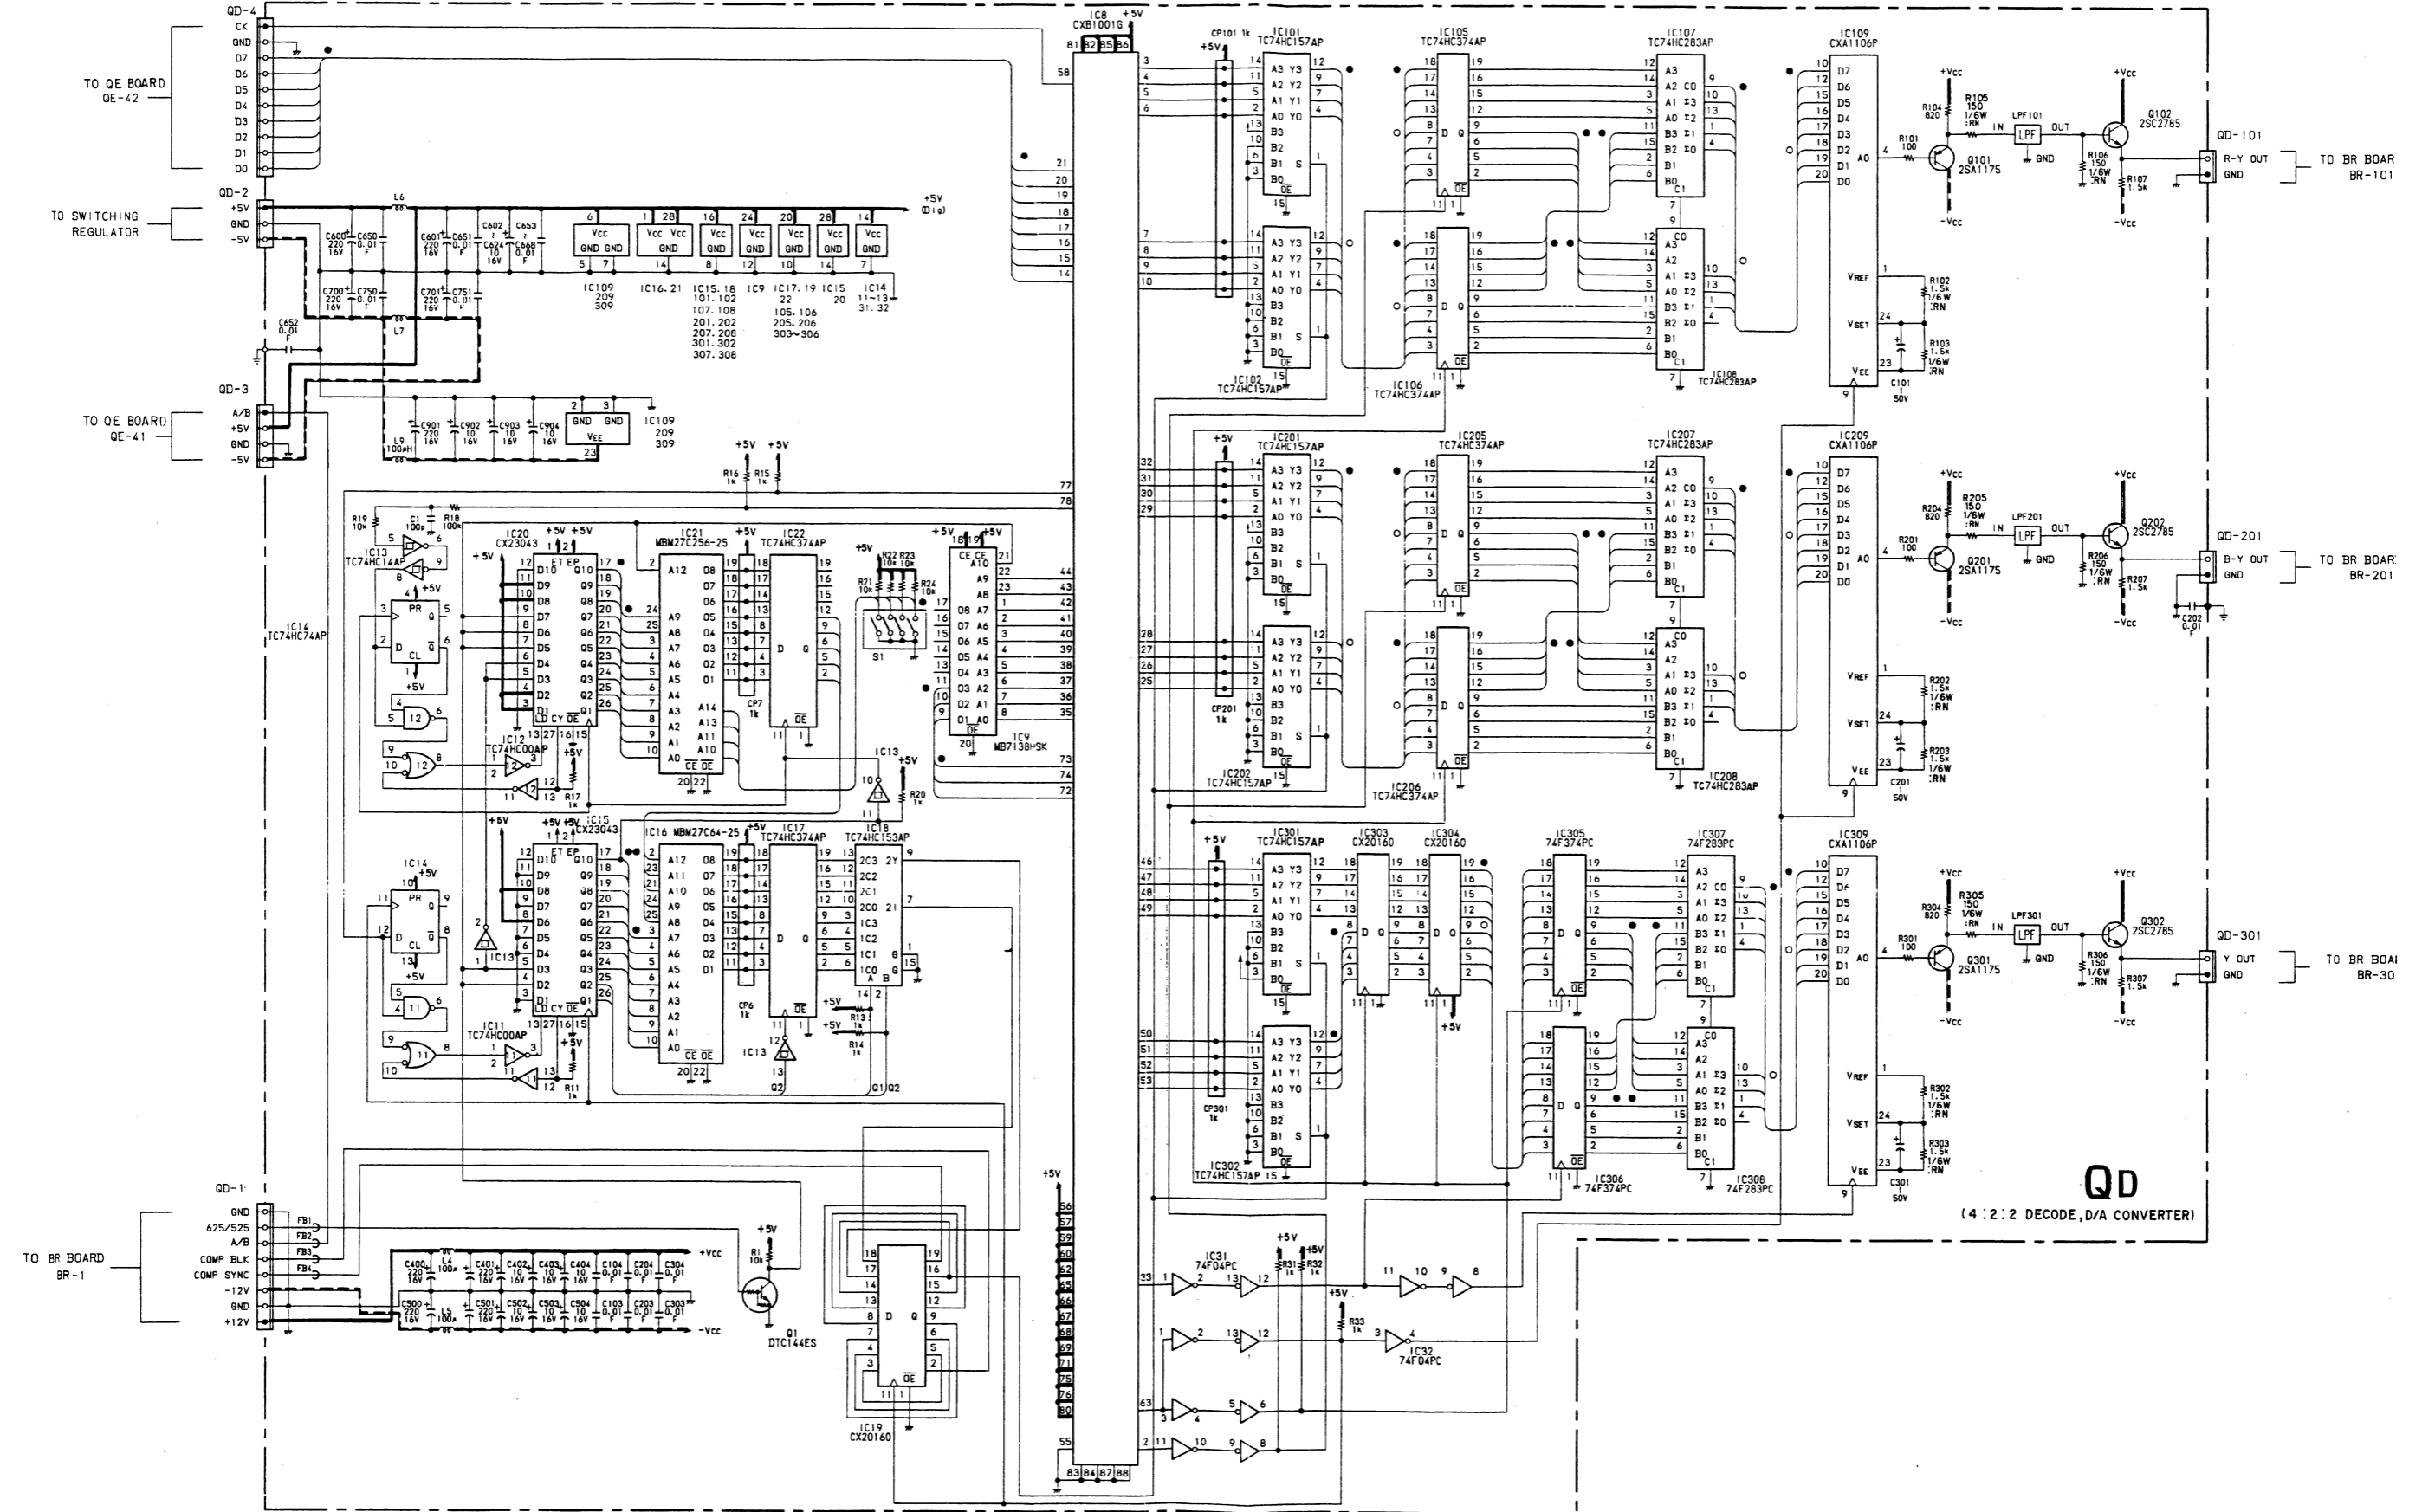



QE board (ECL TO TTL CONVERTER) (BVM-2010PD/PMD only)

5. DIAGRAMS

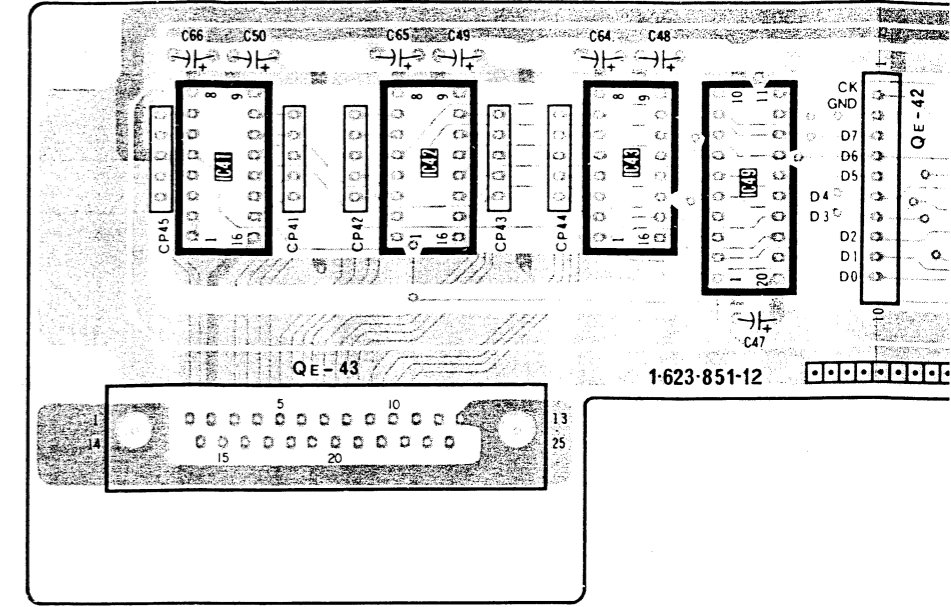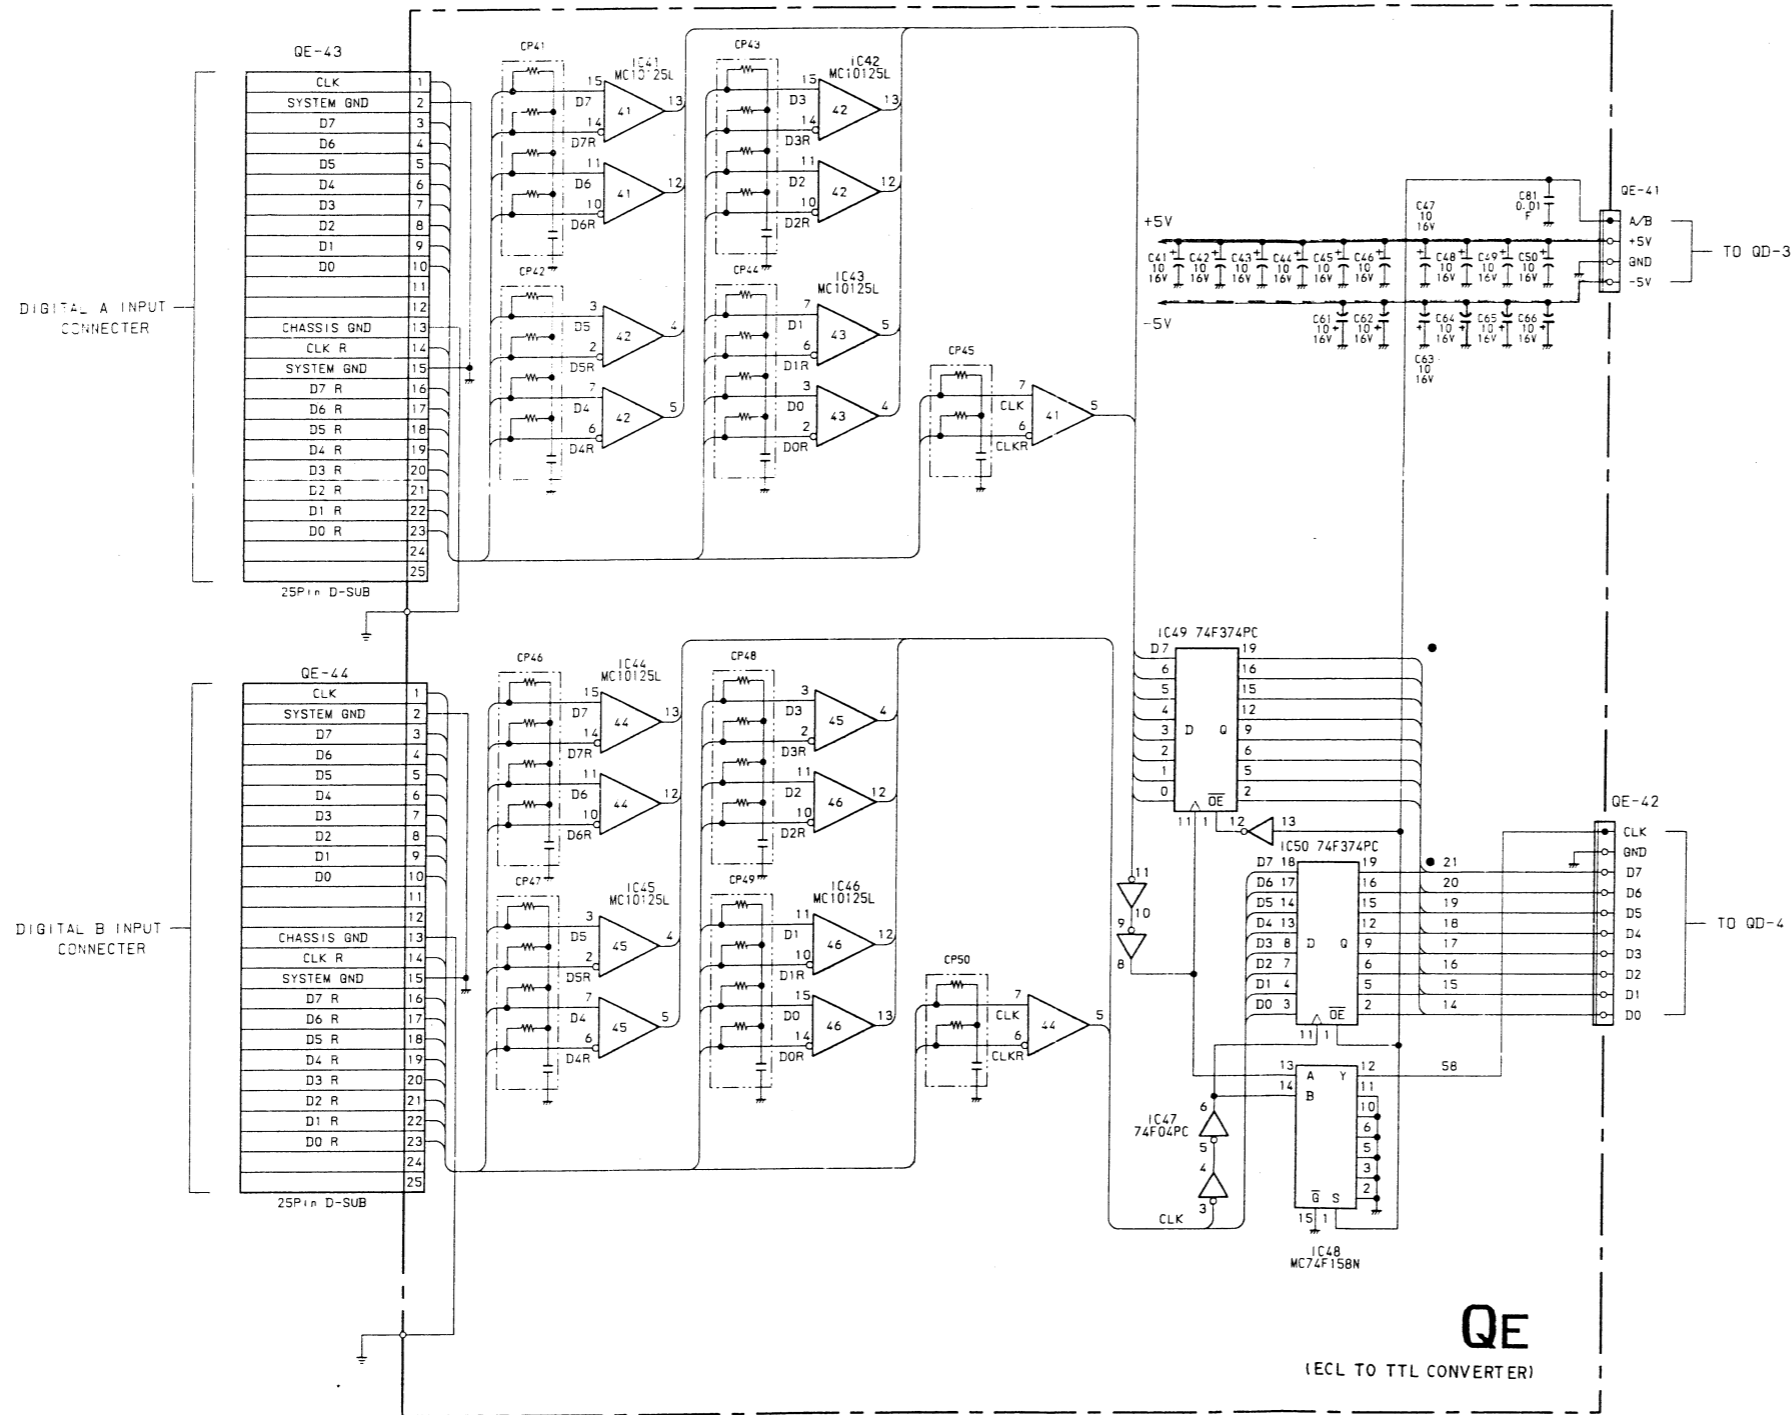

IC	Value	Quantity
QE	41	MC10125L
	42	MC10125L
	43	MC10125L
	44	MC10125L
	45	MC10125L
	46	MC10125L
	47	74F04PC
	48	MC74F158N
	49	74F374PC
	50	74F374PC

QE QE

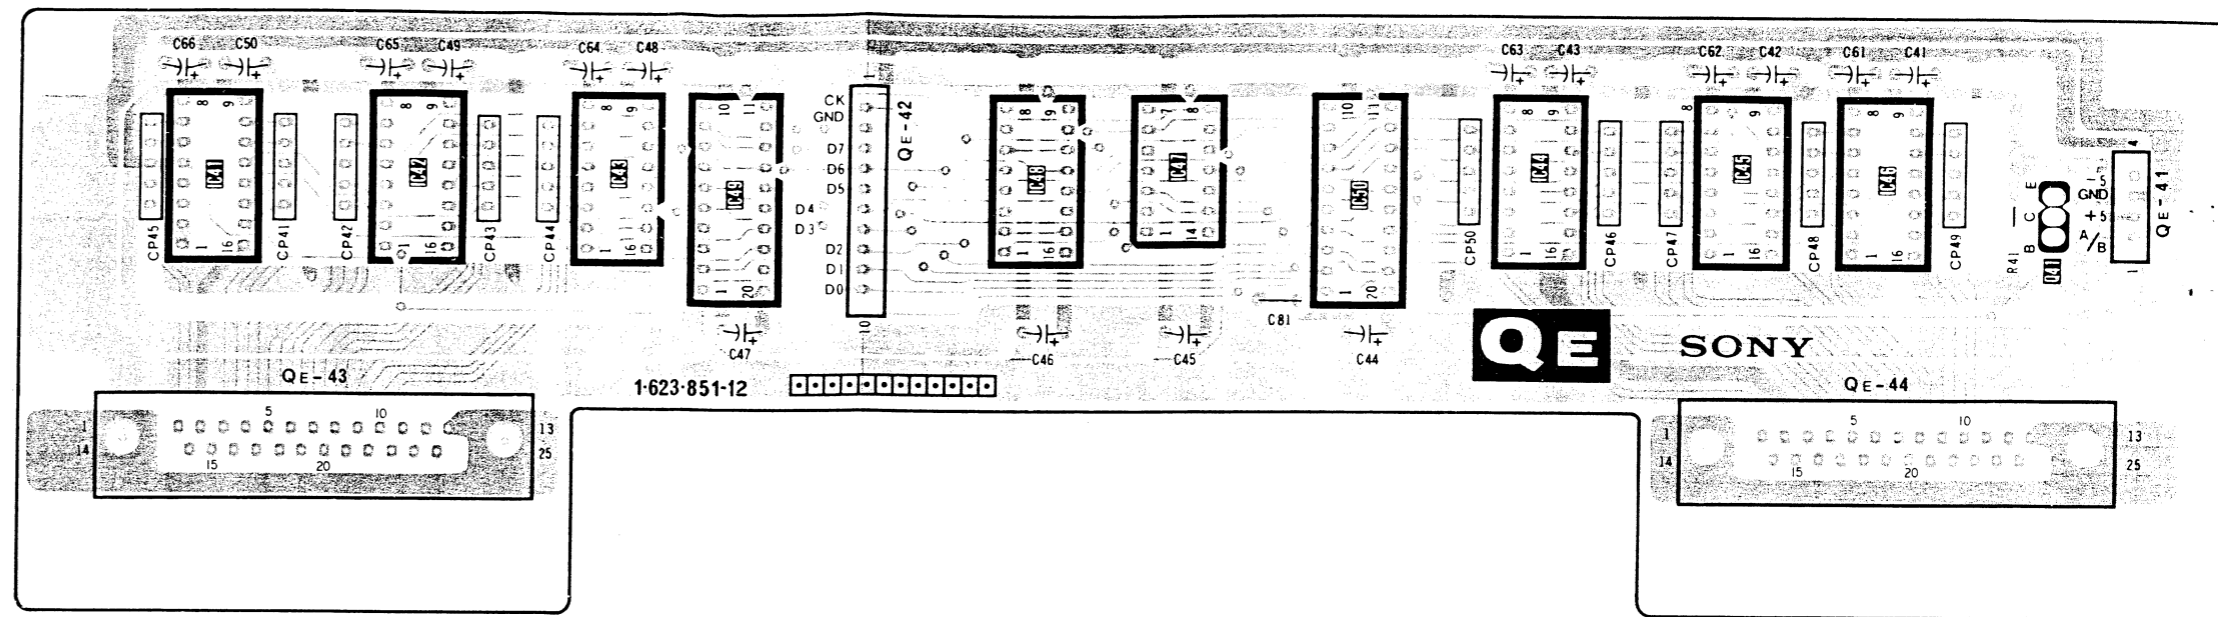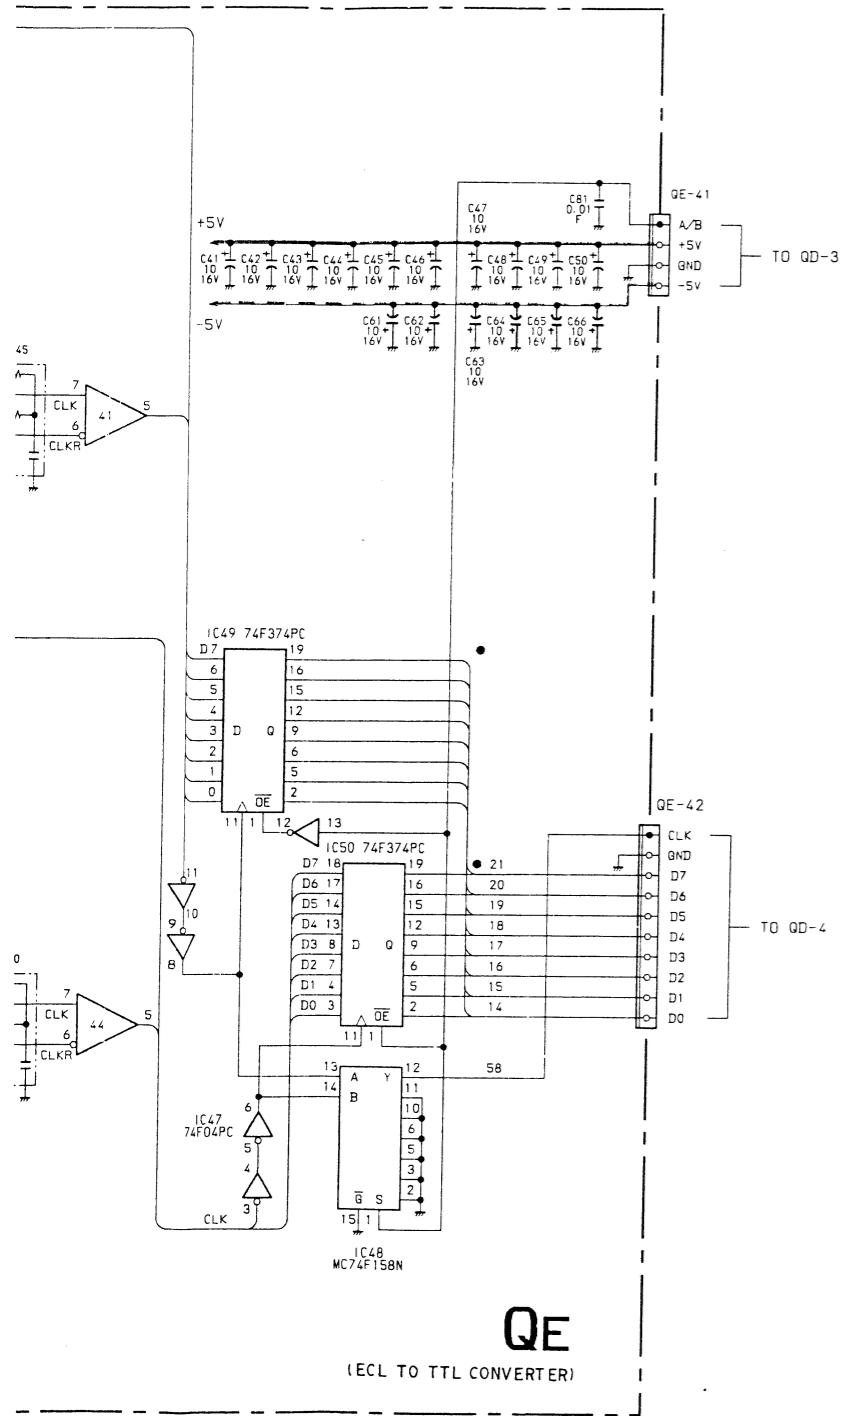


- : Conductor side pattern
- : Component side pattern

QE	IC 41	MC10125L	
	42	MC10125L	
	43	MC10125L	
	44	MC10125L	
	45	MC10125L	
	46	MC10125L	
	47	74F04PC	
	48	MC74F158N	
	49	74F374PC	
	50	74F374PC	

Z Z


Z board (EXTENSION BOARD)

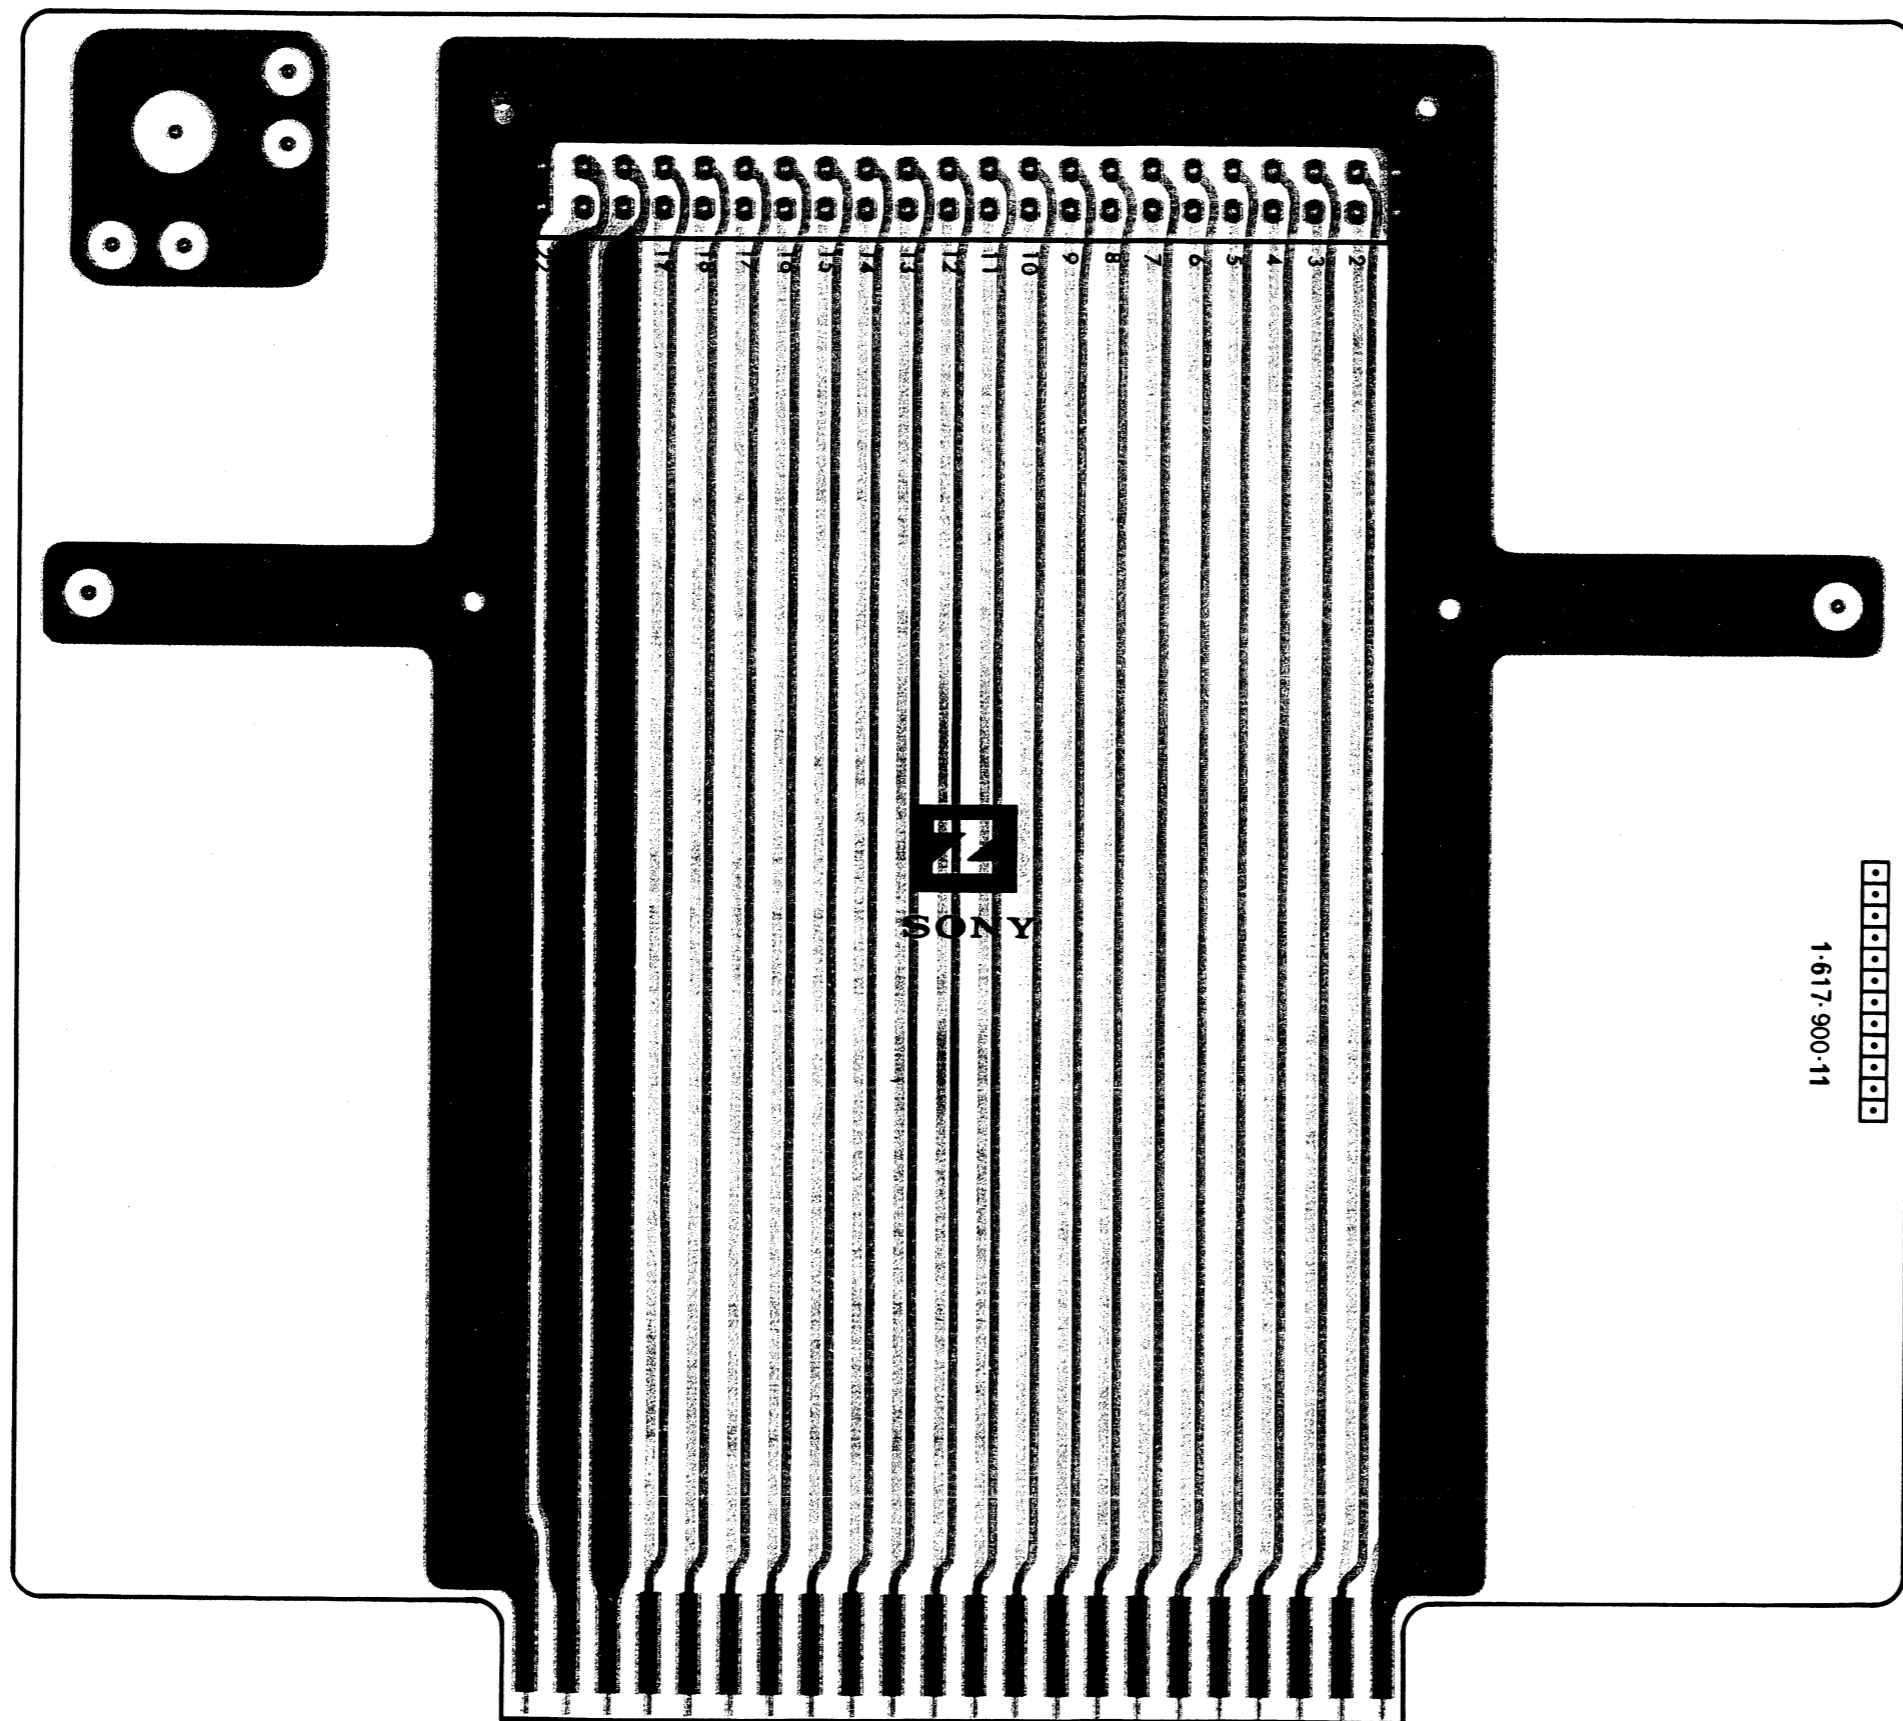



- [Solid black rectangle] : Conductor side pattern
- [Dotted rectangle] : Component side pattern

5-4. SEMICONDUCTORS


BA4558 (ROHM)
HA17558 (HITACHI)
NJM4558D (JRC)
uPC4558C (NEC)
OPERATIONAL AMPLIFIER
— TOP VIEW —



TC4030BP (TOSHIBA)
TC4030BPHB (TOSHIBA)
C-MOS EXCLUSIVE OR GATE
— TOP VIEW —





CX158 (SONY)
HORIZONTAL DEFLECTION OSCILLATOR/FREQUENCY LIMITER
— TOP VIEW —





D.P.: DISCHARGE PROTECTION
F.L. IN: FREQUENCY LIMITER IN
H.F. ADJ.: HORIZONTAL FREQUENCY ADJ.
H.OSC. OUT: HORIZONTAL OSCILLATOR OUT
H.S. IN: HORIZONTAL SYNC IN
S.W. IN: SAW WAVE IN
T.C. 1/2: TIME CONSTANT 1/2

CX20081 (SONY)
ANALOG SWITCH
— SIDE VIEW —



CX23025 (SONY)
C-MOS TV-VTR SYNC SIGNAL DISCRIMINATOR
— TOP VIEW —





A OUT: SYNC SIGNAL DISCRIMINATION OUTPUT
B OUT: SYNC SIGNAL DISCRIMINATION OUTPUT
H IN: HORIZONTAL SYNC INPUT
SLCT: POWER ON INITIALIZED SELECT INPUT
V IN: VERTICAL SYNC INPUT
V IN: VERTICAL SYNC INPUT

POWER ON INITIALIZED			
SLCT INPUT	A OUTPUT	B OUTPUT	
1	0	1	
0	1	0	


DISCRIMINATION			
V SYNC INPUT	A OUTPUTS	B OUTPUTS	
50Hz	0	1	
60Hz	1	0	

0: LOW LEVEL
1: HIGH LEVEL



CX-718D (SONY)
SRG FET IC
— TOP VIEW —

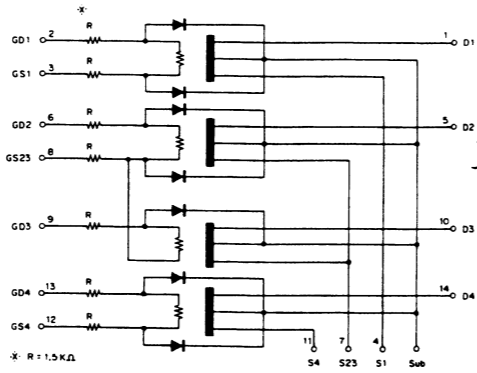



CX894 (SONY)
3 INPUT SWITCH
— SIDE VIEW —





HD14001BP (HITACHI)
MC14001BCP (MOTOROLA)
TC4001BP (TOSHIBA)
uPD4001BC (NEC)
C-MOS 2-INPUT NOR GATE
— TOP VIEW —





HD14011BP (HITACHI)
MC14011BCP (MOTOROLA)
TC4011BP (TOSHIBA)
uPD4011BC (NEC)
C-MOS 2-INPUT NAND GATE
— TOP VIEW —






HD14023BP (MOTOROLA)
MC14023BCP (MOTOROLA)
TC4023BP (TOSHIBA)
uPD4023BC (NEC)
C-MOS 3-INPUT NAND GATE
— TOP VIEW —



HD14027BP (HITACHI)
MB84027B (FUJITSU)
MC14027BCP (MOTOROLA)
TC504027BP (TOSHIBA)
uPD4027BC (NEC)
C-MOS J-K MASTER SLAVE FLIP-FLOP WITH DIRECT SET/RESET
— TOP VIEW —





HD14040BP (HITACHI)
MC14040BCP (MOTOROLA)
TC4040BP (TOSHIBA)
uPD4040C (NEC)
C-MOS 12-STAGE RIPPLE CARRY BINARY COUNTER/DRIVER
— TOP VIEW —



COUNT	Q11	Q10	Q9	Q8	Q7	Q6	Q5	Q4	Q3	Q2	Q1	Q0	RD	Q11	Q10	Q9	Q8	Q7	Q6	Q5	Q4	Q3	Q2	Q1	Q0	
0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	ALL LOW	0	COUNT									
1	0	0	0	0	0	0	0	0	0	0	0	1	0													
2	0	0	0	0	0	0	0	0	0	0	1	0	0													
3	0	0	0	0	0	0	0	0	0	0	1	1	0													
...
4095	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	

0: LOW LEVEL
1: HIGH LEVEL


HD14051BP (HITACHI)
TC4051BP (TOSHIBA)
uPD4051BC (NEC)
C-MOS 8-CHANNEL MULTIPLEXER/DEMULTIPLEXER
— TOP VIEW —

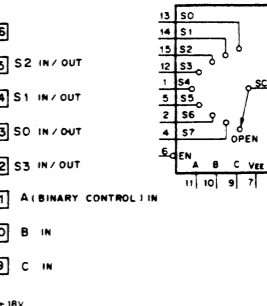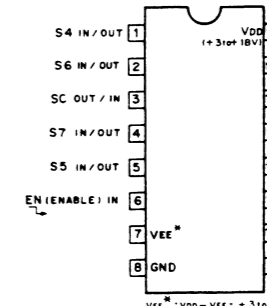

EN	C	B	A	"ON" CHANNEL
0	0	0	0	0
0	0	0	1	1
0	0	1	0	2
0	0	1	1	3
0	1	0	0	4
0	1	0	1	5
0	1	1	0	6
0	1	1	1	7
1	X	X	X	OPEN

0: LOW LEVEL
1: HIGH LEVEL
X: DON'T CARE


HD14053BP (HITACHI)
 MC14053BCP (MOTOROLA)
 TC4053BPHB (TOSHIBA)
 uPD4053BC (NEC)
 C-MOS 2-CHANNEL MULTIPLEXER/DEMULTIPLEXER
 — TOP VIEW —

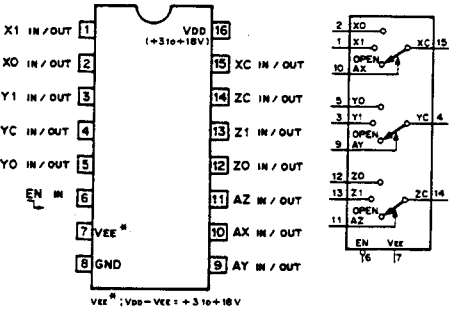

CONT. INPUTS	ON
EN A (X,Y,Z)	CHANNEL
0	0
0	1
1	X

0: LOW LEVEL
 1: HIGH LEVEL
 X: DON'T CARE

HD14073BP (HITACHI)
 MC14073BCP (MOTOROLA)
 TC4073BP (TOSHIBA)
 uPD4073BC (NEC)
 C-MOS 3-INPUT POSITIVE AND GATE
 — TOP VIEW —




$Y = A \cdot B \cdot C = \overline{\overline{A} + \overline{B} + \overline{C}}$

A	B	C	Y
X	X	0	0
X	0	X	0
0	X	X	0
1	1	1	1

0: LOW LEVEL
 1: HIGH LEVEL
 X: DON'T CARE

HD14081BP (HITACHI)
 MC14081BCP (MOTOROLA)
 TC4081BP (TOSHIBA)
 uPD4081BC (NEC)
 C-MOS 2-INPUT AND GATE
 — TOP VIEW —





$Y = A \cdot B = \overline{\overline{A} + \overline{B}}$


A	B	Y
0	0	0
0	1	0
1	0	0
1	1	1

0: LOW LEVEL
 1: HIGH LEVEL

HD14066BP (HITACHI)
 MB84066B (FUJITSU)
 uPD4066C (NEC)
 C-MOS BILATERAL ANALOG SWITCH
 — TOP VIEW —




HD14093BP (HITACHI)
 uPD4093BC (NEC)
 TC4093BP (TOSHIBA)
 C-MOS 2-INPUT NAND SCHMITT TRIGGER
 — TOP VIEW —





$Y = \overline{A \cdot B} = \overline{A} + \overline{B}$

A	B	Y
0	0	1
0	1	1
1	0	1
1	1	0

0: LOW LEVEL
 1: HIGH LEVEL




HD14069UBP (HITACHI)
 MC14069BCP (MOTOROLA)
 TC4069UBP (TOSHIBA)
 uPD4069UBC (NEC)
 C-MOS INVERTER
 — TOP VIEW —



0: LOW LEVEL
 1: HIGH LEVEL

HD14071BP (HITACHI)
 MC14071BCP (MOTOROLA)
 TC4071BP (TOSHIBA)
 uPD4071BC (NEC)
 C-MOS 2-INPUT OR GATE
 — TOP VIEW —




$Y = A + B = \overline{\overline{A} \cdot \overline{B}}$

A	B	Y
0	0	0
0	1	1
1	0	1
1	1	1


0: LOW LEVEL
 1: HIGH LEVEL

HD14175BP (HITACHI)
 MC14175BCP (MOTOROLA)
 TC40175BP (TOSHIBA)
 μPD4175BC (NEC)
 C-MOS DECADE COUNTER/DIVIDER
 — TOP VIEW —

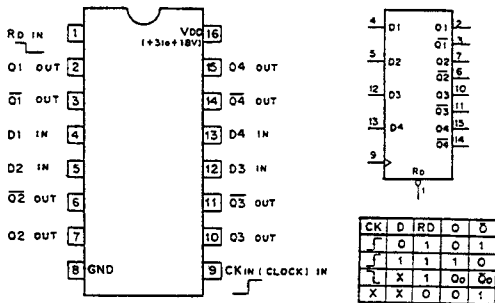


CK	D	R	D	O	O
0	0	1	0	1	1
1	1	1	1	0	0
X	X	0	0	1	1

0; LOW LEVEL
 1; HIGH LEVEL
 X; DON'T CARE

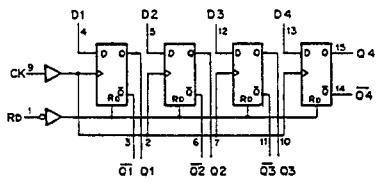


HD14538BP (HITACHI)
 TC4538BP (TOSHIBA)
 C-MOS DUAL RETRIGGERABLE/NON-RETRIGGERABLE
 MONOSTABLE MULTIVIBRATOR
 — TOP VIEW —

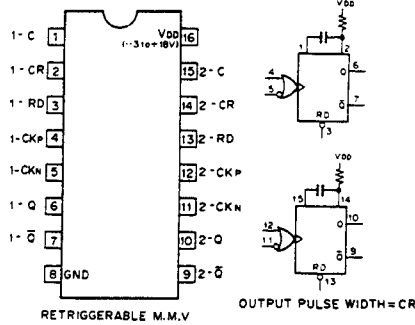


RETRIGGERABLE M.M.V

OUTPUT PULSE WIDTH = CR




NON-RETRIGGERABLE M.M.V

HD14520BP (HITACHI)
 MC14520BCP (MOTOROLA)
 TC4520BP (TOSHIBA)
 TC4520PHB (TOSHIBA)
 μPD4520BC (NEC)
 C-MOS DUAL 4-BIT BINARY UP COUNTER
 — TOP VIEW —

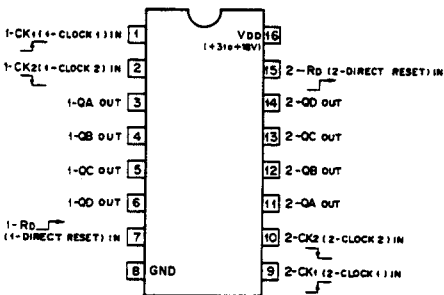


STATE	OUTPUTS
0	0 0 0 0
1	0 0 0 1
2	0 0 1 0
3	0 0 1 1
4	0 1 0 0
5	0 1 0 1
6	0 1 1 0
7	0 1 1 1
8	1 0 0 0
9	1 0 0 1
10	1 0 1 0
11	1 0 1 1
12	1 1 0 0
13	1 1 0 1
14	1 1 1 0
15	1 1 1 1



CK1	CK2	RD	ACTION
0	0	0	INCREMENT COUNTER
0	0	1	INCREMENT COUNTER
1	X	0	NO CHANGE
X	0	0	NO CHANGE
0	0	0	NO CHANGE
1	0	0	NO CHANGE
X	X	1	QA THRU QD = 0

0; LOW LEVEL
 1; HIGH LEVEL
 X; DON'T CARE


LA7016 (SANYO)
 ELECTRONIC SWITCH
 — SIDE VIEW —

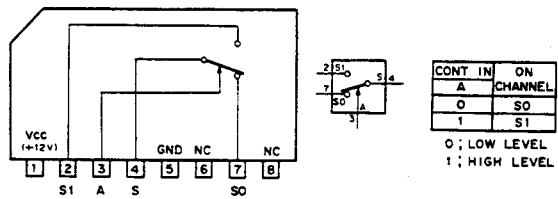


CONT	IN	ON
0	A	CHANNEL
0	SO	
1	S1	

0; LOW LEVEL
 1; HIGH LEVEL


M5218L (MITSUBISHI)
 LOW NOISE DUAL OPERATIONAL AMPLIFIER
 — SIDE VIEW —






TL082CP (TI)
 μPC4082C (NEC)
 OPERATIONAL AMPLIFIER
 J FET-INPUT
 — TOP VIEW —




TL494CN (TI)
 PWM POWER CONTROL
 — TOP VIEW —

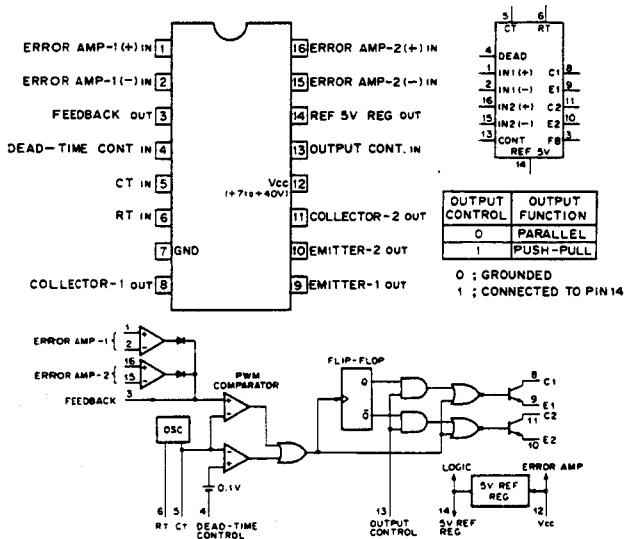


TL860BP (TOSHIBA)
 N-CH CCD ANALOG PROCESSING UNIT
 — TOP VIEW —

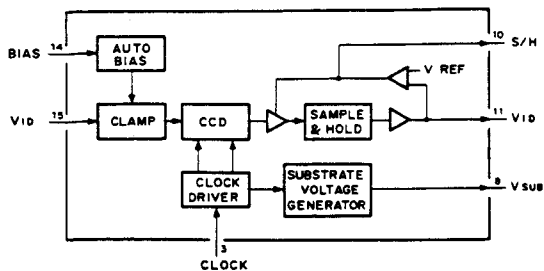



UA733CN (TI)
 DIFFERENTIAL VIDEO AMP
 — TOP VIEW —




μPC1394C (NEC)
 CONTROLLER OF SWITCHING MODE POWER SUPPLY
 — TOP VIEW —

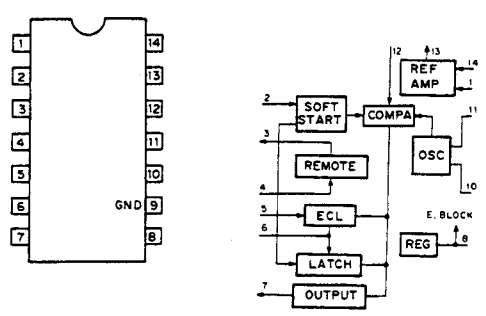

μPC78M12H (NEC)
 POSITIVE VOLTAGE REGULATOR (0.5A)
 — SIDE VIEW —

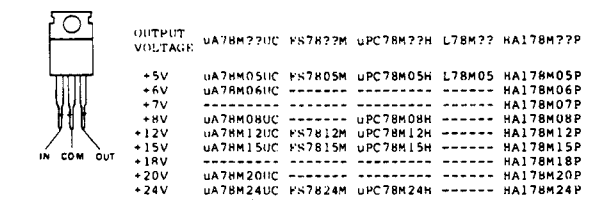


μPC79??H (NEC)
 NEGATIVE VOLTAGE REGULATOR (1A)
 — SIDE VIEW —

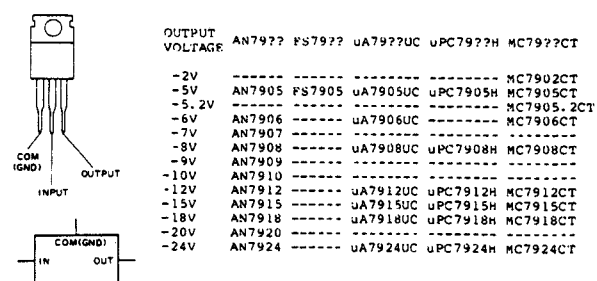

2SA1048
2SA1115
2SC2458
2SC2603
2SC3327
2SC403SP
DTA124ES
DTA144ES
DTC124ES
DTC143TS
DTC144ES




2SA1175
2SC2785



2SA1142
2SA1406
2SC3600



2SA473
2SB858
2SB860
2SB861
2SC1173
2SC3675
2SD1134
2SD1137



2SA844
2SA933S
2SA1091
2SC1740
2SC1890A
2SC2551
2SC2878
2SC3068



2SA893A
2SB740
2SD789



2SA979



2SB734
2SD774



2SC2555




2SC2688
2SC2752
2SD669A




2SC2910




2SD1556




2SK381
2SK514




2SK523



1T25




1SS119
1SS133T
1SS148
RD12ES-T1B1
RD12ES-T1B2
RD13ES-B
RD3.0ES-T1B2
RD4.3ES-T1B
RD6.2ES-T1B



1SS83
1S1555
1S1585
1S2076
10E2
EQA02-06A
EQA02-07D
EQA02-08A
EQA02-10B
EQA02-11D
EQA02-14B
ERB44-06
ERD28-04S
ERD28-08S
GPO8D
HZT33-02
HZ10EB3
HZ12EB2
HZ15EB3
HZ4.3EB1
HZ4.3EB2
HZ5.6EB2
HZ6.2EB1
HZ6.2EB2
HZ6.2EB3
HZ7.5EB3
HZ9.1EB2
HZ9.1EB3
RD10EB2
RD10EB3


RD12E-B2
RD12EB1
RD12EB3
RD15E-B2
RD15EB3
RD3.0EB1
RD3.0EB2
RD3.9EB2
RD4.3EB1
RD4.3EB2
RD4.7EL1
RD4.7EL2
RD4.7EL3
RD5.6EB2
RD5.6ES-B
RD5.6ES-B1
RD5.6ES-B2
RD5.6ES-B3
RD6.2EB1
RD6.2EB2
RD6.2EB3
RD7.5EB2
RD7.5EB3
RD7.5ES-T1
RD8.2ES-T1B1
RD8.2ES-T1B2
RD8.2ES-T1B3
RD9.1EB1
RD9.1EB2
RD9.1EB3




CRO2AM-4
CRO2AM-8




CR3CM-8




CTU-38R
CTU-38S



ERB81-004
ERC24-04S
ERC24-06S
HZ12EB1
HZ12EB3
HZ3.0EB1
HZ3.0EB2
HZ3.9EB2
HZ9.1EB1
RH-1
RH-1A
RU-1A
RU-1C
SIB01-02




ESAC25-04C




ESAC25-04N
ESAD25-04D




ESAC31-02D




LT9010H




MC911




**TLG124A
TLO124
TLR124
TLY124**




MC921



**U05G
V11N**




MC931




μPC574J




RB406NH



S3WB60Z





STR8124





(BVM-2010PD/PMD ONLY)

74F04 PC (FSC)
TTL INVERTER
— TOP VIEW —





74F158 APC (FSC)
74F158 PC (FSC)
MC74F158N (MOTOROLA)
TTL 2-LINE-TO-1-LINE INVERTED DATA SELECTOR/MULTIPLEXER
— TOP VIEW —




CONT. IN	IN	ON	CHANNEL
0	0	0	0
0	1	1	1
1	X	GND	

0: LOW LEVEL
1: HIGH LEVEL
X: DON'T CARE

74F283 PC (FSC)
TTL 4-BIT BINARY FULL ADDER
— TOP VIEW —

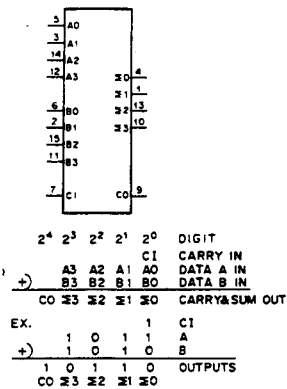


74F374 PC (FSC)
TTL 3-STATE OUTPUTS OCTAL D-TYPE FLIP-FLOP
— TOP VIEW —

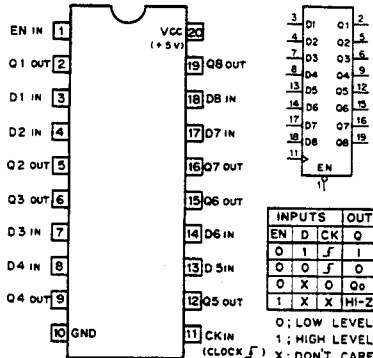


INPUTS	OUT
EN D CK Q	
0 1 F 1	
0 0 F 0	
0 X 0 Q ₀	
1 X X HI-Z	

0: LOW LEVEL
1: HIGH LEVEL
X: DON'T CARE
HI-Z: HIGH IMPEDANCE




CX20160 (SONY)
TTL OCTAL 3 OR 4 STAGE SHIFT REGISTER
— TOP VIEW —

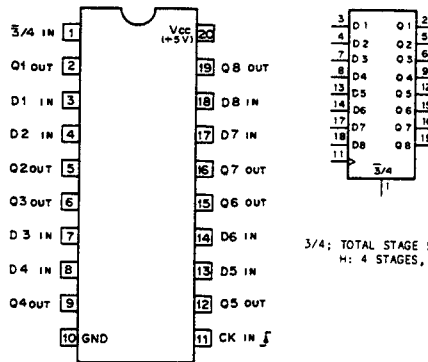


3/4: TOTAL STAGE SELECTION SIGNAL INPUT
H: 4 STAGES, L: 3 STAGES

CX20197 (SONY)
DUAL OPERATIONAL AMPLIFIER
— TOP VIEW —




(BVM-2010PD/PMD ONLY)

CX23043 (SONY)
N-MOS SYNCHRONOUS 10-BIT BINARY COUNTER
— TOP VIEW —

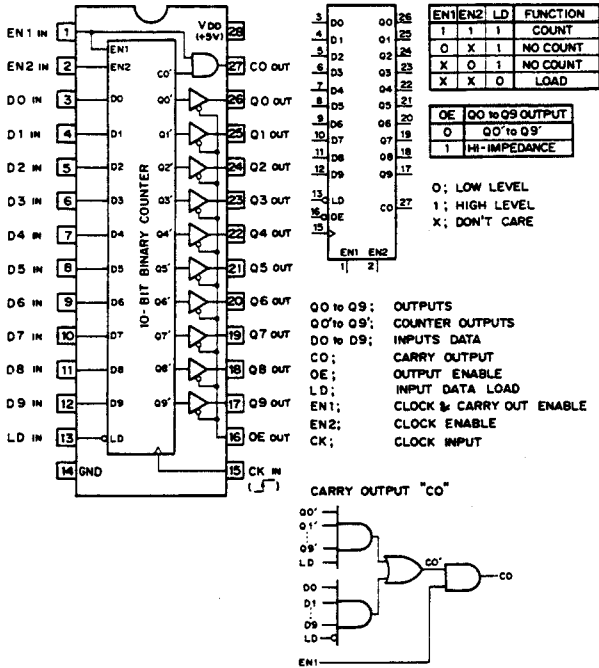


CXB1001G (SONY)
4:2:2 PARALLEL INTERFACE FOR 525/625-LINE DIGITAL VIDEO SIGNALS
— TOP VIEW —

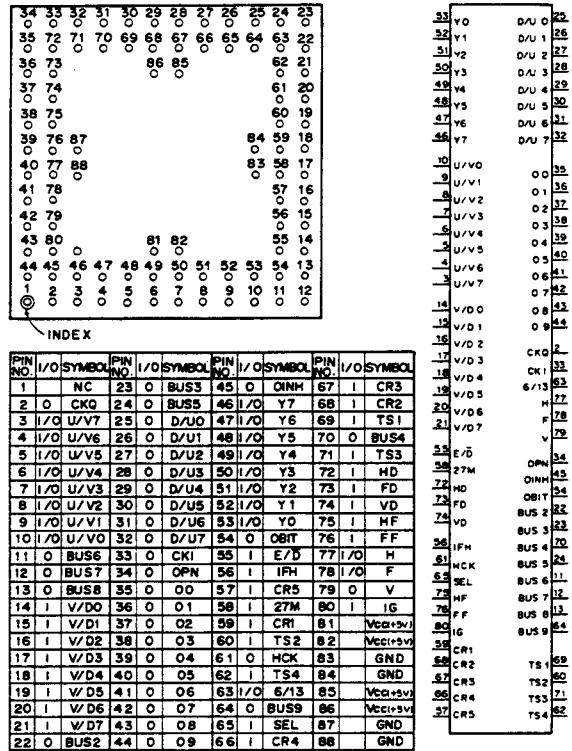

5. DIAGRAMS


CXA1106P (SONY)
8-BIT D/A CONVERTER (TTL INPUT)
— TOP VIEW —

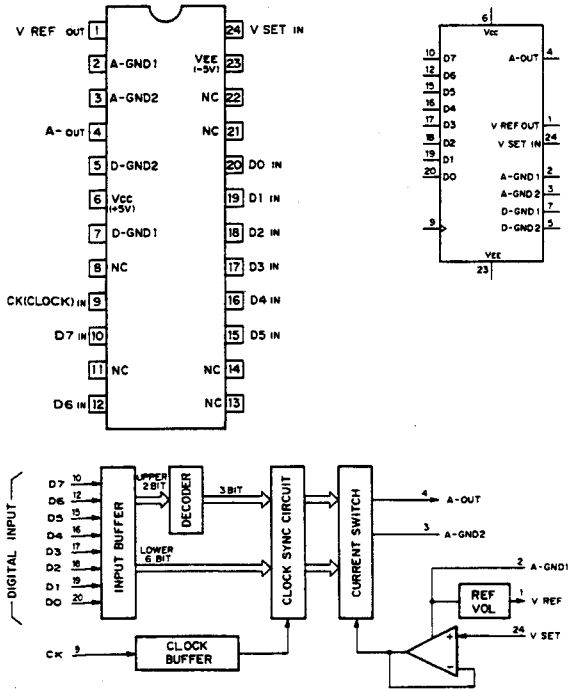


SYMBOL	FUNCTION	
	ENCODER MODE (E/D = "11")	DECODER MODE (E/D = "11")
Y0-Y7	Y SIGNAL INPUTS	Y SIGNAL OUTPUTS
U/V0-U/V7	C _B SIGNAL INPUTS	C _R SIGNAL OUTPUTS
V/D0-V/D7	C _B SIGNAL INPUTS	MULTIPLICATOR DATA INPUTS
D/U0-D/U7	MULTIPLICATOR DATA OUTPUTS	C _B SIGNAL OUTPUTS
00-09	EXTERNAL PROM ADDRESS OUTPUTS	
E/D	ENCODER/DECODER MODE SELECT INPUT	
27M	CLOCK INPUT (27MHz)	
HD	(H)	
FD	(F)	
VD	(V)	
CKQ	D/U SYNCHRONOUS CLOCK OUTPUT	C _R SYNCHRONOUS CLOCK OUTPUT
CKI	INPUT DATA LATCH CLOCK (3.5MHz)	INPUT DATA LATCH CLOCK (27MHz)
6/13	C _R SYNCHRONOUS CLOCK INPUT	13.5MHz CLOCK OUTPUT
H	REFERENCE H INPUT	DECODE H OUTPUT
F	REFERENCE F INPUT	DECODE F OUTPUT
V	DECODE V OUTPUT	DECODE V OUTPUT
IFH	CONNECT WITH "+5V"	
HCK	6.75MHz H COUNTER CLOCK OUTPUT	
SEL	CONNECT WITH "+5V"	
HF	CONNECT WITH "+5V"	
FF	CONNECT WITH "+5V"	
IG	CONNECT WITH "+5V"	
CR1-CR5	CONNECT WITH "+5V"	
TS1-TS4	CONNECT WITH "+5V"	
OPN	FOR TEST	
ONH	FOR TEST	
OBIT	FOR TEST	
BUS2-BUS9	FOR TEST	

(BVM-2010PD/PMD ONLY)


BLOCK DIAGRAMS
A. ENCODER MODE

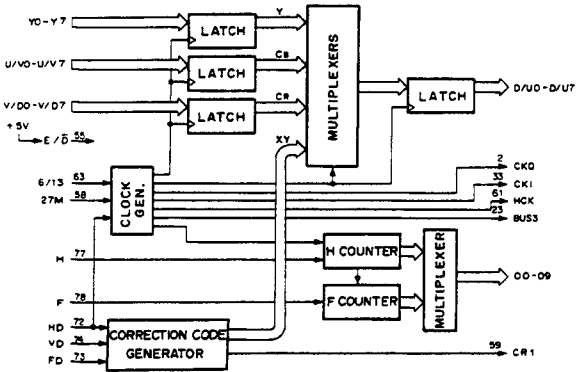


B. DECODER MODE

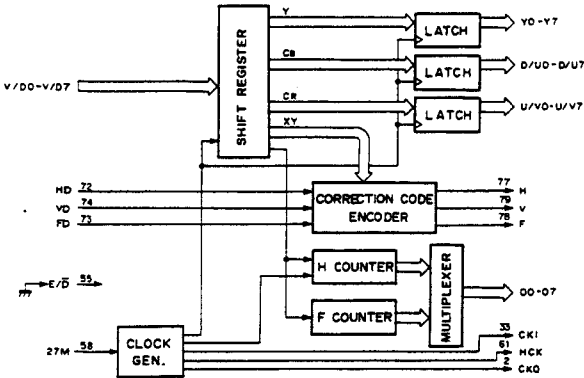

TIMING CHART
A. ENCODER MODE

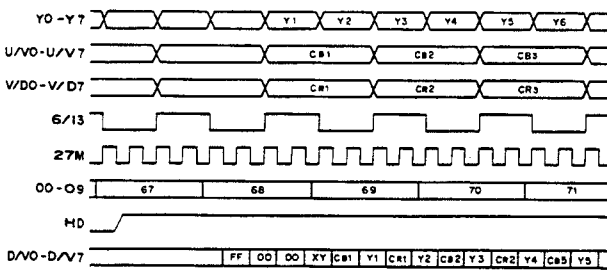


B. DECODER MODE

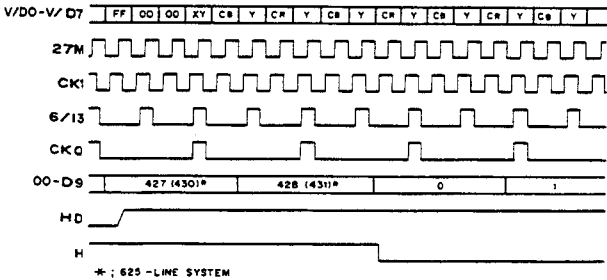


* : 625-LINE SYSTEM

HD10125 (HITACHI)
MC10125L (MOTOROLA)
ECL ECL-TO-TTL TRANSLATOR
- TOP VIEW -



HN17C64G-20 (HITACHI)
MBM27C64-25 (FUJITSU) (ACCESS TIME = 250 nS)
C-MOS 64K (8K-8) ERASABLE PROM WITH 3-STATE OUTPUTS
- TOP VIEW -

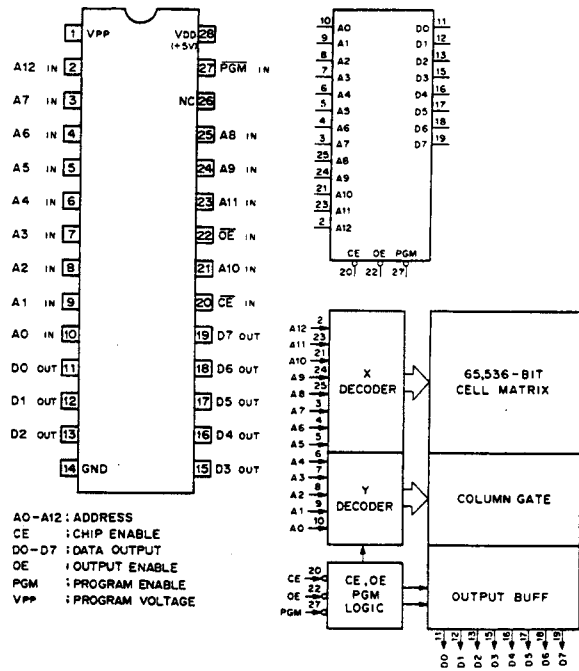


A0-A12 : ADDRESS
CE : CHIP ENABLE
D0-D7 : DATA OUTPUT
OE : OUTPUT ENABLE
PGM : PROGRAM ENABLE
VPP : PROGRAM VOLTAGE

An	CE	OE	PGM	VPP	Dn	FUNCTION
An	0	0	1	+5V	D OUT	READ
An	0	1	1	+5V	HI-Z	OUTPUT DISABLE
An	0	0	0	+5V	HI-Z	OUTPUT DISABLE
X	1	X	X	+5V	HI-Z	STANDBY
An	0	X	1	+21V	Din	PGM
An	0	0	1	+21V	D OUT	PGM VERIFY
X	1	X	X	+21V	HI-Z	PGM INH

0 : LOW LEVEL
1 : HIGH LEVEL
X : DON'T CARE
HI-Z, HIGH IMPEDANCE

(BVM-2010PD/PMD ONLY)

MB7138HSK (FUJITSU) (ACCESS TIME = 45 nS)
16384-BIT (2048x8) PROM WITH 3-STATE OUTPUTS
— TOP VIEW —

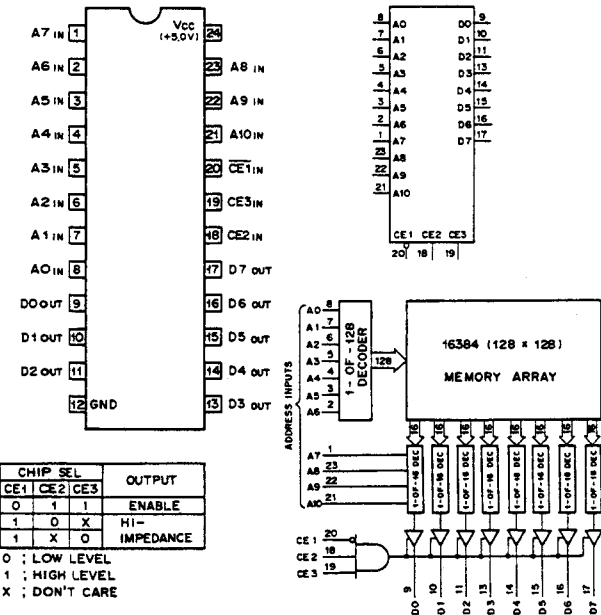

CHIP SEL			OUTPUT
CE1	CE2	CE3	
0	1	1	ENABLE
1	0	X	HI-IMPEDANCE
1	X	0	


0 : LOW LEVEL
1 : HIGH LEVEL
X : DON'T CARE

WORD	ADDRESS INPUT							
	A7	A6	A5	A4	A3	A2	A1	A0
0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	1
2	0	0	0	0	0	0	1	0
3	0	0	0	0	0	1	0	1
4	0	0	0	0	1	0	0	0
5	0	0	0	0	1	0	0	1
6	0	0	0	1	0	0	0	0
7	0	0	0	1	0	0	0	1
8	0	0	1	0	0	0	0	0
9	0	0	1	0	0	0	0	1
10	0	1	0	0	0	0	0	0
11	0	1	0	0	0	0	0	1
12	0	1	0	1	0	0	0	0
13	0	1	0	1	0	0	0	1
14	0	1	1	0	0	0	0	0
15	0	1	1	0	0	0	0	1
16	0	1	1	1	0	0	0	0
17	0	1	1	1	0	0	0	1
18	0	1	1	1	1	0	0	0
19	0	1	1	1	1	0	0	1
20	1	0	0	0	0	0	0	0
21	1	0	0	0	0	0	0	1
22	1	0	0	0	0	1	0	0
23	1	0	0	0	0	1	0	1
24	1	0	0	1	0	0	0	0
25	1	0	0	1	0	0	0	1
26	1	0	0	1	1	0	0	0
27	1	0	0	1	1	0	0	1
28	1	0	1	0	0	0	0	0
29	1	0	1	0	0	0	0	1
30	1	0	1	1	0	0	0	0
31	1	0	1	1	0	0	0	1
32	1	1	0	0	0	0	0	0
33	1	1	0	0	0	0	0	1
34	1	1	0	1	0	0	0	0
35	1	1	0	1	0	0	0	1
36	1	1	1	0	0	0	0	0
37	1	1	1	0	0	0	0	1
38	1	1	1	1	0	0	0	0
39	1	1	1	1	0	0	0	1
40	1	1	1	1	1	0	0	0
41	1	1	1	1	1	0	0	1
42	1	1	1	1	1	1	0	0
43	1	1	1	1	1	1	0	1
44	1	1	1	1	1	1	1	0
45	1	1	1	1	1	1	1	1

DATA CODE	ACTUAL DATA							
	D7	D6	D5	D4	D3	D2	D1	D0
0	00	0	0	0	0	0	0	0
1	01	0	0	0	0	0	0	1
2	02	0	0	0	0	0	1	0
3	03	0	0	0	0	1	0	1
4	04	0	0	0	1	0	0	0
5	05	0	0	0	1	0	0	1
6	06	0	0	1	0	0	0	0
7	07	0	0	1	0	0	0	1
8	08	0	0	1	1	0	0	0
9	09	0	0	1	1	0	0	1
10	0A	0	0	1	1	1	0	0
11	0B	0	0	1	1	1	0	1
12	0C	0	0	1	1	1	1	0
13	0D	0	0	1	1	1	1	1
14	0E	0	1	0	0	0	0	0
15	0F	0	1	0	0	0	0	1
16	10	0	1	0	0	0	1	0
17	11	0	1	0	0	0	1	1
18	12	0	1	1	0	0	0	0
19	13	0	1	1	0	0	0	1
20	14	0	1	1	1	0	0	0
21	15	0	1	1	1	0	0	1
22	16	0	1	1	1	1	0	0
23	17	0	1	1	1	1	0	1
24	18	0	1	1	1	1	1	0
25	19	0	1	1	1	1	1	1
26	1A	1	0	0	0	0	0	0
27	1B	1	0	0	0	0	0	1
28	1C	1	0	0	0	0	1	0
29	1D	1	0	0	0	0	1	1
30	1E	1	0	1	0	0	0	0
31	1F	1	0	1	0	0	0	1
32	20	1	0	1	0	1	0	0
33	21	1	0	1	0	1	0	1
34	22	1	0	1	1	0	0	0
35	23	1	0	1	1	0	0	1
36	24	1	0	1	1	1	0	0
37	25	1	0	1	1	1	0	1
38	26	1	0	1	1	1	1	0
39	27	1	0	1	1	1	1	1
40	28	1	1	0	0	0	0	0
41	29	1	1	0	0	0	0	1
42	2A	1	1	0	0	0	1	0
43	2B	1	1	0	0	0	1	1
44	2C	1	1	0	1	0	0	0
45	2D	1	1	0	1	0	0	1
46	2E	1	1	0	1	1	0	0
47	2F	1	1	0	1	1	0	1
48	30	1	1	1	0	0	0	0
49	31	1	1	1	0	0	0	1
50	32	1	1	1	0	0	1	0
51	33	1	1	1	0	0	1	1
52	34	1	1	1	1	0	0	0
53	35	1	1	1	1	0	0	1
54	36	1	1	1	1	1	0	0
55	37	1	1	1	1	1	0	1
56	38	1	1	1	1	1	1	0
57	39	1	1	1	1	1	1	1

IN HEXADECIMAL
IN DECIMAL

MBM27C256-25 (FUJITSU) (ACCESS TIME = 250 nS)
C-MOS 256K (32Kx8) ERASABLE PROM WITH 3-STATE OUTPUTS
— TOP VIEW —

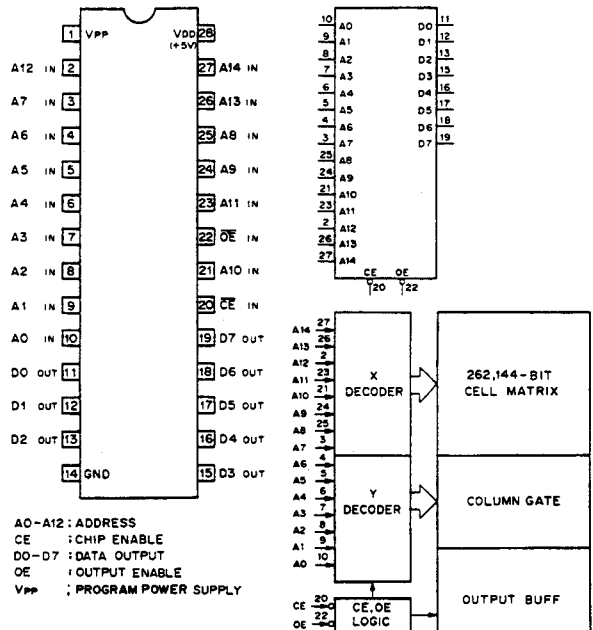


A0-A12 : ADDRESS
CE : CHIP ENABLE
DO-D7 : DATA OUTPUT
OE : OUTPUT ENABLE
Vpp : PROGRAM POWER SUPPLY

An	CE	OE	Vpp	Dn	FUNCTION
An	0	0	+5V	D out	READ
An	0	1	+5V	HI-Z	OUTPUT DISABLE
X	1	X	+5V	HI-Z	STANDBY
An	0	1	+21V	D in	PGM
An	0	0	+21V	D out	PGM VERIFY
X	1	X	+21V	HI-Z	PGM INH

0 : LOW LEVEL
1 : HIGH LEVEL
X : DON'T CARE
HI-Z : HIGH IMPEDANCE

5. DIAGRAMS

TC74HC00P (TOSHIBA)
C-MOS 2-INPUT NAND GATE
— TOP VIEW —

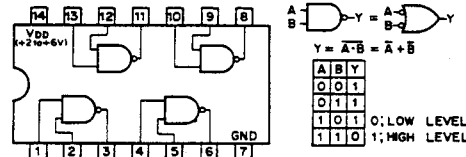


A	B	Y
0	0	1
0	1	1
1	0	1
1	1	0

0 : LOW LEVEL
1 : HIGH LEVEL

(BVM-2010PD/PMD ONLY)


MC74HC74N (MOTOROLA)
TC74 HC74P (TOSHIBA)
C-MOS D-TYPE FLIP FLOP WITH DIRECT SET/RESET
— TOP VIEW —



INPUTS		OUTPUTS	
SD	Rd	Qn+1	Qn+1
0	1	X	X
1	0	X	X
0	0	X	X
1	1	1	0
1	1	0	1
1	1	0	X


0: LOW LEVEL
1: HIGH LEVEL
X: DON'T CARE
*: NONSTABLE

TC74HC157P (TOSHIBA)
C-MOS 2-LINE-TO-1-LINE DATA SELECTOR/MULTIPLEXER
— TOP VIEW —





CONT. IN		ON CHANNEL
INH	A	CHANNEL
0	0	0
0	1	1
1	X	GND

0: LOW LEVEL
1: HIGH LEVEL
X: DON'T CARE





TC74HC14P (TOSHIBA)
C-MOS SCHMITT TRIGGER INVERTER
— TOP VIEW —





0: LOW LEVEL
1: HIGH LEVEL

TC74HC283P (TOSHIBA)
C-MOS 4-BIT FULL ADDER
— TOP VIEW —

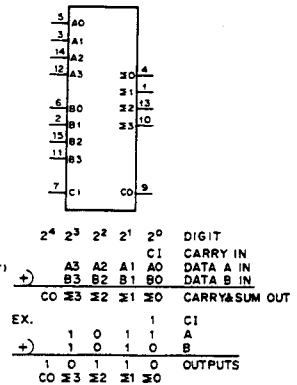


TC74HC153P (TOSHIBA)
C-MOS 4-LINE-TO-1-LINE DATA SELECTOR/MULTIPLEXER
— TOP VIEW —

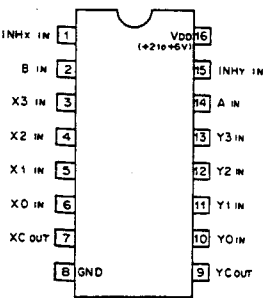

CONTROL IN		ON CHANNEL
INH	B	Δ
0	0	0
0	0	1
0	1	0
0	1	1
1	X	X

0: LOW LEVEL
1: HIGH LEVEL
X: DON'T CARE

TC74HC374P (TOSHIBA)
C-MOS 3-STATE OCTAL D-TYPE FLIP-FLOP
— TOP VIEW —

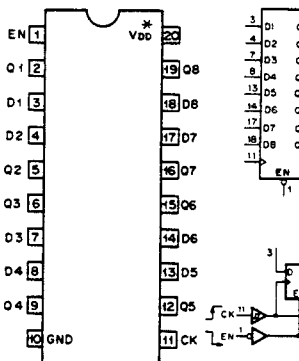

INPUTS		OUT
EN	D	CK
0	1	J
0	0	F
0	X	Q ₀
1	X	HI-Z

0: LOW LEVEL
1: HIGH LEVEL
X: DON'T CARE
HI-Z: HIGH IMPEDANCE

* V_{DD} HC: +2to+6V
HCT: +5V



SECTION 6 EXPLODED VIEWS


NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.

- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

6-1. BEZEL AND COVERS

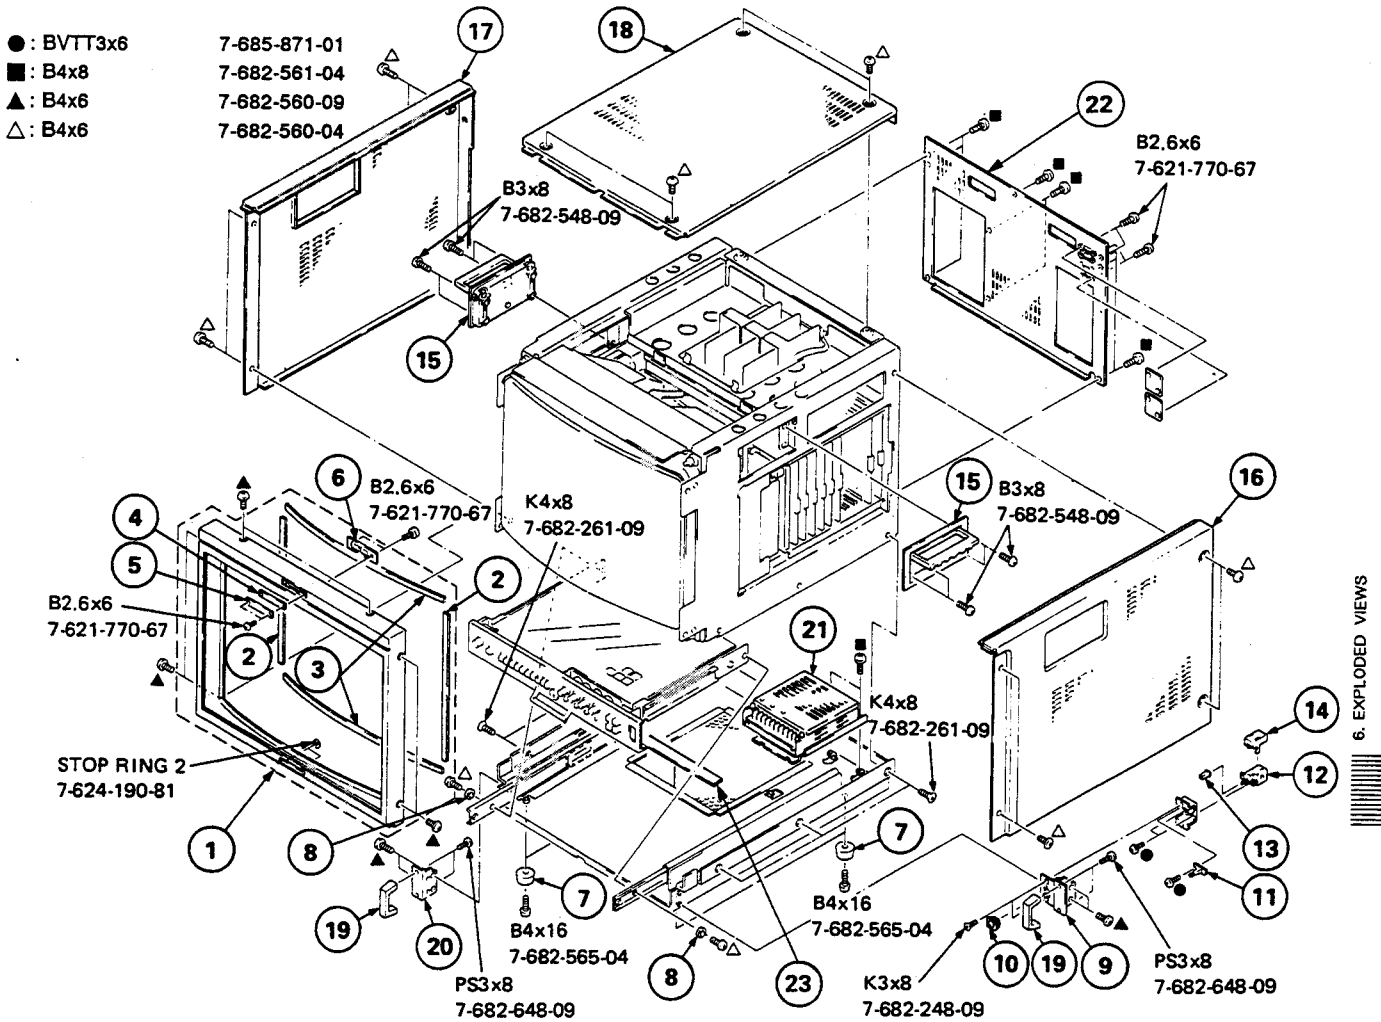


6. EXPLODED VIEWS

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
1	X-4379-412-1	BEZEL ASSY	2, 3	14	4-373-038-01	COVER, SWITCH, POWER	
2	4-308-878-XX	CUSHION (B), BEZEL		15	X-3642-018-0	HANDLE ASSY	
3	4-308-878-XX	CUSHION (A), CRT		16	*4-386-832-01	COVER (RIGHT)	
4	*4-386-839-01	PLATE, TALLY		17	*4-386-833-01	COVER (LEFT)	
5	*4-386-840-01	PLATE (B), TALLY		18	*4-386-831-01	COVER (UPPER)	
6	*1-623-002-11	XB BOARD		19	*4-353-706-00	HANDLE	
7	X-4836-202-9	FOOT		20	*4-386-808-01	BRACKET (LEFT), HANDLE	
8	*4-379-499-01	SPACER		21	Δ 1-413-319-11	REGULATOR, SWITCHING	
9	*X-4379-408-1	PANEL ASSY, POWER SWITCH				(GSK 20-1205) (BVM-2010PD/PMD ONLY)	
10	4-379-423-01	ESCUTCHEON (A)		22	*4-386-811-03	COVER, REAR (BVM-2010P/PM ONLY)	
11	*1-617-893-11	Y BOARD			*4-386-866-01	COVER, REAR (BVM-2010PD/PMD ONLY)	
12	Δ 1-570-052-12	SWITCH, PUSH (AC POWER) (1 KEY)		23	4-372-556-01	SHEET, BLOTTING	
13	4-374-839-11	BUTTON (A)					

6-2. PICTURE TUBE

- : BVTT3x6 7-685-871-01
- : B3x10 7-682-549-04

6. EXPLODED VIEWS

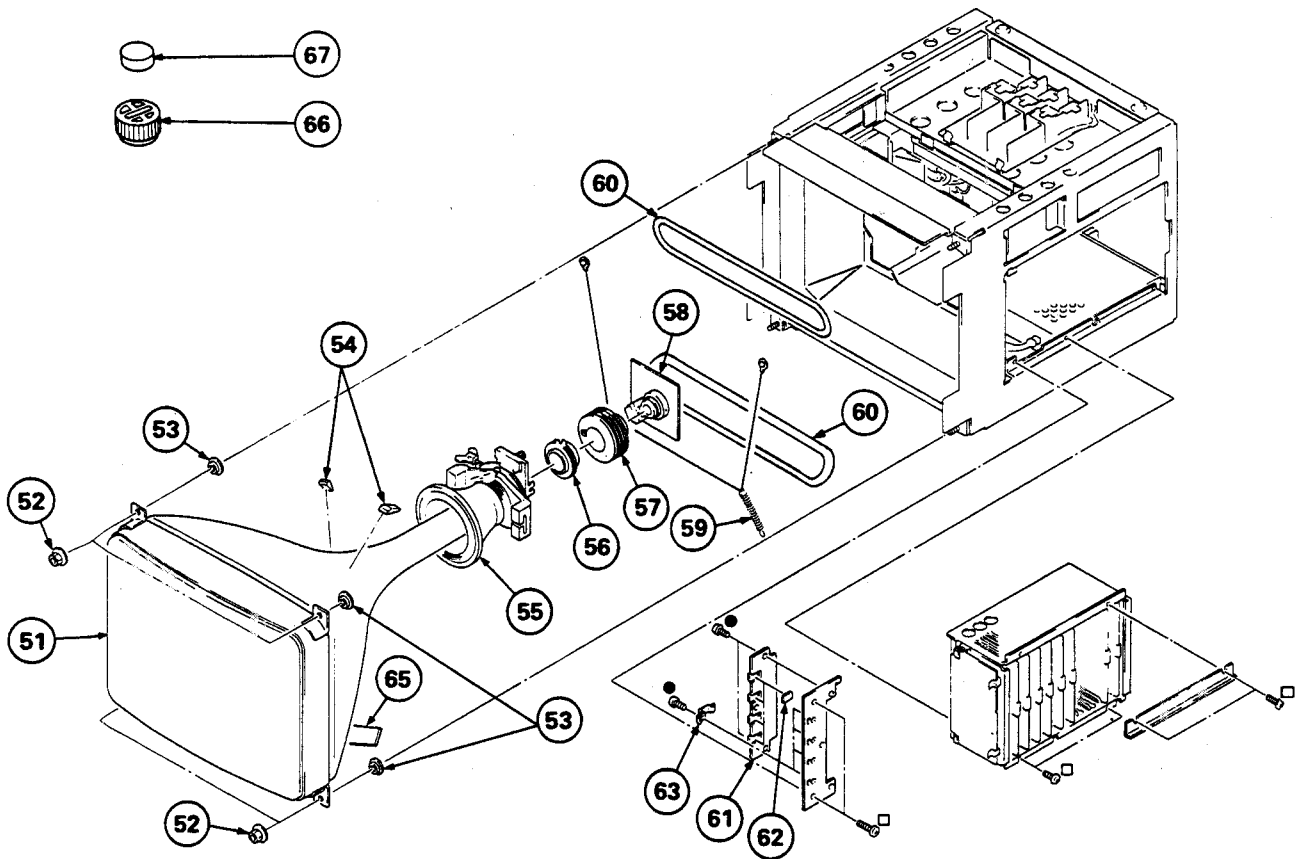


The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	Δ 8-733-054-05	PICTURE TUBE (M49JJP21X)		60	Δ 1-426-328-11	COIL, DEGAUSSING	
52	4-306-034-00	FLANGE NUT, (B) 5MM		61	*1-617-885-11	GC BOARD	
53	4-348-567-00	WASHER, CRT POSITION		62	4-370-970-01	SPACER, TR	
54	3-703-961-01	SPACER, DY		63	*4-363-404-00	HOLDER, IC	
55	Δ 1-451-287-21	DEFLECTION YOKE (Y14FAA)		65	3-831-441-11	CLOTH, BLOTTING	
56	Δ 1-452-261-22	CRT NECK ASSY (326)		66	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM ϕ	
57	Δ 1-452-117-31	CRT NECK ASSY		67	1-452-032-00	MAGNET, DISK; 10MM ϕ	
58	*1-617-889-11	C BOARD					
59	4-303-774-XX	SPRING					

6-3. CHASSIS

- : BVTT3x6 7-685-871-01
- : B4x8 7-682-561-04
- : B3x10 7-682-549-04

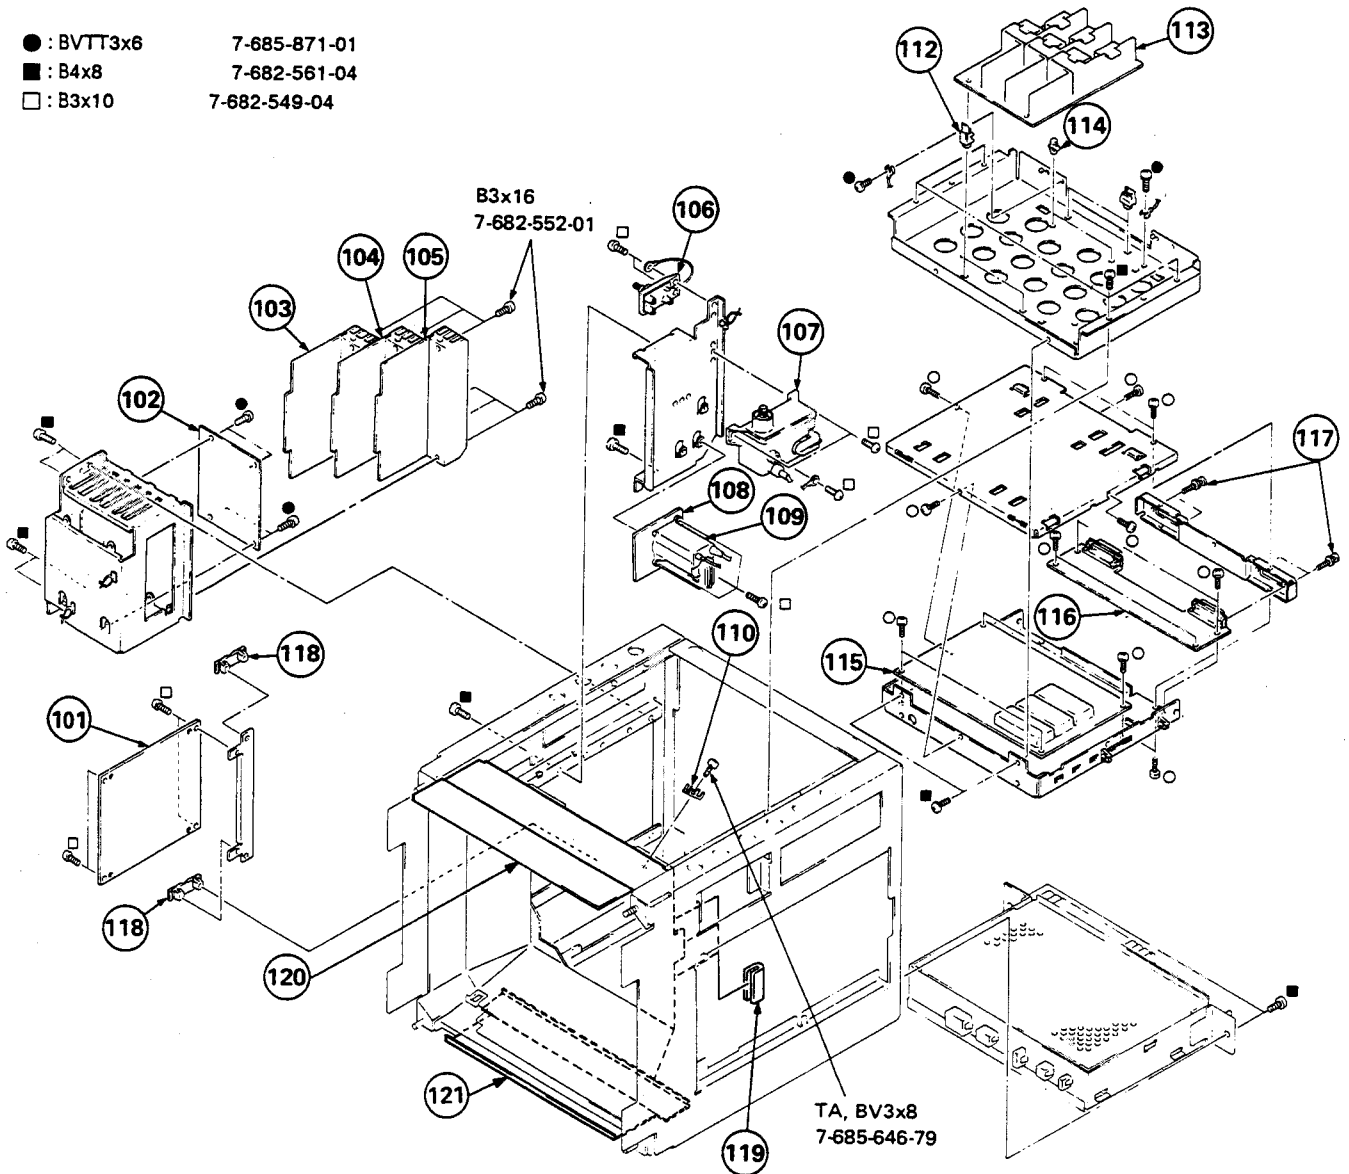


6. EXPLODED VIEWS

The components identified by shading and mark **▲** are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	*A-1345-732-A	DB BOARD, COMPLETE		112	*3-703-141-00	HOLDER, PCB	
102	*1-617-898-11	TA BOARD		113	*A-1135-464-A	EK BOARD, COMPLETE	
103	*A-1345-730-A	EA BOARD, COMPLETE		114	*3-670-570-11	SPACERR, SUPPORT	
104	*A-1345-731-A	EB BOARD, COMPLETE		115	*A-1275-088-A	QD BOARD, COMPLETE (BVM-2010PD/PMD ONLY)	
105	*A-1394-128-A	PA BOARD, COMPLETE		116	*1-623-851-11	QE BOARD (BVM-2010PD/PMD ONLY)	
106	▲ 1-237-165-11	RESISTOR ASSY, HIGH-VOLTAGE		117	2-133-531-01	SCREW, CONNECTOR (BVM-2010PD/PMD ONLY)	
107	▲ 1-453-103-31	HIGH-VOLTAGE BLOCK		118	*4-313-732-00	CLIP, HINGE, CIRCUIT BOARD	
108	*1-617-891-11	PB BOARD		119	*4-911-234-01	EDGING	
109	▲ 1-439-382-21	TRANSFORMER ASSY, FLYBACK		120	*4-386-819-02	STAY, FRONT	
110	*4-309-624-00	TERMINAL, EARTH		121	*4-391-234-03	STAY, UNDER	

6-4. SIGNAL BLOCK

- : BVTT3x6 7-685-871-01
- : BVTT3x6 7-682-147-09

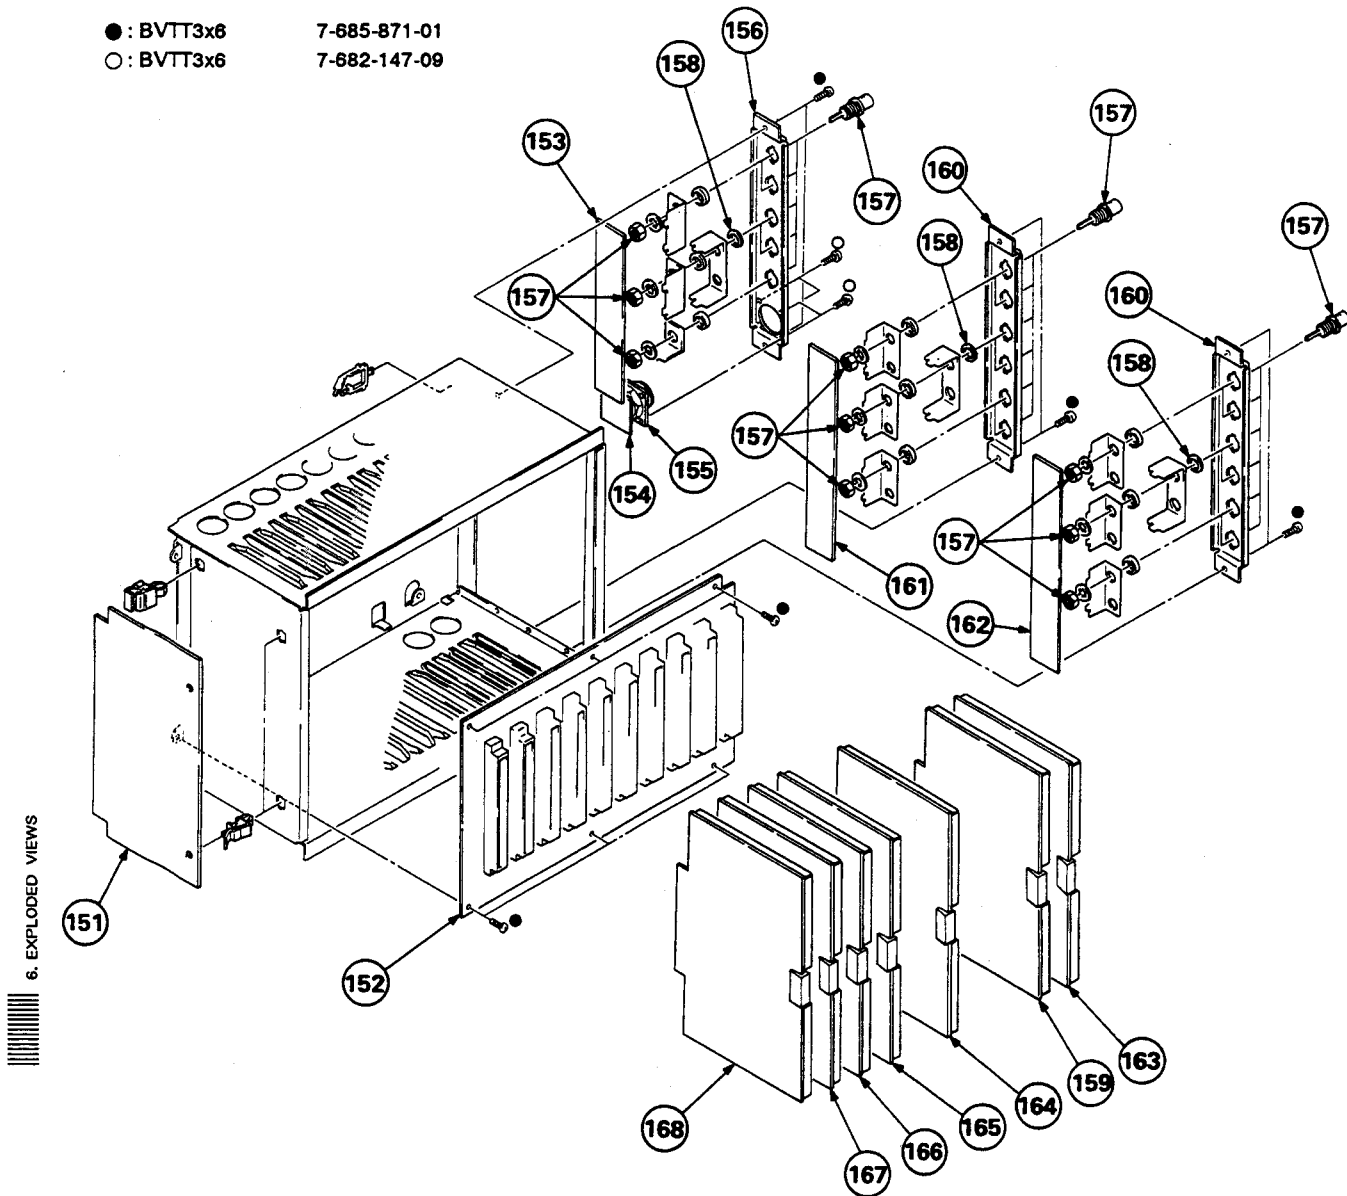


6. EXPLODED VIEWS

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
151	*A-1285-072-A	RB BOARD, COMPLETE		160	*4-379-439-01	PANEL (A), CONNECTOR	
152	*1-617-899-11	TB BOARD		161	*1-618-786-11	QB BOARD	
153	*1-617-897-11	W BOARD		162	*1-617-895-11	QA BOARD	
154	*1-617-896-11	V BOARD		163	*A-1135-355-A	BA BOARD, COMPLETE	
155	1-563-265-11	CONNECTOR, MULTIPLE 10P		164	*A-1135-391-A	BD BOARD, COMPLETE (BVM-2010P/PD ONLY)	
156	*4-379-440-01	PANEL (B), CONNECTOR		165	*A-1135-424-A	BM BOARD, COMPLETE (BVM-2010PM/PMD ONLY)	
157	1-565-791-11	CONNECTOR, BNC 1P		166	*A-1135-358-A	BG BOARD, COMPLETE	
158	*4-379-404-01	INSULATOR, BNC		167	*A-1135-359-A	BH BOARD, COMPLETE	
159	*A-1135-472-A	BR BOARD, COMPLETE (BVM-2010PD/PMD ONLY)		168	*A-1135-360-A	BI BOARD, COMPLETE	
					*A-1135-361-A	BJ BOARD, COMPLETE	

6-5. DRAWER BLOCK

● : BVTT3x6 7-685-871-01

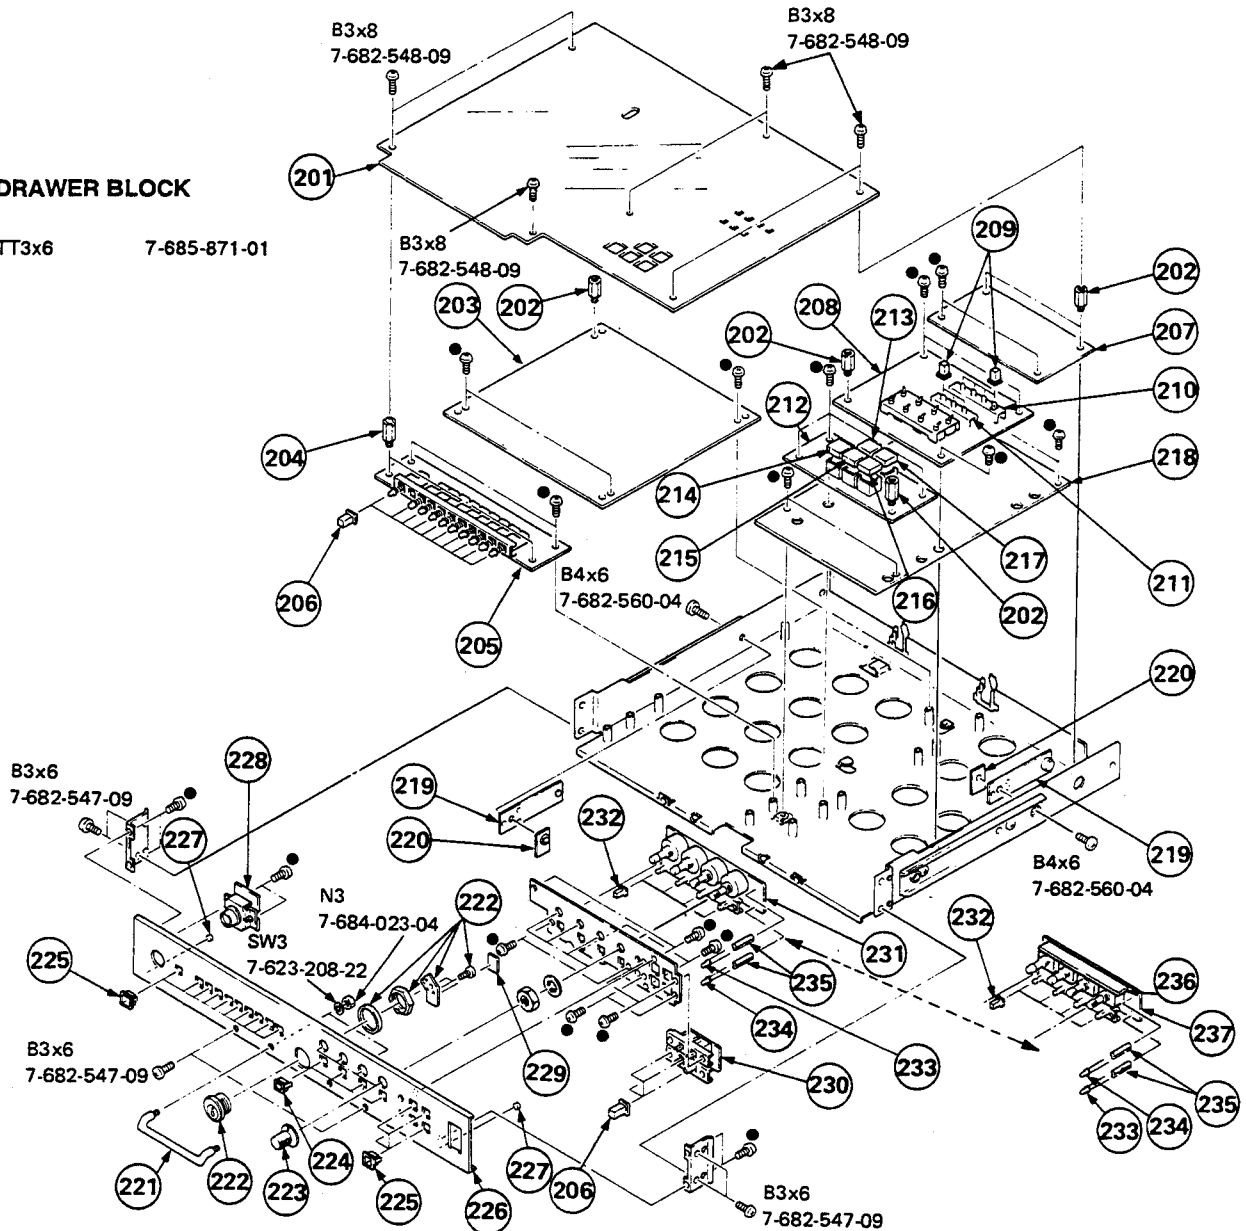

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
201	*4-386-845-01	COVER, PC BOARD		225	4-379-423-01	ESCUTCHEON (A)	
202	*2-264-136-00	SUPPORT, SWITCH, PUSH BUTTON		226	4-386-822-01	PANEL, CONTROL	
203	*A-1345-736-A	DA BOARD, COMPLETE		227	*4-911-672-01	FELT, COVER	
204	3-897-313-01	BOSS (17.2), RELAY		228	*1-623-001-11	HF BOARD	
205	*1-617-890-11	HA BOARD		229	4-337-209-11	PROTECTOR, SCRATCH	
206	4-374-839-01	BUTTON (A)		230	*1-617-887-11	HC BOARD	
207	*A-1340-989-A	DC BOARD, COMPLETE		231	*1-617-888-11	HD BOARD	(Serial No. Up to 2,001,080 BVM-2010P ONLY)
208	*1-617-886-11	HB BOARD					(Serial No. Up to 2,000,041 BVM-2010PD ONLY)
209	4-369-627-11	PUSH BUTTON					(Serial No. Up to 2,000,003 BVM-2010PM ONLY)
210	1-570-568-11	SWITCH, PUSH (4 KEY)		232	4-379-422-01	BUTTON (B)	
211	1-570-569-11	SWITCH, PUSH (3 KEY)		233	8-719-812-41	DIODE TLR124	
212	*1-618-814-11	HE BOARD		234	8-719-938-68	TLY124	
213	4-379-004-01	KEY TOP		235	*4-026-910-00	HOLDER, LED	
214	4-379-004-11	KEY TOP		236	1-627-682-11	HH BOARD	(Serial No. 2,001,081 and Higher BVM-2010P ONLY)
215	4-379-004-41	KEY TOP					(Serial No. 2,000,004 and Higher BVM-2010PM ONLY)
216	4-379-004-31	KEY TOP					(Serial No. 2,000,042 and Higher BVM-2010PD ONLY)
217	4-379-004-21	KEY TOP					(Serial No. 2,000,001 and Higher BVM-2010PMD ONLY)
218	*A-1285-073-A	RA BOARD, COMPLETE		237	1-627-681-11	HG BOARD	(Serial No. 2,001,081 and Higher BVM-2010P ONLY)
219	*X-4379-407-1	STOPPER ASSY					(Serial No. 2,000,004 and Higher BVM-2010PM ONLY)
220	*4-386-844-01	NUT, PLATE					(Serial No. 2,000,042 and Higher BVM-2010PD ONLY)
221	4-386-802-01	HANDLE, DRAWER					(Serial No. 2,000,001 and Higher BVM-2010PMD ONLY)
222	4-378-917-01	LOCK, CYLINDER					
223	X-3673-635-0	KNOB (1) ASSY, CONTROL					
224	4-379-424-01	ESCUTCHEON (B)					

6. EXPLODED VIEWS

SECTION 7

BA

ELECTRICAL PARTS LIST

NOTE:

The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

When indicating parts by reference number, please include the board name.

• Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

• All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

RESISTORS

• All resistors are in ohms
• F : nonflammable

CAPACITORS

• MF : μ F, PF : μ F

COILS

• MMH : mH, UH : μ H

• The components identified by \boxtimes in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

• * : Selected to yield optimum performance.

• There are some cases the reference number on one board overlaps on the other board. Therefore, when ordering parts by the reference number, please include the board name.

Ref.No	Part No.	Description	Remark
*A-1135-355-A	BA BOARD, COMPLETE	*****	
*4-353-708-00	HOOK, FINGER		
7-682-547-04	SCREW BVTT 3X6 (S)		
8-729-119-78	TRANSISTOR 2SC2785-HFE		
CONNECTOR			
BA1	*1-566-054-11	PIN, CONNECTOR 2P	
BA2	*1-566-054-11	PIN, CONNECTOR 2P	
BA3	*1-566-054-11	PIN, CONNECTOR 2P	
BA4	*1-566-054-11	PIN, CONNECTOR 2P	
BA5	*1-566-054-11	PIN, CONNECTOR 2P	
BA6	*1-566-054-11	PIN, CONNECTOR 2P	
CAPACITOR			
C1	1-124-910-11	ELECT	47MF 20% 16V
C2	1-124-910-11	ELECT	47MF 20% 16V
C3	1-124-910-11	ELECT	47MF 20% 16V
C4	1-123-356-00	ELECT	10MF 20% 16V
C5	1-124-910-11	ELECT	47MF 20% 16V
C6	1-124-910-11	ELECT	47MF 20% 16V
C7	1-124-910-11	ELECT	47MF 20% 16V
C8	1-124-910-11	ELECT	47MF 20% 16V
C9	1-101-004-00	CERAMIC	0.01MF 50V
C10	1-101-004-00	CERAMIC	0.01MF 50V
C11	1-124-119-00	ELECT	330MF 20% 16V
C12	1-123-356-00	ELECT	10MF 20% 16V
C13	1-123-356-00	ELECT	10MF 20% 16V
C14	1-123-356-00	ELECT	10MF 20% 16V
C15	1-123-356-00	ELECT	10MF 20% 16V
C16	1-123-356-00	ELECT	10MF 20% 16V
C17	1-123-356-00	ELECT	10MF 20% 16V
C18	1-123-356-00	ELECT	10MF 20% 16V
C19	1-123-356-00	ELECT	10MF 20% 16V
C20	1-101-004-00	CERAMIC	0.01MF 50V
C21	1-101-006-00	CERAMIC	0.047MF 50V
C31	1-101-004-00	CERAMIC	0.01MF 50V
C32	1-123-356-00	ELECT	10MF 20% 16V
C33	1-123-356-00	ELECT	10MF 20% 16V
C34	1-123-356-00	ELECT	10MF 20% 16V
C35	1-123-356-00	ELECT	10MF 20% 16V
C36	1-123-356-00	ELECT	10MF 20% 16V
C37	1-123-356-00	ELECT	10MF 20% 16V
C38	1-123-356-00	ELECT	10MF 20% 16V
C39	1-101-004-00	CERAMIC	0.01MF 50V
C51	1-124-119-00	ELECT	330MF 20% 16V
C52	1-123-356-00	ELECT	10MF 20% 16V
C53	1-123-356-00	ELECT	10MF 20% 16V
C54	1-123-356-00	ELECT	10MF 20% 16V
C55	1-123-356-00	ELECT	10MF 20% 16V
C56	1-123-356-00	ELECT	10MF 20% 16V
C57	1-123-356-00	ELECT	10MF 20% 16V
C71	1-101-004-00	CERAMIC	0.01MF 50V

Ref.No	Part No.	Description	Remark
C72	1-101-004-00	CERAMIC	0.01MF 50V
C73	1-101-004-00	CERAMIC	0.01MF 50V
C74	1-101-004-00	CERAMIC	0.01MF 50V
C75	1-101-004-00	CERAMIC	0.01MF 50V
C76	1-101-004-00	CERAMIC	0.01MF 50V
C77	1-101-004-00	CERAMIC	0.01MF 50V
C101	1-102-038-00	CERAMIC	0.001MF 500V
C102	1-123-356-00	ELECT	10MF 20% 16V
C103	1-102-951-00	CERAMIC	15PF 5% 50V
C104	1-123-379-00	ELECT	0.47MF 20% 50V
C201	1-102-038-00	CERAMIC	0.001MF 500V
C202	1-123-356-00	ELECT	10MF 20% 16V
C203	1-102-951-00	CERAMIC	15PF 5% 50V
C204	1-123-379-00	ELECT	0.47MF 20% 50V
C301	1-102-038-00	CERAMIC	0.001MF 500V
C302	1-123-356-00	ELECT	10MF 20% 16V
C303	1-102-965-00	CERAMIC	39PF 5% 50V
C304	1-123-379-00	ELECT	0.47MF 20% 50V
C305	1-102-947-00	CERAMIC	10PF 0.5PF 50V
C306	1-102-942-00	CERAMIC	5PF 1PF 50V
C401	1-102-038-00	CERAMIC	0.001MF 500V
C402	1-123-356-00	ELECT	10MF 20% 16V
C403	1-102-951-00	CERAMIC	15PF 5% 50V
C404	1-123-379-00	ELECT	0.47MF 20% 50V
C501	1-102-038-00	CERAMIC	0.001MF 500V
C502	1-123-356-00	ELECT	10MF 20% 16V
C503	1-102-951-00	CERAMIC	15PF 5% 50V
C504	1-123-379-00	ELECT	0.47MF 20% 50V
C601	1-102-038-00	CERAMIC	0.001MF 500V
C602	1-123-356-00	ELECT	10MF 20% 16V
C603	1-102-951-00	CERAMIC	15PF 5% 50V
C604	1-123-379-00	ELECT	0.47MF 20% 50V
C701	1-102-976-00	CERAMIC	180PF 5% 50V
C702	1-102-947-00	CERAMIC	10PF 0.5PF 50V
C703	1-123-356-00	ELECT	10MF 20% 16V
C704	1-124-910-11	ELECT	47MF 20% 16V
C705	1-136-153-00	FILM	0.01MF 5% 50V
C706	1-123-380-00	ELECT	1MF 20% 50V
C707	1-123-369-00	ELECT	4.7MF 20% 25V
C708	1-123-356-00	ELECT	10MF 20% 16V
C709	1-102-973-00	CERAMIC	100PF 5% 50V
C710	1-130-481-00	MYLAR	0.0068MF 5% 50V
C711	1-136-155-00	FILM	0.015MF 5% 50V
C712	1-130-471-00	MYLAR	0.001MF 5% 50V
C713	1-123-380-00	ELECT	1MF 20% 50V
C714	1-102-973-00	CERAMIC	100PF 5% 50V
C715	1-101-361-00	CERAMIC	150PF 5% 50V
C716	1-136-153-00	FILM	0.01MF 5% 50V
C717	1-102-973-00	CERAMIC	100PF 5% 50V
TRIMMER			
CV101	1-141-179-12	CAP, VAR, TRIMMER	
CV102	1-141-260-21	TRIMAR, CERAMIC	
CV201	1-141-179-12	CAP, VAR, TRIMMER	
CV202	1-141-260-21	TRIMAR, CERAMIC	

7. ELECTRICAL PARTS LIST

BA

7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Remark
CV401	1-141-179-12	CAP, VAR, TRIMMER	
CV402	1-141-260-21	TRIMAR, CERAMIC	
CV501	1-141-179-12	CAP, VAR, TRIMMER	
CV502	1-141-260-21	TRIMAR, CERAMIC	
CV601	1-141-179-12	CAP, VAR, TRIMMER	
CV602	1-141-260-21	TRIMAR, CERAMIC	
<u>DIODE</u>			
D1	8-719-109-63	DIODE RD3.0ES-B2	
D2	8-719-000-06	DIODE MC921	
D4	8-719-000-04	DIODE MC911	
D701	8-719-911-19	DIODE ISS119	
D702	8-719-109-75	DIODE RD4.3ES-B2	
D703	8-719-911-19	DIODE ISS119	
D704	8-719-911-19	DIODE ISS119	
D705	8-719-911-19	DIODE ISS119	
D706	8-719-911-19	DIODE ISS119	
D707	8-719-911-19	DIODE ISS119	
D708	8-719-911-19	DIODE ISS119	
D709	8-719-911-19	DIODE ISS119	
D710	8-719-911-19	DIODE ISS119	
<u>IC</u>			
IC1	8-759-208-94	IC CX-894	
IC2	8-759-208-94	IC CX-894	
IC3	8-759-140-53	IC MC14053BCP	
<u>TRANSISTOR</u>			
Q1	8-729-900-89	TRANSISTOR DTC144ES	
Q2	8-729-384-48	TRANSISTOR 2SA844-E	
Q3	8-729-900-89	TRANSISTOR DTC144ES	
Q4	8-729-900-89	TRANSISTOR DTC144ES	
Q5	8-729-900-89	TRANSISTOR DTC144ES	
Q6	8-729-926-32	TRANSISTOR XDA144ES	
Q101	8-729-266-82	TRANSISTOR 2SC2668-O	
Q102	8-729-266-82	TRANSISTOR 2SC2668-O	
Q103	8-729-266-82	TRANSISTOR 2SC2668-O	
Q104	8-729-384-48	TRANSISTOR 2SA844-E	
Q105	8-729-266-82	TRANSISTOR 2SC2668-O	
Q201	8-729-266-82	TRANSISTOR 2SC2668-O	
Q202	8-729-266-82	TRANSISTOR 2SC2668-O	
Q203	8-729-266-82	TRANSISTOR 2SC2668-O	
Q204	8-729-384-48	TRANSISTOR 2SA844-E	
Q205	8-729-266-82	TRANSISTOR 2SC2668-O	
Q301	8-729-266-82	TRANSISTOR 2SC2668-O	
Q302	8-729-266-82	TRANSISTOR 2SC2668-O	
Q303	8-729-266-82	TRANSISTOR 2SC2668-O	
Q304	8-729-384-48	TRANSISTOR 2SA844-E	
Q305	8-729-266-82	TRANSISTOR 2SC2668-O	
Q401	8-729-266-82	TRANSISTOR 2SC2668-O	
Q402	8-729-266-82	TRANSISTOR 2SC2668-O	
Q403	8-729-266-82	TRANSISTOR 2SC2668-O	
Q404	8-729-384-48	TRANSISTOR 2SA844-E	
Q405	8-729-266-82	TRANSISTOR 2SC2668-O	
Q501	8-729-266-82	TRANSISTOR 2SC2668-O	
Q502	8-729-266-82	TRANSISTOR 2SC2668-O	
Q503	8-729-266-82	TRANSISTOR 2SC2668-O	
Q504	8-729-384-48	TRANSISTOR 2SA844-E	
Q505	8-729-266-82	TRANSISTOR 2SC2668-O	
Q601	8-729-266-82	TRANSISTOR 2SC2668-O	
Q602	8-729-266-82	TRANSISTOR 2SC2668-O	
Q603	8-729-266-82	TRANSISTOR 2SC2668-O	
Q604	8-729-384-48	TRANSISTOR 2SA844-E	
Q605	8-729-266-82	TRANSISTOR 2SC2668-O	
Q701	8-729-119-76	TRANSISTOR 2SA1175-HFE	

Ref.No	Part No.	Description	Remark
Q702	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q703	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q704	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q705	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q706	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q707	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q708	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q709	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q710	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q711	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q712	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q713	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q714	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q715	8-729-800-10	TRANSISTOR 2SC3068	
Q716	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q717	8-729-119-76	TRANSISTOR 2SA1175-HFE	
<u>RESISTOR</u>			
R1	1-249-405-11	CARBON	100 5% 1/4W
R2	1-249-405-11	CARBON	100 5% 1/4W
R3	1-249-405-11	CARBON	100 5% 1/4W
R4	1-249-437-11	CARBON	47K 5% 1/4W
R5	1-249-405-11	CARBON	100 5% 1/4W
R6	1-249-432-11	CARBON	18K 5% 1/4W
R7	1-249-434-11	CARBON	27K 5% 1/4W
R8	1-249-422-11	CARBON	2.7K 5% 1/4W
R9	1-249-405-11	CARBON	100 5% 1/4W
R10	1-249-405-11	CARBON	100 5% 1/4W
R11	1-249-433-11	CARBON	22K 5% 1/4W
R12	1-249-405-11	CARBON	100 5% 1/4W
R13	1-249-437-11	CARBON	47K 5% 1/4W
R14	1-249-429-11	CARBON	10K 5% 1/4W
R101	1-249-417-11	CARBON	1K 5% 1/4W
R102	1-249-418-11	CARBON	1.2K 5% 1/4W
R103	1-249-425-11	CARBON	4.7K 5% 1/4W
R104	1-249-405-11	CARBON	100 5% 1/4W
R105	1-215-437-00	METAL	4.7K 1% 1/6W
R106	1-249-430-11	CARBON	12K 5% 1/4W
R107	1-249-433-11	CARBON	22K 5% 1/4W
R108	1-215-427-00	METAL	1.8K 1% 1/6W
R109	1-215-415-00	METAL	560 1% 1/6W
R110	1-249-405-11	CARBON	100 5% 1/4W
R111	1-215-431-00	METAL	2.7K 1% 1/6W
R112	1-249-421-11	CARBON	2.2K 5% 1/4W
R113	1-249-393-11	CARBON	10 5% 1/4W
R201	1-249-417-11	CARBON	1K 5% 1/4W
R202	1-249-418-11	CARBON	1.2K 5% 1/4W
R203	1-249-425-11	CARBON	4.7K 5% 1/4W
R204	1-249-405-11	CARBON	100 5% 1/4W
R205	1-215-437-00	METAL	4.7K 1% 1/6W
R206	1-249-430-11	CARBON	12K 5% 1/4W
R207	1-249-433-11	CARBON	22K 5% 1/4W
R208	1-215-427-00	METAL	1.8K 1% 1/6W
R209	1-215-415-00	METAL	560 1% 1/6W
R210	1-249-405-11	CARBON	100 5% 1/4W
R211	1-215-431-00	METAL	2.7K 1% 1/6W
R212	1-249-421-11	CARBON	2.2K 5% 1/4W
R213	1-249-393-11	CARBON	10 5% 1/4W
R301	1-249-417-11	CARBON	1K 5% 1/4W
R302	1-249-418-11	CARBON	1.2K 5% 1/4W
R303	1-249-426-11	CARBON	5.6K 5% 1/4W
R304	1-249-405-11	CARBON	100 5% 1/4W
R305	1-249-426-11	CARBON	5.6K 5% 1/4W
R306	1-249-430-11	CARBON	12K 5% 1/4W
R307	1-249-432-11	CARBON	18K 5% 1/4W



Ref.No	Part No.	Description	Remark		
R308	1-249-421-11	CARBON	2.2K	5%	1/4W
R309	1-249-417-11	CARBON	1K	5%	1/4W
R310	1-249-405-11	CARBON	100	5%	1/4W
R311	1-249-417-11	CARBON	1K	5%	1/4W
R312	1-249-421-11	CARBON	2.2K	5%	1/4W
R313	1-249-393-11	CARBON	10	5%	1/4W
R401	1-249-417-11	CARBON	1K	5%	1/4W
R402	1-249-418-11	CARBON	1.2K	5%	1/4W
R403	1-249-425-11	CARBON	4.7K	5%	1/4W
R404	1-249-405-11	CARBON	100	5%	1/4W
R405	1-215-437-00	METAL	4.7K	1%	1/6W
R406	1-249-430-11	CARBON	12K	5%	1/4W
R407	1-249-433-11	CARBON	22K	5%	1/4W
R408	1-215-427-00	METAL	1.8K	1%	1/6W
R409	1-215-415-00	METAL	560	1%	1/6W
R410	1-249-405-11	CARBON	100	5%	1/4W
R411	1-215-431-00	METAL	2.7K	1%	1/6W
R412	1-249-421-11	CARBON	2.2K	5%	1/4W
R413	1-249-393-11	CARBON	10	5%	1/4W
R501	1-249-417-11	CARBON	1K	5%	1/4W
R502	1-249-418-11	CARBON	1.2K	5%	1/4W
R503	1-249-425-11	CARBON	4.7K	5%	1/4W
R504	1-249-405-11	CARBON	100	5%	1/4W
R505	1-215-437-00	METAL	4.7K	1%	1/6W
R506	1-249-430-11	CARBON	12K	5%	1/4W
R507	1-249-433-11	CARBON	22K	5%	1/4W
R508	1-215-427-00	METAL	1.8K	1%	1/6W
R509	1-215-415-00	METAL	560	1%	1/6W
R510	1-249-405-11	CARBON	100	5%	1/4W
R511	1-215-431-00	METAL	2.7K	1%	1/6W
R512	1-249-421-11	CARBON	2.2K	5%	1/4W
R513	1-249-393-11	CARBON	10	5%	1/4W
R601	1-249-417-11	CARBON	1K	5%	1/4W
R602	1-249-418-11	CARBON	1.2K	5%	1/4W
R603	1-249-425-11	CARBON	4.7K	5%	1/4W
R604	1-249-405-11	CARBON	100	5%	1/4W
R605	1-215-437-00	METAL	4.7K	1%	1/6W
R606	1-249-430-11	CARBON	12K	5%	1/4W
R607	1-249-433-11	CARBON	22K	5%	1/4W
R608	1-215-427-00	METAL	1.8K	1%	1/6W
R609	1-215-415-00	METAL	560	1%	1/6W
R610	1-249-405-11	CARBON	100	5%	1/4W
R611	1-215-431-00	METAL	2.7K	1%	1/6W
R612	1-249-421-11	CARBON	2.2K	5%	1/4W
R613	1-249-393-11	CARBON	10	5%	1/4W
R701	1-249-433-11	CARBON	22K	5%	1/4W
R702	1-249-438-11	CARBON	56K	5%	1/4W
R703	1-249-417-11	CARBON	1K	5%	1/4W
R704	1-249-417-11	CARBON	1K	5%	1/4W
R705	1-249-424-11	CARBON	3.9K	5%	1/4W
R706	1-249-417-11	CARBON	1K	5%	1/4W
R707	1-249-429-11	CARBON	10K	5%	1/4W
R708	1-249-421-11	CARBON	2.2K	5%	1/4W
R709	1-249-419-11	CARBON	1.5K	5%	1/4W
R710	1-249-418-11	CARBON	1.2K	5%	1/4W
R711	1-249-434-11	CARBON	27K	5%	1/4W
R712	1-249-433-11	CARBON	22K	5%	1/4W
R713	1-249-422-11	CARBON	2.7K	5%	1/4W
R714	1-249-427-11	CARBON	6.8K	5%	1/4W
R715	1-249-433-11	CARBON	22K	5%	1/4W
R716	1-249-422-11	CARBON	2.7K	5%	1/4W
R717	1-249-425-11	CARBON	4.7K	5%	1/4W
R718	1-249-410-11	CARBON	270	5%	1/4W
R719	1-249-414-11	CARBON	560	5%	1/4W
R720	1-247-850-11	CARBON	6.2K	5%	1/4W

Ref.No	Part No.	Description	Remark		
R721	1-249-438-11	CARBON	56K	5%	1/4W
R722	1-249-441-11	CARBON	100K	5%	1/4W
R723	1-249-437-11	CARBON	47K	5%	1/4W
R724	1-249-429-11	CARBON	10K	5%	1/4W
R725	1-249-438-11	CARBON	56K	5%	1/4W
R726	1-247-895-00	CARBON	470K	5%	1/4W
R727	1-249-425-11	CARBON	4.7K	5%	1/4W
R728	1-249-435-11	CARBON	33K	5%	1/4W
R729	1-249-423-11	CARBON	3.3K	5%	1/4W
R730	1-249-421-11	CARBON	2.2K	5%	1/4W
R731	1-249-422-11	CARBON	2.7K	5%	1/4W
R732	1-249-422-11	CARBON	2.7K	5%	1/4W
R733	1-249-421-11	CARBON	2.2K	5%	1/4W
R734	1-249-421-11	CARBON	2.2K	5%	1/4W
R735	1-249-421-11	CARBON	2.2K	5%	1/4W
R736	1-249-425-11	CARBON	4.7K	5%	1/4W
R737	1-249-405-11	CARBON	100	5%	1/4W
R738	1-249-441-11	CARBON	100K	5%	1/4W
R739	1-249-433-11	CARBON	22K	5%	1/4W
R740	1-249-417-11	CARBON	1K	5%	1/4W
R741	1-202-473-00	SOLID	5.6M	5%	1/4W

VARIABLE RESISTOR

RV101	1-237-514-21	RES, ADJ, CERMET 500
RV201	1-237-514-21	RES, ADJ, CERMET 500
RV401	1-237-514-21	RES, ADJ, CERMET 500
RV501	1-237-514-21	RES, ADJ, CERMET 500
RV601	1-237-514-21	RES, ADJ, CERMET 500

*A-1135-391-A BD BOARD, COMPLETE (BVM-2010P/PD ONLY)

*A-1135-424-A BM BOARD, COMPLETE (BVM-2010PM/PMD ONLY)

*4-353-708-00 HOOK, FINGER

7-682-547-04 SCREW BVTT 3X6 (S)

7-682-950-01 SCREW PSW 3X12

CAPACITOR

C1	1-102-947-00	CERAMIC	10PF	0.5PF	50V
		(BVM-2010P/PD ONLY)			
C1	1-102-951-00	CERAMIC	15PF	5%	50V
		(BVM-2010PM/PMD ONLY)			
C2	1-102-947-00	CERAMIC	10PF	0.5PF	50V
		(BVM-2010P/PD ONLY)			
C2	1-102-951-00	CERAMIC	15PF	5%	50V
		(BVM-2010PM/PMD ONLY)			
C3	1-102-963-00	CERAMIC	33PF	5%	50V
		(BVM-2010P/PD ONLY)			
C4	1-101-880-00	CERAMIC	47PF	5%	50V
		(BVM-2010P/PD ONLY)			
C4	1-101-361-00	CERAMIC	39PF	5%	50V
		(BVM-2010PM/PMD ONLY)			
C6	1-101-888-00	CERAMIC	68PF	5%	50V
		(BVM-2010P/PD ONLY)			
C6	1-101-884-00	CERAMIC	56PF	5%	50V
		(BVM-2010PM/PMD ONLY)			
C7	1-102-963-00	CERAMIC	33PF	5%	50V
		(BVM-2010P/PD ONLY)			
C7	1-101-361-00	CERAMIC	39PF	5%	50V
		(BVM-2010PM/PMD ONLY)			
C8	1-102-943-00	CERAMIC	6PF	0.5PF	50V
		(BVM-2010P/PD ONLY)			
C8	1-102-935-00	CERAMIC	2PF	0.25PF	50V
		(BVM-2010PM/PMD ONLY)			
C9	1-123-356-00	ELECT	10MF	20%	16V
C10	1-123-356-00	ELECT	10MF	20%	16V

7. ELECTRICAL PARTS LIST

BD**BM**

Ref.No	Part No.	Description		Remark
C11	1-101-004-00	CERAMIC	0.01MF	50V
C12	1-101-004-00	CERAMIC	0.01MF	50V
C13	1-101-004-00	CERAMIC	0.01MF	50V
C14	1-101-004-00	CERAMIC	0.01MF	50V
C15	1-101-004-00	CERAMIC	0.01MF	50V
C16	1-101-004-00	CERAMIC	0.01MF	50V
C17	1-136-165-00	FILM	0.1MF	5% 50V
C18	1-102-950-00	CERAMIC (BVM-2010P/PD ONLY)	13PF	5% 50V
C18	1-102-951-00	CERAMIC (BVM-2010PM/PMD ONLY)	15PF	5% 50V
C19	1-102-951-00	CERAMIC	15PF	5% 50V
C20	1-101-888-00	CERAMIC (BVM-2010P/PD ONLY)	68PF	5% 50V
C20	1-101-884-00	CERAMIC (BVM-2010PM/PMD ONLY)	56PF	5% 50V
C21	1-163-157-00	FILM	0.022MF	5% 50V
C22	1-163-157-00	FILM	0.022MF	5% 50V
C23	1-123-380-00	ELECT (BVM-2010P/PD ONLY)	1MF	20% 50V
C23	1-136-153-00	FILM (BVM-2010PM/PMD ONLY)	0.01MF	5% 50V
C24	1-101-004-00	CERAMIC	0.01MF	50V
C25	1-124-910-11	ELECT	47MF	20% 16V
C26	1-109-628-00	MICA (BVM-2010P/PD ONLY)	160PF	1% 500V
C26	1-109-676-00	MICA (BVM-2010PM/PMD ONLY)	130PF	1% 500V
C27	1-102-960-00	CERAMIC	24PF	5% 50V
C28	1-109-631-00	MICA	330PF	1% 500V
C29	1-124-910-11	ELECT	47MF	20% 16V
C30	1-109-628-00	MICA (BVM-2010P/PD ONLY)	160PF	1% 500V
C30	1-109-676-00	MICA (BVM-2010PM/PMD ONLY)	130PF	1% 500V
C31	1-102-960-00	CERAMIC	24PF	5% 50V
C32	1-109-631-00	MICA	330PF	1% 500V
C33	1-101-004-00	CERAMIC	0.01MF	50V
C34	1-136-153-00	FILM	0.01MF	5% 50V
C35	1-101-004-00	CERAMIC	0.01MF	50V
C36	1-123-379-00	ELECT	0.47MF	20% 50V
C37	1-101-004-00	CERAMIC	0.01MF	50V
C38	1-123-382-00	ELECT	3.3MF	20% 50V
C39	1-109-667-11	MICA	56PF	1% 500V
C40	1-102-942-00	CERAMIC	5PF	0.5PF 50V
C41	1-109-621-00	MICA	220PF	1% 500V
C43	1-124-910-11	ELECT	47MF	20% 16V
C44	1-124-910-11	ELECT	47MF	20% 16V
C45	1-101-004-00	CERAMIC	0.01MF	50V
C46	1-136-153-00	FILM	0.01MF	5% 50V
C49	1-123-379-00	ELECT	0.47MF	20% 50V
C50	1-123-382-00	ELECT	3.3MF	20% 50V
C51	1-109-667-11	MICA	56PF	1% 500V
C52	1-102-942-00	CERAMIC	5PF	0.5PF 50V
C53	1-109-621-00	MICA	220PF	1% 500V
C55	1-124-910-11	ELECT	47MF	20% 16V
C56	1-124-910-11	ELECT	47MF	20% 16V
C57	1-101-004-00	CERAMIC	0.01MF	50V
C58	1-101-004-00	CERAMIC	0.01MF	50V
C59	1-101-004-00	CERAMIC	0.01MF	50V
C60	1-124-910-11	ELECT	47MF	20% 16V
C62	1-102-960-00	CERAMIC (BVM-2010P/PD ONLY)	24PF	5% 50V
C63	1-101-884-00	CERAMIC	56PF	5% 50V
C64	1-101-884-00	CERAMIC	56PF	5% 50V
C65	1-102-951-00	CERAMIC	15PF	5% 50V
C66	1-102-965-00	CERAMIC	39PF	5% 50V

Ref.No	Part No.	Description		Remark
C67	1-102-935-00	CERAMIC	2PF	0.25PF 50V
C68	1-124-034-51	ELECT	33MF	20% 16V
C69	1-124-034-51	ELECT	33MF	20% 16V
C70	1-123-369-00	ELECT	4.7MF	20% 50V
C71	1-101-004-00	CERAMIC	0.01MF	50V
C75	1-101-004-00	CERAMIC	0.01MF	50V
C80	1-126-301-11	ELECT (BVM-2010PM/PMD ONLY)	1MF	20% 50V
C100	1-124-034-51	ELECT	33MF	20% 16V
C101	1-124-910-11	ELECT	47MF	20% 25V
C102	1-124-034-51	ELECT	33MF	20% 16V
C103	1-124-034-51	ELECT	33MF	20% 16V
C104	1-124-034-51	ELECT	33MF	20% 16V
C106	1-124-034-51	ELECT	33MF	20% 16V
C107	1-124-034-51	ELECT	33MF	20% 16V
C108	1-124-034-51	ELECT	33MF	20% 16V
C109	1-124-034-51	ELECT	33MF	20% 16V
C110	1-124-034-51	ELECT	33MF	20% 16V
C111	1-124-034-51	ELECT	33MF	20% 16V
C112	1-124-119-00	ELECT	330MF	20% 16V
C114	1-124-034-51	ELECT	33MF	20% 16V
C115	1-124-034-51	ELECT	33MF	20% 16V
C121	1-101-004-00	CERAMIC	0.01MF	50V
C122	1-101-004-00	CERAMIC	0.01MF	50V
C123	1-101-004-00	CERAMIC	0.01MF	50V
C124	1-101-004-00	CERAMIC	0.01MF	50V
C125	1-101-004-00	CERAMIC	0.01MF	50V
C126	1-101-004-00	CERAMIC	0.01MF	50V
C200	1-124-034-51	ELECT	33MF	20% 16V
C201	1-124-910-11	ELECT	47MF	20% 25V
C202	1-124-034-51	ELECT	33MF	20% 16V
C203	1-124-034-51	ELECT	33MF	20% 16V
C204	1-101-004-00	CERAMIC	0.01MF	50V
C220	1-101-004-00	CERAMIC	0.01MF	50V
C221	1-101-004-00	CERAMIC	0.01MF	50V
C222	1-101-004-00	CERAMIC	0.01MF	50V
C224	1-101-004-00	CERAMIC	0.01MF	50V
C225	1-101-004-00	CERAMIC	0.01MF	50V
C226	1-101-004-00	CERAMIC	0.01MF	50V
C227	1-123-330-00	ELECT	22MF	20% 25V
C250	1-124-034-51	ELECT	33MF	20% 16V
C251	1-101-004-00	CERAMIC	0.01MF	50V
C301	1-101-004-00	CERAMIC	0.01MF	50V
C302	1-101-004-00	CERAMIC	0.01MF	50V
C303	1-101-004-00	CERAMIC	0.01MF	50V
C304	1-102-947-00	CERAMIC (BVM-2010P/PD ONLY)	10PF	0.5PF 50V
C312	1-101-004-00	CERAMIC	0.01MF	50V
C313	1-101-004-00	CERAMIC	0.01MF	50V
C316	1-102-935-00	CERAMIC (BVM-2010P/PD ONLY)	2PF	0.25PF 50V
C316	1-102-947-00	CERAMIC (BVM-2010PM/PMD ONLY)	10PF	0.5PF 50V
C350	1-102-963-00	CERAMIC (BVM-2010P/PD ONLY)	33PF	5% 50V
C350	1-102-959-00	CERAMIC (BVM-2010PM/PMD ONLY)	22PF	5% 50V
TRIMMER				
CV1	1-141-171-00	CAP,TRIMMER	15P	
CV2	1-141-179-12	CAP, VAR, TRIMMER		
DIODE				
D1	8-719-911-19	DIODE	1SS119	
D2	8-719-911-19	DIODE	1SS119	
D4	8-719-109-63	DIODE	RD3.0ES-B2	

7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Remark
D5	8-719-100-54	DIODE RD9.1EB2	
D6	8-719-911-19	DIODE 1SS119	
D10	8-719-920-95	DIODE 1T25-0	
D11	8-719-911-19	DIODE 1SS119	
D12	8-719-100-66	DIODE RD12EB2	
D13	8-719-100-66	DIODE RD12EB2	
D15	8-719-911-19	DIODE 1SS119 (BVM-2010PM/PMD ONLY)	
D16	8-719-911-19	DIODE 1SS119	
D201	8-719-911-19	DIODE 1SS119	
D202	8-719-911-19	DIODE 1SS119	
<u>IC</u>			
IC1	8-759-204-21	IC TA7193P	
IC2	8-759-800-81	IC LA7016	
IC3	8-759-246-15	IC TL8608AP	
	*1-526-654-00	SOCKET, IC (DP) 16P (IC3)	
IC4	8-759-246-15	IC TL8608AP	
	*1-526-654-00	SOCKET, IC (DP) 16P (IC4)	
IC5	8-759-140-53	IC MC14053BCP	
IC6	8-759-800-81	IC LA7016	
IC7	8-759-945-58	IC RC4558P	
IC8	8-759-945-58	IC RC4558P	
<u>COIL</u>			
L1.	1-408-533-00	COIL, VARIABLE	
L2	1-408-532-00	COIL, VARIABLE (BVM-2010P/PD ONLY)	
L2	1-408-514-00	COIL, VARIABLE (BVM-2010PM/PMD ONLY)	
L3	1-408-514-00	COIL (VARIABLE) (BVM-2010P/PD ONLY)	
L3	1-408-533-00	COIL (VARIABLE) (BVM-2010PM/PMD ONLY)	
L4	1-408-421-00	INDUCTOR 100UH	
L5	1-408-429-00	INDUCTOR 470UH	
L6	1-408-429-00	INDUCTOR 470UH	
L8	1-408-421-00	INDUCTOR 100UH	
L101	1-408-421-00	INDUCTOR 100UH	
L102	1-408-421-00	INDUCTOR 100UH	
<u>TRANSISTOR</u>			
Q1	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q2	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q3	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q4	8-729-800-10	TRANSISTOR 2SC3068	
Q5	8-729-800-10	TRANSISTOR 2SC3068	
Q6	8-729-384-48	TRANSISTOR 2SA844	
Q7	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q8	8-729-384-48	TRANSISTOR 2SA844	
Q9	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q10	8-729-119-76	TRANSISTOR 2SA1175-HFE (BVM-2010P/PD ONLY)	
Q10	8-729-384-48	TRANSISTOR 2SA844 (BVM-2010PM/PMD ONLY)	
Q11	8-729-119-76	TRANSISTOR 2SA1175-HFE (BVM-2010P/PD ONLY)	
Q11	8-729-384-48	TRANSISTOR 2SA844 (BVM-2010PM/PMD ONLY)	
Q12	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q13	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q14	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q15	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q16	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q17	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q18	8-729-600-19	TRANSISTOR 2SK381-A	

Ref.No	Part No.	Description	Remark
Q20	8-729-119-76	TRANSISTOR 2SA1175-HFE (BVM-2010P/PD ONLY)	
Q20	8-729-384-48	TRANSISTOR 2SA844 (BVM-2010PM/PMD ONLY)	
Q21	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q22	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q23	8-729-384-48	TRANSISTOR 2SA844	
Q24	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q25	8-729-800-10	TRANSISTOR 2SC3068	
Q26	8-729-600-19	TRANSISTOR 2SK381-A	
Q28	8-729-119-76	TRANSISTOR 2SA1175-HFE (BVM-2010P/PD ONLY)	
Q28	8-729-384-48	TRANSISTOR 2SA844 (BVM-2010PM/PMD ONLY)	
Q29	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q30	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q31	8-729-384-48	TRANSISTOR 2SA844	
Q32	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q33	8-729-800-10	TRANSISTOR 2SC3068	
Q34	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q35	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q36	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q38	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q101	8-729-140-97	TRANSISTOR 2SB734-34	
Q102	8-729-320-62	TRANSISTOR 2SD789-34 (BVM-2010P/PD ONLY)	
Q102	8-729-378-93	TRANSISTOR 2SD789-5 (BVM-2010PM/PMD ONLY)	
Q103	8-729-926-40	TRANSISTOR XDA124ES	
Q104	8-729-926-40	TRANSISTOR XDA124ES	
<u>RESISTOR</u>			
R1	1-249-428-11	CARBON 8.2K 5%	1/4W
R2	1-249-429-11	CARBON 10K 5%	1/4W
R3	1-249-422-11	CARBON 2.7K 5%	1/4W
R4	1-215-425-00	METAL 1.5K 1%	1/4W
R4	1-215-421-00	METAL 1K 1%	1/6W
		(BVM-2010PM/PMD ONLY)	
R5	1-215-395-00	METAL 82 1%	1/6W
		(BVM-2010P/PD ONLY)	
R5	1-215-398-00	METAL 110 1%	1/6W
		(BVM-2010PM/PMD ONLY)	
R6	1-215-421-00	METAL 1K 1%	1/4W
R7	1-215-421-00	METAL 1K 1%	1/4W
R8	1-215-423-00	METAL 1.2K 1%	1/6W
		(BVM-2010P/PD ONLY)	
R8	1-215-427-00	METAL 1.8K 1%	1/6W
		(BVM-2010PM/PMD ONLY)	
R9	1-215-421-00	METAL 1K 1%	1/6W
R10	1-215-421-00	METAL 1K 1%	1/6W
R11	1-215-391-00	METAL 56 1%	1/6W
		(BVM-2010P/PD ONLY)	
R11	1-215-400-00	METAL 130 1%	1/6W
		(BVM-2010PM/PMD ONLY)	
R12	1-215-427-00	METAL 1.8K 1%	1/6W
		(BVM-2010P/PD ONLY)	
R12	1-215-429-00	METAL 2.2K 1%	1/6W
		(BVM-2010PM/PMD ONLY)	
R13	1-249-425-11	CARBON 4.7K 5%	1/4W
R14	1-249-429-11	CARBON 10K 5%	1/4W
R15	1-249-429-11	CARBON 10K 5%	1/4W
R17	1-249-433-11	CARBON 22K 5%	1/4W
R18	1-215-425-00	METAL 1.5K 1%	1/4W
R19	1-215-425-00	METAL 1.5K 1%	1/4W
R20	1-215-425-00	METAL 1.5K 1%	1/4W
R21	1-215-425-00	METAL 1.5K 1%	1/4W
R22	1-249-405-11	CARBON 100 5%	1/4W

BD	BM
----	----

7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Remark
R23	1-215-441-00	METAL 6.8K 1% (BVM-2010P/PD ONLY)	1/4W
R23	1-215-439-00	METAL 5.6K 1% (BVM-2010PM/PMD ONLY)	1/6W
R24	1-215-469-00	METAL 100K 1%	1/6W
R25	1-249-427-11	CARBON 6.8K 5% (BVM-2010P/PD ONLY)	1/4W
R25	1-249-425-11	CARBON 4.7K 5% (BVM-2010PM/PMD ONLY)	1/4W
R26	1-249-415-11	CARBON 680 5% (BVM-2010P/PD ONLY)	1/4W
R26	1-249-418-11	CARBON 1.2 5% (BVM-2010PM/PMD ONLY)	1/4W
R27	1-249-415-11	CARBON 680 5%	1/4W
R28	1-249-420-11	CARBON 1.8K 5% (BVM-2010P/PD ONLY)	1/4W
R28	1-249-423-11	CARBON 3.3K 5% (BVM-2010PM/PMD ONLY)	1/4W
R29	1-249-422-11	CARBON 2.7K 5%	1/4W
R30	1-249-405-11	CARBON 100 5%	1/4W
R31	1-247-903-00	CARBON 1M 5%	1/4W
R32	1-249-429-11	CARBON 10K 5%	1/4W
R34	1-215-407-00	METAL 270 1% (BVM-2010P/PD ONLY)	1/4W
R34	1-215-417-00	METAL 680 1% (BVM-2010PM/PMD ONLY)	1/6W
R35	1-215-407-00	METAL 270 1% (BVM-2010P/PD ONLY)	1/4W
R35	1-215-417-00	METAL 680 1% (BVM-2010PM/PMD ONLY)	1/6W
R36	1-215-413-00	METAL 470 1%	1/4W
R37	1-215-443-00	METAL 8.2K 1%	1/4W
R38	1-249-441-11	CARBON 100K 5%	1/4W
R39	1-215-425-00	METAL 1.5K 1% (BVM-2010P/PD ONLY)	1/6W
R39	1-215-429-00	METAL 2.2K 1% (BVM-2010PM/PMD ONLY)	1/6W
R40	1-215-421-00	METAL 1K 1% (BVM-2010P/PD ONLY)	1/6W
R40	1-215-417-00	CARBON 1K 1% (BVM-2010PM/PMD ONLY)	1/4W
R41	1-215-429-00	METAL 2.2K 1% (BVM-2010P/PD ONLY)	1/6W
R41	1-215-421-11	CARBON 2.2K 5% (BVM-2010PM/PMD ONLY)	1/4W
R42	1-215-445-00	METAL 10K 1% (BVM-2010P/PD ONLY)	1/6W
R42	1-249-429-11	CARBON 10K 1% (BVM-2010PM/PMD ONLY)	1/4W
R43	1-215-421-00	METAL 1K 1% (BVM-2010P/PD ONLY)	1/6W
R43	1-249-417-11	CARBON 1K 1% (BVM-2010PM/PMD ONLY)	1/4W
R44	1-249-433-11	CARBON 22K 5%	1/4W
R45	1-249-429-11	CARBON 10K 5%	1/4W
R46	1-249-429-11	CARBON 10K 5%	1/4W
R47	1-249-441-11	CARBON 100K 5%	1/4W
R48	1-249-425-11	CARBON 4.7K 5%	1/4W
R54	1-249-422-11	CARBON 2.7K 5%	1/4W
R55	1-215-418-00	METAL 750 1% (BVM-2010P/PD ONLY)	1/6W
R55	1-215-420-00	METAL 910 1% (BVM-2010PM/PMD ONLY)	1/6W
R56	1-215-420-00	METAL 910 1%	1/6W
R57	1-249-415-11	CARBON 680 5%	1/4W
R58	1-249-422-11	CARBON 2.7K 5%	1/4W
R59	1-249-422-11	CARBON 2.7K 5%	1/4W
R60	1-215-418-00	METAL 750 1% (BVM-2010P/PD ONLY)	1/6W

Ref.No	Part No.	Description	Remark
R60	1-215-420-00	METAL 910 1% (BVM-2010PM/PMD ONLY)	1/6W
R61	1-215-420-00	METAL 910 1%	1/6W
R62	1-249-415-11	CARBON 680 5%	1/4W
R63	1-249-422-11	CARBON 2.7K 5%	1/4W
R64	1-215-477-00	METAL 220K 1% (BVM-2010P/PD ONLY)	1/6W
R64	1-249-417-11	CARBON 1K 5% (BVM-2010PM/PMD ONLY)	1/4W
R65	1-215-435-00	METAL 3.9K 1% (BVM-2010P/PD ONLY)	1/6W
R65	1-215-429-00	METAL 2.2K 1% (BVM-2010PM/PMD ONLY)	1/6W
R66	1-249-405-11	CARBON 100 5%	1/4W
R70	1-247-903-00	CARBON 1M 5%	1/4W
R71	1-249-429-11	CARBON 10K 5%	1/4W
R72	1-249-429-11	CARBON 10K 5%	1/4W
R73	1-249-429-11	CARBON 10K 5%	1/4W
R74	1-249-417-11	CARBON 1K 5%	1/4W
R75	1-249-427-11	CARBON 6.8K 5%	1/4W
R76	1-249-427-11	CARBON 6.8K 5%	1/4W
R77	1-249-425-11	CARBON 4.7K 5%	1/4W
R78	1-215-424-00	METAL 1.3K 1%	1/6W
R79	1-215-419-00	METAL 820 1%	1/6W
R80	1-215-425-00	METAL 1.5K 1%	1/6W
R81	1-249-422-11	CARBON 2.7K 5%	1/4W
R82	1-249-425-11	CARBON 4.7K 5%	1/4W
R83	1-249-435-11	CARBON 33K 5%	1/4W
R84	1-249-435-11	CARBON 33K 5%	1/4W
R85	1-247-903-00	CARBON 1M 5%	1/4W
R86	1-249-429-11	CARBON 10K 5%	1/4W
R87	1-249-429-11	CARBON 10K 5%	1/4W
R88	1-249-429-11	CARBON 10K 5%	1/4W
R89	1-249-417-11	CARBON 1K 5%	1/4W
R90	1-249-427-11	CARBON 6.8K 5%	1/4W
R91	1-249-427-11	CARBON 6.8K 5%	1/4W
R92	1-249-425-11	CARBON 4.7K 5%	1/4W
R93	1-215-424-00	METAL 1.3K 1%	1/6W
R94	1-215-419-00	METAL 820 1%	1/6W
R95	1-215-425-00	METAL 1.5K 1%	1/6W
R96	1-249-422-11	CARBON 2.7K 5%	1/4W
R97	1-249-425-11	CARBON 4.7K 5%	1/4W
R98	1-249-435-11	CARBON 33K 5%	1/4W
R99	1-249-435-11	CARBON 33K 5%	1/4W
R100	1-215-438-00	METAL 5.1K 1%	1/6W
R101	1-215-438-00	METAL 5.1K 1%	1/6W
R102	1-215-438-00	METAL 5.1K 1%	1/6W
R103	1-215-438-00	METAL 5.1K 1%	1/6W
R104	1-249-437-11	CARBON 47K 5%	1/4W
R105	1-249-438-11	CARBON 56K 5%	1/4W
R106	1-249-417-11	CARBON 1K 5%	1/4W
R107	1-249-417-11	CARBON 1K 5%	1/4W
R108	1-249-417-11	CARBON 1K 5%	1/4W
R109	1-249-417-11	CARBON 1K 5%	1/4W
R110	1-249-417-11	CARBON 1K 5%	1/4W
R115	1-215-438-00	METAL 5.1K 1% (BVM-2010P/PD ONLY)	1/6W
R115	1-215-429-00	METAL 2.2K 1% (BVM-2010PM/PMD ONLY)	1/6W
R116	1-215-438-00	METAL 5.1K 1% (BVM-2010P/PD ONLY)	1/6W
R116	1-215-429-00	METAL 2.2K 1% (BVM-2010PM/PMD ONLY)	1/6W
R120	1-249-429-11	CARBON 10K 5%	1/4W
R121	1-249-429-11	CARBON 10K 5%	1/4W
R130	1-215-477-00	METAL 220K 1% (BVM-2010P/PD ONLY)	1/6W



Ref.No	Part No.	Description	Remark
R130	1-215-485-00	METAL 470K 1% (BVM-2010PM/PMD ONLY)	1/6W
R150	1-249-441-11	CARBON 100K 5%	1/4W
R201	1-249-423-11	CARBON 3.3K 5%	1/4W
R202	1-249-423-11	CARBON 3.3K 5%	1/4W
R203	1-249-422-11	CARBON 2.7K 5%	1/4W
R204	1-249-423-11	CARBON 3.3K 5%	1/4W
R220	1-249-441-11	CARBON 100K 5%	1/4W
R221	1-249-433-11	CARBON 22K 5%	1/4W
R222	1-249-433-11	CARBON 22K 5%	1/4W
R250	1-215-415-00	METAL 560 1%	1/6W
R251	1-215-415-00	METAL 560 1%	1/6W
R252	1-215-421-00	METAL 1K 1%	1/6W
R254	1-249-429-11	CARBON 10K 5%	1/4W
R255	1-249-441-11	CARBON 100K 5%	1/4W
R259	1-215-421-00	METAL 1K 1%	1/6W
R301	1-215-469-00	METAL 100K 1%	1/6W
R302	1-215-491-00	METAL 820K 1%	1/6W
R303	1-249-418-11	CARBON 1.2K 5%	1/4W
R305	1-249-431-11	CARBON 15K 5%	1/4W
R306	1-249-428-11	CARBON 8.2K 5%	1/4W
R307	1-249-417-11	CARBON 1K 5%	1/4W
R308	1-249-417-11	CARBON 1K 5%	1/4W
R310	1-249-422-11	CARBON 2.7K 5%	1/4W
R314	1-215-417-00	METAL 680 1%	1/6W
R315	1-249-422-11	CARBON 2.7K 5%	1/4W
R316	1-249-413-11	CARBON 470 5%	1/4W
R317	1-249-413-11	CARBON 470 5%	1/4W
R320	1-215-472-00	METAL 130K 1% (BVM-2010P/PD ONLY)	1/6W
R320	1-215-482-00	METAL 360K 1% (BVM-2010PM/PMD ONLY)	1/6W
R353	1-249-432-11	CARBON 18K 5%	1/4W
R354	1-249-432-11	CARBON 18K 5%	1/4W
R400	1-215-429-00	METAL 2.2K 1%	1/6W
<u>VARIABLE RESISTOR</u>			
RV1	1-237-515-21	RES, ADJ, CERMET 1K	
RV2	1-237-499-21	RES, ADJ, CERMET 500	
RV3	1-237-501-21	RES, ADJ, CERMET 2K	
RV4	1-237-501-21	RES, ADJ, CERMET 2K	
RV5	1-237-517-21	RES, ADJ, CERMET 5K	
RV6	1-237-517-21	RES, ADJ, CERMET 5K	
RV7	1-237-504-21	RES, ADJ, CERMET 20K	
RV8	1-237-504-21	RES, ADJ, CERMET 20K	
RV9	1-237-517-21	RES, ADJ, CERMET 5K	
RV10	1-237-517-21	RES, ADJ, CERMET 5K	
<u>THERMISTOR</u>			
TH1	1-800-202-XX	THERMISTOR S-10K (BVM-2010PM/PMD ONLY)	
<u>CRYSTAL</u>			
X1	1-567-504-11	OSCILLATOR, CRYSTAL 4.43 MHz (BVM-2010P/PD ONLY)	
X1	1-527-794-00	VIBRATOR, CRYSTAL 3.58 MHz (BVM-2010PM/PMD ONLY)	
X2	1-567-409-11	VIBRATOR, CRYSTAL 10.64 MHz (BVM-2010P/PD ONLY)	
X2	1-567-416-11	VIBRATOR, CRYSTAL 10.717 MHz (BVM-2010PM/PMD ONLY)	

Ref.No	Part No.	Description	Remark
*A-1135-358-A BG BOARD, COMPLETE *****			
*4-353-708-00 HOOK, FINGER 7-682-547-04 SCREW BVTT 3X6 (S)			
<u>CAPACITOR</u>			
C1	1-124-910-11	ELECT 47MF	20% 16V
C2	1-124-910-11	ELECT 47MF	20% 16V
C3	1-123-356-00	ELECT 10MF	20% 16V
C4	1-124-910-11	ELECT 47MF	20% 16V
C7	1-101-004-00	CERAMIC 0.01MF	50V
C8	1-101-004-00	CERAMIC 0.01MF	50V
C9	1-101-004-00	CERAMIC 0.01MF	50V
C10	1-102-935-00	CERAMIC 2PF	0.25PF 50V
C12	1-101-004-00	CERAMIC 0.01MF	50V
C15	1-102-965-00	CERAMIC 39PF	5% 50V
C16	1-101-004-00	CERAMIC 0.01MF	50V
C22	1-101-004-00	CERAMIC 0.01MF	50V
C25	1-102-965-00	CERAMIC 39PF	5% 50V
C26	1-101-004-00	CERAMIC 0.01MF	50V
C32	1-101-004-00	CERAMIC 0.01MF	50V
C33	1-136-165-00	FILM 0.1MF	5% 50V
C34	1-136-165-00	FILM 0.1MF	5% 50V
C35	1-136-165-00	FILM 0.1MF	5% 50V
C41	1-102-942-00	CERAMIC 5PF	1PF 50V
C42	1-102-947-00	CERAMIC 10PF	0.5PF 50V
C44	1-102-936-00	CERAMIC 3PF	0.25PF 50V
C45	1-102-947-00	CERAMIC 10PF	0.5PF 50V
C47	1-123-356-00	ELECT 10MF	20% 16V
C51	1-102-942-00	CERAMIC 5PF	0.5PF 50V
C52	1-102-942-00	CERAMIC 5PF	0.5PF 50V
C53	1-123-356-00	ELECT 10MF	20% 25V
C54	1-101-004-00	CERAMIC 0.01MF	50V
C55	1-102-976-00	CERAMIC 180PF	5% 50V
C56	1-102-976-00	CERAMIC 180PF	5% 50V
C101	1-124-034-51	ELECT 33MF	20% 16V
C102	1-124-034-51	ELECT 33MF	20% 16V
C103	1-124-034-51	ELECT 33MF	20% 16V
C105	1-124-122-11	ELECT 100MF	20% 16V
C106	1-124-034-51	ELECT 33MF	20% 16V
C111	1-123-356-00	ELECT 10MF	20% 16V
C112	1-101-004-00	CERAMIC 0.01MF	50V
C113	1-101-004-00	CERAMIC 0.01MF	50V
C114	1-101-004-00	CERAMIC 0.01MF	50V
C115	1-101-004-00	CERAMIC 0.01MF	50V
C116	1-101-004-00	CERAMIC 0.01MF	50V
C117	1-101-004-00	CERAMIC 0.01MF	50V
C131	1-124-034-51	ELECT 33MF	20% 16V
C132	1-124-034-51	ELECT 33MF	20% 16V
C133	1-124-034-51	ELECT 33MF	20% 16V
C135	1-124-122-11	ELECT 100MF	20% 16V
C136	1-124-034-51	ELECT 33MF	20% 16V
C141	1-101-004-00	CERAMIC 0.01MF	50V
C142	1-101-004-00	CERAMIC 0.01MF	50V
C143	1-101-004-00	CERAMIC 0.01MF	50V
C144	1-101-004-00	CERAMIC 0.01MF	50V
C145	1-101-004-00	CERAMIC 0.01MF	50V
C146	1-101-004-00	CERAMIC 0.01MF	50V
C147	1-101-004-00	CERAMIC 0.01MF	50V
<u>TRIMMER</u>			
CV2	1-141-181-11	CAP,TRIMMER	
CV3	1-141-171-00	CAP,TRIMMER 20P	

7. ELECTRICAL PARTS LIST



7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Remark
<u>DIODE</u>			
D1	8-719-911-19	DIODE 1SS119	
D2	8-719-911-19	DIODE 1SS119	
D3	8-719-016-42	DIODE MC932	
D4	8-719-016-42	DIODE MC932	
D5	8-719-911-19	DIODE 1SS119	
D6	8-719-911-19	DIODE 1SS119	
D7	8-719-911-19	DIODE 1SS119	
D8	8-719-109-93	DIODE RD6.2ES-B2	
D11	8-719-911-19	DIODE 1SS119	
D12	8-719-911-19	DIODE 1SS119	
D13	8-719-911-19	DIODE 1SS119	
D14	8-719-911-19	DIODE 1SS119	
D16	8-719-911-19	DIODE 1SS119	
D17	8-719-911-19	DIODE 1SS119	
<u>DELAY LINE</u>			
DL1	1-415-477-11	DELAY LINE	
DL2	1-415-458-11	DELAY LINE	
DL3	1-415-458-11	DELAY LINE	
DL4	1-415-458-11	DELAY LINE	
<u>IC</u>			
IC1	8-759-800-81	IC LA7016	
IC2	8-766-001-49	TRANSISTOR TX-429M	
IC3	8-759-945-58	IC RC4558P	
IC4	8-757-182-14	IC CX-718D-1	
IC5	8-759-140-53	IC MC14053BCP	
IC6	8-759-140-53	IC MC14053BCP	
IC7	8-759-990-82	IC TL082CP	
IC8	8-759-990-82	IC TL082CP	
IC9	8-759-990-82	IC TL082CP	
<u>COIL</u>			
L2	1-408-408-00	INDUCTOR	8.2UH
L3	1-408-413-00	INDUCTOR	22UH
L4	1-408-413-00	INDUCTOR	22UH
<u>TRANSISTOR</u>			
Q1	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q5	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q7	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q8	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q9	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q10	8-729-384-48	TRANSISTOR 2SA844-E	
Q11	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q12	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q13	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q14	8-729-800-10	TRANSISTOR 2SC3068	
Q21	8-729-384-48	TRANSISTOR 2SA844-E	
Q22	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q23	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q24	8-729-600-19	TRANSISTOR 2SK381-A	
Q25	8-729-384-48	TRANSISTOR 2SA844-E	
Q26	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q27	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q28	8-729-600-19	TRANSISTOR 2SK381-A	
Q29	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q30	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q31	8-729-384-48	TRANSISTOR 2SA844-E	
Q32	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q33	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q34	8-729-600-19	TRANSISTOR 2SK381-A	
Q35	8-729-384-48	TRANSISTOR 2SA844-E	
Q36	8-729-119-78	TRANSISTOR 2SC2785-HFE	

Ref.No	Part No.	Description	Remark
Q37	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q38	8-729-600-19	TRANSISTOR 2SK381-A	
Q39	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q40	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q41	8-729-384-48	TRANSISTOR 2SA844-E	
Q42	8-729-384-48	TRANSISTOR 2SA844-E	
Q43	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q44	8-729-384-48	TRANSISTOR 2SA844-E	
Q45	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q49	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q50	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q51	8-729-926-40	TRANSISTOR XDA124ES	
Q52	8-729-926-40	TRANSISTOR XDA124ES	
Q53	8-729-926-40	TRANSISTOR XDA124ES	
Q54	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q55	8-729-600-19	TRANSISTOR 2SK381-A	
Q56	8-729-926-40	TRANSISTOR XDA124ES	
Q57	8-729-926-40	TRANSISTOR XDA124ES	
Q58	8-729-926-40	TRANSISTOR XDA124ES	
Q59	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q60	8-729-600-19	TRANSISTOR 2SK381-A	
Q71	8-729-384-48	TRANSISTOR 2SA844-E	
Q72	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q73	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q74	8-729-384-48	TRANSISTOR 2SA844-E	
Q75	8-729-800-10	TRANSISTOR 2SC3068	
Q76	8-729-926-40	TRANSISTOR XDA124ES	
Q77	8-729-926-40	TRANSISTOR XDA124ES	
Q78	8-729-900-89	TRANSISTOR DTC144ES	
Q81	8-729-384-48	TRANSISTOR 2SA844-E	
Q82	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q83	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q84	8-729-384-48	TRANSISTOR 2SA844-E	
Q85	8-729-800-10	TRANSISTOR 2SC3068	
<u>RESISTOR</u>			
R1	1-249-405-11	CARBON	100 5% 1/4W
R2	1-215-396-00	METAL	91 1% 1/6W
R3	1-215-431-00	METAL	2.7K 1% 1/6W
R4	1-249-419-11	CARBON	1.5K 5% 1/4W
R6	1-249-405-11	CARBON	100 5% 1/4W
R7	1-249-405-11	CARBON	100 5% 1/4W
R8	1-249-429-11	CARBON	10K 5% 1/4W
R10	1-247-830-11	CARBON	910 5% 1/4W
R11	1-249-417-11	CARBON	1K 5% 1/4W
R12	1-249-417-11	CARBON	1K 5% 1/4W
R13	1-215-462-00	METAL	51K 1% 1/6W
R14	1-249-426-11	CARBON	5.6K 5% 1/4W
R15	1-247-903-00	CARBON	1M 5% 1/4W
R16	1-215-477-00	METAL	220K 1% 1/6W
R17	1-249-429-11	CARBON	10K 5% 1/4W
R18	1-249-429-11	CARBON	10K 5% 1/4W
R19	1-249-417-11	CARBON	1K 5% 1/4W
R20	1-215-421-00	METAL	1K 1% 1/6W
R21	1-215-421-00	METAL	1K 1% 1/6W
R22	1-249-441-11	CARBON	100K 5% 1/4W
R23	1-215-409-00	METAL	330 1% 1/6W
R24	1-215-380-00	METAL	20 1% 1/6W
R25	1-215-380-00	METAL	20 1% 1/6W
R26	1-215-409-00	METAL	330 1% 1/6W
R27	1-249-429-11	CARBON	10K 5% 1/4W
R28	1-249-417-11	CARBON	1K 5% 1/4W
R29	1-215-418-00	METAL	750 1% 1/6W
R30	1-249-422-11	CARBON	2.7K 5% 1/4W
R31	1-249-405-11	CARBON	100 5% 1/4W
R32	1-249-420-11	CARBON	1.8K 5% 1/4W



Ref.No	Part No.	Description	Remark
R33	1-249-429-11	CARBON 10K 5%	1/4W
R34	1-249-428-11	CARBON 8.2K 5%	1/4W
R35	1-249-417-11	CARBON 1K 5%	1/4W
R36	1-249-422-11	CARBON 2.7K 5%	1/4W
R37	1-249-405-11	CARBON 100 5%	1/4W
R40	1-249-425-11	CARBON 4.7K 5%	1/4W
R41	1-249-422-11	CARBON 2.7K 5%	1/4W
R42	1-249-417-11	CARBON 1K 5%	1/4W
R43	1-249-417-11	CARBON 1K 5%	1/4W
R44	1-249-431-11	CARBON 15K 5%	1/4W
R45	1-249-423-11	CARBON 3.3K 5%	1/4W
R46	1-249-417-11	CARBON 1K 5%	1/4W
R47	1-249-423-11	CARBON 3.3K 5%	1/4W
R48	1-249-422-11	CARBON 2.7K 5%	1/4W
R49	1-249-405-11	CARBON 100 5%	1/4W
R50	1-249-422-11	CARBON 2.7K 5%	1/4W
R51	1-247-903-00	CARBON 1M 5%	1/4W
R52	1-247-866-11	CARBON 30K 5%	1/4W
R53	1-215-445-00	METAL 10K 1%	1/6W
R54	1-249-420-11	CARBON 1.8K 5%	1/4W
R55	1-249-422-11	CARBON 2.7K 5%	1/4W
R56	1-249-405-11	CARBON 100 5%	1/4W
R57	1-249-422-11	CARBON 2.7K 5%	1/4W
R58	1-249-422-11	CARBON 2.7K 5%	1/4W
R59	1-249-422-11	CARBON 2.7K 5%	1/4W
R61	1-249-422-11	CARBON 2.7K 5%	1/4W
R62	1-249-417-11	CARBON 1K 5%	1/4W
R63	1-249-417-11	CARBON 1K 5%	1/4W
R64	1-249-431-11	CARBON 15K 5%	1/4W
R65	1-249-423-11	CARBON 3.3K 5%	1/4W
R66	1-249-417-11	CARBON 1K 5%	1/4W
R67	1-249-423-11	CARBON 3.3K 5%	1/4W
R68	1-249-422-11	CARBON 2.7K 5%	1/4W
R69	1-249-405-11	CARBON 100 5%	1/4W
R70	1-249-422-11	CARBON 2.7K 5%	1/4W
R71	1-247-903-00	CARBON 1M 5%	1/4W
R72	1-247-866-11	CARBON 30K 5%	1/4W
R73	1-215-445-00	METAL 10K 1%	1/6W
R74	1-249-420-11	CARBON 1.8K 5%	1/4W
R75	1-249-422-11	CARBON 2.7K 5%	1/4W
R76	1-249-405-11	CARBON 100 5%	1/4W
R77	1-249-422-11	CARBON 2.7K 5%	1/4W
R78	1-249-422-11	CARBON 2.7K 5%	1/4W
R79	1-249-422-11	CARBON 2.7K 5%	1/4W
R80	1-249-405-11	CARBON 100 5%	1/4W
R81	1-249-422-11	CARBON 2.7K 5%	1/4W
R82	1-247-903-00	CARBON 1M 5%	1/4W
R83	1-249-420-11	CARBON 1.8K 5%	1/4W
R84	1-249-405-11	CARBON 100 5%	1/4W
R85	1-247-866-11	CARBON 30K 5%	1/4W
R86	1-215-445-00	METAL 10K 1%	1/6W
R87	1-249-422-11	CARBON 2.7K 5%	1/4W
R88	1-215-430-00	METAL 2.4K 1%	1/6W
R89	1-215-443-00	METAL 8.2K 1%	1/6W
R90	1-249-430-11	CARBON 12K 5%	1/4W
R91	1-249-405-11	CARBON 100 5%	1/4W
R92	1-247-830-11	CARBON 910 5%	1/4W
R93	1-215-421-00	METAL 1K 1%	1/6W
R94	1-249-422-11	CARBON 2.7K 5%	1/4W
R98	1-249-422-11	CARBON 2.7K 5%	1/4W
R99	1-249-422-11	CARBON 2.7K 5%	1/4W
R101	1-249-432-11	CARBON 18K 5%	1/4W
R102	1-249-421-11	CARBON 2.2K 5%	1/4W
R103	1-249-421-11	CARBON 2.2K 5%	1/4W
R104	1-249-421-11	CARBON 2.2K 5%	1/4W

Ref.No	Part No.	Description	Remark
R105	1-249-433-11	CARBON 22K 5%	1/4W
R106	1-249-429-11	CARBON 10K 5%	1/4W
R107	1-249-429-11	CARBON 10K 5%	1/4W
R108	1-249-405-11	CARBON 100 5%	1/4W
R109	1-249-422-11	CARBON 2.7K 5%	1/4W
R110	1-249-405-11	CARBON 100 5%	1/4W
R111	1-249-435-11	CARBON 33K 5%	1/4W
R112	1-249-421-11	CARBON 2.2K 5%	1/4W
R113	1-249-421-11	CARBON 2.2K 5%	1/4W
R114	1-249-421-11	CARBON 2.2K 5%	1/4W
R115	1-249-433-11	CARBON 22K 5%	1/4W
R116	1-249-429-11	CARBON 10K 5%	1/4W
R117	1-249-429-11	CARBON 10K 5%	1/4W
R118	1-249-405-11	CARBON 100 5%	1/4W
R119	1-249-422-11	CARBON 2.7K 5%	1/4W
R120	1-249-405-11	CARBON 100 5%	1/4W
R161	1-215-438-00	METAL 5.1K 1%	1/6W
R162	1-249-431-11	CARBON 15K 5%	1/4W
R163	1-249-417-11	CARBON 1K 5%	1/4W
R164	1-215-435-00	METAL 3.9K 1%	1/6W
R165	1-249-422-11	CARBON 2.7K 5%	1/4W
R166	1-249-422-11	CARBON 2.7K 5%	1/4W
R167	1-215-409-00	METAL 330 1%	1/6W
R168	1-215-411-00	METAL 390 1%	1/6W
R169	1-215-427-00	METAL 1.8K 1%	1/6W
R170	1-249-425-11	CARBON 4.7K 5%	1/4W
R171	1-215-436-00	METAL 4.3K 1%	1/6W
R172	1-249-431-11	CARBON 15K 5%	1/4W
R173	1-249-417-11	CARBON 1K 5%	1/4W
R174	1-215-435-00	METAL 3.9K 1%	1/6W
R175	1-249-422-11	CARBON 2.7K 5%	1/4W
R176	1-249-422-11	CARBON 2.7K 5%	1/4W
R177	1-215-409-00	METAL 330 1%	1/6W
R178	1-215-414-00	METAL 510 1%	1/6W
R179	1-215-422-00	METAL 1.1K 1%	1/6W
R180	1-249-425-11	CARBON 4.7K 5%	1/4W
R181	1-215-380-00	METAL 20 1%	1/6W
R182	1-215-380-00	METAL 20 1%	1/6W
R183	1-249-433-11	CARBON 22K 5%	1/4W
R184	1-249-425-11	CARBON 4.7K 5%	1/4W
R185	1-249-429-11	CARBON 10K 5%	1/4W
R201	1-249-437-11	CARBON 47K 5%	1/4W
R202	1-249-429-11	CARBON 10K 5%	1/4W
R203	1-249-435-11	CARBON 33K 5%	1/4W
R204	1-247-872-11	CARBON 51K 5%	1/4W

VARIABLE RESISTOR

RV1	1-237-514-21	RES, ADJ. CERMET 500
RV2	1-237-508-21	RES, ADJ. CERMET 500K
RV3	1-237-498-21	RES, ADJ. CERMET 200
RV4	1-237-500-21	RES, ADJ. CERMET 1K
RV5	1-237-500-21	RES, ADJ. CERMET 1K
RV11	1-237-519-21	RES, ADJ. CERMET 20K
RV12	1-237-519-21	RES, ADJ. CERMET 20K
RV13	1-237-519-21	RES, ADJ. CERMET 20K
RV14	1-237-519-21	RES, ADJ. CERMET 20K
RV15	1-237-519-21	RES, ADJ. CERMET 20K
RV16	1-237-519-21	RES, ADJ. CERMET 20K
RV21	1-237-517-21	RES, ADJ. CERMET 5K
RV22	1-237-517-21	RES, ADJ. CERMET 5K

SWITCH

S1	1-570-857-11	SWITCH, SLIDE
----	--------------	---------------

7. ELECTRICAL PARTS LIST

BH

7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Remark
*A-1135-359-A BH BOARD, COMPLETE *****			
*4-353-708-00 HOOK, FINGER 7-682-547-04 SCREW BVTT 3X6 (S)			
<u>CAPACITOR</u>			
C1	1-124-034-51	ELECT	33MF 20% 16V
C2	1-124-034-51	ELECT	33MF 20% 16V
C3	1-124-034-51	ELECT	33MF 20% 16V
C4	1-124-034-51	ELECT	33MF 20% 16V
C5	1-124-034-51	ELECT	33MF 20% 16V
C6	1-124-034-51	ELECT	33MF 20% 16V
C7	1-124-034-51	ELECT	33MF 20% 16V
C8	1-124-034-51	ELECT	33MF 20% 16V
C9	1-124-034-51	ELECT	33MF 20% 16V
C10	1-124-034-51	ELECT	33MF 20% 16V
C11	1-124-034-51	ELECT	33MF 20% 16V
C12	1-124-034-51	ELECT	33MF 20% 16V
C13	1-124-034-51	ELECT	33MF 20% 16V
C14	1-124-034-51	ELECT	33MF 20% 16V
C15	1-101-004-00	CERAMIC	0.01MF 50V
C16	1-101-004-00	CERAMIC	0.01MF 50V
C17	1-101-004-00	CERAMIC	0.01MF 50V
C18	1-101-004-00	CERAMIC	0.01MF 50V
C20	1-123-382-00	ELECT	3.3MF 20% 50V
C21	1-123-356-00	ELECT	10MF 20% 16V
C22	1-123-356-00	ELECT	10MF 20% 16V
C23	1-123-356-00	ELECT	10MF 20% 16V
C24	1-123-356-00	ELECT	10MF 20% 16V
C26	1-101-004-00	CERAMIC	0.01MF 50V
C41	1-124-122-11	ELECT	100MF 20% 16V
C42	1-123-356-00	ELECT	10MF 20% 16V
C43	1-123-356-00	ELECT	10MF 20% 16V
C44	1-123-356-00	ELECT	10MF 20% 16V
C45	1-123-356-00	ELECT	10MF 20% 16V
C50	1-123-356-00	ELECT	10MF 20% 16V
C51	1-101-004-00	CERAMIC	0.01MF 50V
C52	1-101-004-00	CERAMIC	0.01MF 50V
C53	1-101-004-00	CERAMIC	0.01MF 50V
C54	1-101-004-00	CERAMIC	0.01MF 50V
C55	1-101-004-00	CERAMIC	0.01MF 50V
C71	1-124-122-11	ELECT	100MF 20% 16V
C72	1-123-356-00	ELECT	10MF 20% 16V
C73	1-123-356-00	ELECT	10MF 20% 16V
C74	1-123-356-00	ELECT	10MF 20% 16V
C80	1-123-356-00	ELECT	10MF 20% 16V
C81	1-101-004-00	CERAMIC	0.01MF 50V
C82	1-101-004-00	CERAMIC	0.01MF 50V
C83	1-101-004-00	CERAMIC	0.01MF 50V
C84	1-101-004-00	CERAMIC	0.01MF 50V
C85	1-101-004-00	CERAMIC	0.01MF 50V
C86	1-101-004-00	CERAMIC	0.01MF 50V
C101	1-161-021-11	CERAMIC	0.047MF 10% 25V
C102	1-102-942-00	CERAMIC	5PF 0.5PF 50V
C103	1-102-959-00	CERAMIC	22PF 5% 50V
C104	1-123-356-00	ELECT	10MF 20% 16V
C105	1-161-021-11	CERAMIC	0.047MF 10% 25V
C106	1-101-004-00	CERAMIC	0.01MF 50V
C107	1-161-021-11	CERAMIC	0.047MF 10% 25V
C108	1-101-004-00	CERAMIC	0.01MF 50V
C109	1-101-004-00	CERAMIC	0.01MF 50V
C110	1-101-880-00	CERAMIC	47PF 5% 50V
C201	1-161-021-11	CERAMIC	0.047MF 10% 25V
C202	1-102-942-00	CERAMIC	5PF 0.5PF 50V

Ref.No	Part No.	Description	Remark
C203	1-102-959-00	CERAMIC	22PF 5% 50V
C204	1-123-356-00	ELECT	10MF 20% 16V
C205	1-161-021-11	CERAMIC	0.047MF 10% 25V
C206	1-101-004-00	CERAMIC	0.01MF 50V
C207	1-161-021-11	CERAMIC	0.047MF 10% 25V
C208	1-101-004-00	CERAMIC	0.01MF 50V
C209	1-101-004-00	CERAMIC	0.01MF 50V
C210	1-101-880-00	CERAMIC	47PF 5% 50V
C301	1-161-021-11	CERAMIC	0.047MF 10% 25V
C302	1-102-942-00	CERAMIC	5PF 0.5PF 50V
C303	1-102-959-00	CERAMIC	22PF 5% 50V
C304	1-123-356-00	ELECT	10MF 20% 16V
C305	1-161-021-11	CERAMIC	0.047MF 10% 25V
C306	1-101-004-00	CERAMIC	0.01MF 50V
C307	1-161-021-11	CERAMIC	0.047MF 10% 25V
C308	1-101-004-00	CERAMIC	0.01MF 50V
C309	1-101-004-00	CERAMIC	0.01MF 50V
C310	1-101-880-00	CERAMIC	47PF 5% 50V
<u>DIODE</u>			
D1	8-719-911-19	DIODE 1SS119	
D101	8-719-911-19	DIODE 1SS119	
D102	8-719-911-19	DIODE 1SS119	
D201	8-719-911-19	DIODE 1SS119	
D202	8-719-911-19	DIODE 1SS119	
D301	8-719-911-19	DIODE 1SS119	
D302	8-719-911-19	DIODE 1SS119	
<u>IC</u>			
IC1	8-759-040-53	IC TC4053BPHB	
IC2	8-759-040-53	IC TC4053BPHB	
IC3	8-759-040-53	IC TC4053BPHB	
IC4	8-759-040-53	IC TC4053BPHB	
IC5	8-759-981-95	IC RC4558S	
IC6	8-759-981-95	IC RC4558S	
IC7	8-759-800-81	IC LA7016	
IC8	8-759-800-81	IC LA7016	
IC9	8-759-140-53	IC MC14053BCP	
IC10	8-759-140-53	IC MC14053BCP	
IC11	8-759-240-81	IC TC4081BP	
IC12	8-759-240-81	IC TC4081BP	
IC13	8-759-240-01	IC TC4001BP	
IC14	8-759-207-73	IC TC4030BPHB	
IC101	8-766-001-49	TRANSISTOR TX-429M	
IC102	8-759-990-82	IC TL082CP	
IC201	8-766-001-49	TRANSISTOR TX-429M	
IC202	8-759-990-82	IC TL082CP	
IC301	8-766-001-49	TRANSISTOR TX-429M	
IC302	8-759-990-82	IC TL082CP	
<u>TRANSISTOR</u>			
Q1	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q2	8-729-105-71	TRANSISTOR 2SK523-K2	
Q3	8-729-384-48	TRANSISTOR 2SA844-E	
Q4	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q5	8-729-105-71	TRANSISTOR 2SK523-K2	
Q6	8-729-384-48	TRANSISTOR 2SA844-E	
Q7	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q8	8-729-105-71	TRANSISTOR 2SK523-K2	
Q9	8-729-384-48	TRANSISTOR 2SA844-E	
Q10	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q11	8-729-105-71	TRANSISTOR 2SK523-K2	
Q12	8-729-384-48	TRANSISTOR 2SA844-E	
Q13	8-729-384-48	TRANSISTOR 2SA844-E	
Q14	8-729-384-48	TRANSISTOR 2SA844-E	
Q15	8-729-384-48	TRANSISTOR 2SA844-E	



Ref.No	Part No.	Description	Remark
Q16	8-729-800-10	TRANSISTOR 2SC3068	
Q101	8-729-600-19	TRANSISTOR 2SK381-A	
Q102	8-729-384-48	TRANSISTOR 2SA844-E	
Q103	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q104	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q105	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q106	8-729-600-19	TRANSISTOR 2SK381-A	
Q107	8-729-600-19	TRANSISTOR 2SK381-A	
Q108	8-729-600-19	TRANSISTOR 2SK381-A	
Q201	8-729-600-19	TRANSISTOR 2SK381-A	
Q202	8-729-384-48	TRANSISTOR 2SA844-E	
Q203	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q204	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q205	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q206	8-729-600-19	TRANSISTOR 2SK381-A	
Q207	8-729-600-19	TRANSISTOR 2SK381-A	
Q208	8-729-600-19	TRANSISTOR 2SK381-A	
Q301	8-729-600-19	TRANSISTOR 2SK381-A	
Q302	8-729-384-48	TRANSISTOR 2SA844-E	
Q303	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q304	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q305	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q306	8-729-600-19	TRANSISTOR 2SK381-A	
Q307	8-729-600-19	TRANSISTOR 2SK381-A	
Q308	8-729-600-19	TRANSISTOR 2SK381-A	
<u>RESISTOR</u>			
R1	1-249-433-11	CARBON 22K 5%	1/4W
R3	1-249-427-11	CARBON 6.8K 5%	1/4W
R5	1-249-422-11	CARBON 2.7K 5%	1/4W
R6	1-249-433-11	CARBON 22K 5%	1/4W
R7	1-249-433-11	CARBON 22K 5%	1/4W
R9	1-249-427-11	CARBON 6.8K 5%	1/4W
R11	1-249-422-11	CARBON 2.7K 5%	1/4W
R12	1-249-433-11	CARBON 22K 5%	1/4W
R13	1-249-433-11	CARBON 22K 5%	1/4W
R15	1-249-427-11	CARBON 6.8K 5%	1/4W
R17	1-249-422-11	CARBON 2.7K 5%	1/4W
R18	1-249-433-11	CARBON 22K 5%	1/4W
R19	1-249-433-11	CARBON 22K 5%	1/4W
R21	1-249-427-11	CARBON 6.8K 5%	1/4W
R23	1-249-422-11	CARBON 2.7K 5%	1/4W
R31	1-249-405-11	CARBON 100 5%	1/4W
R32	1-249-405-11	CARBON 100 5%	1/4W
R33	1-249-433-11	CARBON 22K 5%	1/4W
R34	1-249-422-11	CARBON 2.7K 5%	1/4W
R35	1-249-405-11	CARBON 100 5%	1/4W
R36	1-249-405-11	CARBON 100 5%	1/4W
R37	1-249-433-11	CARBON 22K 5%	1/4W
R38	1-249-422-11	CARBON 2.7K 5%	1/4W
R39	1-249-433-11	CARBON 22K 5%	1/4W
R40	1-249-422-11	CARBON 2.7K 5%	1/4W
R52	1-249-417-11	CARBON 1K 5%	1/4W
R53	1-249-425-11	CARBON 4.7K 5%	1/4W
R54	1-249-441-11	CARBON 100K 5%	1/4W
R63	1-249-417-11	CARBON 1K 5%	1/4W
R64	1-249-437-11	CARBON 47K 5%	1/4W
R65	1-249-433-11	CARBON 22K 5%	1/4W
R66	1-249-417-11	CARBON 1K 5%	1/4W
R101	1-247-903-00	CARBON 1M 5%	1/4W
R102	1-249-431-11	CARBON 15K 5%	1/4W
R103	1-249-419-11	CARBON 1.5K 5%	1/4W
R104	1-249-430-11	CARBON 12K 5%	1/4W
R105	1-249-409-11	CARBON 220 5%	1/4W
R106	1-249-419-11	CARBON 1.5K 5%	1/4W
R107	1-215-425-00	METAL 1.5K 1%	1/6W

Ref.No	Part No.	Description	Remark
R108	1-249-415-11	CARBON 680 5%	1/4W
R109	1-249-419-11	CARBON 1.5K 5%	1/4W
R110	1-215-427-00	METAL 1.8K 1%	1/6W
R111	1-215-453-00	METAL 22K 1%	1/6W
R112	1-249-419-11	CARBON 1.5K 5%	1/4W
R113	1-249-405-11	CARBON 100 5%	1/4W
R114	1-215-445-00	METAL 10K 1%	1/6W
R115	1-215-445-00	METAL 10K 1%	1/6W
R116	1-249-429-11	CARBON 10K 5%	1/4W
R117	1-215-493-00	METAL 1M 1%	1/6W
R120	1-215-451-00	METAL 18K 1%	1/6W
R121	1-215-453-00	METAL 22K 1%	1/6W
R201	1-247-903-00	CARBON 1M 5%	1/4W
R202	1-249-431-11	CARBON 15K 5%	1/4W
R203	1-249-419-11	CARBON 1.5K 5%	1/4W
R204	1-249-430-11	CARBON 12K 5%	1/4W
R205	1-249-409-11	CARBON 220 5%	1/4W
R206	1-249-419-11	CARBON 1.5K 5%	1/4W
R207	1-215-425-00	METAL 1.5K 1%	1/6W
R208	1-249-415-11	CARBON 680 5%	1/4W
R209	1-249-419-11	CARBON 1.5K 5%	1/4W
R210	1-215-427-00	METAL 1.8K 1%	1/6W
R211	1-215-453-00	METAL 22K 1%	1/6W
R212	1-249-419-11	CARBON 1.5K 5%	1/4W
R213	1-249-405-11	CARBON 100 5%	1/4W
R214	1-215-445-00	METAL 10K 1%	1/6W
R215	1-215-445-00	METAL 10K 1%	1/6W
R216	1-249-429-11	CARBON 10K 5%	1/4W
R217	1-215-455-00	METAL 27K 1%	1/6W
R301	1-247-903-00	CARBON 1M 5%	1/4W
R302	1-249-431-11	CARBON 15K 5%	1/4W
R303	1-249-419-11	CARBON 1.5K 5%	1/4W
R304	1-249-430-11	CARBON 12K 5%	1/4W
R305	1-249-409-11	CARBON 220 5%	1/4W
R306	1-249-419-11	CARBON 1.5K 5%	1/4W
R307	1-215-425-00	METAL 1.5K 1%	1/6W
R308	1-249-415-11	CARBON 680 5%	1/4W
R309	1-249-419-11	CARBON 1.5K 5%	1/4W
R310	1-215-427-00	METAL 1.8K 1%	1/6W
R311	1-215-453-00	METAL 22K 1%	1/6W
R312	1-249-419-11	CARBON 1.5K 5%	1/4W
R313	1-249-405-11	CARBON 100 5%	1/4W
R314	1-215-445-00	METAL 10K 1%	1/6W
R315	1-215-445-00	METAL 10K 1%	1/6W
R316	1-249-429-11	CARBON 10K 5%	1/4W
<u>VARIABLE RESISTOR</u>			
RV1	1-237-505-21	RES. ADJ, CERMET 50K	
RV2	1-237-505-21	RES. ADJ, CERMET 50K	
RV3	1-237-505-21	RES. ADJ, CERMET 50K	
<u>SWITCH</u>			
S1	1-570-857-11	SWITCH, SLIDE	
S2	1-570-851-11	SWITCH, SLIDE	

*A-1135-360-A BI BOARD, COMPLETE			

*4-353-708-00 HOOK, FINGER			
7-682-547-04 SCREW BVTT 3X6 (S)			
<u>CAPACITOR</u>			
C1	1-130-481-00	MYLAR 0.0068MF 5%	50V
C2	1-136-165-00	FILM 0.1MF 5%	50V

7. ELECTRICAL PARTS LIST

BI

7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Remark
C3	1-123-369-00	ELECT	4.7MF 20% 25V
C4	1-123-369-00	ELECT	4.7MF 20% 25V
C5	1-102-973-00	CERAMIC	100PF 5% 50V
C7	1-123-330-00	ELECT	22MF 20% 25V
C8	1-123-369-00	ELECT	4.7MF 20% 25V
C11	1-123-356-00	ELECT	10MF 20% 16V
C12	1-101-004-00	CERAMIC	0.01MF 50V
C13	1-101-004-00	CERAMIC	0.01MF 50V
C14	1-101-004-00	CERAMIC	0.01MF 50V
C15	1-123-330-00	ELECT	22MF 20% 16V
C16	1-123-356-00	ELECT	10MF 20% 16V
C17	1-101-004-00	CERAMIC	0.01MF 50V
C18	1-101-004-00	CERAMIC	0.01MF 50V
C19	1-101-004-00	CERAMIC	0.01MF 50V
C41	1-124-034-51	ELECT	33MF 20% 16V
C42	1-124-034-51	ELECT	33MF 20% 16V
C43	1-124-034-51	ELECT	33MF 20% 16V
C44	1-124-034-51	ELECT	33MF 20% 16V
C45	1-124-034-51	ELECT	33MF 20% 16V
C46	1-124-034-51	ELECT	33MF 20% 16V
C51	1-101-004-00	CERAMIC	0.01MF 50V
C52	1-101-004-00	CERAMIC	0.01MF 50V
C53	1-101-004-00	CERAMIC	0.01MF 50V
C54	1-101-004-00	CERAMIC	0.01MF 50V
C55	1-101-004-00	CERAMIC	0.01MF 50V
C56	1-101-004-00	CERAMIC	0.01MF 50V
C57	1-101-004-00	CERAMIC	0.01MF 50V
C71	1-124-034-51	ELECT	33MF 20% 16V
C72	1-124-034-51	ELECT	33MF 20% 16V
C73	1-124-034-51	ELECT	33MF 20% 16V
C74	1-124-034-51	ELECT	33MF 20% 16V
C75	1-124-034-51	ELECT	33MF 20% 16V
C76	1-124-034-51	ELECT	33MF 20% 16V
C81	1-101-004-00	CERAMIC	0.01MF 50V
C82	1-101-004-00	CERAMIC	0.01MF 50V
C83	1-101-004-00	CERAMIC	0.01MF 50V
C84	1-101-004-00	CERAMIC	0.01MF 50V
C85	1-101-004-00	CERAMIC	0.01MF 50V
C86	1-101-004-00	CERAMIC	0.01MF 50V
C87	1-101-004-00	CERAMIC	0.01MF 50V
C101	1-101-004-00	CERAMIC	0.01MF 50V
C102	1-123-380-00	ELECT	1MF 20% 50V
C104	1-123-356-00	ELECT	10MF 20% 16V
C105	1-101-004-00	CERAMIC	0.01MF 50V
C106	1-136-161-00	FILM	0.047MF 5% 50V
C107	1-102-937-00	CERAMIC	4PF 0.25PF 50V
C108	1-101-880-00	CERAMIC	47PF 5% 50V
C109	1-136-161-00	FILM	0.047MF 5% 50V
C110	1-136-161-00	FILM	0.047MF 5% 50V
C114	1-102-951-00	CERAMIC	15PF 5% 50V
C115	1-136-153-00	FILM	0.01MF 5% 50V
C116	1-102-973-00	CERAMIC	100PF 5% 50V
C117	1-101-004-00	CERAMIC	0.01MF 50V
C118	1-101-004-00	CERAMIC	0.01MF 50V
C119	1-102-953-00	CERAMIC	18PF 5% 50V
C120	1-102-038-00	CERAMIC	0.001MF 500V
C122	1-102-943-00	CERAMIC	6PF 0.5PF 50V
C201	1-101-004-00	CERAMIC	0.01MF 50V
C202	1-123-380-00	ELECT	1MF 20% 50V
C204	1-123-356-00	ELECT	10MF 20% 16V
C205	1-101-004-00	CERAMIC	0.01MF 50V
C206	1-136-161-00	FILM	0.047MF 5% 50V
C207	1-102-937-00	CERAMIC	4PF 0.25PF 50V
C208	1-101-880-00	CERAMIC	47PF 5% 50V
C209	1-136-161-00	FILM	0.047MF 5% 50V

Ref.No	Part No.	Description	Remark
C210	1-136-161-00	FILM	0.047MF 5% 50V
C214	1-102-951-00	CERAMIC	15PF 5% 50V
C215	1-136-153-00	FILM	0.01MF 5% 50V
C216	1-102-973-00	CERAMIC	100PF 5% 50V
C217	1-101-004-00	CERAMIC	0.01MF 50V
C218	1-101-004-00	CERAMIC	0.01MF 50V
C219	1-102-953-00	CERAMIC	18PF 5% 50V
C220	1-102-038-00	CERAMIC	0.001MF 500V
C222	1-102-943-00	CERAMIC	6PF 0.5PF 50V
C301	1-101-004-00	CERAMIC	0.01MF 50V
C302	1-123-380-00	ELECT	1MF 20% 50V
C304	1-123-356-00	ELECT	10MF 20% 16V
C305	1-101-004-00	CERAMIC	0.01MF 50V
C306	1-136-161-00	FILM	0.047MF 5% 50V
C307	1-102-937-00	CERAMIC	4PF 0.25PF 50V
C308	1-101-880-00	CERAMIC	47PF 5% 50V
C309	1-136-161-00	FILM	0.047MF 5% 50V
C310	1-136-161-00	FILM	0.047MF 5% 50V
C314	1-102-951-00	CERAMIC	15PF 5% 50V
C315	1-136-153-00	FILM	0.01MF 5% 50V
C316	1-102-973-00	CERAMIC	100PF 5% 50V
C317	1-101-004-00	CERAMIC	0.01MF 50V
C318	1-101-004-00	CERAMIC	0.01MF 50V
C319	1-102-953-00	CERAMIC	18PF 5% 50V
C320	1-102-038-00	CERAMIC	0.001MF 500V
C322	1-102-943-00	CERAMIC	6PF 0.5PF 50V

DIODE

D1	8-719-911-19	DIODE 1SS119	
D2	8-719-911-19	DIODE 1SS119	
D4	8-719-911-19	DIODE 1SS119	
D5	8-719-911-19	DIODE 1SS119	
D6	8-719-110-31	DIODE RD12ES-B2	
D7	8-719-911-19	DIODE 1SS119	
D8	8-719-911-19	DIODE 1SS119	
D101	8-719-911-19	DIODE 1SS119	
D102	8-719-016-42	DIODE MC932	
D103	8-719-109-74	DIODE RD4.3ES-B1	
D104	8-719-911-19	DIODE 1SS119	
D105	8-719-109-93	DIODE RD6.2ES-B2	
D201	8-719-911-19	DIODE 1SS119	
D202	8-719-016-42	DIODE MC932	
D203	8-719-109-74	DIODE RD4.3ES-B1	
D204	8-719-911-19	DIODE 1SS119	
D205	8-719-109-93	DIODE RD6.2ES-B2	
D301	8-719-911-19	DIODE 1SS119	
D302	8-719-016-42	DIODE MC932	
D303	8-719-109-74	DIODE RD4.3ES-B1	
D304	8-719-911-19	DIODE 1SS119	
D305	8-719-109-93	DIODE RD6.2ES-B2	

IC

IC1	8-759-945-58	IC RC4558P	
IC101	8-759-040-53	IC MC14053BCP	
IC102	8-766-001-49	TRANSISTOR TX-429M	
IC103	8-759-990-82	IC TL082CP	
IC104	8-759-990-82	IC TL082CP	
IC105	8-759-990-82	IC TL082CP	
IC201	8-759-040-53	IC MC14053BCP	
IC202	8-766-001-49	TRANSISTOR TX-429M	
IC203	8-759-990-82	IC TL082CP	
IC204	8-759-990-82	IC TL082CP	
IC205	8-759-990-82	IC TL082CP	
IC301	8-759-040-53	IC MC14053BCP	
IC302	8-766-001-49	TRANSISTOR TX-429M	

Ref.No	Part No.	Description	Remark
IC303	8-759-990-82	IC TL082CP	
IC304	8-759-990-82	IC TL082CP	
IC305	8-759-990-82	IC TL082CP	

TRANSISTOR

Q1	8-729-900-74	TRANSISTOR DTC143TS	
Q2	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q3	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q11	8-729-201-05	TRANSISTOR 2SC2878-B	
Q12	8-729-201-05	TRANSISTOR 2SC2878-B	
Q13	8-729-201-05	TRANSISTOR 2SC2878-B	
Q14	8-729-201-05	TRANSISTOR 2SC2878-B	
Q15	8-729-926-32	TRANSISTOR XDA144ES	
Q101	8-729-384-48	TRANSISTOR 2SA844-E	
Q102	8-729-384-48	TRANSISTOR 2SA844-E	
Q103	8-729-384-48	TRANSISTOR 2SA844-E	
Q105	8-729-600-19	TRANSISTOR 2SK381-A	
Q106	8-729-384-48	TRANSISTOR 2SA844-E	
Q107	8-729-266-82	TRANSISTOR 2SC2668-O	
Q108	8-729-384-48	TRANSISTOR 2SA844-E	
Q109	8-729-600-19	TRANSISTOR 2SK381-A	
Q110	8-729-600-19	TRANSISTOR 2SK381-A	
Q113	8-729-600-19	TRANSISTOR 2SK381-A	
Q114	8-729-200-17	TRANSISTOR 2SA1091-O	
Q201	8-729-384-48	TRANSISTOR 2SA844-E	
Q202	8-729-384-48	TRANSISTOR 2SA844-E	
Q203	8-729-384-48	TRANSISTOR 2SA844-E	
Q205	8-729-600-19	TRANSISTOR 2SK381-A	
Q206	8-729-384-48	TRANSISTOR 2SA844-E	
Q207	8-729-266-82	TRANSISTOR 2SC2668-O	
Q208	8-729-384-48	TRANSISTOR 2SA844-E	
Q209	8-729-600-19	TRANSISTOR 2SK381-A	
Q210	8-729-600-19	TRANSISTOR 2SK381-A	
Q213	8-729-600-19	TRANSISTOR 2SK381-A	
Q214	8-729-200-17	TRANSISTOR 2SA1091-O	
Q301	8-729-384-48	TRANSISTOR 2SA844-E	
Q302	8-729-384-48	TRANSISTOR 2SA844-E	
Q303	8-729-384-48	TRANSISTOR 2SA844-E	
Q305	8-729-600-19	TRANSISTOR 2SK381-A	
Q306	8-729-384-48	TRANSISTOR 2SA844-E	
Q307	8-729-266-82	TRANSISTOR 2SC2668-O	
Q308	8-729-384-48	TRANSISTOR 2SA844-E	
Q309	8-729-600-19	TRANSISTOR 2SK381-A	
Q310	8-729-600-19	TRANSISTOR 2SK381-A	
Q313	8-729-600-19	TRANSISTOR 2SK381-A	
Q314	8-729-200-17	TRANSISTOR 2SA1091-O	

RESISTOR

R1	1-247-903-00	CARBON	1M	5%	1/4W
R2	1-249-429-11	CARBON	10K	5%	1/4W
R3	1-215-493-00	METAL	1M	1%	1/6W
R4	1-215-469-00	METAL	100K	1%	1/6W
R5	1-249-435-11	CARBON	33K	5%	1/4W
R8	1-249-441-11	CARBON	100K	5%	1/4W
R9	1-249-424-11	CARBON	3.9K	5%	1/4W
R10	1-249-425-11	CARBON	4.7K	5%	1/4W
R11	1-249-435-11	CARBON	33K	5%	1/4W
R12	1-249-429-11	CARBON	10K	5%	1/4W
R13	1-249-425-11	CARBON	4.7K	5%	1/4W
R14	1-249-435-11	CARBON	33K	5%	1/4W
R15	1-249-429-11	CARBON	10K	5%	1/4W
R23	1-249-417-11	CARBON	1K	5%	1/4W
R24	1-249-417-11	CARBON	1K	5%	1/4W
R25	1-249-417-11	CARBON	1K	5%	1/4W
R31	1-249-430-11	CARBON	12K	5%	1/4W

Ref.No	Part No.	Description	Remark
--------	----------	-------------	--------

R32	1-249-436-11	CARBON	39K	5%	1/4W
R33	1-249-430-11	CARBON	12K	5%	1/4W
R51	1-249-417-11	CARBON	1K	5%	1/4W
R52	1-249-417-11	CARBON	1K	5%	1/4W
R53	1-249-417-11	CARBON	1K	5%	1/4W

R54	1-249-431-11	CARBON	15K	5%	1/4W
R55	1-249-437-11	CARBON	47K	5%	1/4W
R56	1-249-431-11	CARBON	15K	5%	1/4W
R57	1-249-431-11	CARBON	15K	5%	1/4W
R58	1-249-439-11	CARBON	68K	5%	1/4W

R60	1-215-465-00	METAL	68K	1%	1/6W
R61	1-215-445-00	METAL	10K	1%	1/6W
R101	1-249-441-11	CARBON	100K	5%	1/4W
R102	1-249-421-11	CARBON	2.2K	5%	1/4W
R104	1-215-469-00	METAL	100K	1%	1/6W

R105	1-215-477-00	METAL	220K	1%	1/6W
R106	1-215-427-00	METAL	1.8K	1%	1/6W
R107	1-249-435-11	CARBON	33K	5%	1/4W
R108	1-249-430-11	CARBON	12K	5%	1/4W
R109	1-249-417-11	CARBON	1K	5%	1/4W

R110	1-249-441-11	CARBON	100K	5%	1/4W
R111	1-249-417-11	CARBON	1K	5%	1/4W
R112	1-249-417-11	CARBON	1K	5%	1/4W
R113	1-247-903-00	CARBON	1M	5%	1/4W
R114	1-249-419-11	CARBON	1.5K	5%	1/4W

R115	1-249-419-11	CARBON	1.5K	5%	1/4W
R116	1-249-424-11	CARBON	3.9K	5%	1/4W
R117	1-249-419-11	CARBON	1.5K	5%	1/4W
R118	1-215-421-00	METAL	1K	1%	1/6W
R119	1-249-405-11	CARBON	100	5%	1/4W

R120	1-249-405-11	CARBON	100	5%	1/4W
R121	1-249-409-11	CARBON	220	5%	1/4W
R122	1-215-427-00	METAL	1.8K	1%	1/6W
R123	1-249-429-11	CARBON	10K	5%	1/4W
R124	1-249-429-11	CARBON	10K	5%	1/4W

R125	1-249-422-11	CARBON	2.7K	5%	1/4W
R127	1-215-453-00	METAL	22K	1%	1/6W
R128	1-215-445-00	METAL	10K	1%	1/6W
R136	1-215-477-00	METAL	220K	1%	1/6W
R137	1-249-417-11	CARBON	1K	5%	1/4W

R138	1-249-441-11	CARBON	100K	5%	1/4W
R140	1-249-429-11	CARBON	10K	5%	1/4W
R141	1-215-469-00	METAL	100K	1%	1/6W
R142	1-215-455-00	METAL	27K	1%	1/6W
R143	1-215-488-00	METAL	620K	1%	1/6W

R144	1-249-434-11	CARBON	27K	5%	1/4W
R146	1-249-417-11	CARBON	1K	5%	1/4W
R147	1-249-405-11	CARBON	100	5%	1/4W
R201	1-249-441-11	CARBON	100K	5%	1/4W
R202	1-249-421-11	CARBON	2.2K	5%	1/4W

R204	1-215-469-00	METAL	100K	1%	1/6W
R205	1-215-477-00	METAL	220K	1%	1/6W
R206	1-215-427-00	METAL	1.8K	1%	1/6W
R207	1-249-435-11	CARBON	33K	5%	1/4W
R208	1-249-430-11	CARBON	12K	5%	1/4W

R209	1-249-417-11	CARBON	1K	5%	1/4W
R210	1-249-441-11	CARBON	100K	5%	1/4W
R211	1-249-417-11	CARBON	1K	5%	1/4W
R212	1-249-417-11	CARBON	1K	5%	1/4W
R213	1-247-903-00	CARBON	1M	5%	1/4W

R214	1-249-419-11	CARBON	1.5K	5%	1/4W
R215	1-249-419-11	CARBON	1.5K	5%	1/4W
R216	1-249-424-11	CARBON	3.9K	5%	1/4W
R217	1-249-419-11	CARBON	1.5K	5%	1/4W
R218	1-215-421-00	METAL	1K	1%	1/6W



7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Remark
R219	1-249-405-11	CARBON	100 5% 1/4W
R220	1-249-405-11	CARBON	100 5% 1/4W
R221	1-249-409-11	CARBON	220 5% 1/4W
R222	1-215-427-00	METAL	1.8K 1% 1/6W
R223	1-249-429-11	CARBON	10K 5% 1/4W
R224	1-249-429-11	CARBON	10K 5% 1/4W
R225	1-249-422-11	CARBON	2.7K 5% 1/4W
R227	1-215-453-00	METAL	22K 1% 1/6W
R228	1-215-445-00	METAL	10K 1% 1/6W
R236	1-215-477-00	METAL	220K 1% 1/6W
R237	1-249-417-11	CARBON	1K 5% 1/4W
R238	1-249-441-11	CARBON	100K 5% 1/4W
R240	1-249-429-11	CARBON	10K 5% 1/4W
R241	1-215-469-00	METAL	100K 1% 1/6W
R242	1-215-455-00	METAL	27K 1% 1/6W
R243	1-215-488-00	METAL	620K 1% 1/6W
R244	1-249-434-11	CARBON	27K 5% 1/4W
R246	1-249-417-11	CARBON	1K 5% 1/4W
R247	1-249-405-11	CARBON	100 5% 1/4W
R301	1-249-441-11	CARBON	100K 5% 1/4W
R302	1-249-421-11	CARBON	2.2K 5% 1/4W
R304	1-215-469-00	METAL	100K 1% 1/6W
R305	1-215-477-00	METAL	220K 1% 1/6W
R306	1-215-427-00	METAL	1.8K 1% 1/6W
R307	1-249-435-11	CARBON	33K 5% 1/4W
R308	1-249-430-11	CARBON	12K 5% 1/4W
R309	1-249-417-11	CARBON	1K 5% 1/4W
R310	1-249-441-11	CARBON	100K 5% 1/4W
R311	1-249-417-11	CARBON	1K 5% 1/4W
R312	1-249-417-11	CARBON	1K 5% 1/4W
R313	1-247-903-00	CARBON	1M 5% 1/4W
R314	1-249-419-11	CARBON	1.5K 5% 1/4W
R315	1-249-419-11	CARBON	1.5K 5% 1/4W
R316	1-249-424-11	CARBON	3.9K 5% 1/4W
R317	1-249-419-11	CARBON	1.5K 5% 1/4W
R318	1-215-421-00	METAL	1K 1% 1/6W
R319	1-249-405-11	CARBON	100 5% 1/4W
R320	1-249-405-11	CARBON	100 5% 1/4W
R321	1-249-409-11	CARBON	220 5% 1/4W
R322	1-215-427-00	METAL	1.8K 1% 1/6W
R323	1-249-429-11	CARBON	10K 5% 1/4W
R324	1-249-429-11	CARBON	10K 5% 1/4W
R325	1-249-422-11	CARBON	2.7K 5% 1/4W
R327	1-215-453-00	METAL	22K 1% 1/6W
R328	1-215-445-00	METAL	10K 1% 1/6W
R336	1-215-477-00	METAL	220K 1% 1/6W
R337	1-249-417-11	CARBON	1K 5% 1/4W
R338	1-249-441-11	CARBON	100K 5% 1/4W
R340	1-249-429-11	CARBON	10K 5% 1/4W
R341	1-215-469-00	METAL	100K 1% 1/6W
R342	1-215-455-00	METAL	27K 1% 1/6W
R343	1-215-488-00	METAL	620K 1% 1/6W
R344	1-249-434-11	CARBON	27K 5% 1/4W
R346	1-249-417-11	CARBON	1K 5% 1/4W
R347	1-249-405-11	CARBON	100 5% 1/4W

*A-1135-361-A BJ BOARD, COMPLETE

*4-353-708-00 HOOK, FINGER
7-682-547-04 SCREW BVTT 3X6 (S)

CAPACITOR

C1	1-101-361-00	CERAMIC	150PF 5% 50V
----	--------------	---------	--------------

Ref.No	Part No.	Description	Remark
C2	1-101-361-00	CERAMIC	150PF 5% 50V
C4	1-102-821-00	CERAMIC	360PF 5% 50V
C5	1-130-473-00	MYLAR	0.0015MF 5% 50V
C11	1-104-302-11	POLYSTYRENE	0.001MF 5% 50V
C12	1-102-525-11	CERAMIC	68PF 5% 50V
C14	1-102-525-11	CERAMIC	68PF 5% 50V
C15	1-102-525-11	CERAMIC	68PF 5% 50V
C16	1-102-525-11	CERAMIC	68PF 5% 50V
C17	1-102-525-11	CERAMIC	68PF 5% 50V
C18	1-104-302-11	POLYSTYRENE	0.001MF 5% 50V
C19	1-102-973-00	CERAMIC	100PF 5% 50V
C20	1-102-525-11	CERAMIC	68PF 5% 50V
C21	1-101-361-00	CERAMIC	150PF 5% 50V
C22	1-101-890-00	CERAMIC	75PF 5% 50V
C23	1-102-965-00	CERAMIC	39PF 5% 50V
C25	1-102-811-91	CERAMIC	9PF 1PF 50V
C26	1-102-944-00	CERAMIC	7PF 1PF 50V
C27	1-101-361-00	CERAMIC	150PF 5% 50V
C28	1-130-471-00	MYLAR	0.001MF 5% 50V
C29	1-130-471-00	MYLAR	0.001MF 5% 50V
C30	1-101-004-00	CERAMIC	0.01MF 50V
C31	1-101-361-00	CERAMIC	150PF 5% 50V
C32	1-101-361-00	CERAMIC	150PF 5% 50V
C33	1-101-361-00	CERAMIC	150PF 5% 50V
C34	1-101-361-00	CERAMIC	150PF 5% 50V
C35	1-130-471-00	MYLAR	0.001MF 5% 50V
C36	1-102-824-00	CERAMIC	470PF 5% 50V
C37	1-123-380-00	ELECT	1MF 20% 50V
C38	1-101-004-00	CERAMIC	0.01MF 50V
C39	1-101-004-00	CERAMIC	0.01MF 50V
C40	1-102-074-00	CERAMIC	0.001MF 10% 50V
C61	1-101-888-00	CERAMIC	68PF 5% 50V
C62	1-101-880-00	CERAMIC	47PF 5% 50V
C63	1-101-888-00	CERAMIC	68PF 5% 50V
C64	1-101-880-00	CERAMIC	47PF 5% 50V
C65	1-102-820-00	CERAMIC	330PF 5% 50V
C66	1-101-004-00	CERAMIC	0.01MF 50V
C67	1-101-880-00	CERAMIC	47PF 5% 50V
C100	1-124-910-11	ELECT	47MF 20% 16V
C102	1-124-034-51	ELECT	33MF 20% 16V
C106	1-101-004-00	CERAMIC	0.01MF 50V
C108	1-124-034-51	ELECT	33MF 20% 16V
C109	1-101-004-00	CERAMIC	0.01MF 50V
C110	1-101-004-00	CERAMIC	0.01MF 50V
C111	1-101-004-00	CERAMIC	0.01MF 50V
C112	1-101-004-00	CERAMIC	0.01MF 50V
C113	1-101-004-00	CERAMIC	0.01MF 50V
C114	1-123-356-00	ELECT	10MF 20% 16V
C115	1-101-004-00	CERAMIC	0.01MF 50V
C116	1-101-004-00	CERAMIC	0.01MF 50V
C117	1-101-004-00	CERAMIC	0.01MF 50V
C118	1-123-356-00	ELECT	10MF 20% 16V
C120	1-101-004-00	CERAMIC	0.01MF 50V
C121	1-101-004-00	CERAMIC	0.01MF 50V
C122	1-101-004-00	CERAMIC	0.01MF 50V
C130	1-124-034-51	ELECT	33MF 20% 16V

DIODE

D1	8-719-911-19	DIODE 1SS119
D2	8-719-911-19	DIODE 1SS119
D3	8-719-911-19	DIODE 1SS119
D7	8-719-911-19	DIODE 1SS119
D8	8-719-911-19	DIODE 1SS119
D9	8-719-911-19	DIODE 1SS119
D11	8-719-016-42	DIODE MC932

Ref.No	Part No.	Description	Remark
<u>IC</u>			
IC1	8-759-345-38	IC HD14538BP	
IC2	8-759-240-01	IC TC14001BP	
IC3	8-759-240-40	IC TC4040BP	
IC4	8-759-240-40	IC TC4040BP	
IC5	8-759-000-35	IC MC14027BCP	
IC6	8-759-000-35	IC MC14027BCP	
IC7	8-759-000-35	IC MC14027BCP	
IC8	8-759-000-35	IC MC14027BCP	
IC9	8-759-000-35	IC MC14027BCP	
IC10	8-759-345-38	IC HD14538BP	
IC11	8-759-345-38	IC HD14538BP	
IC12	8-759-345-38	IC HD14538BP	
IC13	8-759-240-01	IC TC14001BP	
IC14	8-759-240-01	IC TC14001BP	
IC15	8-759-240-71	IC TC14071BP	
IC16	8-759-040-11	IC MC14011BCP	
IC17	8-759-040-11	IC MC14011BCP	
IC18	8-759-000-32	IC MC14023BCP	
IC19	8-759-240-81	IC TC14081BP	
IC20	8-759-240-81	IC TC14081BP	
IC21	8-759-240-71	IC TC14071BP	
IC22	8-759-240-71	IC TC14071BP	
IC23	8-759-040-73	IC MC14073BCP	
IC24	8-759-240-69	IC MC14069UBCP	
IC25	8-759-240-69	IC MC14069UBCP	
IC26	8-759-041-75	IC MC14175BCP	
IC27	8-759-040-53	IC MC14053BCP	
IC28	8-759-000-77	IC MC14520BCP	
IC29	8-759-345-38	IC HD14538BP	
<u>COIL</u>			
L1	1-408-098-00	INDUCTOR 560UH	
L2	1-408-098-00	INDUCTOR 560UH	
L3	1-408-100-00	INDUCTOR 680UH	
<u>TRANSISTOR</u>			
Q14	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q15	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q16	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q17	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q18	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q19	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q20	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q21	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q22	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q23	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q24	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q25	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q26	8-729-119-78	TRANSISTOR 2SC2785-HFE	
<u>RESISTOR</u>			
R2	1-215-439-00	METAL 5.6K 1% 1/6W	
R3	1-249-422-11	CARBON 2.7K 5% 1/4W	
R4	1-215-449-00	METAL 15K 1% 1/6W	
R5	1-249-441-11	CARBON 100K 5% 1/4W	
R6	1-249-425-11	CARBON 4.7K 5% 1/4W	
R7	1-215-439-00	METAL 5.6K 1% 1/6W	
R37	1-249-441-11	CARBON 100K 5% 1/4W	
R38	1-215-454-00	METAL 24K 1% 1/6W	
R39	1-249-422-11	CARBON 2.7K 5% 1/4W	
R42	1-249-433-11	CARBON 22K 5% 1/4W	
R43	1-247-876-11	CARBON 75K 5% 1/4W	
R44	1-249-429-11	CARBON 10K 5% 1/4W	
R45	1-249-441-11	CARBON 100K 5% 1/4W	

Ref.No	Part No.	Description	Remark
R46	1-249-441-11	CARBON 100K 5% 1/4W	
R47	1-247-862-11	CARBON 20K 5% 1/4W	
R48	1-215-467-00	METAL 82K 1% 1/6W	
R49	1-249-422-11	CARBON 2.7K 5% 1/4W	
R50	1-215-469-00	METAL 100K 1% 1/6W	
R51	1-215-445-00	METAL 10K 1% 1/6W	
R52	1-247-885-00	CARBON 180K 5% 1/4W	
R53	1-215-449-00	METAL 15K 1% 1/6W	
R54	1-249-422-11	CARBON 2.7K 5% 1/4W	
R56	1-249-434-11	CARBON 27K 5% 1/4W	
R57	1-249-422-11	CARBON 2.7K 5% 1/4W	
R58	1-249-425-11	CARBON 4.7K 5% 1/4W	
R59	1-247-836-11	CARBON 1.6K 5% 1/4W	
R60	1-249-427-11	CARBON 6.8K 5% 1/4W	
R61	1-215-449-00	METAL 15K 1% 1/6W	
R62	1-249-433-11	CARBON 22K 5% 1/4W	
R63	1-249-425-11	CARBON 4.7K 5% 1/4W	
R64	1-249-425-11	CARBON 4.7K 5% 1/4W	
R65	1-249-417-11	CARBON 1K 5% 1/4W	
R66	1-249-430-11	CARBON 12K 5% 1/4W	
R67	1-249-425-11	CARBON 4.7K 5% 1/4W	
R68	1-249-433-11	CARBON 22K 5% 1/4W	
R69	1-249-425-11	CARBON 4.7K 5% 1/4W	
R70	1-249-417-11	CARBON 1K 5% 1/4W	
R71	1-249-430-11	CARBON 12K 5% 1/4W	
R72	1-249-433-11	CARBON 22K 5% 1/4W	
R74	1-249-430-11	CARBON 12K 5% 1/4W	
R75	1-249-422-11	CARBON 2.7K 5% 1/4W	
R76	1-215-463-00	METAL 56K 1% 1/6W	
R77	1-215-475-00	METAL 180K 1% 1/6W	
R78	1-215-439-00	METAL 5.6K 1% 1/6W	
R79	1-249-425-11	CARBON 4.7K 5% 1/4W	
R80	1-249-433-11	CARBON 22K 5% 1/4W	
R81	1-249-425-11	CARBON 4.7K 5% 1/4W	
R82	1-249-415-11	CARBON 680 5% 1/4W	
R83	1-249-417-11	CARBON 1K 5% 1/4W	
R85	1-249-430-11	CARBON 12K 5% 1/4W	
R87	1-249-422-11	CARBON 2.7K 5% 1/4W	
R89	1-247-887-00	CARBON 220K 5% 1/4W	
R90	1-249-441-11	CARBON 100K 5% 1/4W	
R91	1-249-441-11	CARBON 100K 5% 1/4W	
R92	1-249-441-11	CARBON 100K 5% 1/4W	
R93	1-249-429-11	CARBON 10K 5% 1/4W	
R94	1-249-429-11	CARBON 10K 5% 1/4W	
R95	1-249-441-11	CARBON 100K 5% 1/4W	
R96	1-249-417-11	CARBON 1K 5% 1/4W	
R100	1-249-423-11	CARBON 3.3K 5% 1/4W	
R111	1-249-427-11	CARBON 6.8K 5% 1/4W	
R112	1-249-429-11	CARBON 10K 5% 1/4W	
R113	1-249-429-11	CARBON 10K 5% 1/4W	
R114	1-249-422-11	CARBON 2.7K 5% 1/4W	
R115	1-249-419-11	CARBON 1.5K 5% 1/4W	
R116	1-249-427-11	CARBON 6.8K 5% 1/4W	
R117	1-249-429-11	CARBON 10K 5% 1/4W	
R118	1-249-429-11	CARBON 10K 5% 1/4W	
R119	1-249-422-11	CARBON 2.7K 5% 1/4W	
R120	1-249-419-11	CARBON 1.5K 5% 1/4W	
R121	1-249-417-11	CARBON 1K 5% 1/4W	
R122	1-249-417-11	CARBON 1K 5% 1/4W	
R123	1-249-413-11	CARBON 470 5% 1/4W	
R124	1-249-417-11	CARBON 1K 5% 1/4W	
R125	1-249-417-11	CARBON 1K 5% 1/4W	
R126	1-249-417-11	CARBON 1K 5% 1/4W	
R127	1-249-417-11	CARBON 1K 5% 1/4W	
R128	1-249-417-11	CARBON 1K 5% 1/4W	

7. ELECTRICAL PARTS LIST

BJ**BK**

Ref.No	Part No.	Description	Remark
R129	1-249-417-11	CARBON 1K 5%	1/4W

VARIABLE RESISTOR

RV1	1-237-504-21	RES, ADJ, CERMET 20K	
RV3	1-237-504-21	RES, ADJ, CERMET 20K	
RV4	1-237-503-21	RES, ADJ, CERMET 10K	
RV5	1-237-506-21	RES, ADJ, CERMET 100K	
RV6	1-237-505-21	RES, ADJ, CERMET 50K	

RV7	1-237-504-21	RES, ADJ, CERMET 20K	
RV8	1-237-504-21	RES, ADJ, CERMET 20K	
RV9	1-237-505-21	RES, ADJ, CERMET 50K	

SWITCH

S1	1-570-857-11	SWITCH, SLIDE	
----	--------------	---------------	--

*A-1135-464-A BK BOARD, COMPLETE

2-365-226-00	HEAT SINK
4-370-970-01	SPACER, TR
4-379-411-01	RETAINER (BK), TR
4-902-345-01	HEAT SINK
7-682-948-01	SCREW PSW 3X8

7-685-646-79	SCREW BVTP 3X8 TYPE2 IT-3
--------------	---------------------------

CONNECTOR

BK1	*1-566-056-11	PIN, CONNECTOR 4P	
BK2	*1-566-056-11	PIN, CONNECTOR 4P	
BK3	*1-566-056-11	PIN, CONNECTOR 4P	
BK4	*1-566-055-11	PIN, CONNECTOR 3P	
BK5	*1-566-057-11	PIN, CONNECTOR 5P	

BK6	*1-566-056-11	PIN, CONNECTOR 4P	
BK7	*1-566-056-11	PIN, CONNECTOR 4P	
BK8	*1-566-056-11	PIN, CONNECTOR 4P	

CAPACITOR

C1	1-130-483-00	MYLAR	0.01MF	5%	50V
C10	1-124-046-00	ELECT	10MF	20%	160V
C11	1-130-483-00	MYLAR	0.01MF	5%	50V
C51	1-101-004-00	CERAMIC	0.01MF		50V
C52	1-101-004-00	CERAMIC	0.01MF		50V

C53	1-101-004-00	CERAMIC	0.01MF		50V
C54	1-101-004-00	CERAMIC	0.01MF		50V
C55	1-101-004-00	CERAMIC	0.01MF		50V
C56	1-101-004-00	CERAMIC	0.01MF		50V
C64	1-124-034-51	ELECT	33MF	20%	16V

C65	1-124-034-51	ELECT	33MF	20%	16V
C66	1-124-034-51	ELECT	33MF	20%	16V
C67	1-124-034-51	ELECT	33MF	20%	16V
C68	1-124-034-51	ELECT	33MF	20%	16V
C69	1-124-034-51	ELECT	33MF	20%	16V

C70	1-124-034-51	ELECT	33MF	20%	16V
C71	1-124-034-51	ELECT	33MF	20%	16V
C72	1-124-034-51	ELECT	33MF	20%	16V
C73	1-124-034-51	ELECT	33MF	20%	16V
C74	1-124-034-51	ELECT	33MF	20%	16V

C75	1-124-034-51	ELECT	33MF	20%	16V
C76	1-124-034-51	ELECT	33MF	20%	16V
C80	1-124-046-00	ELECT	10MF	20%	160V
C81	1-124-046-00	ELECT	10MF	20%	160V
C82	1-124-046-00	ELECT	10MF	20%	160V

C83	1-123-939-00	ELECT	10MF	20%	200V
C84	1-123-939-00	ELECT	10MF	20%	200V

Ref.No	Part No.	Description	Remark
C85	1-123-939-00	ELECT	10MF 20% 200V
C86	1-123-939-00	ELECT	10MF 20% 200V
C87	1-123-939-00	ELECT	10MF 20% 200V
C88	1-123-939-00	ELECT	10MF 20% 200V
C91	1-102-050-00	CERAMIC	0.01MF 99% 500V

C92	1-102-050-00	CERAMIC	0.01MF 99% 500V
C93	1-102-050-00	CERAMIC	0.01MF 99% 500V
C100	1-136-165-00	FILM	0.1MF 5% 50V
C102	1-124-046-00	ELECT	10MF 20% 160V
C103	1-102-976-00	CERAMIC	180PF 5% 50V

C104	1-136-110-00	FILM	0.91MF 5% 200V
C105	1-124-034-51	ELECT	33MF 20% 16V
C106	1-124-910-11	ELECT	47MF 20% 25V
C107	1-101-004-00	CERAMIC	0.01MF 50V
C108	1-106-371-00	MYLAR	0.015MF 10% 200V

C109	1-124-046-00	ELECT	10MF 20% 160V
C110	1-102-973-00	CERAMIC	100PF 5% 50V
C111	1-102-965-00	CERAMIC	39PF 5% 50V
C112	1-102-942-00	CERAMIC	5PF 1PF 50V
C114	1-102-936-00	CERAMIC	3PF 0.25PF 50V

C115	1-101-880-00	CERAMIC	47PF 5% 50V
C133	1-102-942-00	CERAMIC	5PF 1PF 50V
C200	1-136-165-00	FILM	0.1MF 5% 50V
C202	1-124-046-00	ELECT	10MF 20% 160V
C203	1-102-976-00	CERAMIC	180PF 5% 50V

C204	1-136-110-00	FILM	0.91MF 5% 200V
C205	1-124-034-51	ELECT	33MF 20% 16V
C206	1-124-910-11	ELECT	47MF 20% 25V
C207	1-101-004-00	CERAMIC	0.01MF 50V
C208	1-106-371-00	MYLAR	0.015MF 10% 200V

C209	1-124-046-00	ELECT	10MF 20% 160V
C210	1-102-973-00	CERAMIC	100PF 5% 50V
C211	1-102-965-00	CERAMIC	39PF 5% 50V
C212	1-102-942-00	CERAMIC	5PF 1PF 50V
C214	1-102-936-00	CERAMIC	3PF 0.25PF 50V

C215	1-101-880-00	CERAMIC	47PF 5% 50V
C233	1-102-942-00	CERAMIC	5PF 1PF 50V
C300	1-136-165-00	FILM	0.1MF 5% 50V
C302	1-124-046-00	ELECT	10MF 20% 160V
C303	1-102-976-00	CERAMIC	180PF 5% 50V

C304	1-136-110-00	FILM	0.91MF 5% 200V
C305	1-124-034-51	ELECT	33MF 20% 16V
C306	1-124-910-11	ELECT	47MF 20% 25V
C307	1-101-004-00	CERAMIC	0.01MF 50V
C308	1-106-371-00	MYLAR	0.015MF 10% 200V

C309	1-124-046-00	ELECT	10MF 20% 160V
C310	1-102-973-00	CERAMIC	100PF 5% 50V
C311	1-102-965-00	CERAMIC	39PF 5% 50V
C312	1-102-942-00	CERAMIC	5PF 1PF 50V
C314	1-102-936-00	CERAMIC	3PF 0.25PF 50V

C315	1-101-880-00	CERAMIC	47PF 5% 50V
C333	1-102-942-00	CERAMIC	5PF 1PF 50V

TRIMMER

CV101	1-141-179-12	CAP, VAR, TRIMMER	
CV102	1-141-171-00	CAP, TRIMMER 15P	
CV201	1-141-179-12	CAP, VAR, TRIMMER	
CV202	1-141-171-00	CAP, TRIMMER 15P	
CV301	1-141-179-12	CAP, VAR, TRIMMER	

CV302	1-141-171-00	CAP, TRIMMER 15P	
-------	--------------	------------------	--

DIODE

D1	8-719-911-19	DIODE 1SS119	
D2	8-719-911-19	DIODE 1SS119	
D101	8-719-911-19	DIODE 1SS119	

Ref.No	Part No.	Description	Remark
D102	8-719-911-19	DIODE 1SS119	
D103	8-719-911-19	DIODE 1SS119	
D104	8-719-911-19	DIODE 1SS119	
D105	8-719-911-19	DIODE 1SS119	
D106	8-719-911-19	DIODE 1SS119	
D107	8-719-911-19	DIODE 1SS119	
D108	8-719-911-19	DIODE 1SS119	
D109	8-719-901-83	DIODE 1SS83	
D110	8-719-300-80	DIODE RU-1C	
D111	8-719-300-80	DIODE RU-1C	
D112	8-719-911-19	DIODE 1SS119	
D113	8-719-911-19	DIODE 1SS119	
D114	8-719-911-19	DIODE 1SS119	
D115	8-719-911-19	DIODE 1SS119	
D116	8-719-911-19	DIODE 1SS119	
D201	8-719-911-19	DIODE 1SS119	
D202	8-719-911-19	DIODE 1SS119	
D203	8-719-911-19	DIODE 1SS119	
D204	8-719-911-19	DIODE 1SS119	
D205	8-719-911-19	DIODE 1SS119	
D206	8-719-911-19	DIODE 1SS119	
D207	8-719-911-19	DIODE 1SS119	
D208	8-719-911-19	DIODE 1SS119	
D209	8-719-901-83	DIODE 1SS83	
D210	8-719-300-80	DIODE RU-1C	
D211	8-719-300-80	DIODE RU-1C	
D212	8-719-911-19	DIODE 1SS119	
D213	8-719-911-19	DIODE 1SS119	
D214	8-719-911-19	DIODE 1SS119	
D215	8-719-911-19	DIODE 1SS119	
D216	8-719-911-19	DIODE 1SS119	
D301	8-719-911-19	DIODE 1SS119	
D302	8-719-911-19	DIODE 1SS119	
D303	8-719-911-19	DIODE 1SS119	
D304	8-719-911-19	DIODE 1SS119	
D305	8-719-911-19	DIODE 1SS119	
D306	8-719-911-19	DIODE 1SS119	
D307	8-719-911-19	DIODE 1SS119	
D308	8-719-911-19	DIODE 1SS119	
D309	8-719-901-83	DIODE 1SS83	
D310	8-719-300-80	DIODE RU-1C	
D311	8-719-300-80	DIODE RU-1C	
D312	8-719-911-19	DIODE 1SS119	
D313	8-719-911-19	DIODE 1SS119	
D314	8-719-911-19	DIODE 1SS119	
D315	8-719-911-19	DIODE 1SS119	
D316	8-719-911-19	DIODE 1SS119	
<u>IC</u>			
IC1	8-759-945-58	IC RC4558P	
<u>TRANSISTOR</u>			
Q1	8-729-384-48	TRANSISTOR 2SA844	
Q12	8-729-200-17	TRANSISTOR 2SA1091-O	
Q13	8-729-200-17	TRANSISTOR 2SA1091-O	
Q101	8-729-266-82	TRANSISTOR 2SC2668-O	
Q102	8-729-384-48	TRANSISTOR 2SA844	
Q103	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q104	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q105	8-729-384-48	TRANSISTOR 2SA844	
Q106	8-729-804-63	TRANSISTOR 2SA1406-E	
Q107	8-729-804-58	TRANSISTOR 2SC3600-E	
Q108	8-729-804-58	TRANSISTOR 2SC3600-E	
Q109	8-729-804-63	TRANSISTOR 2SA1406-E	
Q110	8-729-804-58	TRANSISTOR 2SC3600-E	

Ref.No	Part No.	Description	Remark
Q111	8-729-804-63	TRANSISTOR 2SA1406-E	
Q112	8-729-255-12	TRANSISTOR 2SC2551-O	
Q113	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q114	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q115	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q201	8-729-266-82	TRANSISTOR 2SC2668-O	
Q202	8-729-384-48	TRANSISTOR 2SA844	
Q203	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q204	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q205	8-729-384-48	TRANSISTOR 2SA844	
Q206	8-729-804-63	TRANSISTOR 2SA1406-E	
Q207	8-729-804-58	TRANSISTOR 2SC3600-E	
Q208	8-729-804-58	TRANSISTOR 2SC3600-E	
Q209	8-729-804-63	TRANSISTOR 2SA1406-E	
Q210	8-729-804-58	TRANSISTOR 2SC3600-E	
Q211	8-729-804-63	TRANSISTOR 2SA1406-E	
Q212	8-729-255-12	TRANSISTOR 2SC2551-O	
Q213	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q214	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q215	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q301	8-729-266-82	TRANSISTOR 2SC2668-O	
Q302	8-729-384-48	TRANSISTOR 2SA844	
Q303	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q304	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q305	8-729-384-48	TRANSISTOR 2SA844	
Q306	8-729-804-63	TRANSISTOR 2SA1406-E	
Q307	8-729-804-58	TRANSISTOR 2SC3600-E	
Q308	8-729-804-58	TRANSISTOR 2SC3600-E	
Q309	8-729-804-63	TRANSISTOR 2SA1406-E	
Q310	8-729-804-58	TRANSISTOR 2SC3600-E	
Q311	8-729-804-63	TRANSISTOR 2SA1406-E	
Q312	8-729-255-12	TRANSISTOR 2SC2551-O	
Q313	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q314	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q315	8-729-119-78	TRANSISTOR 2SC2785-HFE	
<u>RESISTOR</u>			
R1	1-249-429-11	CARBON 10K 5%	1/4W
R2	1-249-441-11	CARBON 100K 5%	1/4W
R3	1-249-417-11	CARBON 1K 5%	1/4W
R10	1-215-878-00	METAL OXIDE 33K 5%	1W F
R11	1-249-439-11	CARBON 68K 5%	1/4W
R12	1-249-417-11	CARBON 1K 5%	1/4W
R13	1-249-429-11	CARBON 10K 5%	1/4W
R14	1-215-469-00	METAL 100K 1%	1/6W
R15	1-215-461-00	METAL 47K 1%	1/6W
R16	1-215-447-00	METAL 12K 1%	1/6W
R101	1-215-391-00	METAL 56 1%	1/6W
R102	1-249-419-11	CARBON 1.5K 5%	1/4W
R104	1-249-405-11	CARBON 100 5%	1/4W
R105	1-249-424-11	CARBON 3.9K 5%	1/4W
R106	1-249-422-11	CARBON 2.7K 5%	1/4W
R107	1-249-405-11	CARBON 100 5%	1/4W
R108	1-249-405-11	CARBON 100 5%	1/4W
R109	1-249-421-11	CARBON 2.2K 5%	1/4W
R110	1-249-405-11	CARBON 100 5%	1/4W
R111	1-249-405-11	CARBON 100 5%	1/4W
R112	1-215-391-00	METAL 56 1%	1/6W
R113	1-215-391-00	METAL 56 1%	1/6W
R114	1-215-437-00	METAL 4.7K 1%	1/6W
R115	1-214-765-00	METAL 33K 1%	1/4W
R116	1-214-765-00	METAL 33K 1%	1/4W
R117	1-249-405-11	CARBON 100 5%	1/4W
R118	1-214-781-00	METAL 150K 1%	1/4W
R119	1-215-447-00	METAL 12K 1%	1/6W
R120	1-216-430-11	METAL OXIDE 390 5%	1W F

BK BR

7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Quantity	Percentage	Remark
R121	1-249-405-11	CARBON	100	5%	1/4W
R122	1-249-405-11	CARBON	100	5%	1/4W
R123	1-215-405-00	METAL	220	1%	1/6W
R124	1-249-405-11	CARBON	100	5%	1/4W
R125	1-249-405-11	CARBON	100	5%	1/4W
R126	1-215-394-00	METAL	75	1%	1/4W
R127	1-215-394-00	METAL	75	1%	1/4W
R128	1-214-779-00	METAL	120K	1%	1/4W
R129	1-249-430-11	CARBON	12K	5%	1/4W
R130	1-216-443-11	METAL OXIDE	56K	5%	1W F
R131	1-249-433-11	CARBON	22K	5%	1/4W
R132	1-249-422-11	CARBON	27K	5%	1/4W
R133	1-249-435-11	CARBON	33K	5%	1/4W
R134	1-249-433-11	CARBON	22K	5%	1/4W
R135	1-249-426-11	CARBON	5.6K	5%	1/4W
R136	1-249-423-11	CARBON	3.3K	5%	1/4W
R137	1-247-903-00	CARBON	1M	5%	1/4W
R138	1-249-426-11	CARBON	5.6K	5%	1/4W
R139	1-215-441-00	METAL	6.8K	1%	1/6W
R140	1-249-405-11	CARBON	100	5%	1/4W
R141	1-249-413-11	CARBON	470	5%	1/4W
R142	1-249-390-11	CARBON	5.6	5%	1/4W
R143	1-249-422-11	CARBON	2.7K	5%	1/4W
R201	1-215-391-00	METAL	56	1%	1/6W
R202	1-249-419-11	CARBON	1.5K	5%	1/4W
R204	1-249-405-11	CARBON	100	5%	1/4W
R205	1-249-424-11	CARBON	3.9K	5%	1/4W
R206	1-249-422-11	CARBON	2.7K	5%	1/4W
R207	1-249-405-11	CARBON	100	5%	1/4W
R208	1-249-405-11	CARBON	100	5%	1/4W
R209	1-249-421-11	CARBON	2.2K	5%	1/4W
R210	1-249-405-11	CARBON	100	5%	1/4W
R211	1-249-405-11	CARBON	100	5%	1/4W
R212	1-215-391-00	METAL	56	1%	1/6W
R213	1-215-391-00	METAL	56	1%	1/6W
R214	1-215-437-00	METAL	4.7K	1%	1/6W
R215	1-214-765-00	METAL	33K	1%	1/4W
R216	1-214-765-00	METAL	33K	1%	1/4W
R217	1-249-405-11	CARBON	100	5%	1/4W
R218	1-214-781-00	METAL	150K	1%	1/4W
R219	1-215-447-00	METAL	12K	1%	1/6W
R220	1-216-430-11	METAL OXIDE	390	5%	1W F
R221	1-249-405-11	CARBON	100	5%	1/4W
R222	1-249-405-11	CARBON	100	5%	1/4W
R223	1-215-405-00	METAL	220	1%	1/6W
R224	1-249-405-11	CARBON	100	5%	1/4W
R225	1-249-405-11	CARBON	100	5%	1/4W
R226	1-215-394-00	METAL	75	1%	1/6W
R227	1-215-394-00	METAL	75	1%	1/6W
R228	1-214-779-00	METAL	120K	1%	1/4W
R229	1-249-430-11	CARBON	12K	5%	1/4W
R230	1-216-443-11	METAL OXIDE	56K	5%	1W F
R231	1-249-433-11	CARBON	22K	5%	1/4W
R232	1-249-422-11	CARBON	2.7K	5%	1/4W
R233	1-249-435-11	CARBON	33K	5%	1/4W
R234	1-249-433-11	CARBON	22K	5%	1/4W
R235	1-249-426-11	CARBON	5.6K	5%	1/4W
R236	1-249-423-11	CARBON	3.3K	5%	1/4W
R237	1-247-903-00	CARBON	1M	5%	1/4W
R238	1-249-426-11	CARBON	5.6K	5%	1/4W
R239	1-215-441-00	METAL	6.8K	1%	1/6W
R240	1-249-405-11	CARBON	100	5%	1/4W
R241	1-249-413-11	CARBON	470	5%	1/4W
R242	1-249-390-11	CARBON	5.6	5%	1/4W
R243	1-249-422-11	CARBON	2.7K	5%	1/4W

Ref.No	Part No.	Description	Quantity	Percentage	Remark
R301	1-215-391-00	METAL	56	1%	1/6W
R302	1-249-419-11	CARBON	1.5K	5%	1/4W
R304	1-249-405-11	CARBON	100	5%	1/4W
R305	1-249-424-11	CARBON	3.9K	5%	1/4W
R306	1-249-422-11	CARBON	2.7K	5%	1/4W
R307	1-249-405-11	CARBON	100	5%	1/4W
R308	1-249-405-11	CARBON	100	5%	1/4W
R309	1-249-421-11	CARBON	2.2K	5%	1/4W
R310	1-249-405-11	CARBON	100	5%	1/4W
R311	1-249-405-11	CARBON	100	5%	1/4W
R312	1-215-391-00	METAL	56	1%	1/6W
R313	1-215-391-00	METAL	56	1%	1/6W
R314	1-215-437-00	METAL	4.7K	1%	1/6W
R315	1-214-765-00	METAL	33K	1%	1/4W
R316	1-214-765-00	METAL	33K	1%	1/4W
R317	1-249-405-11	CARBON	100	5%	1/4W
R318	1-214-781-00	METAL	150K	1%	1/4W
R319	1-215-447-00	METAL	12K	1%	1/6W
R320	1-216-430-11	METAL OXIDE	390	5%	1W F
R321	1-249-405-11	CARBON	100	5%	1/4W
R322	1-249-405-11	CARBON	100	5%	1/4W
R323	1-215-405-00	METAL	220	1%	1/6W
R324	1-249-405-11	CARBON	100	5%	1/4W
R325	1-249-405-11	CARBON	100	5%	1/4W
R326	1-215-394-00	METAL	75	1%	1/6W
R327	1-215-394-00	METAL	75	1%	1/6W
R328	1-214-779-00	METAL	120K	1%	1/4W
R329	1-249-430-11	CARBON	12K	5%	1/4W
R330	1-216-443-11	METAL OXIDE	56K	5%	1W F
R331	1-249-433-11	CARBON	22K	5%	1/4W
R332	1-249-422-11	CARBON	2.7K	5%	1/4W
R333	1-249-435-11	CARBON	33K	5%	1/4W
R334	1-249-433-11	CARBON	22K	5%	1/4W
R335	1-249-426-11	CARBON	5.6K	5%	1/4W
R336	1-249-423-11	CARBON	3.3K	5%	1/4W
R337	1-247-903-00	CARBON	1M	5%	1/4W
R338	1-249-426-11	CARBON	5.6K	5%	1/4W
R339	1-215-441-00	METAL	6.8K	1%	1/6W
R340	1-249-405-11	CARBON	100	5%	1/4W
R341	1-249-413-11	CARBON	470	5%	1/4W
R342	1-249-390-11	CARBON	5.6	5%	1/4W
R343	1-249-422-11	CARBON	2.7K	5%	1/4W

*A-1135-472-A BR BOARD, COMPLETE

 (BVM-2010 PD/PMD ONLY)

4-353-708-00 HOOK, FINGER
 7-682-547-04 SCREW BVTT 3X6 (S)

CONNECTOR

BR1	*1-566-060-11	PIN, CONNECTOR 8P
BR101	*1-566-054-11	PIN, CONNECTOR 2P
BR201	*1-566-054-11	PIN, CONNECTOR 2P
BR301	*1-566-054-11	PIN, CONNECTOR 2P

CAPACITOR

C1	1-101-004-00	CERAMIC	0.01MF	50V
C2	1-101-004-00	CERAMIC	0.01MF	50V
C3	1-101-004-00	CERAMIC	0.01MF	50V
C4	1-102-973-00	CERAMIC	100PF	5% 50V
C5	1-124-034-51	ELECT	33MF	20% 16V
C6	1-124-034-51	ELECT	33MF	20% 16V
C7	1-102-973-00	CERAMIC	100PF	5% 50V
C8	1-124-034-51	ELECT	33MF	20% 16V



Ref.No	Part No.	Description	Remark
C9	1-124-034-51	ELECT	33MF 20% 16V
C10	1-101-888-00	CERAMIC	68PF 5% 50V
C11	1-102-960-00	CERAMIC	24PF 5% 50V
C12	1-102-856-	CERAMIC	5PF 0.5PF 50V
C13	1-124-122-11	ELECT	100MF 20% 16V
C14	1-101-004-00	CERAMIC	0.01MF 50V
C101	1-102-937-00	CERAMIC	4PF 0.25PF 50V
C102	1-102-937-00	CERAMIC	4PF 0.25PF 50V
C103	1-101-880-00	CERAMIC	47PF 5% 50V
C201	1-102-937-00	CERAMIC	4PF 0.25PF 50V
C202	1-102-937-00	CERAMIC	4PF 0.25PF 50V
C203	1-101-880-00	CERAMIC	47PF 5% 50V
C301	1-101-880-00	CERAMIC	47PF 5% 50V
C302	1-124-122-11	ELECT	100MF 20% 16V
C303	1-124-122-11	ELECT	100MF 20% 16V
C400	1-124-122-11	ELECT	100MF 20% 16V
C401	1-123-356-00	ELECT	10MF 20% 16V
C402	1-123-356-00	ELECT	10MF 20% 16V
C403	1-123-356-00	ELECT	10MF 20% 16V
C404	1-123-356-00	ELECT	10MF 20% 16V
C405	1-123-356-00	ELECT	10MF 20% 16V
C406	1-123-356-00	ELECT	10MF 20% 16V
C407	1-123-356-00	ELECT	10MF 20% 16V
C408	1-123-356-00	ELECT	10MF 20% 16V
C411	1-101-004-00	CERAMIC	0.01MF 50V
C412	1-101-004-00	CERAMIC	0.01MF 50V
C413	1-101-004-00	CERAMIC	0.01MF 50V
C414	1-101-004-00	CERAMIC	0.01MF 50V
C415	1-101-004-00	CERAMIC	0.01MF 50V
C416	1-101-004-00	CERAMIC	0.01MF 50V
C417	1-101-004-00	CERAMIC	0.01MF 50V
C418	1-101-004-00	CERAMIC	0.01MF 50V
C419	1-101-004-00	CERAMIC	0.01MF 50V
C421	1-123-356-00	ELECT	10MF 20% 16V
C422	1-123-356-00	ELECT	10MF 20% 16V
C426	1-101-004-00	CERAMIC	0.01MF 50V
C427	1-101-004-00	CERAMIC	0.01MF 50V
C430	1-124-122-11	ELECT	100MF 20% 16V
C431	1-123-356-00	ELECT	10MF 20% 16V
C432	1-123-356-00	ELECT	10MF 20% 16V
C433	1-123-356-00	ELECT	10MF 20% 16V
C434	1-123-356-00	ELECT	10MF 20% 16V
C435	1-123-356-00	ELECT	10MF 20% 16V
C436	1-123-356-00	ELECT	10MF 20% 16V
C437	1-123-356-00	ELECT	10MF 20% 16V
C441	1-101-004-00	CERAMIC	0.01MF 50V
C442	1-101-004-00	CERAMIC	0.01MF 50V
C443	1-101-004-00	CERAMIC	0.01MF 50V
C444	1-101-004-00	CERAMIC	0.01MF 50V
C445	1-101-004-00	CERAMIC	0.01MF 50V
C446	1-101-004-00	CERAMIC	0.01MF 50V
C447	1-101-004-00	CERAMIC	0.01MF 50V
C451	1-123-356-00	ELECT	10MF 20% 16V
C452	1-101-004-00	CERAMIC	0.01MF 50V

TRIMMER

CV301 1-141-171-00 CAP,TRIMMER 15P

DIODE

D1 8-719-911-19 DIODE 1SS119
D2 8-719-911-19 DIODE 1SS119
D3 8-719-911-19 DIODE 1SS119
D4 8-719-911-19 DIODE 1SS119
D5 8-719-911-19 DIODE 1SS119
D6 8-719-911-19 DIODE 1SS119

Ref.No	Part No.	Description	Remark
D7	8-719-911-19	DIODE 1SS119	
D8	8-719-911-19	DIODE 1SS119	
D9	8-719-911-19	DIODE 1SS119	
D10	8-719-911-19	DIODE 1SS119	
D11	8-719-911-19	DIODE 1SS119	

D102	8-719-911-19	DIODE 1SS119	
D202	8-719-911-19	DIODE 1SS119	
D301	8-719-109-74	DIODE RD4.3ES-B1	
D302	8-719-911-19	DIODE 1SS119	

IC

IC1	8-759-040-53	IC TC14053BCP	
IC101	8-759-603-24	IC CX20197	
IC201	8-759-603-24	IC CX20197	

COIL

L1	1-408-417-00	INDUCTOR	47UH
L2	1-408-413-00	INDUCTOR	22UH

TRANSISTOR

Q1	8-729-900-89	TRANSISTOR DTC144ES	
Q2	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q3	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q4	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q5	8-729-119-78	TRANSISTOR 2SC2785-HFE	

Q6	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q7	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q9	8-729-900-89	TRANSISTOR DTC144ES	
Q10	8-729-900-89	TRANSISTOR DTC144ES	
Q11	8-729-800-10	TRANSISTOR 2SC3068	

Q12	8-729-900-89	TRANSISTOR DTC144ES	
Q101	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q104	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q105	8-729-800-10	TRANSISTOR 2SC3068	
Q201	8-729-119-76	TRANSISTOR 2SA1175-HFE	

Q204	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q205	8-729-800-10	TRANSISTOR 2SC3068	
Q301	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q302	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q303	8-729-119-78	TRANSISTOR 2SC2785-HFE	

Q304	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q305	8-729-800-10	TRANSISTOR 2SC3068	

RESISTOR

R1	1-249-429-11	CARBON	10K 5% 1/4W
R2	1-249-429-11	CARBON	10K 5% 1/4W
R3	1-249-429-11	CARBON	10K 5% 1/4W
R4	1-249-429-11	CARBON	10K 5% 1/4W
R5	1-249-429-11	CARBON	10K 5% 1/4W

R6	1-249-417-11	CARBON	1K 5% 1/4W
R7	1-249-422-11	CARBON	2.7K 5% 1/4W
R8	1-249-417-11	CARBON	1K 5% 1/4W
R9	1-215-461-00	METAL	47K 1% 1/4W
R10	1-215-463-00	METAL	56K 1% 1/6W

R11	1-249-419-11	CARBON	1.5K 5% 1/4W
R12	1-249-417-11	CARBON	1K 5% 1/4W
R13	1-249-422-11	CARBON	2.7K 5% 1/4W
R14	1-215-461-00	METAL	47K 1% 1/6W
R15	1-215-435-00	METAL	3.9K 1% 1/6W

R16	1-215-463-00	METAL	56K 1% 1/6W
R17	1-249-419-11	CARBON	1.5K 5% 1/4W
R18	1-215-430-00	METAL	2.4K 1% 1/6W
R19	1-215-430-00	METAL	2.4K 1% 1/6W
R20	1-215-424-00	METAL	1.3K 1% 1/6W

R21	1-215-450-00	METAL	16K 1% 1/6W
-----	--------------	-------	-------------

7. ELECTRICAL PARTS LIST

BR C DA

The components identified by shading and mark **A** are critical for safety. Replace only with part number specified

7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Remark
R22	1-249-422-11	CARBON	27K 5% 1/4W
R23	1-249-425-11	CARBON	4.7K 5% 1/4W
R24	1-249-427-11	CARBON	6.8K 5% 1/4W
R25	1-249-423-11	CARBON	3.3K 5% 1/4W
R27	1-249-437-11	CARBON	47K 5% 1/4W
R28	1-249-429-11	CARBON	10K 5% 1/4W
R29	1-249-425-11	CARBON	4.7K 5% 1/4W
R30	1-249-425-11	CARBON	4.7K 5% 1/4W
R101	1-249-405-11	CARBON	100 5% 1/4W
R102	1-249-422-11	CARBON	2.7K 5% 1/4W
R103	1-215-429-00	METAL	2.2K 1% 1/6W
R104	1-215-429-00	METAL	2.2K 1% 1/6W
R105	1-215-429-00	METAL	2.2K 1% 1/6W
R106	1-215-429-00	METAL	2.2K 1% 1/6W
R113	1-249-425-11	CARBON	4.7K 5% 1/4W
R114	1-249-437-11	CARBON	47K 5% 1/4W
R115	1-249-405-11	CARBON	100 5% 1/4W
R201	1-249-405-11	CARBON	100 5% 1/4W
R202	1-249-422-11	CARBON	2.7K 5% 1/4W
R203	1-215-429-00	METAL	2.2K 1% 1/6W
R204	1-215-429-00	METAL	2.2K 1% 1/6W
R205	1-215-429-00	METAL	2.2K 1% 1/6W
R206	1-215-429-00	METAL	2.2K 1% 1/6W
R213	1-249-425-11	CARBON	4.7K 5% 1/4W
R214	1-249-437-11	CARBON	47K 5% 1/4W
R215	1-249-405-11	CARBON	100 5% 1/4W
R301	1-249-405-11	CARBON	100 5% 1/4W
R302	1-249-422-11	CARBON	2.7K 5% 1/4W
R303	1-215-421-00	METAL	1K 1% 1/6W
R304	1-215-421-00	METAL	1K 1% 1/6W
R305	1-215-441-00	METAL	6.8K 1% 1/6W
R306	1-215-417-00	METAL	680 1% 1/6W
R307	1-247-850-11	CARBON	6.2K 5% 1/4W
R308	1-215-431-00	METAL	2.7K 1% 1/6W
R309	1-249-422-11	CARBON	2.7K 5% 1/4W
R310	1-249-405-11	CARBON	100 5% 1/4W
R311	1-249-437-11	CARBON	47K 5% 1/4W
R312	1-249-437-11	CARBON	47K 5% 1/4W
R313	1-249-425-11	CARBON	4.7K 5% 1/4W
R314	1-249-437-11	CARBON	47K 5% 1/4W
R315	1-249-405-11	CARBON	100 5% 1/4W
<u>VARIABLE RESISTOR</u>			
RV1	1-237-500-21	RES, ADJ, CERMET 1K	
RV101	1-237-502-21	RES, ADJ, CERMET 5K	
RV102	1-237-500-21	RES, ADJ, CERMET 1K	
RV201	1-237-502-21	RES, ADJ, CERMET 5K	
RV202	1-237-500-21	RES, ADJ, CERMET 1K	
RV301	1-237-502-21	RES, ADJ, CERMET 5K	
<u>SWITCH</u>			
S1	1-570-857-11	SWITCH, SLIDE	
S2	1-570-857-11	SWITCH, SLIDE	
S3	1-570-851-11	SWITCH, SLIDE	

*1-617-889-11	C BOARD	*****	
1-526-771-11	SOCKET, CRT		
1-556-880-81	LEAD ASSY, HIGH-VOLTAGE		
<u>CAPACITOR</u>			
C1	1-162-114-00	CERAMIC	0.0047MF 2KV

Ref.No	Part No.	Description	Remark
C2	1-162-114-00	CERAMIC	0.0047MF 2KV
<u>CONNECTOR</u>			
C1	*1-566-054-11	PIN, CONNECTOR 2P	
C2	*1-566-056-11	PIN, CONNECTOR 4P	
C3	*1-566-054-11	PIN, CONNECTOR 2P	
C4	*1-566-056-11	PIN, CONNECTOR 4P	
C5	*1-566-054-11	PIN, CONNECTOR 2P	
C6	*1-566-056-11	PIN, CONNECTOR 4P	
C7	1-508-765-00	PIN, CONNECTOR 3P PLUG(M)	
C8	*1-508-786-00	PIN, CONNECTOR 2P PLUG(M)	
<u>COIL</u>			
L1	1-408-408-00	INDUCTOR	8.2UH
L2	1-408-408-00	INDUCTOR	8.2UH
L3	1-408-408-00	INDUCTOR	8.2UH
<u>RESISTOR</u>			
R1	1-202-818-00	SOLID	1K 10% 1/2W
R2	1-202-818-00	SOLID	1K 10% 1/2W
R3	1-202-818-00	SOLID	1K 10% 1/2W
R4	1-249-431-11	CARBON	15K 5% 1/4W
R5	1-202-818-00	SOLID	1K 10% 1/2W
R6	1-202-818-00	SOLID	1K 10% 1/2W
R7	1-202-818-00	SOLID	1K 10% 1/2W
R8	1-249-431-11	CARBON	15K 5% 1/4W
R9	1-202-818-00	SOLID	1K 10% 1/2W
R10	1-202-818-00	SOLID	1K 10% 1/2W
R11	1-202-818-00	SOLID	1K 10% 1/2W
R12	1-249-431-11	CARBON	15K 5% 1/4W
R13	1-202-818-00	SOLID	1K 10% 1/2W
<u>SPARK GAP</u>			
SG1	1-519-063-XX	DISCHARGING GAP	
SG2	1-519-063-XX	DISCHARGING GAP	
SG3	1-519-063-XX	DISCHARGING GAP	
SG4	1-519-063-XX	DISCHARGING GAP	
SG5	1-519-063-XX	DISCHARGING GAP	
SG6	1-519-063-XX	DISCHARGING GAP	
SG7	1-519-063-XX	DISCHARGING GAP	

*A-1345-736-A	DA BOARD, COMPLETE	*****	
1-566-054-11	PIN, CONNECTOR 2P		
3-618-225-00	NUT, PLATE		
4-026-910-00	HOLDER, LED		
7-682-548-04	SCREW P 3X8		
<u>CAPACITOR</u>			
C1	1-126-157-11	ELECT	10MF 20% 16V
C2	1-126-157-11	ELECT	10MF 20% 16V
C3	1-161-051-00	CERAMIC	0.01MF 10% 50V
C4	1-101-361-00	CERAMIC	150PF 5% 50V
C5	1-161-051-00	CERAMIC	0.01MF 10% 50V
C6	1-161-051-00	CERAMIC	0.01MF 10% 50V
C7	1-101-361-00	CERAMIC	150PF 5% 50V
C8	1-102-527-11	CERAMIC	82PF 5% 50V
C9	1-101-361-00	CERAMIC	150PF 5% 50V
C10	1-106-188-51	MYLAR	0.0047MF 5% 100V
C11	1-130-738-00	FILM	0.015MF 5% 100V
C12	1-163-157-00	FILM	0.022MF 5% 50V
C13	1-136-155-00	FILM	0.015MF 5% 50V
C14	1-163-157-00	FILM	0.022MF 5% 50V

DA

Ref.No	Part No.	Description	Remark
C15	1-130-479-00	MYLAR	0.0047MF 5% 50V
C16	1-124-589-11	ELECT	47MF 20% 16V
C17	1-124-234-00	ELECT	22MF 20% 16V
C18	1-124-234-00	ELECT	22MF 20% 16V
C19	1-161-051-00	CERAMIC	0.01MF 10% 50V
C20	1-130-871-11	FILM	0.01MF 5% 50V
C21	1-126-301-11	ELECT	1MF 20% 50V
C22	1-130-871-11	FILM	0.01MF 5% 50V
C23	1-126-301-11	ELECT	1MF 20% 50V
C24	1-126-301-11	ELECT	1MF 20% 50V
C25	1-126-301-11	ELECT	1MF 20% 50V
C26	1-161-051-00	CERAMIC	0.01MF 10% 50V
C27	1-126-157-11	ELECT	10MF 20% 16V
C28	1-126-157-11	ELECT	10MF 20% 16V
C29	1-126-301-11	ELECT	1MF 20% 50V
C30	1-161-051-00	CERAMIC	0.01MF 10% 50V
C31	1-102-973-00	CERAMIC	100PF 5% 50V
C32	1-101-361-00	CERAMIC	150PF 5% 50V
C33	1-130-871-11	FILM	0.01MF 5% 50V
C34	1-126-301-11	ELECT	1MF 20% 50V
C35	1-161-051-00	CERAMIC	0.01MF 10% 50V
C36	1-102-824-00	CERAMIC	470PF 5% 50V
C38	1-102-824-00	CERAMIC	470PF 5% 50V
C39	1-161-051-00	CERAMIC	0.01MF 10% 50V
C40	1-130-871-11	FILM	0.01MF 5% 50V
C41	1-126-301-11	ELECT	1MF 20% 50V
C42	1-130-871-11	FILM	0.01MF 5% 50V
C43	1-126-301-11	ELECT	1MF 20% 50V
C44	1-124-465-00	ELECT	0.47MF 20% 50V
C45	1-126-157-11	ELECT	10MF 20% 16V
C46	1-126-157-11	ELECT	10MF 20% 16V
C47	1-161-051-00	CERAMIC	0.01MF 10% 50V
C48	1-161-051-00	CERAMIC	0.01MF 10% 50V
C49	1-161-051-00	CERAMIC	0.01MF 10% 50V
C50	1-161-051-00	CERAMIC	0.01MF 10% 50V
C51	1-161-051-00	CERAMIC	0.01MF 10% 50V
C52	1-161-051-00	CERAMIC	0.01MF 10% 50V
C53	1-161-051-00	CERAMIC	0.01MF 10% 50V
C54	1-126-157-11	ELECT	10MF 20% 16V
C55	1-126-157-11	ELECT	10MF 20% 16V
C56	1-161-051-00	CERAMIC	0.01MF 10% 50V
C57	1-136-474-11	FILM	0.1MF 5% 100V
C58	1-130-871-11	FILM	0.01MF 5% 50V
C59	1-161-051-00	CERAMIC	0.01MF 10% 50V
C60	1-130-871-11	FILM	0.01MF 5% 50V
C61	1-161-051-00	CERAMIC	0.01MF 10% 50V
C62	1-130-871-11	FILM	0.01MF 5% 50V
C63	1-161-051-00	CERAMIC	0.01MF 10% 50V
C64	1-130-871-11	FILM	0.01MF 5% 50V
C65	1-161-051-00	CERAMIC	0.01MF 10% 50V
C66	1-161-051-00	CERAMIC	0.01MF 10% 50V
C67	1-126-163-11	ELECT	4.7MF 20% 25V
C68	1-101-361-00	CERAMIC	150PF 5% 50V
C69	1-126-157-11	ELECT	10MF 20% 16V
C70	1-126-157-11	ELECT	10MF 20% 16V
C71	1-126-157-11	ELECT	10MF 20% 16V
C72	1-126-157-11	ELECT	10MF 20% 16V
C73	1-161-051-00	CERAMIC	0.01MF 10% 50V
C74	1-126-157-11	ELECT	10MF 20% 16V
C75	1-126-157-11	ELECT	10MF 20% 16V
C76	1-136-165-00	FILM	0.1MF 5% 50V
C77	1-136-165-00	FILM	0.1MF 5% 50V
C78	1-161-051-00	CERAMIC	0.01MF 10% 50V
C80	1-101-004-00	CERAMIC	0.01MF 50V
C90	1-136-161-00	FILM	0.047MF 5% 50V

Ref.No	Part No.	Description	Remark
C100	1-136-165-00	FILM	0.1MF 5% 50V
C101	1-136-165-00	FILM	0.1MF 5% 50V
C102	1-102-978-00	CERAMIC	220PF 5% 50V
<u>DIODE</u>			
D1	8-719-911-19	DIODE 1SS119	
D2	8-719-911-19	DIODE 1SS119	
D3	8-719-109-97	DIODE RD6.8ES-B2	
D4	8-719-109-97	DIODE RD6.8ES-B2	
D5	8-719-110-31	DIODE RD12ES-B2	
D6	8-719-110-31	DIODE RD12ES-B2	
D7	8-719-911-19	DIODE 1SS119	
D8	8-719-911-19	DIODE 1SS119	
D9	8-719-110-03	DIODE RD7.5ES-B2	
D10	8-719-110-03	DIODE RD7.5ES-B2	
D11	8-719-110-41	DIODE RD15ES-B2	
D12	8-719-109-89	DIODE RD5.6ES-B2	
D13	8-719-911-19	DIODE 1SS119	
D14	8-719-911-19	DIODE 1SS119	
D15	8-719-911-19	DIODE 1SS119	
D18	8-719-911-19	DIODE 1SS119	
D19	8-719-911-19	DIODE 1SS119	
<u>CONNECTOR</u>			
DA1	*1-566-060-11	PIN, CONNECTOR 8P	
DA2	*1-566-056-11	PIN, CONNECTOR 4P	
DA3	*1-566-062-11	PIN, CONNECTOR 10P	
DA4	*1-566-058-11	PIN, CONNECTOR 6P	
DA5	*1-566-055-11	PIN, CONNECTOR 3P	
DA6	*1-566-058-11	PIN, CONNECTOR 6P	
DA7	*1-566-056-11	PIN, CONNECTOR 4P	
<u>IC</u>			
IC1	8-759-984-27	IC MB84027B	
IC2	8-759-140-11	IC MC14011BCP	
IC3	8-759-000-58	IC MC14093BCP	
IC4	8-751-580-00	IC CX-158	
IC5	8-759-990-82	IC TL082CP	
IC6	8-759-990-82	IC TL082CP	
IC7	8-759-014-96	IC MC1496P	
IC8	8-759-981-64	IC LM2903DQ	
IC9	8-759-990-82	IC TL082CP	
IC10	8-759-981-64	IC LM2903DQ	
IC11	8-759-990-82	IC TL082CP	
IC12	8-759-014-96	IC MC1496P	
IC13	8-759-000-49	IC MC14066BCP	
IC14	8-759-000-49	IC MC14066BCP	
IC15	8-759-000-49	IC MC14066BCP	
IC16	8-759-000-49	IC MC14066BCP	
IC17	8-759-945-58	IC RC4558DQ	
IC18	8-759-909-70	IC CX23025	
IC19	8-759-945-58	IC RC4558DQ	
IC20	8-759-945-58	IC RC4558DQ	
IC21	8-759-945-58	IC RC4558DQ	
IC22	8-759-945-58	IC RC4558DQ	
IC23	8-759-945-58	IC RC4558DQ	
IC24	8-759-929-62	IC LM7812CT	
IC25	8-759-929-65	IC LM7912CT	
IC26	8-759-990-82	IC TL082CP	
<u>COIL</u>			
L1	1-407-504-00	INDUCTOR 10MMH	

7. ELECTRICAL PARTS LIST

DA

7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Remark
TRANSISTOR			
Q1	8-729-900-89	TRANSISTOR DTC144ES	
Q2	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q3	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q4	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q5	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q6	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q7	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q8	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q9	8-729-800-10	TRANSISTOR 2SC3068	
Q10	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q12	8-729-900-89	TRANSISTOR DTC144ES	
Q13	8-729-900-89	TRANSISTOR DTC144ES	
Q14	8-729-900-89	TRANSISTOR DTC144ES	
Q15	8-729-900-89	TRANSISTOR DTC144ES	
Q16	8-729-900-89	TRANSISTOR DTC144ES	
Q17	8-729-900-89	TRANSISTOR DTC144ES	
Q18	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q19	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q20	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q21	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q22	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q23	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q24	8-729-119-78	TRANSISTOR 2SC2785-HFE	
RESISTOR			
R1	1-215-461-00	METAL 47K	1% 1/6W
R2	1-249-417-11	CARBON 1K	5% 1/4W
R3	1-249-430-11	CARBON 12K	5% 1/4W
R4	1-249-417-11	CARBON 1K	5% 1/4W
R5	1-249-422-11	CARBON 2.7K	5% 1/4W
R6	1-247-840-00	CARBON 2.4K	5% 1/4W
R7	1-215-462-00	METAL 51K	1% 1/6W
R8	1-249-417-11	CARBON 1K	5% 1/4W
R9	1-249-417-11	CARBON 1K	5% 1/4W
R10	1-249-423-11	CARBON 3.3K	5% 1/4W
R11	1-249-419-11	CARBON 1.5K	5% 1/4W
R12	1-249-429-11	CARBON 10K	5% 1/4W
R13	1-249-424-11	CARBON 3.9K	5% 1/4W
R14	1-249-419-11	CARBON 1.5K	5% 1/4W
R15	1-249-410-11	CARBON 270	5% 1/4W
R16	1-249-417-11	CARBON 1K	5% 1/4W
R17	1-215-427-00	METAL 1.8K	1% 1/6W
R18	1-215-435-00	METAL 3.9K	1% 1/6W
R19	1-215-443-00	METAL 8.2K	1% 1/6W
R20	1-249-400-11	CARBON 39	5% 1/4W F
R21	1-249-429-11	CARBON 10K	5% 1/4W
R22	1-215-445-00	METAL 10K	1% 1/6W
R23	1-249-429-11	CARBON 10K	5% 1/4W
R24	1-249-427-11	CARBON 6.8K	5% 1/4W
R25	1-249-393-11	CARBON 10	5% 1/4W
R26	1-215-439-00	METAL 5.6K	1% 1/6W
R27	1-249-429-11	CARBON 10K	5% 1/4W
R28	1-215-421-00	METAL 1K	1% 1/6W
R29	1-215-458-00	METAL 36K	1% 1/6W
R30	1-249-429-11	CARBON 10K	5% 1/4W
R31	1-249-427-11	CARBON 6.8K	5% 1/4W
R32	1-249-393-11	CARBON 10	5% 1/4W
R33	1-247-848-11	CARBON 5.1K	5% 1/4W
R34	1-249-424-11	CARBON 3.9K	5% 1/4W
R35	1-247-800-11	CARBON 51	5% 1/4W
R36	1-249-417-11	CARBON 1K	5% 1/4W
R37	1-249-417-11	CARBON 1K	5% 1/4W
R38	1-249-417-11	CARBON 1K	5% 1/4W
R39	1-249-417-11	CARBON 1K	5% 1/4W

Ref.No	Part No.	Description	Remark
R40	1-249-417-11	CARBON 1K	5% 1/4W
R41	1-247-800-11	CARBON 51	5% 1/4W
R42	1-249-430-11	CARBON 12K	5% 1/4W
R43	1-249-419-11	CARBON 1.5K	5% 1/4W
R44	1-249-424-11	CARBON 3.9K	5% 1/4W
R45	1-249-429-11	CARBON 10K	5% 1/4W
R46	1-249-429-11	CARBON 10K	5% 1/4W
R47	1-249-431-11	CARBON 15K	5% 1/4W
R48	1-249-429-11	CARBON 10K	5% 1/4W
R49	1-249-429-11	CARBON 10K	5% 1/4W
R50	1-249-429-11	CARBON 10K	5% 1/4W
R51	1-249-429-11	CARBON 10K	5% 1/4W
R52	1-249-417-11	CARBON 1K	5% 1/4W
R53	1-247-903-00	CARBON 1M	5% 1/4W
R54	1-249-421-11	CARBON 2.2K	5% 1/4W
R55	1-249-417-11	CARBON 1K	5% 1/4W
R56	1-249-435-11	CARBON 33K	5% 1/4W
R57	1-249-429-11	CARBON 10K	5% 1/4W
R58	1-249-423-11	CARBON 3.3K	5% 1/4W
R59	1-249-429-11	CARBON 10K	5% 1/4W
R60	1-215-445-00	METAL 10K	1% 1/6W
R61	1-249-429-11	CARBON 10K	5% 1/4W
R62	1-249-427-11	CARBON 6.8K	5% 1/4W
R63	1-249-393-11	CARBON 10	5% 1/4W
R64	1-249-429-11	CARBON 10K	5% 1/4W
R65	1-249-433-11	CARBON 22K	5% 1/4W
R66	1-249-433-11	CARBON 22K	5% 1/4W
R67	1-249-429-11	CARBON 10K	5% 1/4W
R68	1-247-903-00	CARBON 1M	5% 1/4W
R69	1-249-421-11	CARBON 2.2K	5% 1/4W
R70	1-249-435-11	CARBON 33K	5% 1/4W
R71	1-249-429-11	CARBON 10K	5% 1/4W
R72	1-249-423-11	CARBON 3.3K	5% 1/4W
R74	1-249-429-11	CARBON 10K	5% 1/4W
R76	1-249-433-11	CARBON 22K	5% 1/4W
R77	1-249-439-11	CARBON 68K	5% 1/4W
R79	1-249-421-11	CARBON 2.2K	5% 1/4W
R80	1-249-435-11	CARBON 33K	5% 1/4W
R81	1-249-429-11	CARBON 10K	5% 1/4W
R82	1-249-423-11	CARBON 3.3K	5% 1/4W
R83	1-249-429-11	CARBON 10K	5% 1/4W
R84	1-215-445-00	METAL 10K	1% 1/6W
R85	1-249-427-11	CARBON 6.8K	5% 1/4W
R86	1-249-429-11	CARBON 10K	5% 1/4W
R87	1-249-393-11	CARBON 10	5% 1/4W
R88	1-249-429-11	CARBON 10K	5% 1/4W
R89	1-249-429-11	CARBON 10K	5% 1/4W
R90	1-249-417-11	CARBON 1K	5% 1/4W
R91	1-249-429-11	CARBON 10K	5% 1/4W
R92	1-249-435-11	CARBON 33K	5% 1/4W
R93	1-249-393-11	CARBON 10	5% 1/4W
R94	1-247-848-11	CARBON 5.1K	5% 1/4W
R95	1-249-417-11	CARBON 1K	5% 1/4W
R96	1-249-429-11	CARBON 10K	5% 1/4W
R97	1-249-433-11	CARBON 22K	5% 1/4W
R98	1-249-409-11	CARBON 220	5% 1/4W
R99	1-249-405-11	CARBON 100	5% 1/4W
R100	1-249-417-11	CARBON 1K	5% 1/4W
R101	1-249-405-11	CARBON 100	5% 1/4W
R102	1-249-430-11	CARBON 12K	5% 1/4W
R103	1-249-424-11	CARBON 3.9K	5% 1/4W
R104	1-247-800-11	CARBON 51	5% 1/4W
R105	1-249-417-11	CARBON 1K	5% 1/4W
R106	1-249-417-11	CARBON 1K	5% 1/4W
R107	1-249-424-11	CARBON 3.9K	5% 1/4W



Ref.No	Part No.	Description	Remark
R109	1-249-437-11	CARBON 47K 5%	1/4W
R110	1-249-430-11	CARBON 12K 5%	1/4W
R111	1-249-437-11	CARBON 47K 5%	1/4W
R112	1-249-426-11	CARBON 5.6K 5%	1/4W
R113	1-249-430-11	CARBON 12K 5%	1/4W
R114	1-249-437-11	CARBON 47K 5%	1/4W
R115	1-247-830-11	CARBON 910 5%	1/4W
R116	1-247-830-11	CARBON 910 5%	1/4W
R117	1-215-445-00	METAL 10K 1%	1/6W
R118	1-215-449-00	METAL 15K 1%	1/6W
R119	1-215-454-00	METAL 24K 1%	1/6W
R120	1-215-437-00	METAL 4.7K 1%	1/6W
R121	1-215-445-00	METAL 10K 1%	1/6W
R122	1-215-421-00	METAL 1K 1%	1/6W
R123	1-215-445-00	METAL 10K 1%	1/6W
R124	1-215-433-00	METAL 3.3K 1%	1/6W
R125	1-215-443-00	METAL 8.2K 1%	1/6W
R126	1-215-437-00	METAL 4.7K 1%	1/6W
R127	1-249-417-11	CARBON 1K 5%	1/4W
R128	1-249-417-11	CARBON 1K 5%	1/4W
R129	1-249-405-11	CARBON 100 5%	1/4W
R130	1-249-429-11	CARBON 10K 5%	1/4W
R131	1-215-445-00	METAL 10K 1%	1/6W
R132	1-215-445-00	METAL 10K 1%	1/6W
R133	1-215-461-00	METAL 47K 1%	1/6W
R134	1-215-447-00	METAL 12K 1%	1/6W
R135	1-249-427-11	CARBON 6.8K 5%	1/4W
R136	1-249-429-11	CARBON 10K 5%	1/4W
R137	1-249-405-11	CARBON 100 5%	1/4W
R138	1-249-417-11	CARBON 1K 5%	1/4W
R139	1-249-417-11	CARBON 1K 5%	1/4W
R140	1-215-421-00	METAL 1K 1%	1/6W
R141	1-249-429-11	CARBON 10K 5%	1/4W
R142	1-215-457-00	METAL 33K 1%	1/6W
R143	1-215-457-00	METAL 33K 1%	1/4W
R144	1-249-429-11	CARBON 10K 5%	1/4W
R145	1-215-481-00	METAL 330K 1%	1/6W
R146	1-249-429-11	CARBON 10K 5%	1/4W
R147	1-249-433-11	CARBON 22K 5%	1/4W
R148	1-249-405-11	CARBON 100 5%	1/4W
R149	1-215-421-00	METAL 1K 1%	1/6W
R150	1-215-457-00	METAL 33K 1%	1/6W
R151	1-215-457-00	METAL 33K 1%	1/6W
R152	1-215-481-00	METAL 330K 1%	1/6W
R153	1-215-431-00	METAL 2.7K 1%	1/6W
R154	1-215-413-00	METAL 470 1%	1/6W
R155	1-249-429-11	CARBON 10K 5%	1/4W
R156	1-249-429-11	CARBON 10K 5%	1/4W
R157	1-249-433-11	CARBON 22K 5%	1/4W
R158	1-249-405-11	CARBON 100 5%	1/4W
R159	1-249-429-11	CARBON 10K 5%	1/4W
R160	1-247-897-11	CARBON 560K 5%	1/4W
R161	1-215-455-00	METAL 27K 1%	1/4W
R162	1-215-445-00	METAL 10K 1%	1/6W
R163	1-215-445-00	METAL 10K 1%	1/6W
R164	1-215-461-00	METAL 47K 1%	1/6W
R165	1-215-461-00	METAL 47K 1%	1/6W
R166	1-215-485-00	METAL 470K 1%	1/6W
R167	1-249-429-11	CARBON 10K 5%	1/4W
R168	1-249-429-11	CARBON 10K 5%	1/4W
R169	1-249-433-11	CARBON 22K 5%	1/4W
R170	1-249-405-11	CARBON 100 5%	1/4W
R171	1-249-429-11	CARBON 10K 5%	1/4W
R172	1-215-445-00	METAL 10K 1%	1/6W
R173	1-215-445-00	METAL 10K 1%	1/6W

Ref.No	Part No.	Description	Remark
R174	1-215-457-00	METAL 33K 1%	1/6W
R175	1-215-457-00	METAL 33K 1%	1/6W
R176	1-215-481-00	METAL 330K 1%	1/6W
R177	1-249-429-11	CARBON 10K 5%	1/4W
R178	1-247-903-00	CARBON 1M 5%	1/4W
R179	1-249-429-11	CARBON 10K 5%	1/4W
R180	1-249-433-11	CARBON 22K 5%	1/4W
R181	1-249-405-11	CARBON 100 5%	1/4W
R182	1-215-451-00	METAL 18K 1%	1/6W
R183	1-249-429-11	CARBON 10K 5%	1/4W
R184	1-215-477-00	METAL 220K 1%	1/6W
R185	1-215-445-00	METAL 10K 1%	1/6W
R186	1-215-445-00	METAL 10K 1%	1/6W
R187	1-215-437-00	METAL 4.7K 1%	1/6W
R188	1-215-431-00	METAL 2.7K 1%	1/6W
R189	1-215-405-00	METAL 220 1%	1/6W
R190	1-215-433-00	METAL 3.3K 1%	1/6W
R191	1-215-405-00	METAL 220 1%	1/6W
R192	1-215-433-00	METAL 3.3K 1%	1/6W
R193	1-249-433-11	CARBON 22K 5%	1/4W
R194	1-249-417-11	CARBON 1K 5%	1/4W
R195	1-249-417-11	CARBON 1K 5%	1/4W
R196	1-249-429-11	CARBON 10K 5%	1/4W
R197	1-249-429-11	CARBON 10K 5%	1/4W
R198	1-215-475-00	METAL 180K 1%	1/6W
R200	1-215-445-00	METAL 10K 1%	1/4W
R201	1-249-429-11	CARBON 10K 5%	1/4W
R202	1-249-429-11	CARBON 10K 5%	1/4W
R203	1-249-429-11	CARBON 10K 5%	1/4W
R204	1-249-429-11	CARBON 10K 5%	1/4W
R205	1-249-437-11	CARBON 47K 5%	1/4W
R206	1-249-417-11	CARBON 1K 5%	1/4W
R207	1-249-433-11	CARBON 22K 5%	1/4W
R208	1-249-437-11	CARBON 47K 5%	1/4W
R209	1-249-429-11	CARBON 10K 5%	1/4W
R210	1-249-429-11	CARBON 10K 5%	1/4W
R211	1-249-429-11	CARBON 10K 5%	1/4W
R220	1-249-439-11	CARBON 68K 5%	1/4W
R221	1-249-428-11	CARBON 8.2K 5%	1/4W
R223	1-249-433-11	CARBON 22K 5%	1/4W
R224	1-249-433-11	CARBON 22K 5%	1/4W
R290	1-215-443-00	METAL 8.2K 1%	1/6W
VARIABLE RESISTOR			
RV1	1-237-521-21	RES, ADJ, CERMET 100K	
RV2	1-237-522-21	RES, ADJ, CERMET 200K	
RV3	1-237-521-21	RES, ADJ, CERMET 100K	
RV4	1-237-519-21	RES, ADJ, CERMET 20K	
RV5	1-237-519-21	RES, ADJ, CERMET 20K	
RV6	1-237-518-21	RES, ADJ, CERMET 10K	
RV7	1-237-518-21	RES, ADJ, CERMET 10K	
RV10	1-237-519-21	RES, ADJ, CERMET 20K	
RV11	1-237-519-21	RES, ADJ, CERMET 20K	
RV12	1-237-519-21	RES, ADJ, CERMET 20K	
RV13	1-237-519-21	RES, ADJ, CERMET 20K	
RV14	1-237-519-21	RES, ADJ, CERMET 20K	
RV15	1-237-519-21	RES, ADJ, CERMET 20K	
RV16	1-237-519-21	RES, ADJ, CERMET 20K	
RV17	1-237-517-21	RES, ADJ, CERMET 5K	
RV18	1-237-517-21	RES, ADJ, CERMET 5K	
RV19	1-237-519-21	RES, ADJ, CERMET 20K	
RV20	1-237-519-21	RES, ADJ, CERMET 20K	
RV21	1-237-519-21	RES, ADJ, CERMET 20K	
RV22	1-237-516-21	RES, ADJ, CERMET 2K	
RV23	1-237-516-21	RES, ADJ, CERMET 2K	

7. ELECTRICAL PARTS LIST



DA DB

Ref.No	Part No.	Description	Remark
RV24	1-237-516-21	RES, ADJ, CERMET 2K	
RV25	1-237-519-21	RES, ADJ, CERMET 20K	
RV26	1-237-519-21	RES, ADJ, CERMET 20K	
RV27	1-237-519-21	RES, ADJ, CERMET 20K	
RV28	1-237-519-21	RES, ADJ, CERMET 20K	

SWITCH

S1	1-571-908-11	SWITCH, SLIDE	
----	--------------	---------------	--

*A-1345-732-A DB BOARD, COMPLETE

3-618-225-00 NUT, PLATE
7-682-548-04 SCREW P 3X8

CAPACITOR

C3	1-102-963-00	CERAMIC	33PF	5%	50V
C4	1-136-165-00	FILM	0.1MF	5%	50V
C5	1-136-161-00	FILM	0.047MF	5%	50V
C6	1-161-051-00	CERAMIC	0.01MF	10%	50V
C7	1-124-589-11	ELECT	47MF	20%	16V
C8	1-136-153-00	FILM	0.01MF	5%	50V
C9	1-102-074-00	CERAMIC	0.001MF	10%	50V
C10	1-136-161-00	FILM	0.047MF	5%	50V
C11	1-102-973-00	CERAMIC	100PF	5%	50V
C12	1-136-165-00	FILM	0.1MF	5%	50V
C13	1-136-161-00	FILM	0.047MF	5%	50V
C14	1-102-824-00	CERAMIC	470PF	5%	50V
C15	1-136-165-00	FILM	0.1MF	5%	50V
C16	1-102-074-00	CERAMIC	0.001MF	10%	50V
C17	1-136-153-00	FILM	0.01MF	5%	50V
C18	1-161-051-00	CERAMIC	0.01MF	10%	50V
C19	1-124-589-11	ELECT	47MF	20%	16V
C20	1-124-589-11	ELECT	47MF	20%	16V
C21	1-161-051-00	CERAMIC	0.01MF	10%	50V
C22	1-124-589-11	ELECT	47MF	20%	16V
C23	1-163-157-00	FILM	0.022MF	5%	50V
C24	1-136-165-00	FILM	0.1MF	5%	50V
C25	1-136-153-00	FILM	0.01MF	5%	50V
C26	1-136-161-00	FILM	0.047MF	5%	50V
C27	1-163-157-00	FILM	0.022MF	5%	50V
C28	1-136-165-00	FILM	0.1MF	5%	50V
C29	1-136-153-00	FILM	0.01MF	5%	50V
C30	1-136-161-00	FILM	0.047MF	5%	50V
C31	1-124-589-11	ELECT	47MF	20%	16V
C32	1-161-051-00	CERAMIC	0.01MF	10%	50V
C33	1-102-074-00	CERAMIC	0.001MF	10%	50V
C34	1-136-161-00	FILM	0.047MF	5%	50V
C35	1-102-973-00	CERAMIC	100PF	5%	50V
C36	1-136-165-00	FILM	0.1MF	5%	50V
C37	1-136-161-00	FILM	0.047MF	5%	50V
C38	1-102-824-00	CERAMIC	470PF	5%	50V
C39	1-136-165-00	FILM	0.1MF	5%	50V
C40	1-102-074-00	CERAMIC	0.001MF	10%	50V
C41	1-136-153-00	FILM	0.01MF	5%	50V
C42	1-161-051-00	CERAMIC	0.01MF	10%	50V
C43	1-124-589-11	ELECT	47MF	20%	16V
C44	1-124-589-11	ELECT	47MF	20%	16V
C45	1-102-074-00	CERAMIC	0.001MF	10%	50V
C46	1-136-161-00	FILM	0.047MF	5%	50V
C47	1-102-973-00	CERAMIC	100PF	5%	50V
C48	1-136-165-00	FILM	0.1MF	5%	50V
C49	1-136-161-00	FILM	0.047MF	5%	50V
C50	1-108-794-11	MYLAR	0.0015MF	5%	50V

Ref.No	Part No.	Description	Remark
C51	1-136-161-00	FILM	0.047MF 5% 50V
C52	1-102-074-00	CERAMIC	0.001MF 10% 50V
C53	1-101-880-00	CERAMIC	47PF 5% 50V
C54	1-161-051-00	CERAMIC	0.01MF 10% 50V
C55	1-124-589-11	ELECT	47MF 20% 16V

C56	1-124-589-11	ELECT	47MF 20% 16V
C57	1-102-074-00	CERAMIC	0.001MF 10% 50V
C58	1-136-161-00	FILM	0.047MF 5% 50V
C59	1-102-973-00	CERAMIC	100PF 5% 50V
C60	1-136-169-00	FILM	0.22MF 5% 50V

C61	1-136-161-00	FILM	0.047MF 5% 50V
C62	1-102-074-00	CERAMIC	0.001MF 10% 50V
C63	1-136-161-00	FILM	0.047MF 5% 50V
C64	1-102-074-00	CERAMIC	0.001MF 10% 50V
C65	1-101-880-00	CERAMIC	47PF 5% 50V

C66	1-161-051-00	CERAMIC	0.01MF 10% 50V
C67	1-124-589-11	ELECT	47MF 20% 16V
C68	1-124-589-11	ELECT	47MF 20% 16V
C69	1-161-051-00	CERAMIC	0.01MF 10% 50V
C70	1-102-074-00	CERAMIC	0.001MF 10% 50V

C71	1-124-589-11	ELECT	47MF 20% 16V
C72	1-126-096-11	ELECT	10MF 20% 25V
C73	1-126-096-11	ELECT	10MF 20% 25V
C74	1-126-096-11	ELECT	10MF 20% 25V
C75	1-126-096-11	ELECT	10MF 20% 25V

C76	1-126-096-11	ELECT	10MF 20% 25V
C77	1-126-096-11	ELECT	10MF 20% 25V
C78	1-161-051-00	CERAMIC	0.01MF 10% 50V
C81	1-102-121-00	CERAMIC	0.0022MF 10% 50V
C83	1-136-155-00	FILM	0.15MF 5% 50V

C84	1-161-051-00	CERAMIC	0.01MF 10% 50V
C87	1-101-361-00	CERAMIC	150PF 5% 50V
C88	1-161-051-00	CERAMIC	0.01MF 10% 50V
C89	1-161-051-00	CERAMIC	0.01MF 10% 50V

DIODE

D2	8-719-110-41	DIODE RD15ES-B2	
D3	8-719-911-19	DIODE 1SS119	
D4	8-719-911-19	DIODE 1SS119	
D5	8-719-911-19	DIODE 1SS119	
D6	8-719-110-03	DIODE RD7.5ES-B2	
D7	8-719-110-03	DIODE RD7.5ES-B2	
D8	8-719-109-97	DIODE RD6.8ESB2	

CONNECTOR

DB1	*1-566-062-11	PIN, CONNECTOR 10P	
DB2	*1-566-054-11	PIN, CONNECTOR 2P	
DB3	*1-566-055-11	PIN, CONNECTOR 3P	
DB4	*1-566-055-11	PIN, CONNECTOR 3P	
DB5	*1-566-055-11	PIN, CONNECTOR 3P	
DB6	*1-566-062-11	PIN, CONNECTOR 10P	
DB7	*1-566-062-11	PIN, CONNECTOR 10P	

IC

IC1	8-759-945-58	IC RC4558P	
IC2	8-759-945-58	IC RC4558P	
IC3	8-759-945-58	IC RC4558P	
IC4	8-759-945-58	IC RC4558P	
IC5	8-759-945-58	IC RC4558P	
IC6	8-759-945-58	IC RC4558P	
IC7	8-759-945-58	IC RC4558P	
IC8	8-759-945-58	IC RC4558P	
IC11	8-759-140-53	IC MC14053BCP	
IC12	8-759-945-58	IC RC4558P	
IC13	8-759-929-62	IC LM7812CT	



Ref.No	Part No.	Description	Remark
IC14	8-759-929-65	IC LM7912CT	
IC15	8-759-345-38	IC HD14538BP	
IC16	8-759-981-64	IC LM2903DQ	
<u>COIL</u>			
L1	1-408-236-00	INDUCTOR 2.7MMH	
L2	1-408-236-00	INDUCTOR 2.7MMH	
L3	1-408-238-00	INDUCTOR 3.9MMH	
L4	1-408-237-00	INDUCTOR 3.3MMH	
<u>TRANSISTOR</u>			
Q2	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q3	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q4	8-729-900-63	TRANSISTOR DTC124ES	
Q5	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q6	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q7	8-729-201-05	TRANSISTOR 2SC2878-B	
Q8	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q9	8-729-106-07	TRANSISTOR 2SK514-M	
Q10	8-729-900-63	TRANSISTOR DTC124ES	
Q11	8-729-201-05	TRANSISTOR 2SC2878-B	
Q12	8-729-201-05	TRANSISTOR 2SC2878-B	
Q13	8-729-106-07	TRANSISTOR 2SK514-M	
Q14	8-729-900-63	TRANSISTOR DTC124ES	
Q15	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q16	8-729-106-07	TRANSISTOR 2SK514-M	
Q17	8-729-900-63	TRANSISTOR DTC124ES	
Q18	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q19	8-729-201-05	TRANSISTOR 2SC2878-B	
Q20	8-729-201-05	TRANSISTOR 2SC2878-B	
Q21	8-729-201-05	TRANSISTOR 2SC2878-B	
Q22	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q23	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q24	8-729-106-07	TRANSISTOR 2SK514-M	
Q25	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q26	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q27	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q28	8-729-106-07	TRANSISTOR 2SK514-M	
Q29	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q30	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q31	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q32	8-729-106-07	TRANSISTOR 2SK514-M	
Q33	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q34	8-729-173-38	TRANSISTOR 2SA733-K	
Q35	8-729-173-38	TRANSISTOR 2SA733-K	
Q36	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q37	8-729-900-63	TRANSISTOR DTC124ES	
Q38	8-729-173-38	TRANSISTOR 2SA733-K	
Q40	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q41	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q43	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q44	8-729-173-38	TRANSISTOR 2SA733-K	
<u>RESISTOR</u>			
R3	1-249-423-11	CARBON 3.3K 5% 1/4W	
R4	1-249-441-11	CARBON 100K 5% 1/4W	
R5	1-249-429-11	CARBON 10K 5% 1/4W	
R6	1-249-420-11	CARBON 1.8K 5% 1/4W	
R7	1-249-429-11	CARBON 10K 5% 1/4W	
R8	1-249-429-11	CARBON 10K 5% 1/4W	
R9	1-249-425-11	CARBON 4.7K 5% 1/4W	
R10	1-215-467-00	METAL 82K 1% 1/6W	
R11	1-215-439-00	METAL 5.6K 1% 1/6W	
R12	1-215-477-00	METAL 220K 1% 1/6W	
R13	1-249-429-11	CARBON 10K 5% 1/4W	

Ref.No	Part No.	Description	Remark
R14	1-249-433-11	CARBON 22K 5% 1/4W	
R15	1-249-433-11	CARBON 22K 5% 1/4W	
R16	1-249-441-11	CARBON 100K 5% 1/4W	
R17	1-249-433-11	CARBON 22K 5% 1/4W	
R18	1-215-477-00	METAL 220K 1% 1/6W	
R19	1-249-429-11	CARBON 10K 5% 1/4W	
R20	1-249-433-11	CARBON 22K 5% 1/4W	
R21	1-249-433-11	CARBON 22K 5% 1/4W	
R22	1-249-441-11	CARBON 100K 5% 1/4W	
R23	1-249-429-11	CARBON 10K 5% 1/4W	
R24	1-215-453-00	METAL 22K 1% 1/6W	
R25	1-249-405-11	CARBON 100 5% 1/4W	
R26	1-249-417-11	CARBON 1K 5% 1/4W	
R27	1-249-433-11	CARBON 22K 5% 1/4W	
R28	1-249-425-11	CARBON 4.7K 5% 1/4W	
R29	1-249-435-11	CARBON 33K 5% 1/4W	
R30	1-249-421-11	CARBON 2.2K 5% 1/4W	
R31	1-249-417-11	CARBON 1K 5% 1/4W	
R32	1-249-433-11	CARBON 22K 5% 1/4W	
R33	1-249-425-11	CARBON 4.7K 5% 1/4W	
R34	1-247-903-00	CARBON 1M 5% 1/4W	
R35	1-249-429-11	CARBON 10K 5% 1/4W	
R36	1-249-429-11	CARBON 10K 5% 1/4W	
R37	1-249-429-11	CARBON 10K 5% 1/4W	
R38	1-215-445-00	METAL 10K 1% 1/6W	
R39	1-215-445-00	METAL 10K 1% 1/6W	
R40	1-249-429-11	CARBON 10K 5% 1/4W	
R42	1-249-441-11	CARBON 100K 5% 1/4W	
R43	1-249-405-11	CARBON 100 5% 1/4W	
R44	1-249-421-11	CARBON 2.2K 5% 1/4W	
R45	1-215-445-00	METAL 10K 1% 1/6W	
R46	1-215-445-00	METAL 10K 1% 1/6W	
R47	1-249-429-11	CARBON 10K 5% 1/4W	
R48	1-247-895-00	CARBON 470K 5% 1/4W	
R49	1-215-451-00	METAL 18K 1% 1/6W	
R50	1-215-451-00	METAL 18K 1% 1/6W	
R51	1-249-429-11	CARBON 10K 5% 1/4W	
R52	1-215-451-00	METAL 18K 1% 1/6W	
R53	1-247-895-00	CARBON 470K 5% 1/4W	
R54	1-215-451-00	METAL 18K 1% 1/6W	
R55	1-249-429-11	CARBON 10K 5% 1/4W	
R57	1-249-405-11	CARBON 100 5% 1/4W	
R58	1-249-405-11	CARBON 100 5% 1/4W	
R59	1-249-421-11	CARBON 2.2K 5% 1/4W	
R60	1-215-445-00	METAL 10K 1% 1/6W	
R61	1-249-429-11	CARBON 10K 5% 1/4W	
R62	1-215-445-00	METAL 10K 1% 1/6W	
R63	1-215-453-00	METAL 22K 1% 1/6W	
R64	1-249-429-11	CARBON 10K 5% 1/4W	
R65	1-249-405-11	CARBON 100 5% 1/4W	
R66	1-249-417-11	CARBON 1K 5% 1/4W	
R67	1-249-433-11	CARBON 22K 5% 1/4W	
R68	1-249-425-11	CARBON 4.7K 5% 1/4W	
R69	1-249-435-11	CARBON 33K 5% 1/4W	
R70	1-249-421-11	CARBON 2.2K 5% 1/4W	
R71	1-249-417-11	CARBON 1K 5% 1/4W	
R72	1-249-433-11	CARBON 22K 5% 1/4W	
R73	1-249-425-11	CARBON 4.7K 5% 1/4W	
R74	1-247-903-00	CARBON 1M 5% 1/4W	
R75	1-249-429-11	CARBON 10K 5% 1/4W	
R76	1-249-429-11	CARBON 10K 5% 1/4W	
R77	1-249-429-11	CARBON 10K 5% 1/4W	
R78	1-215-469-00	METAL 100K 1% 1/6W	
R79	1-249-405-11	CARBON 100 5% 1/4W	
R80	1-249-417-11	CARBON 1K 5% 1/4W	

7. ELECTRICAL PARTS LIST



DB**DC**

Ref.No	Part No.	Description	Remark
R81	1-249-433-11	CARBON 22K 5%	1/4W
R82	1-249-425-11	CARBON 4.7K 5%	1/4W
R83	1-249-435-11	CARBON 33K 5%	1/4W
R84	1-249-421-11	CARBON 2.2K 5%	1/4W
R85	1-249-417-11	CARBON 1K 5%	1/4W
R86	1-249-433-11	CARBON 22K 5%	1/4W
R87	1-249-425-11	CARBON 4.7K 5%	1/4W
R88	1-247-895-00	CARBON 470K 5%	1/4W
R89	1-247-895-00	CARBON 470K 5%	1/4W
R90	1-249-429-11	CARBON 10K 5%	1/4W
R91	1-249-429-11	CARBON 10K 5%	1/4W
R92	1-215-469-00	METAL 100K 1%	1/6W
R93	1-249-405-11	CARBON 100 5%	1/4W
R94	1-249-417-11	CARBON 1K 5%	1/4W
R95	1-249-433-11	CARBON 22K 5%	1/4W
R96	1-249-425-11	CARBON 4.7K 5%	1/4W
R97	1-249-435-11	CARBON 33K 5%	1/4W
R98	1-249-421-11	CARBON 2.2K 5%	1/4W
R99	1-249-412-11	CARBON 390 5%	1/4W
R100	1-249-433-11	CARBON 22K 5%	1/4W
R101	1-249-425-11	CARBON 4.7K 5%	1/4W
R102	1-247-895-00	CARBON 470K 5%	1/4W
R103	1-247-895-00	CARBON 470K 5%	1/4W
R104	1-249-429-11	CARBON 10K 5%	1/4W
R105	1-249-429-11	CARBON 10K 5%	1/4W
R106	1-215-397-00	METAL 100 1%	1/6W
R107	1-249-393-11	CARBON 10 5%	1/4W
R108	1-249-393-11	CARBON 10 5%	1/4W
R109	1-249-429-11	CARBON 10K 5%	1/4W
R110	1-215-437-00	METAL 4.7K 1%	1/6W
R111	1-249-421-11	CARBON 2.2K 5%	1/4W
R112	1-249-405-11	CARBON 100 5%	1/4W
R113	1-249-429-11	CARBON 10K 5%	1/4W
R114	1-215-441-00	METAL 6.8K 1%	1/6W
R115	1-215-469-00	METAL 100K 1%	1/6W
R116	1-249-421-11	CARBON 2.2K 5%	1/4W
R117	1-249-405-11	CARBON 100 5%	1/4W
R118	1-249-405-11	CARBON 100 5%	1/4W
R120	1-215-421-00	METAL 1K 1%	1/6W
R121	1-249-425-11	CARBON 4.7K 5%	1/4W
R122	1-215-461-00	METAL 47K 1%	1/6W
R123	1-215-437-00	METAL 4.7K 1%	1/6W
R124	1-215-437-00	METAL 4.7K 1%	1/6W
R125	1-215-469-00	METAL 100K 1%	1/6W
R126	1-249-435-11	CARBON 33K 5%	1/4W
R128	1-202-669-15	SOLID 10M 5%	1/2W
R129	1-215-479-00	METAL 270K 1%	1/6W
R130	1-247-830-11	CARBON 910 5%	1/4W
R132	1-247-830-11	CARBON 910 5%	1/4W
R169	1-247-903-00	CARBON 1M 5%	1/4W
R170	1-247-903-00	CARBON 1M 5%	1/4W
R171	1-249-441-11	CARBON 100K 5%	1/4W
R172	1-249-429-11	CARBON 10K 5%	1/4W
R173	1-249-429-11	CARBON 10K 5%	1/4W
R174	1-249-421-11	CARBON 2.2K 5%	1/4W
R175	1-249-421-11	CARBON 2.2K 5%	1/4W
R176	1-249-425-11	CARBON 4.7K 5%	1/4W
R177	1-249-421-11	CARBON 2.2K 5%	1/4W
R185	1-249-417-11	CARBON 1K 5%	1/4W
R186	1-249-429-11	CARBON 10K 5%	1/4W
R187	1-249-435-11	CARBON 33K 5%	1/4W
R188	1-249-429-11	CARBON 10K 5%	1/4W
R189	1-249-435-11	CARBON 33K 5%	1/4W
R190	1-249-417-11	CARBON 1K 5%	1/4W
R191	1-249-423-11	CARBON 3.3K 5%	1/4W

Ref.No	Part No.	Description	Remark
R192	1-215-453-00	METAL 22K 1%	1/6W
R193	1-249-417-11	CARBON 1K 5%	1/4W
R194	1-249-417-11	CARBON 1K 5%	1/4W

*A-1340-989-A DC BOARD, COMPLETE
*****CAPACITOR

C1	1-126-157-11	ELECT 10MF	20% 16V
C2	1-126-157-11	ELECT 10MF	20% 16V
C3	1-161-051-00	CERAMIC 0.01MF	10% 25V
C4	1-161-051-00	CERAMIC 0.01MF	10% 25V

CONNECTOR

DC1	*1-566-062-11	PIN, CONNECTOR 10P	
DC2	*1-566-062-11	PIN, CONNECTOR 10P	

IC

IC1	8-759-040-53	IC MC14053BCP	
IC2	8-759-040-53	IC MC14053BCP	

TRANSISTOR

Q1	8-729-203-49	TRANSISTOR 2SC3327-B	
Q2	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q3	8-729-119-78	TRANSISTOR 2SC2785-HFE	

RESISTOR

R1	1-215-445-00	METAL 10K 1%	1/6W
R2	1-215-453-00	METAL 22K 1%	1/6W
R3	1-215-453-00	METAL 22K 1%	1/6W
R4	1-215-453-00	METAL 22K 1%	1/6W
R5	1-215-445-00	METAL 10K 1%	1/6W
R6	1-215-453-00	METAL 22K 1%	1/6W
R7	1-215-453-00	METAL 22K 1%	1/6W
R8	1-215-453-00	METAL 22K 1%	1/6W
R9	1-215-453-00	METAL 22K 1%	1/6W
R10	1-215-453-00	METAL 22K 1%	1/6W
R11	1-215-445-00	METAL 10K 1%	1/6W
R12	1-215-453-00	METAL 22K 1%	1/6W
R13	1-215-453-00	METAL 22K 1%	1/6W
R14	1-215-453-00	METAL 22K 1%	1/6W
R15	1-215-445-00	METAL 10K 1%	1/6W
R16	1-215-461-00	METAL 47K 1%	1/6W
R17	1-215-461-00	METAL 47K 1%	1/6W
R18	1-215-467-00	METAL 82K 1%	1/6W
R19	1-215-461-00	METAL 47K 1%	1/6W
R20	1-215-461-00	METAL 47K 1%	1/6W
R21	1-215-445-00	METAL 10K 1%	1/6W
R22	1-215-469-00	METAL 100K 1%	1/6W
R23	1-215-469-00	METAL 100K 1%	1/6W
R24	1-215-469-00	METAL 100K 1%	1/6W
R25	1-215-445-00	METAL 10K 1%	1/6W
R26	1-215-461-00	METAL 47K 1%	1/6W
R27	1-215-461-00	METAL 47K 1%	1/6W
R28	1-215-467-00	METAL 82K 1%	1/6W
R29	1-215-461-00	METAL 47K 1%	1/6W
R30	1-215-461-00	METAL 47K 1%	1/6W
R31	1-215-461-00	METAL 47K 1%	1/6W
R32	1-215-449-00	METAL 15K 1%	1/6W
R33	1-249-433-11	CARBON 22K 5%	1/4W
R34	1-249-437-11	CARBON 47K 5%	1/4W
R35	1-249-437-11	CARBON 47K 5%	1/4W
R36	1-249-438-11	CARBON 56K 5%	1/4W

Ref.No	Part No.	Description	Remark		
R37	1-249-440-11	CARBON 82K	5%	1/4W	
R38	1-249-417-11	CARBON 1K	5%	1/4W	
R39	1-215-453-00	METAL 22K	1%	1/6W	
R40	1-215-469-00	METAL 100K	1%	1/6W	
R41	1-215-469-00	METAL 100K	1%	1/6W	
R42	1-215-445-00	METAL 10K	1%	1/6W	

VARIABLE RESISTOR

RV1	1-237-518-21	RES, ADJ, CERMET 10K			
RV2	1-237-518-21	RES, ADJ, CERMET 10K			
RV3	1-237-518-21	RES, ADJ, CERMET 10K			
RV4	1-237-518-21	RES, ADJ, CERMET 10K			
RV5	1-237-518-21	RES, ADJ, CERMET 10K			
RV6	1-237-518-21	RES, ADJ, CERMET 10K			
RV7	1-237-518-21	RES, ADJ, CERMET 10K			
RV8	1-237-518-21	RES, ADJ, CERMET 10K			
RV9	1-237-518-21	RES, ADJ, CERMET 10K			
RV10	1-237-518-21	RES, ADJ, CERMET 10K			
RV11	1-237-518-21	RES, ADJ, CERMET 10K			
RV12	1-237-518-21	RES, ADJ, CERMET 10K			
RV13	1-237-518-21	RES, ADJ, CERMET 10K			
RV14	1-237-518-21	RES, ADJ, CERMET 10K			
RV15	1-237-518-21	RES, ADJ, CERMET 10K			
RV16	1-237-518-21	RES, ADJ, CERMET 10K			
RV17	1-237-518-21	RES, ADJ, CERMET 10K			
RV18	1-237-518-21	RES, ADJ, CERMET 10K			
RV19	1-237-518-21	RES, ADJ, CERMET 10K			
RV20	1-237-518-21	RES, ADJ, CERMET 10K			
RV21	1-237-518-21	RES, ADJ, CERMET 10K			
RV22	1-237-518-21	RES, ADJ, CERMET 10K			
RV23	1-237-518-21	RES, ADJ, CERMET 10K			
RV24	1-237-518-21	RES, ADJ, CERMET 10K			
RV25	1-237-518-21	RES, ADJ, CERMET 10K			
RV26	1-237-518-21	RES, ADJ, CERMET 10K			
RV27	1-237-518-21	RES, ADJ, CERMET 10K			
RV28	1-237-518-21	RES, ADJ, CERMET 10K			
RV29	1-237-518-21	RES, ADJ, CERMET 10K			
RV30	1-237-518-21	RES, ADJ, CERMET 10K			
RV31	1-237-521-21	RES, ADJ, CERMET 100K			
RV32	1-237-518-21	RES, ADJ, CERMET 10K			
RV33	1-237-518-21	RES, ADJ, CERMET 10K			

*A-1345-730-A EA BOARD, COMPLETE

4-347-706-00 HEAT SINK (TR)
4-373-965-01 INSULATOR (SMALL)
7-682-548-04 SCREW + P 3X8
7-685-646-79 SCREW BVTP 3X8 TYPE2 IT-3

CAPACITOR

C1	1-101-810-00	CERAMIC	100PF	5%	500V
C2	1-124-917-11	ELECT	33MF	20%	25V
C3	1-124-357-11	ELECT	33MF	20%	35V
C4	1-124-046-00	ELECT	10MF		160V
C5	1-124-046-00	ELECT	10MF		160V
C6	1-101-361-00	CERAMIC	150PF	5%	50V
C7	1-124-046-00	ELECT	10MF		160V
C8	1-136-337-11	FILM	3.3MF	10%	100V
C12	1-102-121-00	CERAMIC	0.0022MF	10%	50V
C13	1-136-165-00	FILM	0.1MF	5%	50V
C14	1-130-728-00	FILM	0.0022MF	5%	50V
C15	1-102-973-00	CERAMIC	100PF	5%	50V
C16	1-123-356-00	ELECT	10MF	20%	25V

Ref.No	Part No.	Description	Remark		
C17	1-123-330-00	ELECT	22MF	20%	16V
C18	1-102-973-00	CERAMIC	100PF	5%	50V
C19	1-124-910-11	ELECT	47MF	20%	25V
C20	1-136-161-00	FILM	0.047MF	5%	50V
C21	1-101-810-00	CERAMIC	100PF	5%	500V

C22	1-108-700-11	MYLAR	0.047MF	10%	200V
C23	1-123-024-21	ELECT	33MF		160V
C24	1-124-046-00	ELECT	10MF		160V
C25	1-136-112-00	FILM	1.4MF	5%	200V
C26	1-136-161-00	FILM	0.047MF	5%	50V

C27	1-108-700-11	MYLAR	0.047MF	10%	200V
C28	1-124-666-11	ELECT	4.7MF	20%	200V
C29	1-101-810-00	CERAMIC	100PF	5%	500V
C30	1-162-135-11	CERAMIC	560PF	10%	2KV
C31	1-136-069-00	FILM	0.0044MF	3%	2KV

C32	1-136-069-00	FILM	0.0044MF	3%	2KV
C33	1-124-512-11	ELECT	33MF	20%	50V
C34	1-124-512-11	ELECT	33MF	20%	50V
C35	1-126-163-11	ELECT	4.7MF	20%	50V
C36	1-126-163-11	ELECT	4.7MF	20%	50V

C37	1-161-051-00	CERAMIC	0.01MF	10%	50V
C39	1-162-318-11	CERAMIC	0.001MF	10%	500V
C40	1-123-356-00	ELECT	10MF	20%	16V
C41	1-102-244-00	CERAMIC	220PF	10%	500V
C42	1-102-973-00	CERAMIC	100PF	5%	50V

DIODE

D1	8-719-110-31	DIODE RD12ES-B2			
D2	8-719-911-19	DIODE 1SS119			
D3	8-719-911-19	DIODE 1SS119			
D4	8-719-911-19	DIODE 1SS119			
D7	8-719-110-03	DIODE RD7.5ES-B2			

D8	8-719-300-76	DIODE RH-1			
D9	8-719-928-08	DIODE ERD28-08S			
D10	8-719-300-76	DIODE RH-1A			
D11	8-719-300-76	DIODE RH-1A			
D12	8-719-300-76	DIODE RH-1A			

D13	8-719-109-75	DIODE RD4.3ES-B2			
D14	8-719-109-75	DIODE RD4.3ES-B2			
D15	8-719-911-19	DIODE 1SS119			
D16	8-719-911-19	DIODE 1SS119			

CONNECTOR

EA1	*1-568-536-11	PLUG (MINIATURE DY) 6P			
-----	---------------	------------------------	--	--	--

IC

IC1	8-759-100-75	IC UPC1394C			
IC2	8-759-945-58	IC RC4558P			

COIL

L1	1-459-433-00	COIL (WITH CORE)			
L2	1-459-433-00	COIL (WITH CORE)			
L3	1-459-433-00	COIL (WITH CORE)			
L4	1-459-111-00	COIL, DRAM CORE (CDI)			
L5	1-459-111-00	COIL, DRAM CORE (CDI)			

TRANSISTOR

Q1	8-729-119-78	TRANSISTOR 2SC2785-HFE			
Q2	8-729-697-92	TRANSISTOR 2SA979-G			
Q3	8-729-140-96	TRANSISTOR 2SD774-34			
Q4	8-729-303-61	TRANSISTOR 2SC3851			
Q5	8-729-304-07	TRANSISTOR 2SA1488-Y			

Q10	8-729-119-80	TRANSISTOR 2SC2688-LK			
Q11	8-729-175-22	TRANSISTOR 2SC2752			
Q12	8-729-200-17	TRANSISTOR 2SA1091-O			
Q13	8-729-119-80	TRANSISTOR 2SC2688-LK			



EA

EB

Ref.No	Part No.	Description	Remark
Q14	8-729-202-53	TRANSISTOR 2SD1556-LB	
Q15	8-729-313-42	TRANSISTOR 2SD1134-C	
Q16	8-729-385-82	TRANSISTOR 2SB858-C	

RESISTOR

R1	1-249-418-11	CARBON	1.2K	5%	1/4W	
R2	1-249-425-11	CARBON	4.7K	5%	1/4W	
R3	1-249-429-11	CARBON	10K	5%	1/4W	
R4	1-249-429-11	CARBON	10K	5%	1/4W	
R5	1-249-429-11	CARBON	10K	5%	1/4W	
R6	1-249-429-11	CARBON	10K	5%	1/4W	
R7	1-249-421-11	CARBON	2.2K	5%	1/4W	
R8	1-249-438-11	CARBON	56K	5%	1/4W	
R9	1-249-429-11	CARBON	10K	5%	1/4W	
R10	1-249-418-11	CARBON	1.2K	5%	1/4W	
R11	1-249-448-11	CARBON	1.2	5%	1/4W	F
R12	1-249-448-11	CARBON	1.2	5%	1/4W	F
R13	1-249-417-11	CARBON	1K	5%	1/4W	
R14	1-215-887-00	METAL OXIDE	150	5%	2W	F
R15	1-249-429-11	CARBON	10K	5%	1/4W	
R22	1-249-417-11	CARBON	1K	5%	1/4W	
R23	1-215-445-00	METAL	10K	1%	1/6W	
R24	1-215-445-00	METAL	10K	1%	1/6W	
R25	1-215-431-00	METAL	2.7K	1%	1/6W	
R26	1-215-431-00	METAL	2.7K	1%	1/6W	
R27	1-249-435-11	CARBON	33K	5%	1/4W	
R28	1-215-461-00	METAL	47K	1%	1/6W	
R29	1-249-429-11	CARBON	10K	5%	1/4W	
R30	1-249-429-11	CARBON	10K	5%	1/4W	
R31	1-247-868-11	CARBON	36K	5%	1/4W	
R32	1-249-429-11	CARBON	10K	5%	1/4W	
R33	1-249-427-11	CARBON	6.8K	5%	1/4W	
R34	1-215-433-00	METAL	3.3K	1%	1/6W	
R35	1-215-435-00	METAL	3.9K	1%	1/6W	
R36	1-249-429-11	CARBON	10K	5%	1/4W	
R37	1-249-441-11	CARBON	100K	5%	1/4W	
R38	1-249-429-11	CARBON	10K	5%	1/4W	
R39	1-215-469-00	METAL	100K	1%	1/6W	
R40	1-249-429-11	CARBON	10K	5%	1/4W	
R41	1-249-429-11	CARBON	10K	5%	1/4W	
R42	1-215-876-00	METAL OXIDE	15K	5%	1W	F
R43	1-215-859-00	METAL OXIDE	22	5%	1W	F
R44	1-216-349-00	METAL OXIDE	1	5%	1W	F
R45	1-249-417-11	CARBON	1K	5%	1/4W	
R46	1-249-417-11	CARBON	1K	5%	1/4W	
R47	1-216-463-00	METAL OXIDE	12K	5%	2W	F
R48	1-216-346-00	METAL OXIDE	0.56	5%	1W	F
R49	1-249-382-11	CARBON	1.2	5%	1/4W	F
R50	1-247-826-00	CARBON	620	5%	1/4W	
R51	1-247-826-00	CARBON	620	5%	1/4W	
R52	1-215-445-00	METAL	10K	1%	1/6W	
R53	1-215-445-00	METAL	10K	1%	1/6W	
R54	1-215-447-00	METAL	12K	1%	1/6W	
R55	1-249-391-11	CARBON	6.8	5%	1/4W	F
R56	1-215-445-00	METAL	10K	1%	1/6W	
R57	1-215-445-00	METAL	10K	1%	1/6W	
R58	1-249-405-11	CARBON	100	5%	1/4W	
R59	1-249-419-11	CARBON	1.5K	5%	1/4W	
R60	1-249-419-11	CARBON	1.5K	5%	1/4W	
R61	1-215-882-00	METAL OXIDE	22	5%	2W	F
R62	1-215-882-00	METAL OXIDE	22	5%	2W	F
R63	1-216-361-00	METAL OXIDE	0.22	5%	2W	F

TRANSFORMER

T1 1-460-067-11 HLT

Ref.No	Part No.	Description	Remark
T2	1-407-850-00	DLT	
T3	1-437-078-00	TRANSFORMER, HORIZONTAL DRIVE	
T4	1-437-079-00	TRANSFORMER, HORIZONTAL DRIVE	
T5	1-439-383-11	HOT	

* A-1345-731-A EB BOARD, COMPLETE

4-373-965-01 INSULATOR (SMALL)
 4-373-966-01 INSULATOR (LARGE)
 7-682-548-04 SCREW P 3X8

CAPACITOR

C1	1-124-666-11	ELECT	4.7MF	20%	200V
C2	1-124-917-11	ELECT	33MF	20%	25V
C3	1-123-380-00	ELECT	1MF	20%	50V
C4	1-124-357-11	ELECT	33MF	20%	35V
C5	1-102-978-00	CERAMIC	220PF	5%	50V
C6	1-130-789-00	FILM	1MF	5%	100V
C7	1-108-696-11	MYLAR	0.022MF	10%	200V
C8	1-124-666-11	ELECT	4.7MF	20%	200V
C9	1-130-479-00	MYLAR	0.0047MF	5%	50V
C10	1-124-122-11	ELECT	100MF	20%	25V
C11	1-102-973-00	CERAMIC	100PF	5%	50V
C12	1-124-122-11	ELECT	100MF	20%	25V
C13	1-136-161-00	FILM	0.047MF	5%	50V
C14	1-123-356-00	ELECT	10MF	20%	50V
C15	1-136-155-00	FILM	0.15MF	5%	50V
C16	1-124-046-00	ELECT	10MF		160V
C17	1-124-046-00	ELECT	10MF	20%	160V
C18	1-124-122-11	ELECT	100MF	20%	25V
C19	1-124-122-11	ELECT	100MF	20%	25V
C20	1-162-129-00	CERAMIC	150PF	10%	2KV
C21	1-136-173-00	FILM	0.47MF	5%	50V
C22	1-102-959-00	CERAMIC	22PF	5%	50V
C23	1-101-880-00	CERAMIC	47PF	5%	50V

DIODE

D1	8-719-911-19	DIODE 1SS119
D2	8-719-911-19	DIODE 1SS119
D3	8-719-911-19	DIODE 1SS119
D4	8-719-911-55	DIODE U05G
D5	8-719-911-55	DIODE U05G
D6	8-719-911-19	DIODE 1SS119
D7	8-719-911-19	DIODE 1SS119
D8	8-719-911-19	DIODE 1SS119
D9	8-719-911-19	DIODE 1SS119
D10	8-719-911-19	DIODE 1SS119

COIL

L1 1-459-123-00 COIL,DUST CORE(PAC)

TRANSISTOR

Q1	8-729-697-92	TRANSISTOR 2SA979-G
Q2	8-729-140-96	TRANSISTOR 2SD774-34
Q3	8-729-309-08	TRANSISTOR 2SC1890A-E
Q4	8-729-309-36	TRANSISTOR 2SA893A-EV
Q5	8-729-300-70	TRANSISTOR 2SD1137
Q6	8-729-300-80	TRANSISTOR 2SB860
Q7	8-729-386-12	TRANSISTOR 2SB861-C
Q8	8-729-255-12	TRANSISTOR 2SC2551-0
Q9	8-729-697-92	TRANSISTOR 2SA979-G
Q10	8-729-140-96	TRANSISTOR 2SD774-34
Q11	8-729-140-97	TRANSISTOR 2SB734-34

The components identified by shading and mark **A** are critical for safety.
 Replace only with part number specified.



Ref.No	Part No.	Description	Remark
Q12	8-729-306-92	TRANSISTOR 2SD669A-C	
Q13	8-729-306-92	TRANSISTOR 2SD669A-C	
Q14	8-729-255-12	TRANSISTOR 2SC2551-0	
Q15	8-729-255-12	TRANSISTOR 2SC2551-0	
Q16	8-729-255-12	TRANSISTOR 2SC2551-0	
Q17	8-729-200-17	TRANSISTOR 2SA1091-0	
Q18	8-729-119-80	TRANSISTOR 2SC2688-LK	
Q19	8-729-119-80	TRANSISTOR 2SC2688-LK	
RESISTOR			
R1	1-249-429-11	CARBON 10K 5%	1/4W
R2	1-249-433-11	CARBON 22K 5%	1/4W
R3	1-249-425-11	CARBON 4.7K 5%	1/4W
R4	1-249-430-11	CARBON 12K 5%	1/4W
R5	1-249-426-11	CARBON 5.6K 5%	1/4W
R6	1-249-429-11	CARBON 10K 5%	1/4W
R7	1-216-465-11	METAL OXIDE 27K 5%	2W F
R8	1-247-802-11	CARBON 62 5%	1/4W
R9	1-249-414-11	CARBON 560 5%	1/4W
R10	1-249-448-11	CARBON 1.2 5%	1/4W F
R11	1-249-448-11	CARBON 1.2 5%	1/4W F
R12	1-216-351-00	METAL OXIDE 1.5 5%	1W F
R13	1-216-431-11	METAL OXIDE 560 5%	1W F
R14	1-215-866-11	METAL OXIDE 330 5%	1W F
R15	1-249-425-11	CARBON 4.7K 5%	1/4W
R16	1-249-423-11	CARBON 3.3K 5%	1/4W F
R17	1-247-700-11	CARBON 100 5%	1/4W F
R18	1-215-873-00	METAL OXIDE 4.7K 5%	1W F
R19	1-249-429-11	CARBON 10K 5%	1/4W
R20	1-249-429-11	CARBON 10K 5%	1/4W
R21	1-249-425-11	CARBON 4.7K 5%	1/4W
R22	1-249-423-11	CARBON 3.3K 5%	1/4W
R23	1-249-425-11	CARBON 4.7K 5%	1/4W
R24	1-249-417-11	CARBON 1K 5%	1/4W
R25	1-249-417-11	CARBON 1K 5%	1/4W
R26	1-249-421-11	CARBON 2.2K 5%	1/4W
R27	1-249-421-11	CARBON 2.2K 5%	1/4W
R28	1-249-405-11	CARBON 100 5%	1/4W
R29	1-249-452-11	CARBON 2.7 5%	1/4W F
R30	1-249-452-11	CARBON 2.7 5%	1/4W F
R31	1-249-407-11	CARBON 150 5%	1/4W F
R32	1-216-351-00	METAL OXIDE 1.5 5%	1W F
R33	1-215-421-00	METAL 1K 1%	1/6W
R34	1-215-445-00	METAL 10K 1%	1/6W
R35	1-249-423-11	CARBON 3.3K 5%	1/4W
R36	1-216-465-11	METAL OXIDE 27K 5%	2W F
R37	1-249-401-11	CARBON 47 5%	1/4W
R38	1-249-425-11	CARBON 4.7K 5%	1/4W
R39	1-215-445-00	METAL 10K 1%	1/6W
R40	1-215-453-00	METAL 22K 1%	1/6W
R41	1-215-421-00	METAL 1K 1%	1/6W
R42	1-247-688-11	CARBON 10 5%	1/4W F
R43	1-247-688-11	CARBON 10 5%	1/4W F
R44	1-215-865-11	METAL OXIDE 220 5%	1W F
R45	1-247-688-11	CARBON 10 5%	1/4W F
TRANSFORMER			
T1	1-421-504-00	TRANSFORMER, FERRITE (VPT)	
T2	1-407-849-00	TRANSFORMER, D.F	

Ref.No	Part No.	Description	Remark
*A-1316-056-A		GA BOARD, COMPLETE (BVM-2010P/PD ONLY)	

*A-1316-048-A		GA BOARD, COMPLETE (BVM-2010PM/PMD ONLY)	

A 1-532-203-11		FUSE, TIME-LAG 2A/250V (BVM-2010P/PD ONLY)	
1-533-167-21		HOLDER, FUSE	
1-533-168-21		HOLDER, FUSE	
1-535-316-11		TERMINAL GROUND (M4)	
1-570-173-21		SWITCH, VOLTAGE CHANGE	
A 1-580-375-11		INLET 3P	
2-990-241-01		HOLDER (A), PLUG	
3-337-402-01		BAND, BINDING	
4-347-706-00		HEAT SINK (TR)	
4-371-879-02		COVER, AC SELECT	
4-379-403-01		SPACER (G1), POLISHING	
4-379-408-01		INSULATOR (G3)	
4-379-409-01		NUT, PLATE	
4-379-410-01		SPACER (G2), POLISHING	
4-379-430-01		PANEL, POWER	
4-386-847-01		HEAT SINK (S.R.T)	
4-386-848-01		BAND (S.R.T)	
4-393-031-01		COVER, FUSE HOLDER	
4-601-466-11		COVER, 3P INLET	
7-682-550-04		SCREW P 3X12	
7-682-552-04		SCREW P 3X16	
7-682-554-04		SCREW P 3X25	
7-682-560-04		SCREW P 4X6	
7-682-247-04		SCREW K 3X6	
7-682-547-09		SCREW B 3X6	
7-682-547-04		SCREW BVTT 3X6 (S)	
7-682-948-01		SCREW PSW 3X8	
7-685-646-79		SCREW BVTP 3X8 TYPE2 IT-3	
CAPACITOR			
C1	1-124-024-00	ELECT 4.7MF	20% 350V
C2	1-124-024-00	ELECT 4.7MF	20% 350V
C3	1-162-117-00	CERAMIC 100PF	10% 500V
C4	1-162-117-00	CERAMIC 100PF	10% 500V
C5	1-162-117-00	CERAMIC 100PF	10% 500V
C6	1-162-117-00	CERAMIC 100PF	10% 500V
C7	1-126-104-11	ELECT 470MF	20% 25V
C8	1-126-105-11	ELECT 1000MF	20% 25V
C9	1-126-104-11	ELECT 470MF	20% 25V
C10	1-126-105-11	ELECT 1000MF	20% 25V
C11	1-126-104-11	ELECT 470MF	20% 25V
C12	1-124-602-00	ELECT 2200MF	20% 25V
C13	1-126-104-11	ELECT 470MF	20% 25V
C14	1-124-602-00	ELECT 2200MF	20% 25V
C15	1-124-360-00	ELECT 1000MF	20% 16V
C16	1-126-103-11	ELECT 470MF	20% 16V
C17	1-106-375-12	MYLAR 0.022MF	10% 100V
C18	1-108-638-11	MYLAR 0.1MF	10% 100V
C19	1-102-030-00	CERAMIC 330PF	10% 500V
C20	1-162-117-00	CERAMIC 100PF	10% 500V
C21	1-102-038-00	CERAMIC 0.001MF	500V
C22	1-162-117-00	CERAMIC 100PF	10% 500V
C23	1-106-375-12	MYLAR 0.022MF	10% 100V
C24	1-108-638-11	MYLAR 0.1MF	10% 100V
C25	1-123-380-00	ELECT 1MF	20% 50V
C26	1-101-361-00	CERAMIC 150PF	5% 50V
C27	1-101-361-00	CERAMIC 150PF	5% 50V
C28	1-123-356-00	ELECT 10MF	20% 16V
C29	1-124-910-11	ELECT 47MF	20% 25V
C30	1-162-117-00	CERAMIC 100PF	10% 500V

7. ELECTRICAL PARTS LIST

GA

The components identified by shading and mark **A** are critical for safety.
Replace only with part number specified.

Ref.No	Part No.	Description	Remark
C31	1-102-030-00	CERAMIC	330PF 10% 500V
C32	1-123-380-00	ELECT	1MF 20% 50V
C33	1-101-361-00	CERAMIC	150PF 5% 50V
C34	1-101-361-00	CERAMIC	150PF 5% 50V
C35	1-123-380-00	ELECT	1MF 20% 50V
C36	1-124-910-11	ELECT	47MF 20% 25V
C37	1-130-734-00	FILM	0.0068MF 5% 50V
C38	1-136-165-00	FILM	0.1MF 5% 50V
C39	1-136-165-00	FILM	0.1MF 5% 50V
C40	1-123-381-00	ELECT	2.2MF 20% 50V
C41	1-102-038-00	CERAMIC	0.001MF 500V
C42	1-136-165-00	FILM	0.1MF 5% 50V
C43	1-136-165-00	FILM	0.1MF 5% 50V
C44	1-123-356-00	ELECT	10MF 20% 16V
C45	1-162-132-00	CERAMIC	270PF 10% 2KV
C46	1-123-356-00	ELECT	10MF 20% 16V
C47	1-136-173-00	FILM	0.47MF 5% 50V
C48	1-136-173-00	FILM	0.47MF 5% 50V
C49	1-123-356-00	ELECT	10MF 20% 16V
C50	1-101-006-00	CERAMIC	0.047MF 50V
C51	1-101-006-00	CERAMIC	0.047MF 50V
C52	1-101-006-00	CERAMIC	0.047MF 50V
C53	1-101-006-00	CERAMIC	0.047MF 50V
C54	1-101-006-00	CERAMIC	0.047MF 50V
C55	1-123-356-00	ELECT	10MF 20% 16V
C56	1-136-201-11	FILM	0.22MF 5% 400V
C57	1-123-356-00	ELECT	10MF 20% 25V
C58	1-123-379-00	ELECT	0.47MF 20% 50V
C59	1-130-734-00	FILM	0.0068MF 5% 50V
C60	1-102-228-00	CERAMIC	470PF 10% 500V
C61	1-102-228-00	CERAMIC	470PF 10% 500V
C62	1-102-228-00	CERAMIC	470PF 10% 500V
C63	1-102-228-00	CERAMIC	470PF 10% 500V
C64	1-124-024-00	ELECT	4.7MF 20% 350V
C65	1-124-024-00	ELECT	4.7MF 20% 350V
C66	1-162-117-00	CERAMIC	100PF 10% 500V
C67	1-162-117-00	CERAMIC	100PF 10% 500V
C68	1-162-117-00	CERAMIC	100PF 10% 500V
C69	1-124-562-11	ELECT	47MF 20% 200V
C70	1-124-171-00	ELECT	100MF 20% 160V
C71	1-162-117-00	CERAMIC	100PF 10% 500V
C72	1-124-562-11	ELECT	47MF 20% 200V
C73	1-124-171-00	ELECT	100MF 20% 160V
C74	1-124-122-11	ELECT	100MF 20% 16V
C75	1-124-122-11	ELECT	100MF 20% 16V
C76	A1-162-599-12	CERAMIC	0.0047MF 20% 400V
C77	A1-162-599-12	CERAMIC	0.0047MF 20% 400V
C78	1-162-599-12	CERAMIC	0.0047MF 20% 400V
C79	1-162-599-12	CERAMIC	0.0047MF 20% 400V
C80	1-125-658-11	ELECT	560MF 20% 250V
C81	1-125-658-11	ELECT	560MF 20% 250V
C82	1-123-369-00	ELECT	4.7MF 20% 25V
C83	1-101-004-00	CERAMIC	0.01MF 50V
C84	A1-136-311-11	FILM	0.47MF 20% 300V
C85	A1-162-599-12	CERAMIC	0.0047MF 20% 400V
C86	A1-162-599-12	CERAMIC	0.0047MF 20% 400V
C87	A1-162-599-12	CERAMIC	0.0047MF 20% 400V
C88	A1-162-599-12	CERAMIC	0.0047MF 20% 400V
C89	A1-136-311-11	FILM	0.47MF 20% 300V
C90	1-136-171-00	FILM	0.033MF 5% 50V
C91	1-162-599-12	CERAMIC (BYM-2010P/PD ONLY)	0.0047MF 20% 400V
C92	1-136-171-00	FILM	0.033MF 5% 50V
C93	1-162-599-12	CERAMIC (BYM-2010P/PD ONLY)	0.0047MF 20% 400V
C94	1-102-038-00	CERAMIC	0.001MF 500V

Ref.No	Part No.	Description	Remark
C95	1-136-173-00	FILM	0.47MF 5% 50V
C96	1-102-050-00	CERAMIC	0.01MF 99% 500V
C97	1-136-173-00	FILM	0.47MF 5% 50V
C98	1-136-173-00	FILM	0.47MF 5% 50V
C99	1-102-050-00	CERAMIC	0.01MF 99% 500V
C100	1-162-117-00	CERAMIC	100PF 10% 500V
C101	1-162-117-00	CERAMIC	100PF 10% 500V
C102	1-136-601-11	FILM	0.01MF 5% 630V
C103	1-136-601-11	FILM	0.01MF 5% 630V

DIODE

D1	8-719-912-51	DIODE ESAC25-04C
D2	8-719-918-73	DIODE ESAC25-04N
D3	8-719-901-73	DIODE ESAD25-04D
D4	8-719-901-73	DIODE ESAD25-04D
D5	8-719-907-24	DIODE ESAC31-02D
D6	8-719-907-24	DIODE ESAC31-02D
D7	8-719-300-33	DIODE RU-3AM
D8	8-719-300-52	DIODE CTU-38R
D9	8-719-300-53	DIODE CTU-38S
D10	8-719-912-51	DIODE ESAC25-04C
D11	8-719-918-73	DIODE ESAC25-04N
D12	8-719-911-19	DIODE 1SS119
D13	8-719-911-19	DIODE 1SS119
D14	8-719-100-58	DIODE RD10EB3
D15	8-719-911-19	DIODE 1SS119
D16	8-719-911-19	DIODE 1SS119
D17	8-719-911-19	DIODE 1SS119
D18	8-719-109-89	DIODE RD5.6ES-B2
D20	8-719-200-02	DIODE 10E-2
D21	8-719-300-07	DIODE RB406N
D22	8-759-157-40	IC UPC574J
D23	8-719-911-19	DIODE 1SS119
D24	8-719-100-58	DIODE RD10EB3
D25	8-719-911-19	DIODE 1SS119
D26	8-719-003-08	THYRISTOR CR3CM-8
D27	8-719-981-00	DIODE ERB81-004
D28	8-719-981-00	DIODE ERB81-004
D29	8-719-981-00	DIODE ERB81-004
D30	8-719-981-00	DIODE ERB81-004
D31	8-719-300-33	DIODE RU-3AM
D32	8-719-300-33	DIODE RU-3AM

CONNECTOR

GA1	1-506-348-XX	PIN, CONNECTOR 3P
GA2	*1-506-371-00	PIN, CONNECTOR 2P
GA3	1-508-768-00	PIN, CONNECTOR (5MM PITCH) 6P
GA4	*1-508-786-00	PIN, CONNECTOR (5MM PITCH) 2P
GA5	*1-566-055-11	PIN, CONNECTOR 3P
GA6	*1-566-055-11	PIN, CONNECTOR 3P
GA7	*1-566-058-11	PIN, CONNECTOR 6P
GA8	*1-566-057-11	PIN, CONNECTOR 5P

IC

IC1	1-806-805-11	IC MC5433
IC2	8-759-904-94	IC TL494CN
IC3	8-759-904-94	IC TL494CN

COIL

L3	1-459-643-11	COIL, CHOKE 525UH
L4	1-459-643-11	COIL, CHOKE 525UH
L5	1-459-643-11	COIL, CHOKE 525UH
L6	1-459-643-11	COIL, CHOKE 525UH
L7	1-459-207-00	COIL, CORE
L8	1-459-644-11	COIL, CHOKE 2.9MMH

The components identified by shading and mark Δ are critical for safety.
Replace only with part number specified.

The components identified by \boxtimes in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

GA

Ref.No	Part No.	Description	Remark
L9	1-459-645-11	COIL, CHOKE 20MMH	
L10	1-421-329-00	COIL, CHOKE	
L11	1-421-329-00	COIL, CHOKE	
L12	1-421-329-00	COIL, CHOKE	
L13	1-421-329-00	COIL, CHOKE	
L14	1-421-329-00	COIL, CHOKE	
L15	1-421-329-00	COIL, CHOKE	
L16	1-421-329-00	COIL, CHOKE	
L17	Δ 1-421-590-11	TRANSFORMER, LINE FILTER	
L18	Δ 1-421-590-11	TRANSFORMER, LINE FILTER	

TRANSISTOR

Q1	8-729-301-76	TRANSISTOR STR8124-R	
Q2	8-729-301-76	TRANSISTOR STR8124-R	
Q3	8-729-140-96	TRANSISTOR 2SD774-34	
Q4	8-729-140-96	TRANSISTOR 2SD774-34	
Q5	8-729-140-96	TRANSISTOR 2SD774-34	
Q6	8-729-140-96	TRANSISTOR 2SD774-34	
Q7	8-729-140-97	TRANSISTOR 2SB734-5	
Q8	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q9	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q10	8-729-313-42	TRANSISTOR 2SD1134-C	
Q11	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q12	8-729-140-96	TRANSISTOR 2SD774-34	
Q13	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q14	8-729-119-78	TRANSISTOR 2SC2785-HFE	

RESISTOR

R1	1-215-857-11	METAL OXIDE	10	5%	1W	F
R2	1-215-857-11	METAL OXIDE	10	5%	1W	F
R3	1-247-715-11	CARBON	1.5K	5%	1/4W	
R4	1-215-857-11	METAL OXIDE	10	5%	1W	F
R5	1-215-857-11	METAL OXIDE	10	5%	1W	F
R6	1-249-447-11	CARBON	1	5%	1/4W	F
R7	1-247-692-11	CARBON	22	5%	1/4W	
R8	1-249-418-11	CARBON	1.2K	5%	1/4W	
R9	1-249-382-11	CARBON	1.2	5%	1/4W	F
R10	1-249-447-11	CARBON	1	5%	1/4W	F
R11	1-247-692-11	CARBON	22	5%	1/4W	
R12	1-249-418-11	CARBON	1.2K	5%	1/4W	
R13	1-215-866-11	METAL OXIDE	330	5%	1W	F
R14	1-247-700-11	CARBON	100	5%	1/4W	
R15	1-247-709-11	CARBON	510	5%	1/4W	
R16	1-247-709-11	CARBON	510	5%	1/4W	
R17	1-247-700-11	CARBON	100	5%	1/4W	
R18	1-249-425-11	CARBON	4.7K	5%	1/4W	
R19	1-249-419-11	CARBON	1.5K	5%	1/4W	
R20	1-247-838-00	CARBON	2K	5%	1/4W	
R21	1-249-417-11	CARBON	1K	5%	1/4W	
R22	1-249-409-11	CARBON	220	5%	1/4W	
R23	1-249-417-11	CARBON	1K	5%	1/4W	
R24	1-249-421-11	CARBON	2.2K	5%	1/4W	
R25	1-249-409-11	CARBON	220	5%	1/4W	
R26	1-247-700-11	CARBON	100	5%	1/4W	
R27	1-247-713-11	CARBON	1K	5%	1/4W	
R28	1-247-713-11	CARBON	1K	5%	1/4W	
R29	1-247-700-11	CARBON	100	5%	1/4W	
R30	1-215-886-11	METAL OXIDE	100	5%	2W	F
R31	1-215-886-11	METAL OXIDE	100	5%	2W	F
R32	1-215-886-11	METAL OXIDE	100	5%	2W	F
R33	1-247-697-11	CARBON	56	5%	1/4W	F
R34	1-247-697-11	CARBON	56	5%	1/4W	F
R35	1-215-863-11	METAL OXIDE	100	5%	1W	F
R36	1-249-425-11	CARBON	4.7K	5%	1/4W	
R37	1-249-420-11	CARBON	1.8K	5%	1/4W	
R38	1-249-429-11	CARBON	10K	5%	1/4W	

Ref.No	Part No.	Description	Remark
R39	1-249-413-11	CARBON	470 5% 1/4W
R40	1-215-453-00	METAL	22K 1% 1/4W
R41	1-249-425-11	CARBON	4.7K 5% 1/4W
R42	1-215-437-00	METAL	4.7K 1% 1/4W
R43	1-215-435-00	METAL	3.9K 1% 1/4W
R44	1-215-427-00	METAL	1.8K 1% 1/4W
R45	1-247-713-11	CARBON	1K 5% 1/4W
R46	1-249-417-11	CARBON	1K 5% 1/4W
R47	1-216-995-11	METAL	820 1% 10W
R48	1-215-866-11	METAL OXIDE	330 5% 1W F

\boxtimes R52	Δ	METAL OXIDE				2W	F
\boxtimes R53	Δ	METAL				1/4W	
R54	1-215-901-00	METAL OXIDE	33K	5%	2W	F	
R55	1-215-426-00	METAL	1.6K	1%	1/4W		
R60	1-249-420-11	CARBON	1.8K	5%	1/4W		
R61	1-249-420-11	CARBON	1.8K	5%	1/4W		
R62	1-249-429-11	CARBON	10K	5%	1/4W		
R64	1-249-426-11	CARBON	5.6K	5%	1/4W		
R65	1-215-437-00	METAL	4.7K	1%	1/4W		
R66	1-215-453-00	METAL	22K	1%	1/4W		

\boxtimes R67	Δ	METAL				1/2W	
\boxtimes R68	Δ	METAL				1/4W	
R74	1-215-889-00	METAL OXIDE	330	5%	2W	F	
R77	1-215-433-00	METAL	3.3K	1%	1/4W		
R78	1-215-433-00	METAL	3.3K	1%	1/4W		

R80	Δ 1-202-643-35	SOLID	820K	10%	1/2W	
R81	1-215-461-00	METAL	47K	1%	1/4W	
R82	1-215-461-00	METAL	47K	1%	1/4W	
R83	1-215-461-00	METAL	47K	1%	1/4W	
R84	1-215-459-00	METAL	39K	1%	1/4W	
R85	1-215-449-00	METAL	15K	1%	1/4W	
R86	1-215-437-00	METAL	4.7K	1%	1/4W	
R87	1-249-405-11	CARBON	100	5%	1/4W	
R88	1-249-433-11	CARBON	22K	5%	1/4W	
R89	1-249-429-11	CARBON	10K	5%	1/4W	

R90	1-249-429-11	CARBON	10K	5%	1/4W	
R91	1-249-429-11	CARBON	10K	5%	1/4W	
R92	Δ 1-217-295-11	WIREWOUND	5.6	10%	5W	F
R93	1-215-886-11	METAL OXIDE	100	5%	2W	F
R94	1-205-538-00	WIREWOUND	4.7	10%	10W	
R95	1-215-904-11	METAL OXIDE	100K	5%	2W	F
R96	1-215-904-11	METAL OXIDE	100K	5%	2W	F
R97	1-215-904-11	METAL OXIDE	100K	5%	2W	F
R98	1-215-904-11	METAL OXIDE	100K	5%	2W	F

VARIABLE RESISTOR

RV1	1-237-514-21	RES, ADJ, CERMET 500	
RV2	1-237-515-21	RES, ADJ, CERMET 1K	

RELAY

RY1	Δ 1-515-805-11	RELAY POWER	
-----	-----------------------	-------------	--

TRANSFORMER

T1	Δ 1-448-433-11	TRANSFORMER, CONVERTER (S.R.T)	
T2	Δ 1-447-106-11	TRANSFORMER, DRIVE	
T3	Δ 1-421-624-12	TRANSFORMER, CURRENT	
T4	Δ 1-447-426-11	TRANSFORMER, CONVERTER	
T5	Δ 1-448-432-11	TRANSFORMER, CONVERTER (S.R.T)	

T6	Δ 1-447-106-11	TRANSFORMER, DRIVE	
T7	Δ 1-421-624-12	TRANSFORMER, CURRENT	

THERMISTOR

TH1	Δ 1-800-820-12	THERMISTOR, POWER	
THP1	Δ 1-806-387-12	THERMISTOR (POSITIVE)	
THP2	Δ 1-800-686-33	THERMISTOR (POSITIVE)	

7. ELECTRICAL PARTS LIST

GB	GC	HA
----	----	----

7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Remark
	*1-617-884-11	GB BOARD *****	
<u>CAPACITOR</u>			
C1	1-123-380-00	ELECT	1MF 20% 50V
C2	1-123-380-00	ELECT	1MF 20% 50V
<u>DIODE</u>			
D1	8-719-911-19	DIODE 1SS119	
D2	8-719-110-08	DIODE RD&2ES-B2	
D3	8-719-911-19	DIODE 1SS119	
D4	8-719-911-19	DIODE 1SS119	
D5	8-719-911-19	DIODE 1SS119	
D6	8-719-110-08	DIODE RD&2ES-B2	
D7	8-719-812-41	DIODE TLR124	
D8	8-719-911-19	DIODE 1SS119	
D9	8-719-911-19	DIODE 1SS119	
D10	8-719-812-41	DIODE TLR124	
D11	8-719-110-08	DIODE RD&2ES-B2	
D12	8-719-911-19	DIODE 1SS119	
D13	8-719-911-19	DIODE 1SS119	
D14	8-719-911-19	DIODE 1SS119	
D15	8-719-911-19	DIODE 1SS119	
D16	8-719-911-19	DIODE 1SS119	
D17	8-719-110-08	DIODE RD&2ES-B2	
D18	8-719-911-19	DIODE 1SS119	
D19	8-719-911-19	DIODE 1SS119	
<u>CONNECTOR</u>			
GA1	*1-506-603-11	PLUG, L TYPE (2.0MM PITCH) 10P	
<u>TRANSISTOR</u>			
Q1	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q2	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q3	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q4	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q5	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q6	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q7	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q8	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q9	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q10	8-729-119-78	TRANSISTOR 2SC2785-HFE	
<u>RESISTOR</u>			
R1	1-249-427-11	CARBON	6.8K 5% 1/4W
R2	1-249-428-11	CARBON	8.2K 5% 1/4W
R3	1-249-429-11	CARBON	10K 5% 1/4W
R4	1-249-427-11	CARBON	6.8K 5% 1/4W
R5	1-249-420-11	CARBON	1.8K 5% 1/4W
R6	1-249-427-11	CARBON	6.8K 5% 1/4W
R7	1-249-420-11	CARBON	1.8K 5% 1/4W
R8	1-249-429-11	CARBON	10K 5% 1/4W
R9	1-249-427-11	CARBON	6.8K 5% 1/4W
R10	1-249-428-11	CARBON	8.2K 5% 1/4W
R11	1-249-424-11	CARBON	3.9K 5% 1/4W
R12	1-249-421-11	CARBON	2.2K 5% 1/4W
R13	1-249-425-11	CARBON	4.7K 5% 1/4W
R14	1-249-421-11	CARBON	2.2K 5% 1/4W
R15	1-249-424-11	CARBON	3.9K 5% 1/4W
R16	1-249-421-11	CARBON	2.2K 5% 1/4W
R17	1-249-425-11	CARBON	4.7K 5% 1/4W
R18	1-249-421-11	CARBON	2.2K 5% 1/4W
R19	1-249-429-11	CARBON	10K 5% 1/4W
R20	1-249-429-11	CARBON	10K 5% 1/4W

Ref.No	Part No.	Description	Remark
R21	1-249-429-11	CARBON	10K 5% 1/4W
R22	1-249-423-11	CARBON	3.3K 5% 1/4W
R23	1-249-423-11	CARBON	3.3K 5% 1/4W
R24	1-249-429-11	CARBON	10K 5% 1/4W
R25	1-249-429-11	CARBON	10K 5% 1/4W

	*1-617-885-11	GC BOARD *****	
<u>CAPACITOR</u>			
C1	1-123-330-00	ELECT	22MF 20% 25V
C2	1-123-330-00	ELECT	22MF 20% 25V
C3	1-123-330-00	ELECT	22MF 20% 25V
C4	1-123-330-00	ELECT	22MF 20% 25V
C5	1-123-330-00	ELECT	22MF 20% 25V
C6	1-123-330-00	ELECT	22MF 20% 25V
C7	1-123-330-00	ELECT	22MF 20% 25V
C8	1-123-330-00	ELECT	22MF 20% 25V
C9	1-123-330-00	ELECT	22MF 20% 25V
C12	1-101-004-00	CERAMIC	0.01MF 50V
C14	1-101-004-00	CERAMIC	0.01MF 50V
C16	1-101-004-00	CERAMIC	0.01MF 50V
C17	1-101-004-00	CERAMIC	0.01MF 50V
C18	1-101-004-00	CERAMIC	0.01MF 50V
<u>CONNECTOR</u>			
GC1	*1-566-044-11	PIN, CONNECTOR 5P	
GC2	*1-566-057-11	PIN, CONNECTOR 5P	
GC3	*1-566-044-11	PIN, CONNECTOR 5P	
<u>IC</u>			
IC1	8-759-929-65	IC LM7912CT	
IC2	8-759-929-65	IC LM7912CT	
IC3	8-759-929-62	IC LM7812CT	
IC4	8-759-929-62	IC LM7812CT	

	*1-617-890-11	HA BOARD *****	
<u>CONNECTOR</u>			
HA1	*1-566-055-11	PIN, CONNECTOR 3P	
HA2	*1-566-056-11	PIN, CONNECTOR 4P	
HA3	*1-566-064-11	PIN, CONNECTOR 12P	
HA4	*1-566-054-11	PIN, CONNECTOR 2P	
<u>RESISTOR</u>			
R1	1-247-814-11	CARBON	200 5% 1/4W
R2	1-215-469-00	METAL	100K 1% 1/4W
<u>VARIABLE RESISTOR</u>			
RV1	1-237-519-21	RES, ADJ, CERMET 20K	
<u>SWITCH</u>			
S1	1-570-565-11	SWITCH, PUSH (10 KEY)	
S2	1-570-565-11	SWITCH, PUSH (10 KEY)	
S3	1-570-565-11	SWITCH, PUSH (10 KEY)	
S4	1-570-565-11	SWITCH, PUSH (10 KEY)	
S5	1-570-565-11	SWITCH, PUSH (10 KEY)	
S6	1-570-565-11	SWITCH, PUSH (10 KEY)	
S7	1-570-565-11	SWITCH, PUSH (10 KEY)	
S8	1-570-565-11	SWITCH, PUSH (10 KEY)	
S9	1-570-565-11	SWITCH, PUSH (10 KEY)	

HA	HB	HC	HD	HE
----	----	----	----	----

Ref.No	Part No.	Description	Remark
S10	1-570-565-11	SWITCH, PUSH (10 KEY)	

*1-617-886-11 HB BOARD

1-570-568-11 SWITCH, PUSH (4 KEY)
1-570-569-11 SWITCH, PUSH (3 KEY)

CAPACITOR

C1	1-124-034-51	ELECT	33MF	20%	16V
C2	1-124-034-51	ELECT	33MF	20%	16V
C3	1-101-004-00	CERAMIC	0.01MF		50V
C4	1-101-004-00	CERAMIC	0.01MF		50V
C5	1-101-004-00	CERAMIC	0.01MF		50V
C6	1-101-004-00	CERAMIC	0.01MF		50V
C7	1-101-004-00	CERAMIC	0.01MF		50V

DIODE

D1	8-719-938-68	DIODE GL3HY8
D2	8-719-938-68	DIODE GL3HY8
D3	8-719-938-68	DIODE GL3HY8
D4	8-719-938-68	DIODE GL3HY8
D5	8-719-812-43	DIODE TLG124A
D6	8-719-812-43	DIODE TLG124A
D7	8-719-812-43	DIODE TLG124A

CONNECTOR

HB1	*1-566-064-11	PIN, CONNECTOR 12P
HB2	*1-566-062-11	PIN, CONNECTOR 10P
HB3	*1-566-060-11	PIN, CONNECTOR 8P
HB4	*1-566-064-11	PIN, CONNECTOR 12P
HB5	*1-566-058-11	PIN, CONNECTOR 6P
HB6	*1-566-064-11	PIN, CONNECTOR 12P

RESISTOR

R1	1-215-469-00	METAL	100K	1%	1/4W
R2	1-215-469-00	METAL	100K	1%	1/4W
R3	1-215-469-00	METAL	100K	1%	1/4W
R4	1-215-469-00	METAL	100K	1%	1/4W
R5	1-215-469-00	METAL	100K	1%	1/4W
R6	1-215-469-00	METAL	100K	1%	1/4W
R7	1-215-469-00	METAL	100K	1%	1/4W
R8	1-215-469-00	METAL	100K	1%	1/4W
R9	1-215-469-00	METAL	100K	1%	1/4W
R10	1-215-469-00	METAL	100K	1%	1/4W
R11	1-215-469-00	METAL	100K	1%	1/4W
R12	1-249-425-11	CARBON	4.7K	5%	1/4W
R13	1-249-423-11	CARBON	3.3K	5%	1/4W
R15	1-249-423-11	CARBON	3.3K	5%	1/4W
R16	1-249-423-11	CARBON	3.3K	5%	1/4W
R17	1-249-423-11	CARBON	3.3K	5%	1/4W

VARIABLE RESISTOR

RV1	1-237-519-21	RES, ADJ, CERMET 20K
RV2	1-237-519-21	RES, ADJ, CERMET 20K
RV3	1-237-519-21	RES, ADJ, CERMET 20K
RV4	1-237-519-21	RES, ADJ, CERMET 20K
RV5	1-237-520-21	RES, ADJ, CERMET 50K
RV6	1-237-520-21	RES, ADJ, CERMET 50K
RV7	1-237-520-21	RES, ADJ, CERMET 50K
RV8	1-237-520-21	RES, ADJ, CERMET 50K
RV9	1-237-520-21	RES, ADJ, CERMET 50K
RV10	1-237-520-21	RES, ADJ, CERMET 50K

Ref.No	Part No.	Description	Remark
RV11	1-237-520-21	RES, ADJ, CERMET 50K	
RV12	1-237-521-21	RES, ADJ, CERMET 100K	

SWITCH

S8	1-570-509-11	SWITCH, TOGGLE
S9	1-570-509-11	SWITCH, TOGGLE
S10	1-570-509-11	SWITCH, TOGGLE
S11	1-570-510-11	SWITCH, TOGGLE
S12	1-570-509-11	SWITCH, TOGGLE
S13	1-570-509-11	SWITCH, TOGGLE
S14	1-570-512-11	SWITCH, TOGGLE
S15	1-570-509-11	SWITCH, TOGGLE

*1-617-887-11 HC BOARD

SWITCH

SW1	1-570-567-21	SWITCH, PUSH (2 KEY)
SW2	1-570-567-21	SWITCH, PUSH (2 KEY)
SW3	1-570-567-11	SWITCH, PUSH (2 KEY)
SW4	1-570-567-11	SWITCH, PUSH (2 KEY)

*1-617-888-11 HD BOARD

(BVM-2010P ONLY, Serial No. upto 2,001,080
BVM-2010PD ONLY, Serial No. upto 2,000,042
BVM-2010PM ONLY, Serial No. upto 2,000,003)

*4-026-910-00 HOLDER, LED

DIODE

D1	8-719-812-42	DIODE TLY124A
D2	8-719-812-41	DIODE TLR124A

RESISTOR

R1	1-215-465-00	METAL	68K	1%	1/6W
R2	1-215-451-00	METAL	18K	1%	1/6W
R3	1-215-469-00	METAL	100K	1%	1/6W
R4	1-215-469-00	METAL	100K	1%	1/6W
R5	1-249-425-11	CARBON	4.7K	5%	1/4W

VARIABLE RESISTOR

RV1	1-230-788-71	RES, VAR, CERMET 20K
RV2	1-230-788-71	RES, VAR, CERMET 20K
RV3	1-230-788-71	RES, VAR, CERMET 20K
RV4	1-230-788-71	RES, VAR, CERMET 20K

SWITCH

S1	1-570-566-11	SWITCH, PUSH (4 KEY)
S2	1-570-566-11	SWITCH, PUSH (4 KEY)
S3	1-570-566-11	SWITCH, PUSH (4 KEY)
S4	1-570-566-11	SWITCH, PUSH (4 KEY)

*1-618-814-11 HE BOARD

CAPACITOR

C1	1-101-004-00	CERAMIC	0.01MF		50V
C5	1-124-589-11	ELECT	47MF	20%	16V
C6	1-124-589-11	ELECT	47MF	20%	16V
C7	1-136-161-00	FILM	0.047MF	5%	50V

HE HF HG HH PA

Ref.No Part No. Description Remark

DIODE

D1 8-719-109-89 DIODE RD5.6ES-B2
 D2 8-719-109-89 DIODE RD5.6ES-B2
 D3 8-719-109-89 DIODE RD5.6ES-B2
 D4 8-719-109-89 DIODE RD5.6ES-B2
 D5 8-719-109-89 DIODE RD5.6ES-B2

D6 8-719-109-89 DIODE RD5.6ES-B2
 D7 8-719-109-89 DIODE RD5.6ES-B2
 D8 8-719-110-36 DIODE RD13ES-B2
 D9 8-719-110-36 DIODE RD13ES-B2
 D10 8-719-110-36 DIODE RD13ES-B2

D11 8-719-110-36 DIODE RD13ES-B2

CONNECTOR

HE1 *1-566-065-31 PIN, CONNECTOR 13P
 HE2 *1-566-059-11 PIN, CONNECTOR 7P
 HE3 *1-566-054-11 PIN, CONNECTOR 2P
 HE4 *1-566-064-11 PIN, CONNECTOR 12P

RESISTOR

R1 1-247-887-00 CARBON 220K 5% 1/4W
 R2 1-247-889-00 CARBON 270K 5% 1/4W
 R10 1-247-700-11 CARBON 100 5% 1/4W
 R11 1-247-700-11 CARBON 100 5% 1/4W
 R12 1-247-700-11 CARBON 100 5% 1/4W

R13 1-247-700-11 CARBON 100 5% 1/4W
 R14 1-247-700-11 CARBON 100 5% 1/4W
 R15 1-247-700-11 CARBON 100 5% 1/4W
 R16 1-247-700-11 CARBON 100 5% 1/4W

SWITCH

S1 1-554-724-11 SWITCH, PUSH (1 KEY)
 S2 1-554-724-11 SWITCH, PUSH (1 KEY)
 S3 1-554-724-11 SWITCH, PUSH (1 KEY)
 S4 1-554-724-11 SWITCH, PUSH (1 KEY)
 S5 1-554-724-11 SWITCH, PUSH (1 KEY)

*1-623-001-11 HF BOARD

CONNECTOR

HF1 1-562-221-71 RECEPTACLE, CONNECTOR 12P

*1-627-681-11 HG BOARD

(BVM-2010P ONLY. Serial No. 2,001,081 and higher
 BVM-2010PM ONLY. Serial No. 2,000,004 and higher
 BVM-2010PD ONLY. Serial No. 2,000,042 and higher
 BVM-2010PMD ONLY. Serial No. 2,000,001 and higher)

7-682-547-09 SCREW BVTT 3X6 (S)

DIODE

D1 8-719-938-68 DIODE GL3HY8
 D2 8-719-812-41 DIODE TLR124

RESISTOR

R1 1-215-465-00 METAL 68K 1% 1/4W
 R2 1-215-451-00 METAL 18K 1% 1/4W
 R3 1-215-469-00 METAL 100K 1% 1/4W
 R4 1-215-469-00 METAL 100K 1% 1/4W
 R5 1-249-425-11 CARBON 4.7K 5% 1/4W

Ref.No Part No. Description Remark

SWITCH

SW1 1-570-566-11 SWITCH, PUSH (4 KEY)
 SW2 1-570-566-11 SWITCH, PUSH (4 KEY)
 SW3 1-570-566-11 SWITCH, PUSH (4 KEY)
 SW4 1-570-566-11 SWITCH, PUSH (4 KEY)

*1-627-682-11 HH BOARD

(BVM-2010P ONLY. Serial No. 2,001,081 and higher
 BVM-2010PM ONLY. Serial No. 2,000,004 and higher
 BVM-2010PD ONLY. Serial No. 2,000,042 and higher
 BVM-2010PMD ONLY. Serial No. 2,000,001 and higher)

CONNECTOR

HH1 1-566-614-11 PLUG (L TYPE) 3P
 HH2 1-566-614-11 PLUG (L TYPE) 3P
 HH3 1-566-614-11 PLUG (L TYPE) 3P
 HH4 1-566-614-11 PLUG (L TYPE) 3P

VARIABLE RESISTOR

RV1 1-238-332-11 RES, VAR, CARBON 20K
 RV2 1-238-332-11 RES, VAR, CARBON 20K
 RV3 1-238-332-11 RES, VAR, CARBON 20K
 RV4 1-238-332-11 RES, VAR, CARBON 20K

*A-1394-128-A PA BOARD, COMPLETE

7-682-548-04 SCREW P 3X8

CAPACITOR

C101 1-124-046-00 ELECT 10MF 20% 160V
 C102 1-124-910-11 ELECT 47MF 20% 25V
 C103 1-123-024-21 ELECT 33MF 10% 160V
 C104 1-136-171-00 FILM 0.33MF 5% 50V
 C105 1-108-700-11 MYLAR 0.047MF 10% 200V

C106 1-108-700-11 MYLAR 0.047MF 10% 200V
 C107 1-102-030-00 CERAMIC 330PF 10% 500V
 C108 1-136-072-00 FILM 0.0063MF 3% 2KV
 C109 1-161-753-00 CERAMIC 470PF 10% 3KV
 C110 1-162-114-00 CERAMIC 0.0047MF 2KV

C111 1-136-601-11 FILM 0.01MF 10% 630V
 C112 1-136-557-11 FILM 0.0033MF 5% 630V
 C113 1-136-173-00 FILM 0.47MF 5% 50V
 C116 1-123-330-00 ELECT 22MF 20% 16V
 C117 1-124-910-11 ELECT 47MF 20% 16V

C118 1-102-973-00 CERAMIC 100PF 5% 50V
 C119 1-108-796-11 MYLAR 0.0022MF 5% 50V
 C120 1-123-356-00 ELECT 10MF 20% 16V
 C121 1-102-074-00 CERAMIC 0.001MF 10% 50V
 C122 1-136-165-00 FILM 0.1MF 5% 50V

C123 1-136-169-00 FILM 0.22MF 5% 50V
 C124 1-136-111-00 FILM 1MF 5% 200V
 C125 1-136-169-00 FILM 0.22MF 5% 50V
 C126 1-102-030-00 CERAMIC 330PF 10% 500V
 C127 1-130-736-11 FILM 0.01MF 5% 50V

C128 1-130-994-11 FILM 0.033MF 5% 50V
 C129 1-123-369-00 ELECT 4.7MF 20% 25V
 C130 1-102-074-00 CERAMIC 0.001MF 10% 50V
 C131 1-136-153-00 FILM 0.01MF 5% 50V
 C132 1-101-004-00 CERAMIC 0.01MF 50V

C201 1-108-634-11 MYLAR 0.047MF 10% 100V

7. ELECTRICAL PARTS LIST



The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

The components identified by \boxtimes in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

PA

Ref.No	Part No.	Description	Remark
C202	1-123-356-00	ELECT	10MF 20% 16V
C203	1-101-006-00	CERAMIC	0.047MF 50V
C204	1-124-122-11	ELECT	100MF 20% 25V
C205	1-126-541-11	ELECT	330MF 20% 16V
C207	1-124-122-11	ELECT	100MF 20% 25V
C209	1-101-006-00	CERAMIC	0.047MF 50V
C212	1-101-006-00	CERAMIC	0.047MF 50V
C213	1-123-356-00	ELECT	10MF 20% 50V
C214	1-123-356-00	ELECT	10MF 20% 50V
C215	1-123-356-00	ELECT	10MF 20% 16V
C216	1-136-153-00	FILM	0.01MF 5% 50V
C217	1-123-356-00	ELECT	10MF 20% 16V
C218	1-126-541-11	ELECT	330MF 20% 16V
C219	1-101-004-00	CERAMIC	0.01MF 50V
C220	1-130-994-11	FILM	0.033MF 5% 50V
C221	1-136-171-00	FILM	0.033MF 5% 50V
<u>DIODE</u>			
D102	8-719-300-80	DIODE RU-1C	
D103	8-719-300-80	DIODE RU-1C	
D104	8-719-300-80	DIODE RU-1C	
D105	8-719-300-80	DIODE RU-1C	
D106	8-719-901-19	DIODE V11N	
D107	8-719-109-93	DIODE RD6.2ES-B2	
D109	8-719-911-19	DIODE 1SS119	
D110	8-719-911-19	DIODE 1SS119	
D111	8-719-109-63	DIODE RD3.0ES-B2	
D201	8-719-911-19	DIODE 1SS119	
D202	8-719-109-72	DIODE RD3.9ES-B2	
D203	8-719-911-19	DIODE 1SS119	
D204	8-719-000-28	THYRISTOR CR02AM-8	
D205	8-719-000-28	THYRISTOR CR02AM-8	
D206	8-719-911-19	DIODE 1SS119	
D207	8-719-911-19	DIODE 1SS119	
D215	8-759-157-40	IC UPC574J	
D216	8-759-157-40	IC UPC574J	
D217	8-719-911-19	DIODE 1SS119	
D218	8-719-911-19	DIODE 1SS119	
D219	8-719-911-19	DIODE 1SS119	
D220	8-719-911-19	DIODE 1SS119	
<u>IC</u>			
IC1	8-759-100-75	IC UPC1394C	
IC2	8-759-981-64	IC LM2903DQ	
IC3	8-759-981-64	IC LM2903DQ	
IC4	8-759-990-82	IC TL082CP	
<u>COIL</u>			
L1	1-459-215-00	COIL (WITH CORE)	
<u>CONNECTOR</u>			
PA1	1-508-765-00	PIN, CONNECTOR (5MM PITCH) 3P	
PA2	1-508-766-00	PIN, CONNECTOR (5MM PITCH) 4P	
<u>TRANSISTOR</u>			
Q101	8-729-802-71	TRANSISTOR 2SA1407-D	
Q102	8-729-201-62	TRANSISTOR 2SC2555-2	
Q103	8-729-202-53	TRANSISTOR 2SD1556-LB	
Q104	8-729-804-48	TRANSISTOR 2SC3675	
Q105	8-729-804-48	TRANSISTOR 2SC3675	
Q106	8-729-804-48	TRANSISTOR 2SC3675	
Q107	8-729-119-80	TRANSISTOR 2SC2688-LK	
Q108	8-729-119-80	TRANSISTOR 2SC2688-LK	
Q109	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q110	8-729-119-78	TRANSISTOR 2SC2785-HFE	

Ref.No	Part No.	Description	Remark
Q111	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q112	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q201	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q202	8-729-119-78	TRANSISTOR 2SC2785-HFE	
<u>RESISTOR</u>			
R101	1-216-347-11	METAL OXIDE	0.68 5% 1W F
R102	1-247-887-00	CARBON	220K 5% 1/4W
R103	1-249-419-11	CARBON	1.5K 5% 1/4W
R104	1-216-464-11	METAL OXIDE	18K 5% 2W F
R105	1-216-359-00	METAL OXIDE	6.8 5% 1W F
R106	1-216-350-11	METAL OXIDE	1.2 5% 1W F
R107	1-216-372-11	METAL OXIDE	1.8 5% 2W F
R108	1-212-998-00	FUSIBLE	470 5% 1/2W F
R109	1-215-898-11	METAL OXIDE	10K 5% 2W F
R110	1-202-719-00	SOLID	1M 10% 1/2W
R111	1-202-723-00	SOLID	2.2M 10% 1/2W
R112	1-214-937-00	CARBON	1M 5% 1/2W
R113	1-249-417-11	CARBON	1K 5% 1/4W
R114	1-249-429-11	CARBON	10K 5% 1/4W
R115	1-202-719-00	SOLID	1M 10% 1/2W
R116	1-249-423-11	CARBON	3.3K 5% 1/4W
R117	1-249-429-11	CARBON	10K 5% 1/4W
R118	1-249-429-11	CARBON	10K 5% 1/4W
R119	1-214-937-00	CARBON	1M 5% 1/2W
R120	1-215-451-00	METAL	18K 1% 1/6W
R121	1-249-435-11	CARBON	33K 5% 1/4W
R122	1-249-435-11	CARBON	33K 5% 1/4W
R123	1-215-459-00	METAL	39K 1% 1/6W
\boxtimes R124 Δ	1-215-455-00	METAL	27K 1% 1/6W
\boxtimes R125 Δ	1-215-455-00	METAL	27K 1% 1/6W
\boxtimes R126 Δ		METAL	1/6W
R127	1-249-434-11	CARBON	27K 5% 1/4W
R128	1-249-427-11	CARBON	6.8K 5% 1/4W
R129	1-249-440-11	CARBON	82K 5% 1/4W
R130	1-249-425-11	CARBON	4.7K 5% 1/4W
R131	1-249-429-11	CARBON	10K 5% 1/4W
R132	1-249-428-11	CARBON	8.2K 5% 1/4W
R133	1-249-417-11	CARBON	1K 5% 1/4W
R134	1-249-437-11	CARBON	47K 5% 1/4W
R135	1-249-441-11	CARBON	100K 5% 1/4W
R136	1-249-423-11	CARBON	3.3K 5% 1/4W
R137	1-215-461-00	METAL	47K 1% 1/6W
R138	1-215-440-00	METAL	6.2K 1% 1/6W
R139	1-249-424-11	CARBON	3.9K 5% 1/4W
R140	1-249-417-11	CARBON	1K 5% 1/4W
R141	1-249-429-11	CARBON	10K 5% 1/4W
R142	1-249-419-11	CARBON	1.5K 5% 1/4W
R143	1-215-439-00	METAL	5.6K 1% 1/6W
R144	1-215-439-00	METAL	5.6K 1% 1/6W
R146	1-249-422-11	CARBON	2.7K 5% 1/4W
R148	1-249-422-11	CARBON	2.7K 5% 1/4W
R150	1-249-417-11	CARBON	1K 5% 1/4W
R151	1-249-423-11	CARBON	3.3K 5% 1/4W
R153	1-249-441-11	CARBON	100K 5% 1/4W
R154	1-249-433-11	CARBON	22K 5% 1/4W
R201	1-215-899-11	METAL OXIDE	15K 5% 2W F
R202	1-215-899-11	METAL OXIDE	15K 5% 2W F
R203	1-215-899-11	METAL OXIDE	15K 5% 2W F
R204	1-215-899-11	METAL OXIDE	15K 5% 2W F
R205	1-249-429-11	CARBON	10K 5% 1/4W
R206	1-249-421-11	CARBON	2.2K 5% 1/4W
R207	1-249-393-11	CARBON	10 5% 1/4W
R208	1-249-429-11	CARBON	10K 5% 1/4W
R209	1-249-441-11	CARBON	100K 5% 1/4W
R210	1-249-429-11	CARBON	10K 5% 1/4W

7. ELECTRICAL PARTS LIST

• The components identified by **☒** in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

The components identified by shading and mark **▲** are critical for safety. Replace only with part number specified.

PA PB QA QB

Ref.No	Part No.	Description	Remark
R211	1-249-429-11	CARBON 10K 5%	1/4W
R212	1-249-433-11	CARBON 22K 5%	1/4W
R213	1-249-415-11	CARBON 680 5%	1/4W
R214	1-249-429-11	CARBON 10K 5%	1/4W
R220	1-215-455-00	METAL 27K 1%	1/6W
R221	1-215-437-00	METAL 4.7K 1%	1/6W
☒ R222	▲	METAL	1/6W
R223	1-215-486-00	METAL 510K 1%	1/6W
R224	1-215-471-00	METAL 120K 1%	1/6W
R225	1-215-458-00	METAL 36K 1%	1/6W
R226	1-215-449-00	METAL 15K 1%	1/6W
☒ R227	▲	METAL	1/6W
☒ R228	▲	METAL	1/6W
R231	1-249-415-11	CARBON 680 5%	1/4W
R232	1-249-429-11	CARBON 10K 5%	1/4W
R237	1-215-455-00	METAL 27K 1%	1/6W
R238	1-215-437-00	METAL 4.7K 1%	1/6W
☒ R239	▲	METAL	1/6W
R240	1-215-486-00	METAL 510K 1%	1/6W
R241	1-215-471-00	METAL 120K 1%	1/6W
R242	1-249-422-11	CARBON 2.7K 5%	1/4W
R243	1-249-422-11	CARBON 2.7K 5%	1/4W
R245	1-247-887-00	CARBON 220K 5%	1/4W
R246	1-249-422-11	CARBON 2.7K 5%	1/4W
R247	1-249-422-11	CARBON 2.7K 5%	1/4W
R248	1-249-399-11	CARBON 33 5%	1/4W
R249	1-249-399-11	CARBON 33 5%	1/4W
R250	1-249-411-11	CARBON 330 5%	1/4W

VARIABLE RESISTOR

RV1 1-237-500-21 RES, ADJ, CERMET 1K

TRANSFORMER

T1 1-437-078-00 TRANSFORMER, HORIZONTAL DRIVE
 T2 1-437-079-00 TRANSFORMER, HORIZONTAL DRIVE
 T3 1-439-384-11 LOT

*1-617-891-11 PB BOARD

CAPACITOR

C1 1-130-959-00 FILM 0.047MF 10% 400V
 C2 1-130-959-00 FILM 0.047MF 10% 400V

CONNECTOR

PB1 1-508-766-00 PIN, CONNECTOR (5MM PITCH) 4P

RESISTOR

R1 1-215-426-00 METAL 1.6K 1% 1/4W
 R2 1-215-438-00 METAL 5.1K 1% 1/4W
 R3 1-215-426-00 METAL 1.6K 1% 1/4W
 R4 1-215-438-00 METAL 5.1K 1% 1/4W
 R5 1-215-438-00 METAL 5.1K 1% 1/4W
 R6 1-215-438-00 METAL 5.1K 1% 1/4W

Ref.No	Part No.	Description	Remark
*1-617-895-11 QA BOARD *****			
<u>CAPACITOR</u>			
C1	1-108-692-11	MYLAR 0.01MF	10% 200V
C2	1-126-235-11	ELECT 100MF	20% 16V
C3	1-101-004-00	CERAMIC 0.01MF	50V
C4	1-108-692-11	MYLAR 0.01MF	10% 200V
C5	1-126-235-11	ELECT 100MF	20% 16V
C6	1-101-004-00	CERAMIC 0.01MF	50V
C7	1-108-692-11	MYLAR 0.01MF	10% 200V
C8	1-126-235-11	ELECT 100MF	20% 16V
C9	1-101-004-00	CERAMIC 0.01MF	50V
C10	1-102-951-00	CERAMIC 15PF	5% 50V
C11	1-102-951-00	CERAMIC 15PF	5% 50V
C12	1-102-951-00	CERAMIC 15PF	5% 50V
<u>RESISTOR</u>			
R1	1-215-449-00	METAL 15K 1%	1/4W
R2	1-215-449-00	METAL 15K 1%	1/4W
R3	1-249-439-11	CARBON 68K 5%	1/4W
<u>SWITCH</u>			
S1	1-570-857-11	SWITCH, SLIDE	
S2	1-570-857-11	SWITCH, SLIDE	
S3	1-570-857-11	SWITCH, SLIDE	

*1-618-786-11 QB BOARD

CAPACITOR

C1 1-108-692-11 MYLAR 0.01MF 10% 200V
 C2 1-126-235-11 ELECT 100MF 20% 16V
 C3 1-101-004-00 CERAMIC 0.01MF 50V
 C4 1-108-692-11 MYLAR 0.01MF 10% 200V
 C5 1-126-235-11 ELECT 100MF 20% 16V
 C6 1-101-004-00 CERAMIC 0.01MF 50V
 C7 1-108-692-11 MYLAR 0.01MF 10% 200V
 C8 1-126-235-11 ELECT 100MF 20% 16V
 C9 1-101-004-00 CERAMIC 0.01MF 50V
 C10 1-102-951-00 CERAMIC 15PF 5% 50V
 C11 1-102-951-00 CERAMIC 15PF 5% 50V
 C12 1-102-951-00 CERAMIC 15PF 5% 50V

RESISTOR

R1 1-215-449-00 METAL 15K 1% 1/6W
 R2 1-215-449-00 METAL 15K 1% 1/6W
 R3 1-215-449-00 METAL 15K 1% 1/6W

SWITCH

S1 1-570-857-11 SWITCH, SLIDE
 S2 1-570-857-11 SWITCH, SLIDE
 S3 1-570-857-11 SWITCH, SLIDE

7. ELECTRICAL PARTS LIST



Ref.No	Part No.	Description	Remark
*A-1275-088-A QD BOARD, COMPLETE (BVM-2010PD/PMD ONLY)			

*1-526-816-21 SOCKET, IC (DP) 24P			
<u>CAPACITOR</u>			
C1	1-102-973-00	CERAMIC	100PF 5% 50V
C101	1-123-380-00	ELECT	1MF 20% 50V
C103	1-101-004-00	CERAMIC	0.01MF 50V
C104	1-101-004-00	CERAMIC	0.01MF 50V
C201	1-123-380-00	ELECT	1MF 20% 50V
C202	1-101-004-00	CERAMIC	0.01MF 50V
C203	1-101-004-00	CERAMIC	0.01MF 50V
C204	1-101-004-00	CERAMIC	0.01MF 50V
C301	1-123-380-00	ELECT	1MF 20% 50V
C303	1-101-004-00	CERAMIC	0.01MF 50V
C304	1-101-004-00	CERAMIC	0.01MF 50V
C400	1-124-120-11	ELECT	220MF 20% 16V
C401	1-124-120-11	ELECT	220MF 20% 16V
C402	1-123-356-00	ELECT	10MF 20% 16V
C403	1-123-356-00	ELECT	10MF 20% 16V
C404	1-123-356-00	ELECT	10MF 20% 16V
C500	1-124-120-11	ELECT	220MF 20% 16V
C501	1-124-120-11	ELECT	220MF 20% 16V
C502	1-123-356-00	ELECT	10MF 20% 16V
C503	1-123-356-00	ELECT	10MF 20% 16V
C504	1-123-356-00	ELECT	10MF 20% 16V
C600	1-124-120-11	ELECT	220MF 20% 16V
C601	1-124-120-11	ELECT	220MF 20% 16V
C602	1-123-356-00	ELECT	10MF 20% 16V
C603	1-123-356-00	ELECT	10MF 20% 16V
C604	1-123-356-00	ELECT	10MF 20% 16V
C605	1-123-356-00	ELECT	10MF 20% 16V
C606	1-123-356-00	ELECT	10MF 20% 16V
C607	1-123-356-00	ELECT	10MF 20% 16V
C608	1-123-356-00	ELECT	10MF 20% 16V
C609	1-123-356-00	ELECT	10MF 20% 16V
C610	1-123-356-00	ELECT	10MF 20% 16V
C611	1-123-356-00	ELECT	10MF 20% 16V
C612	1-123-356-00	ELECT	10MF 20% 16V
C613	1-123-356-00	ELECT	10MF 20% 16V
C614	1-123-356-00	ELECT	10MF 20% 16V
C615	1-123-356-00	ELECT	10MF 20% 16V
C616	1-123-356-00	ELECT	10MF 20% 16V
C617	1-123-356-00	ELECT	10MF 20% 16V
C618	1-123-356-00	ELECT	10MF 20% 16V
C619	1-123-356-00	ELECT	10MF 20% 16V
C620	1-123-356-00	ELECT	10MF 20% 16V
C621	1-123-356-00	ELECT	10MF 20% 16V
C622	1-123-356-00	ELECT	10MF 20% 16V
C623	1-123-356-00	ELECT	10MF 20% 16V
C624	1-123-356-00	ELECT	10MF 20% 16V
C650	1-101-004-00	CERAMIC	0.01MF 50V
C651	1-101-004-00	CERAMIC	0.01MF 50V
C652	1-101-004-00	CERAMIC	0.01MF 50V
C653	1-101-004-00	CERAMIC	0.01MF 50V
C654	1-101-004-00	CERAMIC	0.01MF 50V
C655	1-101-004-00	CERAMIC	0.01MF 50V
C656	1-101-004-00	CERAMIC	0.01MF 50V
C657	1-101-004-00	CERAMIC	0.01MF 50V
C658	1-101-004-00	CERAMIC	0.01MF 50V
C659	1-101-004-00	CERAMIC	0.01MF 50V
C660	1-101-004-00	CERAMIC	0.01MF 50V
C661	1-101-004-00	CERAMIC	0.01MF 50V
C662	1-101-004-00	CERAMIC	0.01MF 50V

Ref.No	Part No.	Description	Remark
C663	1-101-004-00	CERAMIC	0.01MF 50V
C664	1-101-004-00	CERAMIC	0.01MF 50V
C665	1-101-004-00	CERAMIC	0.01MF 50V
C666	1-101-004-00	CERAMIC	0.01MF 50V
C667	1-101-004-00	CERAMIC	0.01MF 50V
C668	1-101-004-00	CERAMIC	0.01MF 50V
C700	1-124-120-11	ELECT	220MF 20% 16V
C701	1-124-120-11	ELECT	220MF 20% 16V
C750	1-101-004-00	CERAMIC	0.01MF 50V
C751	1-101-004-00	CERAMIC	0.01MF 50V
C901	1-124-120-11	ELECT	220MF 20% 16V
C902	1-123-356-00	ELECT	10MF 20% 16V
C903	1-123-356-00	ELECT	10MF 20% 16V
C904	1-123-356-00	ELECT	10MF 20% 16V
<u>COMBINATION PARTS</u>			
CP6	1-231-405-00	RESISTOR BLOCK 1K	
CP7	1-231-405-00	RESISTOR BLOCK 1K	
CP101	1-231-405-00	RESISTOR BLOCK 1K	
CP201	1-231-405-00	RESISTOR BLOCK 1K	
CP301	1-231-405-00	RESISTOR BLOCK 1K	
<u>FERRITE BEAD RESISTOR</u>			
FB1	1-535-178-00	RES, FERRITE	
FB2	1-535-178-00	RES, FERRITE	
FB3	1-535-178-00	RES, FERRITE	
FB4	1-535-178-00	RES, FERRITE	
<u>IC</u>			
IC8	8-759-937-27	IC CXB1001G	
IC9	8-759-747-10	IC MB7138HSK	
IC11	8-759-916-12	IC SN74HC00AN	
IC12	8-759-916-12	IC SN74HC00AN	
IC13	8-759-916-20	IC SN74HC14AN	
IC14	8-759-232-31	IC TC74HC74AP	
IC14	8-759-916-29	IC SN74HC74AN	
IC15	8-752-304-30	IC CX23043	
IC16	8-759-746-57	IC HN17C64G-20	
	*2-527-514-16	SEAL, CANNNEL (IC16)	
IC17	8-759-916-96	IC SN74HC374AN	
IC18	8-759-921-17	IC SN74HC153AN	
IC19	8-759-918-33	IC CX20160	
IC20	8-752-304-30	IC CX23043	
IC21	8-759-746-63	IC MBM27C256-25CZ	
	*2-527-514-21	SEAL, CANNNEL (IC21)	
IC22	8-759-916-96	IC SN74HC374AN	
IC31	8-759-904-80	IC 74F04PC	
IC32	8-759-904-80	IC 74F04PC	
IC101	8-759-916-50	IC SN74HC157AN	
IC102	8-759-916-50	IC SN74HC157AN	
IC105	8-759-916-96	IC SN74HC374AN	
IC106	8-759-916-96	IC SN74HC374AN	
IC107	8-759-233-05	IC TC74HC283AP	
IC108	8-759-233-05	IC TC74HC283AP	
IC109	8-752-031-13	IC CXA1106P	
IC201	8-759-916-50	IC SN74HC157AN	
IC202	8-759-916-50	IC SN74HC157AN	
IC205	8-759-916-96	IC SN74HC374AN	
IC206	8-759-916-96	IC SN74HC374AN	
IC207	8-759-233-05	IC TC74HC283AP	
IC208	8-759-233-05	IC TC74HC283AP	
IC209	8-752-031-13	IC CXA1106P	
IC301	8-759-916-50	IC SN74HC157AN	
IC302	8-759-916-50	IC SN74HC157AN	
IC303	8-759-918-33	IC CX20160	
IC304	8-759-918-33	IC CX20160	

IIIIIIIIII 7. ELECTRICAL PARTS LIST

QD**QE**

Ref.No	Part No.	Description	Remark
IC305	8-759-904-87	IC 74F374PC	
IC306	8-759-904-87	IC 74F374PC	
IC307	8-759-906-76	IC 74F283PC	
IC308	8-759-906-76	IC 74F283PC	
IC309	8-752-031-13	IC CXA1106P	

COIL

L4	1-410-645-31	INDUCTOR	100UH
L5	1-410-645-31	INDUCTOR	100UH
L6	1-421-370-00	COIL, CHOKE	
L7	1-421-370-00	COIL, CHOKE	
L9	1-410-645-31	INDUCTOR	100UH

LOWPASS FILTER

LPF101	1-235-967-11	FILTER, LOW PASS	
LPF201	1-235-967-11	FILTER, LOW PASS	
LPF301	1-235-968-12	FILTER, LOW PASS	

TRANSISTOR

Q1	8-729-900-89	TRANSISTOR DTC144ES	
Q101	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q102	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q201	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q202	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q301	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q302	8-729-119-78	TRANSISTOR 2SC2785-HFE	

CONNECTOR

QD1	*1-566-047-11	PIN, CONNECTOR 8P	
QD2	*1-566-042-11	PIN, CONNECTOR 3P	
QD3	*1-566-056-11	PIN, CONNECTOR 4P	
QD4	*1-566-062-11	PIN, CONNECTOR 10P	
QD101	*1-566-041-11	PIN, CONNECTOR 2P	
QD201	*1-566-041-11	PIN, CONNECTOR 2P	
QD301	*1-566-041-11	PIN, CONNECTOR 2P	

RESISTOR

R1	1-249-429-11	CARBON	10K	5%	1/4W
R11	1-249-417-11	CARBON	1K	5%	1/4W
R13	1-249-417-11	CARBON	1K	5%	1/4W
R14	1-249-417-11	CARBON	1K	5%	1/4W
R15	1-249-417-11	CARBON	1K	5%	1/4W
R16	1-249-417-11	CARBON	1K	5%	1/4W
R17	1-249-417-11	CARBON	1K	5%	1/4W
R18	1-249-441-11	CARBON	100K	5%	1/4W
R19	1-249-429-11	CARBON	10K	5%	1/4W
R20	1-249-417-11	CARBON	1K	5%	1/4W
R21	1-249-429-11	CARBON	10K	5%	1/4W
R22	1-249-429-11	CARBON	10K	5%	1/4W
R23	1-249-429-11	CARBON	10K	5%	1/4W
R24	1-249-429-11	CARBON	10K	5%	1/4W
R31	1-249-417-11	CARBON	1K	5%	1/4W
R32	1-249-417-11	CARBON	1K	5%	1/4W
R33	1-249-417-11	CARBON	1K	5%	1/4W
R101	1-249-405-11	CARBON	100	5%	1/4W
R102	1-215-425-00	METAL	1.5K	1%	1/6W
R103	1-215-425-00	METAL	1.5K	1%	1/6W
R104	1-249-416-11	CARBON	820	5%	1/4W
R105	1-215-401-11	METAL	150	1%	1/6W
R106	1-215-401-11	METAL	150	1%	1/6W
R107	1-249-419-11	CARBON	1.5K	5%	1/4W
R201	1-249-405-11	CARBON	100	5%	1/4W
R202	1-215-425-00	METAL	1.5K	1%	1/6W
R203	1-215-425-00	METAL	1.5K	1%	1/6W
R204	1-249-416-11	CARBON	820	5%	1/4W
R205	1-215-401-11	METAL	150	1%	1/6W

Ref.No	Part No.	Description	Remark
R206	1-215-401-11	METAL	150 1% 1/6W
R207	1-249-419-11	CARBON	1.5K 5% 1/4W
R301	1-249-405-11	CARBON	100 5% 1/4W
R302	1-215-425-00	METAL	1.5K 1% 1/6W
R303	1-215-425-00	METAL	1.5K 1% 1/6W

R304	1-249-416-11	CARBON	820 5% 1/4W
R305	1-215-401-11	METAL	150 1% 1/6W
R306	1-215-401-11	METAL	150 1% 1/6W
R307	1-249-419-11	CARBON	1.5K 5% 1/4W

SWITCH

S1	1-553-252-00	SWITCH, ROTARY	
----	--------------	----------------	--

*1-623-851-11 QE BOARD (BVM-2010PD/PMD ONLY)

7-682-547-04 SCREW B 3X6

CAPACITOR

C41	1-123-356-00	ELECT	10MF	20%	16V
C42	1-123-356-00	ELECT	10MF	20%	16V
C43	1-123-356-00	ELECT	10MF	20%	16V
C44	1-123-356-00	ELECT	10MF	20%	16V
C45	1-123-356-00	ELECT	10MF	20%	16V
C46	1-123-356-00	ELECT	10MF	20%	16V
C47	1-123-356-00	ELECT	10MF	20%	16V
C48	1-123-356-00	ELECT	10MF	20%	16V
C49	1-123-356-00	ELECT	10MF	20%	16V
C50	1-123-356-00	ELECT	10MF	20%	16V
C61	1-123-356-00	ELECT	10MF	20%	16V
C62	1-123-356-00	ELECT	10MF	20%	16V
C63	1-123-356-00	ELECT	10MF	20%	16V
C64	1-123-356-00	ELECT	10MF	20%	16V
C65	1-123-356-00	ELECT	10MF	20%	16V
C66	1-123-356-00	ELECT	10MF	20%	16V
C81	1-101-004-00	CERAMIC	0.01MF		50V

COMBINATION PARTS

CP41	1-231-455-00	BLOCK, CR	
CP42	1-231-455-00	BLOCK, CR	
CP43	1-231-455-00	BLOCK, CR	
CP44	1-231-455-00	BLOCK, CR	
CP45	1-231-455-00	BLOCK, CR	
CP46	1-231-455-00	BLOCK, CR	
CP47	1-231-455-00	BLOCK, CR	
CP48	1-231-455-00	BLOCK, CR	
CP49	1-231-455-00	BLOCK, CR	
CP50	1-231-455-00	BLOCK, CR	

IC

IC41	8-759-001-25	IC MC10125L	
IC42	8-759-001-25	IC MC10125L	
IC43	8-759-001-25	IC MC10125L	
IC44	8-759-001-25	IC MC10125L	
IC45	8-759-001-25	IC MC10125L	
IC46	8-759-001-25	IC MC10125L	
IC47	8-759-904-80	IC 74F04PC	
IC48	8-759-938-94	IC 74F158APC	
IC49	8-759-904-87	IC 74F374PC	
IC50	8-759-904-87	IC 74F374PC	

CONNECTOR

QE41	*1-566-056-11	PIN, CONNECTOR 4P	
QE42	*1-566-062-11	PIN, CONNECTOR 10P	



Ref.No	Part No.	Description	Remark
QE43	1-563-322-11	CONNECTOR,D-SUB(MOUNT TYPE)25P	
QE44	1-563-322-11	CONNECTOR,D-SUB(MOUNT TYPE)25P	

*A-1285-073-A RA BOARD, COMPLETE

CAPACITOR

C1	1-161-379-00	CERAMIC	0.01MF	30%	25V
C2	1-161-379-00	CERAMIC	0.01MF	30%	25V
C3	1-161-379-00	CERAMIC	0.01MF	30%	25V
C4	1-161-379-00	CERAMIC	0.01MF	30%	25V
C5	1-161-379-00	CERAMIC	0.01MF	30%	25V
C6	1-124-589-11	ELECT	47MF	20%	16V
C7	1-161-379-00	CERAMIC	0.01MF	30%	25V
C9	1-161-379-00	CERAMIC	0.01MF	30%	25V
C10	1-161-379-00	CERAMIC	0.01MF	30%	25V
C11	1-161-379-00	CERAMIC	0.01MF	30%	25V
C12	1-161-379-00	CERAMIC	0.01MF	30%	25V
C13	1-161-379-00	CERAMIC	0.01MF	30%	25V
C14	1-161-379-00	CERAMIC	0.01MF	30%	25V
C15	1-161-379-00	CERAMIC	0.01MF	30%	25V
C16	1-161-379-00	CERAMIC	0.01MF	30%	25V
C17	1-161-379-00	CERAMIC	0.01MF	30%	25V
C18	1-161-379-00	CERAMIC	0.01MF	30%	25V
C19	1-161-379-00	CERAMIC	0.01MF	30%	25V
C20	1-161-379-00	CERAMIC	0.01MF	30%	25V
C21	1-161-379-00	CERAMIC	0.01MF	30%	25V
C22	1-161-379-00	CERAMIC	0.01MF	30%	25V
C23	1-161-379-00	CERAMIC	0.01MF	30%	25V
C24	1-161-379-00	CERAMIC	0.01MF	30%	25V
C25	1-161-379-00	CERAMIC	0.01MF	30%	25V
C26	1-161-379-00	CERAMIC	0.01MF	30%	25V
C27	1-161-379-00	CERAMIC	0.01MF	30%	25V
C28	1-161-379-00	CERAMIC	0.01MF	30%	25V
C29	1-161-379-00	CERAMIC	0.01MF	30%	25V
C30	1-161-379-00	CERAMIC	0.01MF	30%	25V
C31	1-161-379-00	CERAMIC	0.01MF	30%	25V
C32	1-161-379-00	CERAMIC	0.01MF	30%	25V
C33	1-161-379-00	CERAMIC	0.01MF	30%	25V
C34	1-161-379-00	CERAMIC	0.01MF	30%	25V
C35	1-161-379-00	CERAMIC	0.01MF	30%	25V
C36	1-161-379-00	CERAMIC	0.01MF	30%	25V
C37	1-161-379-00	CERAMIC	0.01MF	30%	25V
C38	1-161-379-00	CERAMIC	0.01MF	30%	25V
C39	1-161-379-00	CERAMIC	0.01MF	30%	25V
C40	1-161-379-00	CERAMIC	0.01MF	30%	25V
C41	1-161-379-00	CERAMIC	0.01MF	30%	25V
C42	1-161-379-00	CERAMIC	0.01MF	30%	25V
C43	1-161-379-00	CERAMIC	0.01MF	30%	25V
C44	1-161-379-00	CERAMIC	0.01MF	30%	25V
C45	1-161-379-00	CERAMIC	0.01MF	30%	25V
C46	1-161-379-00	CERAMIC	0.01MF	30%	25V
C47	1-161-379-00	CERAMIC	0.01MF	30%	25V
C48	1-161-379-00	CERAMIC	0.01MF	30%	25V
C49	1-124-589-11	ELECT	47MF	20%	16V
C50	1-124-589-11	ELECT	47MF	20%	16V
C51	1-124-589-11	ELECT	47MF	20%	16V
C52	1-124-589-11	ELECT	47MF	20%	16V
C53	1-124-589-11	ELECT	47MF	20%	16V
C101	1-124-589-11	ELECT	47MF	20%	16V
C102	1-124-589-11	ELECT	47MF	20%	16V
C103	1-126-157-11	ELECT	10MF	20%	16V
C104	1-126-157-11	ELECT	10MF	20%	16V

Ref.No	Part No.	Description	Remark
--------	----------	-------------	--------

C105	1-126-157-11	ELECT	10MF 20% 16V
C106	1-126-157-11	ELECT	10MF 20% 16V
C107	1-126-157-11	ELECT	10MF 20% 16V
C108	1-126-157-11	ELECT	10MF 20% 16V
C111	1-161-379-00	CERAMIC	0.01MF 30% 25V

C112	1-161-379-00	CERAMIC	0.01MF 30% 25V
C113	1-161-379-00	CERAMIC	0.01MF 30% 25V
C114	1-161-379-00	CERAMIC	0.01MF 30% 25V
C115	1-161-379-00	CERAMIC	0.01MF 30% 25V
C116	1-161-379-00	CERAMIC	0.01MF 30% 25V

C117	1-161-379-00	CERAMIC	0.01MF 30% 25V
C118	1-161-379-00	CERAMIC	0.01MF 30% 25V
C201	1-124-589-11	ELECT	47MF 20% 16V
C202	1-124-589-11	ELECT	47MF 20% 16V
C203	1-126-157-11	ELECT	10MF 20% 16V

C204	1-126-157-11	ELECT	10MF 20% 16V
C205	1-126-157-11	ELECT	10MF 20% 16V
C206	1-126-157-11	ELECT	10MF 20% 16V
C207	1-126-157-11	ELECT	10MF 20% 16V
C208	1-126-157-11	ELECT	10MF 20% 16V

C211	1-161-379-00	CERAMIC	0.01MF 30% 25V
C212	1-161-379-00	CERAMIC	0.01MF 30% 25V
C213	1-161-379-00	CERAMIC	0.01MF 30% 25V
C214	1-161-379-00	CERAMIC	0.01MF 30% 25V
C215	1-161-379-00	CERAMIC	0.01MF 30% 25V

C216	1-161-379-00	CERAMIC	0.01MF 30% 25V
C217	1-161-379-00	CERAMIC	0.01MF 30% 25V
C218	1-161-379-00	CERAMIC	0.01MF 30% 25V

DIODE

D1	8-719-911-19	DIODE 1SS119
D2	8-719-911-19	DIODE 1SS119
D3	8-719-911-19	DIODE 1SS119
D4	8-719-911-19	DIODE 1SS119
D5	8-719-911-19	DIODE 1SS119

D6	8-719-911-19	DIODE 1SS119
D7	8-719-911-19	DIODE 1SS119
D8	8-719-911-19	DIODE 1SS119
D9	8-719-911-19	DIODE 1SS119
D10	8-719-911-19	DIODE 1SS119

D11	8-719-911-19	DIODE 1SS119
D12	8-719-911-19	DIODE 1SS119
D13	8-719-911-19	DIODE 1SS119
D14	8-719-911-19	DIODE 1SS119
D15	8-719-911-19	DIODE 1SS119

D16	8-719-911-19	DIODE 1SS119
D17	8-719-911-19	DIODE 1SS119
D18	8-719-911-19	DIODE 1SS119
D19	8-719-911-19	DIODE 1SS119
D20	8-719-911-19	DIODE 1SS119

D21	8-719-911-19	DIODE 1SS119
D22	8-719-911-19	DIODE 1SS119
D23	8-719-911-19	DIODE 1SS119
D24	8-719-911-19	DIODE 1SS119
D25	8-719-911-19	DIODE 1SS119

D26	8-719-911-19	DIODE 1SS119
D27	8-719-911-19	DIODE 1SS119
D28	8-719-911-19	DIODE 1SS119
D29	8-719-911-19	DIODE 1SS119
D30	8-719-911-19	DIODE 1SS119

D31	8-719-911-19	DIODE 1SS119
D32	8-719-911-19	DIODE 1SS119
D33	8-719-911-19	DIODE 1SS119
D34	8-719-911-19	DIODE 1SS119
D35	8-719-911-19	DIODE 1SS119

7. ELECTRICAL PARTS LIST

RA RB

Ref.No	Part No.	Description	Remark
D36	8-719-911-19	DIODE 1SS119	
D37	8-719-911-19	DIODE 1SS119	
D101	8-719-110-03	DIODE RD7.5ES-B2	
D102	8-719-109-93	DIODE RD6.2ES-B2	
D201	8-719-110-03	DIODE RD7.5ES-B2	
D202	8-719-109-93	DIODE RD6.2ES-B2	
<u>IC</u>			
IC1	8-759-208-06	IC TC4051BP	
IC2	8-759-208-06	IC TC4051BP	
IC3	8-759-208-06	IC TC4051BP	
IC4	8-759-208-06	IC TC4051BP	
IC5	8-759-208-06	IC TC4051BP	
IC6	8-759-208-06	IC TC4051BP	
IC7	8-759-240-40	IC TC4040BP	
IC8	8-759-208-06	IC TC4051BP	
IC9	8-759-990-82	IC TL082CP	
IC10	8-759-981-95	IC RC4558S	
IC11	8-759-981-95	IC RC4558S	
IC12	8-759-981-95	IC RC4558S	
<u>RESISTOR</u>			
R1	1-215-465-00	METAL 68K 1% 1/6W	
R2	1-215-451-00	METAL 18K 1% 1/6W	
R3	1-215-469-00	METAL 100K 1% 1/6W	
R4	1-215-469-00	METAL 100K 1% 1/6W	
R5	1-215-469-00	METAL 100K 1% 1/6W	
R6	1-215-437-00	METAL 4.7K 1% 1/6W	
R7	1-215-469-00	METAL 100K 1% 1/6W	
R8	1-249-405-11	CARBON 100 5% 1/4W	
R9	1-215-469-00	METAL 100K 1% 1/6W	
R10	1-215-469-00	METAL 100K 1% 1/6W	
R11	1-215-469-00	METAL 100K 1% 1/6W	
R12	1-215-469-00	METAL 100K 1% 1/6W	
R13	1-215-469-00	METAL 100K 1% 1/6W	
R14	1-215-469-00	METAL 100K 1% 1/6W	
R15	1-249-441-11	CARBON 100K 5% 1/4W	
R16	1-249-441-11	CARBON 100K 5% 1/4W	
R17	1-249-441-11	CARBON 100K 5% 1/4W	
R18	1-249-441-11	CARBON 100K 5% 1/4W	
R19	1-249-441-11	CARBON 100K 5% 1/4W	
R20	1-249-441-11	CARBON 100K 5% 1/4W	
R21	1-249-441-11	CARBON 100K 5% 1/4W	
R22	1-249-441-11	CARBON 100K 5% 1/4W	
R23	1-249-441-11	CARBON 100K 5% 1/4W	
R24	1-249-441-11	CARBON 100K 5% 1/4W	
R25	1-249-441-11	CARBON 100K 5% 1/4W	
R26	1-249-441-11	CARBON 100K 5% 1/4W	
R27	1-249-441-11	CARBON 100K 5% 1/4W	
R28	1-249-441-11	CARBON 100K 5% 1/4W	
R29	1-249-441-11	CARBON 100K 5% 1/4W	
R30	1-249-441-11	CARBON 100K 5% 1/4W	
R31	1-249-441-11	CARBON 100K 5% 1/4W	
R32	1-249-441-11	CARBON 100K 5% 1/4W	
R33	1-249-441-11	CARBON 100K 5% 1/4W	
R34	1-249-441-11	CARBON 100K 5% 1/4W	
R35	1-249-441-11	CARBON 100K 5% 1/4W	
R36	1-249-441-11	CARBON 100K 5% 1/4W	
R37	1-249-441-11	CARBON 100K 5% 1/4W	
R38	1-249-441-11	CARBON 100K 5% 1/4W	
R39	1-249-441-11	CARBON 100K 5% 1/4W	
R40	1-249-441-11	CARBON 100K 5% 1/4W	
R41	1-249-441-11	CARBON 100K 5% 1/4W	
R42	1-249-441-11	CARBON 100K 5% 1/4W	
R43	1-249-441-11	CARBON 100K 5% 1/4W	

Ref.No	Part No.	Description	Remark
R44	1-249-441-11	CARBON 100K 5% 1/4W	
R45	1-249-441-11	CARBON 100K 5% 1/4W	
R46	1-249-441-11	CARBON 100K 5% 1/4W	
R47	1-249-441-11	CARBON 100K 5% 1/4W	
R48	1-249-441-11	CARBON 100K 5% 1/4W	
R51	1-249-429-11	CARBON 10K 5% 1/4W	
R52	1-249-429-11	CARBON 10K 5% 1/4W	
R53	1-249-429-11	CARBON 10K 5% 1/4W	
R54	1-249-429-11	CARBON 10K 5% 1/4W	
R55	1-249-429-11	CARBON 10K 5% 1/4W	
R56	1-249-429-11	CARBON 10K 5% 1/4W	
R61	1-249-417-11	CARBON 1K 5% 1/4W	
R62	1-249-417-11	CARBON 1K 5% 1/4W	
R63	1-247-903-00	CARBON 1M 5% 1/4W	
R101	1-249-409-11	CARBON 220 5% 1/4W	
R201	1-249-417-11	CARBON 1K 5% 1/4W	
<u>CONNECTOR</u>			
RA1	*1-566-064-11	PIN, CONNECTOR 12P	
RA2	*1-566-064-11	PIN, CONNECTOR 12P	
RA3	*1-566-062-11	PIN, CONNECTOR 10P	
RA4	*1-566-047-11	PIN, CONNECTOR 8P	
RA5	*1-566-051-11	PIN, CONNECTOR 12P	
RA6	*1-566-059-11	PIN, CONNECTOR 7P	
RA7	*1-566-055-11	PIN, CONNECTOR 3P	
RA9	*1-566-060-11	PIN, CONNECTOR 8P	
RA10	*1-566-065-11	PIN, CONNECTOR 13P	

*A-1285-072-A RB BOARD, COMPLETE			

<u>CAPACITOR</u>			
C1	1-101-884-00	CERAMIC 56PF 5% 50V	
C2	1-102-973-00	CERAMIC 100PF 5% 50V	
C3	1-101-004-00	CERAMIC 0.01MF 50V	
C5	1-136-153-00	FILM 0.01MF 5% 50V	
C6	1-136-165-00	FILM 0.1MF 5% 50V	
C7	1-136-165-00	FILM 0.1MF 5% 50V	
C101	1-124-034-51	ELECT 33MF 20% 16V	
C102	1-124-034-51	ELECT 33MF 20% 16V	
C103	1-124-034-51	ELECT 33MF 20% 16V	
C104	1-124-034-51	ELECT 33MF 20% 16V	
C105	1-124-034-51	ELECT 33MF 20% 16V	
C106	1-124-034-51	ELECT 33MF 20% 16V	
C107	1-124-034-51	ELECT 33MF 20% 16V	
C112	1-101-004-00	CERAMIC 0.01MF 50V	
C113	1-101-004-00	CERAMIC 0.01MF 50V	
C114	1-101-004-00	CERAMIC 0.01MF 50V	
C115	1-101-004-00	CERAMIC 0.01MF 50V	
C116	1-101-004-00	CERAMIC 0.01MF 50V	
C117	1-101-004-00	CERAMIC 0.01MF 50V	
C118	1-101-004-00	CERAMIC 0.01MF 50V	
C119	1-101-004-00	CERAMIC 0.01MF 50V	
C120	1-101-004-00	CERAMIC 0.01MF 50V	
C121	1-101-004-00	CERAMIC 0.01MF 50V	
C122	1-101-004-00	CERAMIC 0.01MF 50V	
C123	1-101-004-00	CERAMIC 0.01MF 50V	
C124	1-101-004-00	CERAMIC 0.01MF 50V	
C125	1-101-004-00	CERAMIC 0.01MF 50V	
C126	1-101-004-00	CERAMIC 0.01MF 50V	
C127	1-101-004-00	CERAMIC 0.01MF 50V	
C128	1-101-004-00	CERAMIC 0.01MF 50V	
C129	1-101-004-00	CERAMIC 0.01MF 50V	

7. ELECTRICAL PARTS LIST

Ref.No	Part No.	Description	Remark
C130	1-101-004-00	CERAMIC	0.01MF 50V
C131	1-101-004-00	CERAMIC	0.01MF 50V
C132	1-101-004-00	CERAMIC	0.01MF 50V
C201	1-124-034-51	ELECT	33MF 20% 16V
C202	1-124-034-51	ELECT	33MF 20% 16V
C203	1-124-034-51	ELECT	33MF 20% 16V
C204	1-124-034-51	ELECT	33MF 20% 16V
C205	1-124-034-51	ELECT	33MF 20% 16V
C206	1-124-034-51	ELECT	33MF 20% 16V
C207	1-124-034-51	ELECT	33MF 20% 16V
C212	1-101-004-00	CERAMIC	0.01MF 50V
C213	1-101-004-00	CERAMIC	0.01MF 50V
C214	1-101-004-00	CERAMIC	0.01MF 50V
C215	1-101-004-00	CERAMIC	0.01MF 50V
C216	1-101-004-00	CERAMIC	0.01MF 50V
C217	1-101-004-00	CERAMIC	0.01MF 50V
C218	1-101-004-00	CERAMIC	0.01MF 50V
C219	1-101-004-00	CERAMIC	0.01MF 50V
C220	1-101-004-00	CERAMIC	0.01MF 50V
C221	1-101-004-00	CERAMIC	0.01MF 50V
C222	1-101-004-00	CERAMIC	0.01MF 50V
C223	1-101-004-00	CERAMIC	0.01MF 50V
C224	1-101-004-00	CERAMIC	0.01MF 50V
C225	1-101-004-00	CERAMIC	0.01MF 50V
<u>COMBINATION PARTS</u>			
CP15	1-232-390-11	COMPOSITION CIRCUIT BLOCK	
<u>DIODE</u>			
D1	8-719-911-19	DIODE 1SS119	
D2	8-719-911-19	DIODE 1SS119	
D3	8-719-911-19	DIODE 1SS119	
D4	8-719-911-19	DIODE 1SS119	
D5	8-719-911-19	DIODE 1SS119	
D6	8-719-911-19	DIODE 1SS119	
D7	8-719-911-19	DIODE 1SS119	
D8	8-719-911-19	DIODE 1SS119	
D10	8-719-110-36	DIODE RD13ES-B2	
D101	8-719-110-03	DIODE RD7.5ES-B2	
D201	8-719-110-03	DIODE RD7.5ES-B2	
<u>IC</u>			
IC1	8-759-990-82	IC TL082CP	
IC2	8-759-990-82	IC TL082CP	
IC3	8-759-990-82	IC TL082CP	
IC4	8-759-990-82	IC TL082CP	
IC5	8-759-990-82	IC TL082CP	
IC6	8-759-990-82	IC TL082CP	
IC7	8-759-990-82	IC TL082CP	
IC8	8-759-990-82	IC TL082CP	
IC9	8-759-990-82	IC TL082CP	
IC10	8-759-990-82	IC TL082CP	
IC11	8-759-140-53	IC MC14053BCP	
IC13	8-759-240-40	IC TC4040BP	
IC14	8-759-208-06	IC TC4051BP	
IC15	8-759-208-06	IC TC4051BP	
IC16	8-759-208-06	IC TC4051BP	
IC17	8-759-208-06	IC TC4051BP	
IC18	8-759-208-06	IC TC4051BP	
IC19	8-759-208-06	IC TC4051BP	
IC20	8-759-208-06	IC TC4051BP	
IC21	8-759-240-69	IC MC14069UBCP	
IC22	8-759-240-69	IC MC14069UBCP	
IC23	8-759-240-69	IC MC14069UBCP	
IC24	8-759-240-69	IC MC14069UBCP	

Ref.No	Part No.	Description	Remark
IC25	8-759-240-69	IC MC14069UBCP	
IC26	8-759-240-69	IC MC14069UBCP	
<u>TRANSISTOR</u>			
Q1	8-729-900-89	TRANSISTOR DTC144ES	
Q2	8-729-900-89	TRANSISTOR DTC144ES	
Q3	8-729-900-89	TRANSISTOR DTC144ES	
Q4	8-729-900-89	TRANSISTOR DTC144ES	
Q5	8-729-900-89	TRANSISTOR DTC144ES	
Q6	8-729-900-89	TRANSISTOR DTC144ES	
Q7	8-729-900-89	TRANSISTOR DTC144ES	
Q8	8-729-900-89	TRANSISTOR DTC144ES	
Q9	8-729-900-89	TRANSISTOR DTC144ES	
Q10	8-729-900-89	TRANSISTOR DTC144ES	
Q11	8-729-900-89	TRANSISTOR DTC144ES	
Q12	8-729-900-89	TRANSISTOR DTC144ES	
Q13	8-729-900-89	TRANSISTOR DTC144ES	
Q14	8-729-900-89	TRANSISTOR DTC144ES	
Q15	8-729-900-89	TRANSISTOR DTC144ES	
Q16	8-729-900-89	TRANSISTOR DTC144ES	
Q17	8-729-900-89	TRANSISTOR DTC144ES	
Q18	8-729-900-89	TRANSISTOR DTC144ES	
Q19	8-729-900-89	TRANSISTOR DTC144ES	
Q20	8-729-900-89	TRANSISTOR DTC144ES	
Q21	8-729-900-89	TRANSISTOR DTC144ES	
Q22	8-729-900-89	TRANSISTOR DTC144ES	
Q23	8-729-900-89	TRANSISTOR DTC144ES	
Q24	8-729-900-89	TRANSISTOR DTC144ES	
Q25	8-729-900-89	TRANSISTOR DTC144ES	
Q26	8-729-900-89	TRANSISTOR DTC144ES	
Q27	8-729-900-89	TRANSISTOR DTC144ES	
Q28	8-729-900-89	TRANSISTOR DTC144ES	
Q29	8-729-900-89	TRANSISTOR DTC144ES	
Q30	8-729-900-89	TRANSISTOR DTC144ES	
Q31	8-729-900-89	TRANSISTOR DTC144ES	
Q32	8-729-900-89	TRANSISTOR DTC144ES	
Q33	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q34	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q35	8-729-900-89	TRANSISTOR DTC144ES	
Q36	8-729-900-89	TRANSISTOR DTC144ES	
Q37	8-729-119-76	TRANSISTOR 2SA1175-HFE	
<u>RESISTOR</u>			
R1	1-215-465-00	METAL	68K 1% 1/6W
R2	1-215-451-00	METAL	18K 1% 1/6W
R3	1-215-469-00	METAL	100K 1% 1/6W
R4	1-215-469-00	METAL	100K 1% 1/6W
R5	1-215-469-00	METAL	100K 1% 1/6W
R6	1-215-454-00	METAL	24K 1% 1/6W
R7	1-215-469-00	METAL	100K 1% 1/6W
R9	1-215-469-00	METAL	100K 1% 1/6W
R10	1-215-469-00	METAL	100K 1% 1/6W
R11	1-215-469-00	METAL	100K 1% 1/6W
R12	1-215-469-00	METAL	100K 1% 1/6W
R13	1-215-469-00	METAL	100K 1% 1/6W
R14	1-215-469-00	METAL	100K 1% 1/6W
R15	1-249-435-11	CARBON	33K 5% 1/4W
R16	1-249-429-11	CARBON	10K 5% 1/4W
R17	1-215-445-00	METAL	10K 1% 1/6W
R18	1-215-445-00	METAL	10K 1% 1/6W
R19	1-249-413-11	CARBON	470 5% 1/4W
R21	1-249-405-11	CARBON	100 5% 1/4W
R22	1-249-441-11	CARBON	100K 5% 1/4W
R23	1-249-405-11	CARBON	100 5% 1/4W
R24	1-249-441-11	CARBON	100K 5% 1/4W

RB	TA	TB	V
----	----	----	---

Ref.No	Part No.	Description	Remark
R25	1-249-429-11	CARBON 10K 5%	1/4W
R26	1-249-429-11	CARBON 10K 5%	1/4W
R27	1-249-441-11	CARBON 100K 5%	1/4W
R28	1-249-441-11	CARBON 100K 5%	1/4W
R29	1-249-441-11	CARBON 100K 5%	1/4W
R30	1-249-433-11	CARBON 22K 5%	1/4W
R31	1-249-441-11	CARBON 100K 5%	1/4W
R32	1-249-405-11	CARBON 100 5%	1/4W
R33	1-249-405-11	CARBON 100 5%	1/4W
R34	1-249-441-11	CARBON 100K 5%	1/4W
R35	1-249-422-11	CARBON 27K 5%	1/4W
R37	1-215-446-00	METAL 11K 1%	1/6W
R38	1-249-429-11	CARBON 10K 5%	1/4W
R39	1-249-433-11	CARBON 22K 5%	1/4W
R40	1-249-437-11	CARBON 47K 5%	1/4W
R45	1-249-405-11	CARBON 100 5%	1/4W
R50	1-249-417-11	CARBON 1K 5%	1/4W
R51	1-249-417-11	CARBON 1K 5%	1/4W
R101	1-249-409-11	CARBON 220 5%	1/4W
R201	1-249-417-11	CARBON 1K 5%	1/4W

CONNECTOR

RB1	*1-566-059-11	PIN, CONNECTOR 7P
RB2	*1-566-062-11	PIN, CONNECTOR 10P
RB4	*1-566-060-11	PIN, CONNECTOR 8P
RB5	*1-566-060-11	PIN, CONNECTOR 8P
RB6	*1-566-064-11	PIN, CONNECTOR 12P
RB7	*1-566-064-11	PIN, CONNECTOR 12P
RB8	*1-566-062-11	PIN, CONNECTOR 10P
RB9	*1-566-060-11	PIN, CONNECTOR 8P
RB10	*1-566-064-11	PIN, CONNECTOR 12P
RB11	*1-566-059-11	PIN, CONNECTOR 7P
RB12	*1-566-059-11	PIN, CONNECTOR 7P
RB13	*1-566-060-11	PIN, CONNECTOR 8P
RB14	*1-566-064-11	PIN, CONNECTOR 12P
RB15	*1-566-054-11	PIN, CONNECTOR 2P
RB16	*1-566-054-11	PIN, CONNECTOR 2P
RB17	*1-566-055-11	PIN, CONNECTOR 3P
RB18	*1-566-056-11	PIN, CONNECTOR 4P
RB19	*1-566-058-11	PIN, CONNECTOR 6P
RB20	*1-566-058-11	PIN, CONNECTOR 6P
RB21	*1-566-055-11	PIN, CONNECTOR 3P
RB22	*1-566-055-11	PIN, CONNECTOR 3P

*1-617-898-11 TA BOARD

CONNECTOR

TA1	*1-566-054-11	PIN, CONNECTOR 2P
TA2	*1-566-055-11	PIN, CONNECTOR 3P
TA3	*1-566-056-11	PIN, CONNECTOR 4P
TA4	*1-566-057-11	PIN, CONNECTOR 5P
TA5	*1-566-058-11	PIN, CONNECTOR 6P
TA6	*1-566-055-11	PIN, CONNECTOR 3P
TA7	*1-566-058-11	PIN, CONNECTOR 6P
TA8	*1-566-042-11	PIN, CONNECTOR 3P
TA9	*1-566-045-11	PIN, CONNECTOR 6P
TA10	*1-566-045-11	PIN, CONNECTOR 6P
TA11	*1-566-045-11	PIN, CONNECTOR 6P
TA12	*1-508-786-00	PIN, CONNECTOR (5MM PITCH) 2P
TA13	*1-561-337-00	CONNECTOR, MULTI
TA14	*1-561-337-00	CONNECTOR, MULTI
TA15	*1-561-337-00	CONNECTOR, MULTI

Ref.No	Part No.	Description	Remark
	*1-617-899-11	TB BOARD	*****

CONNECTOR

CN1	*1-564-431-11	POST, CONNECTOR 3P
CN2	*1-564-431-11	POST, CONNECTOR 3P
CN11	*1-561-724-00	SOCKET, CONNECTOR 2P
CN12	*1-561-724-00	SOCKET, CONNECTOR 2P
TB4	*1-566-054-11	PIN, CONNECTOR 2P
TB5	*1-566-054-11	PIN, CONNECTOR 2P
TB6	*1-566-060-11	PIN, CONNECTOR 8P
TB7	*1-566-054-11	PIN, CONNECTOR 2P
TB8	*1-566-058-11	PIN, CONNECTOR 6P
TB9	*1-566-060-11	PIN, CONNECTOR 8P
TB10	*1-566-064-11	PIN, CONNECTOR 12P
TB11	*1-566-055-11	PIN, CONNECTOR 3P
TB12	*1-566-064-11	PIN, CONNECTOR 12P
TB13	*1-566-062-11	PIN, CONNECTOR 10P
TB14	*1-566-064-11	PIN, CONNECTOR 12P
TB15	*1-566-060-11	PIN, CONNECTOR 8P
TB16	*1-566-057-11	PIN, CONNECTOR 5P
TB17	*1-566-057-11	PIN, CONNECTOR 5P
TB18	*1-566-055-11	PIN, CONNECTOR 3P
TB19	*1-566-056-11	PIN, CONNECTOR 4P
TB20	*1-566-056-11	PIN, CONNECTOR 4P
TB21	*1-566-056-11	PIN, CONNECTOR 4P
TB22	*1-566-054-11	PIN, CONNECTOR 2P
TB23	*1-566-054-11	PIN, CONNECTOR 2P
TB24	*1-566-054-11	PIN, CONNECTOR 2P
TB28	*1-566-062-11	PIN, CONNECTOR 10P
TB31	*1-561-337-00	CONNECTOR, MULTI
TB32	*1-561-337-00	CONNECTOR, MULTI
TB33	*1-561-337-00	CONNECTOR, MULTI
TB34	*1-561-337-00	CONNECTOR, MULTI
TB35	*1-561-337-00	CONNECTOR, MULTI
TB36	*1-561-337-00	CONNECTOR, MULTI
TB37	*1-561-337-00	CONNECTOR, MULTI
TB38	*1-561-337-00	CONNECTOR, MULTI
TB39	*1-561-337-00	CONNECTOR, MULTI
TB40	*1-561-337-00	CONNECTOR, MULTI

RESISTOR

R100	1-249-422-11	CARBON 27K 5%	1/4W
------	--------------	---------------	------

*1-617-896-11 V BOARD

1-563-265-11 CONNECTOR, MULTIPLE 10P

RESISTOR

R1	1-249-405-11	CARBON 100 5%	1/4W
R2	1-249-405-11	CARBON 100 5%	1/4W
R3	1-249-405-11	CARBON 100 5%	1/4W
R4	1-249-405-11	CARBON 100 5%	1/4W
R5	1-249-405-11	CARBON 100 5%	1/4W
R6	1-249-405-11	CARBON 100 5%	1/4W
R7	1-249-405-11	CARBON 100 5%	1/4W

The components identified by shading and mark Δ are critical for safety.
 Replace only with part number specified.

W **XB** **Y**

Ref.No Part No. Description Remark

*1-617-897-11 W BOARD

CAPACITOR

C1 1-108-692-11 MYLAR 0.01MF 10% 200V
 C2 1-108-692-11 MYLAR 0.01MF 10% 200V
 C3 1-108-692-11 MYLAR 0.01MF 10% 200V

RESISTOR

R1 1-214-702-00 METAL 75 1% 1/4W
 R2 1-214-702-00 METAL 75 1% 1/4W
 R3 1-214-702-00 METAL 75 1% 1/4W

*1-623-002-11 XB BOARD

DIODE

D1 8-719-901-49 DIODE LT-9010H
 D2 8-719-901-49 DIODE LT-9010H

*1-617-893-11 Y BOARD

DIODE

D1 8-719-812-43 DIODE TLG124A

MISCELLANEOUS

1-216-371-00 RES, METAL OXIDE FILM 1.5
 1-216-373-11 RES, METAL OXIDE FILM 2.2
 Δ 1-237-165-12 RESISTOR ASSY, HIGH-VOLTAGE
 Δ 1-413-319-13 REGULATOR, SWITCHING (BVM-2010PD/PMD ONLY)
 Δ 1-426-328-11 COIL, DEGAUSSING

Δ 1-439-382-21 TRANSFORMER ASSY, FLYBACK
 Δ 1-451-287-21 DEFLECTION YOKE (Y14FAA)

1-452-032-00 MAGNET, DISC, 10MM ϕ
 1-452-094-00 MAGNET, ROTATABLE DISK, 15MM ϕ
 Δ 1-452-117-31 CRT NECK ASSY

Δ 1-452-261-22 CRT NECK ASSY (362)
 Δ 1-453-103-32 HIGH-VOLTAGE BLOCK (HB-203 (B))
 Δ 1-532-203-11 FUSE, TIME-LAG 2A/250V (BVM-2010P/PD ONLY)
 Δ 1-532-746-11 FUSE, GLASS TUBE 4A/125V (BVM-2010PM/PMD ONLY)
 Δ 1-532-822-11 FUSE, GLASS TUBE 1A/25V (BVM-2010PD/PMD ONLY)

1-565-791-11 CONNECTOR, BNC 1P
 S901 Δ 1-570-052-12 SWITCHING, PUSH (AC POWER)(1 KEY)
 V901 Δ B-733-054-05 PICTURE TUBE (M49JJP21X)

Ref.No Part No. Description Remark

ACCESSORIES & PACKING MATERIALS

Δ 1-532-203-11 FUSE, TIME-LAG 2A/250V (BVM-2010P/PD ONLY)
 Δ 1-532-746-11 FUSE, GLASS TUBE 4A/125V (BVM-2010PM/PMD ONLY)
 Δ 1-532-822-11 FUSE, GLASS TUBE 1A/25V (BVM-2010PD/PMD ONLY)
 Δ 1-590-150-11 POWER CORD (BVM-2010P/PD ONLY)
 Δ 1-551-812-11 POWER CORD (BVM-2010PM/PMD ONLY)

1-560-776-00 SOCKET, CONNECTOR 10P
 2-990-242-01 HOLDER (B), PLUG
 *4-361-988-02 BAG, PROTECTION
 4-378-901-01 KEY
 4-386-841-01 LABEL, TALLY NUMBER

4-386-841-11 LABEL, TALLY NUMBER
 4-386-852-21 MANUAL, OPERATION & MAINTNANCE
 *4-386-856-01 INDIVIDUAL CARTON (BVM-2010P ONLY)
 *4-386-858-01 CUSHION (UPPER)
 4-386-870-01 LABEL, DIGITAL (BVM-2010PD ONLY)

*4-386-872-01 INDIVIDUAL CARTON (BVM-2010PD ONLY)
 *4-386-875-01 CUSHION (FRONT LOWER)
 *4-386-876-01 CUSHION (REAR LOWER)
 *4-386-878-01 INDIVIDUAL CARTON (BVM-2010PM ONLY)
 7-700-731-03 DRIVER, VR ADJUSTMENT

*A-1394-088-A Z BOARD, COMPLETE
 (INCLUDING THE FOLLOWING PARTS)
 *1-561-337-21 CONNECTOR, MULTI

7. ELECTRICAL PARTS LIST

